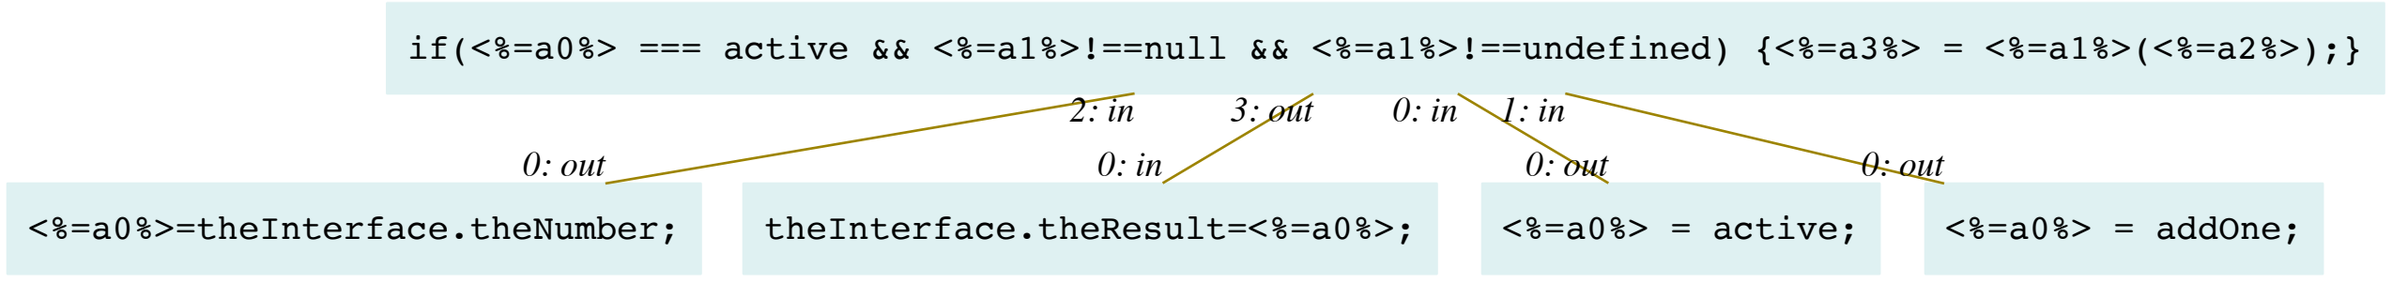
if(<%=a0%> === active && <%=a1%>!==null && <%=a1%>!==undefined) {<%=a3%> = <%=a1%>(<%=a2%>);}
2: in
3: out
0: in
1: in
0: out
0: in
0: out
0: out
<%=a0%>=theInterface.theNumber;
theInterface.theResult=<%=a0%>;
<%=a0%> = active;
<%=a0%> = addOne;