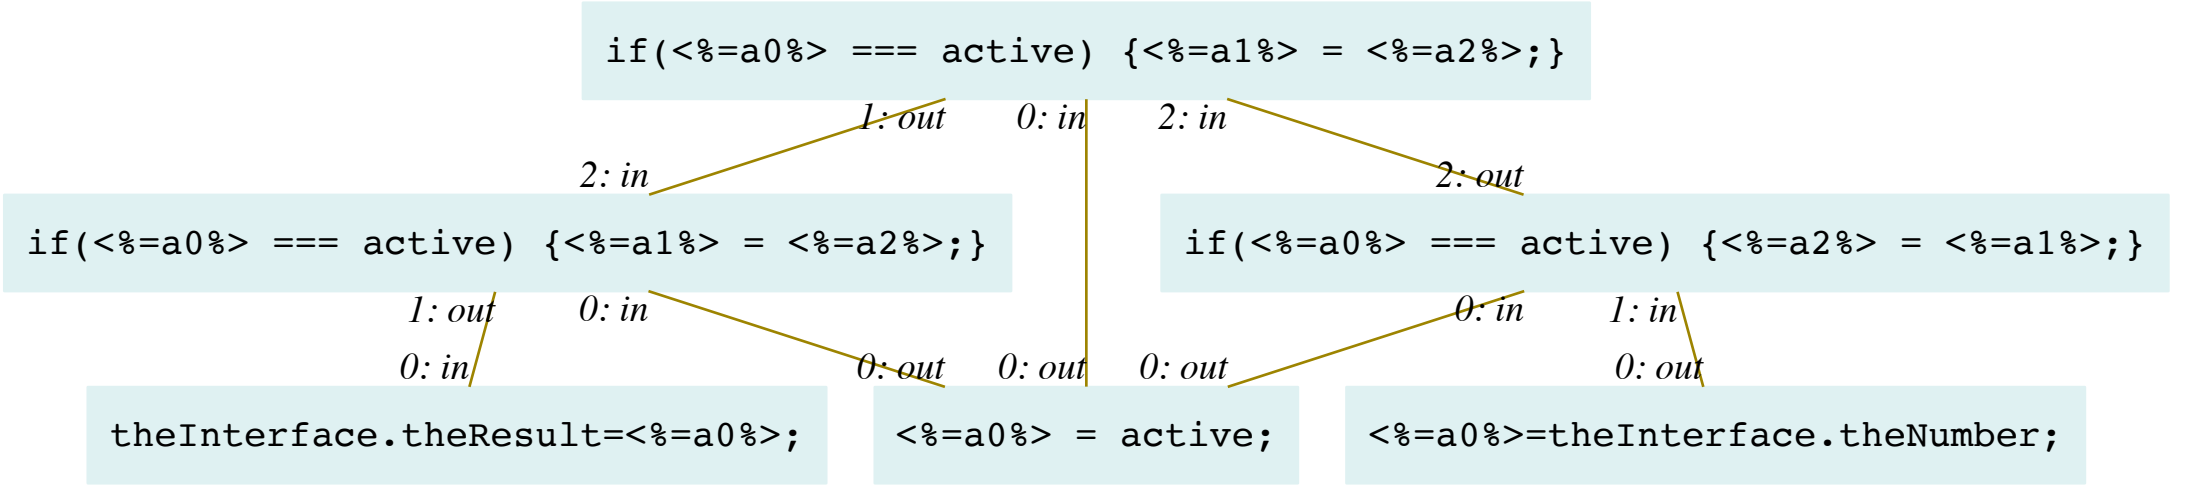
if(<%=a0%> === active) {<%=a1%> = <%=a2%>;}
1: out
0: in
2: in
2: in
2: out
if(<%=a0%> === active) {<%=a1%> = <%=a2%>;}
if(<%=a0%> === active) {<%=a2%> = <%=a1%>;}
1: out
0: in
0: in
1: in
0: in
0: out
0: out
0: out
0: out
theInterface.theResult=<%=a0%>;
<%=a0%> = active;
<%=a0%>=theInterface.theNumber;