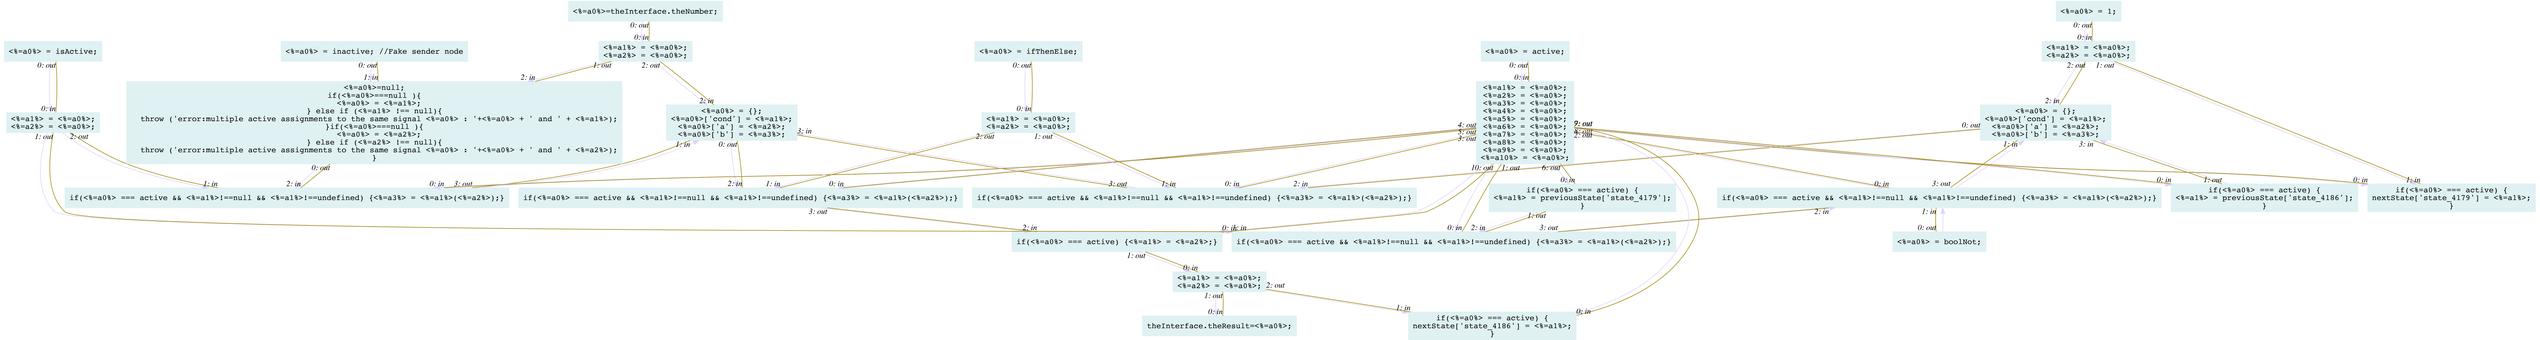
<%a0%>=theInterface.theNumber;
0: out
0: in
<%a0%> = isActive;
0: out
0: in
<%a1%> = <%a0%>;
<%a2%> = <%a0%>;
1: out
2: out
<%a0%> = inactive; //Fake sender node
0: out
1: in
<%a1%> = <%a0%>;
<%a2%> = <%a0%>;
1: out
2: out
2: in
<%a0%>=null;
if(<%a0%>===null){
<%a0%> = <%a1%>;
} else if (<%a1%> !== null){
throw ('error:multiple active assignments to the same signal <%a0%> : '+<%a0%> + ' and ' + <%a1%>);
}}if(<%a0%>===null){
<%a0%> = <%a2%>;
} else if (<%a2%> !== null){
throw ('error:multiple active assignments to the same signal <%a0%> : '+<%a0%> + ' and ' + <%a2%>);
}
0: out
<%a0%> = {};
<%a03%>['cond'] = <%a1%>;
<%a0%>['a'] = <%a2%>;
<%a0%>['b'] = <%a3%>;
3: in
1: in
0: out
<%a1%> = <%a0%>;
<%a2%> = <%a0%>;
1: out
2: out
<%a0%> = ifThenElse;
0: out
0: in
<%a0%> = active;
0: out
0: in
<%a1%> = <%a0%>;
<%a2%> = <%a0%>;
<%a3%> = <%a0%>;
<%a4%> = <%a0%>;
<%a5%> = <%a0%>;
<%a6%> = <%a0%>;
<%a7%> = <%a0%>;
<%a8%> = <%a0%>;
<%a9%> = <%a0%>;
<%a10%> = <%a0%>;
4: out
3: out
5: out
9: out
8: out
2: out
10: out
1: out
6: out
<%a0%> = 1;
0: out
0: in
<%a1%> = <%a0%>;
<%a2%> = <%a0%>;
2: out
1: out
2: in
<%a0%> = {};
<%a03%>['cond'] = <%a1%>;
<%a0%>['a'] = <%a2%>;
<%a0%>['b'] = <%a3%>;
0: out
1: in
3: in
if(<%a0%> === active && <%a1%>!==null && <%a1%>!==undefined) {<%a3%> = <%a1%>(<%a2%>);}
1: in
2: in
3: out
if(<%a0%> === active && <%a1%>!==null && <%a1%>!==undefined) {<%a3%> = <%a1%>(<%a2%>);}
0: in
1: in
3: out
2: in
if(<%a0%> === active && <%a1%>!==null && <%a1%>!==undefined) {<%a3%> = <%a1%>(<%a2%>);}
0: in
2: in
if(<%a0%> === active) {
<%a1%> = previousState['state_4179'];
}
0: in
1: out
if(<%a0%> === active) {
<%a1%> = previousState['state_4186'];
}
0: in
1: in
if(<%a0%> === active) {
nextState['state_4179'] = <%a1%>;
}
0: in
1: in
if(<%a0%> === active && <%a1%>!==null && <%a1%>!==undefined) {<%a3%> = <%a1%>(<%a2%>);}
2: in
1: in
0: out
<%a0%> = boolNot;
if(<%a0%> === active) {<%a1%> = <%a2%>;}
1: out
0: in
0: in
if(<%a0%> === active && <%a1%>!==null && <%a1%>!==undefined) {<%a3%> = <%a1%>(<%a2%>);}
0: in
2: in
3: out
<%a1%> = <%a0%>;
<%a2%> = <%a0%>;
2: out
1: out
0: in
theInterface.theResult=<%a0%>;
1: in
if(<%a0%> === active) {
nextState['state_4186'] = <%a1%>;
}
0: in