


```
node_6885
<%=a0%> = active;

0: Activation out
```

0: {theNumber: Number in, theResult: Number out}

edge_6883

0: {theNumber: Number out, theResult: Number in}

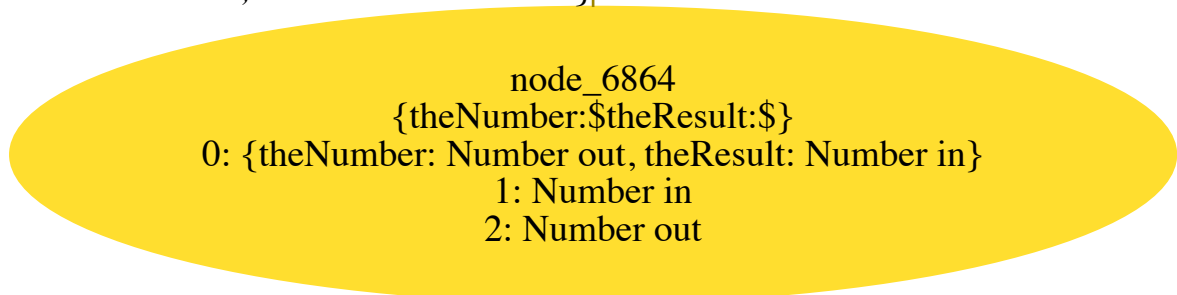

1: Number in: theNumber
2: Number out: theResult

edge_6865

edge_6866

0: Number out

0: Number in

```
node_6860
<%=a0%>=theInterface.theNumber;
```

0: Number out

```
node_6862
theInterface.theResult=<%=a0%>;
```

0: Number in