

**TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING**

Khwopa College Of Engineering
Libali, Bhaktapur
Department of Computer Engineering



**A PROPOSAL ON
IMAGE STEGANALYSIS USING ENSEMBLE CLASSIFIERS**

Submitted in partial fulfillment of the requirements for the degree

BACHELOR OF COMPUTER ENGINEERING

Submitted by

Sachin Koirala

KCE077BCT029

Sajal Poudel

KCE077BCT031

Unique Shrestha

KCE077BCT045

Utsav Chandra Kayastha

KCE077BCT046

Khwopa College Of Engineering
Libali, Bhaktapur
2023

Abstract

Steganography is a technique used to hide information, such as text, images, audio or videos, within another carrier file in a way that is not easily detectable by human senses. Steganography is a tool that can be exploited by malicious software as a means to conceal malicious information and potentially attack systems. Malware can perform various harmful actions, such as damaging data, stealing information, or disrupting the normal operation of a computer system. Almost two-thirds of the internet is made up of JPEGs, this makes digital images the most common carrier format for steganography. Ensemble classifiers created using a bagging ensemble method implemented as a random forest are used to detect hidden malicious content from images as carrier files. Robustness, Model diversity and a faster development cycle were the main reasons for choosing the Ensemble classifier over other Machine learning approaches. The proposed model will perform effectively on three different steganographic methods [nsF5, J-UNIWARD and UERD] that hide messages in JPEG images.

Keywords: Steganography, Steganalysis, Ensemble Classifiers, Machine Learning, Random forest, JPEG

Table of Contents

Abstract	i
List of Figures	iii
List of Tables	iv
List of Abbreviation	v
1 Introduction	1
1.1 Background	1
1.2 Problem Statement	4
1.3 Objectives	4
2 Literature Review	5
3 Feasibility study	10
4 Methodology	11
4.1 Software Development Approach	11
4.2 Block diagram of proposed system	12
4.3 System Architecture	14
5 Implementation Plan	15
5.1 Gantt Chart	15
5.2 Software Requirement	16
5.3 Hardware Requirement	16
6 Expected Outcomes	17
7 Bibliography	18

List of Figures

1.1	Steps used in implementation of Compression Algorithm [7]	2
4.1	Agile Model	11
4.2	Block diagram of proposed system	12
4.3	System Architecture	14
5.1	Gantt Chart	15

List of Tables

2.1	Review Matrix with Research Papers, authors and purpose	9
-----	---	---

List of Abbreviation

API	Application Programming Interface
bpnzac	bits per non-zero
CNN	Convolutional Neural Network
CUDA	Compute Unified Device Architecture
DC-DM	Distortion Compensated-Dither Modulation
DB	Database
DCT	Discrete Cosine Transform
DCTR	Discrete Cosine Transform Residuals
DOM	Document Object Model
FLD	Fisher Linear Discriminant
GIF	Graphics Interchange Format
GFR	Gabor Filter Residuals
GPU	Graphics Processing Unit
J-Uniward	JPEG UNiversal WAVElet Relative Distortion
JPEG	Joint Photography Experts Group
JSON	JavaScript Object Notation
ML	Machine Learning
PHARM	Phase Aware Projection Model
PNG	Portable Network Graphics
RAM	Random Access Memory
SQL	Structured Query Language
UERD	Uniform sEmbedding Revisited Distortion

Chapter 1

Introduction

1.1 Background

Steganography is the skillful technique of secret communication, accomplished through embedding a piece of information into a carrier. In steganography, a “carrier” refers to the cover or host file that conceals the hidden message or information. The word steganography is derived from the Greek words “*stegos*” meaning “*cover*” and “*grafia*” meaning “*writing*” defining it as “*covered writing*” [14]. Misusing steganography for malicious purposes can have serious consequences. A recent trend involves exploiting various steganographic techniques to embed malware in the carrier. Some real life example would be: Hiding malicious code within banner ads, tricking users into installing malicious app, embedding malicious executables and so on. Steganography can utilize various file formats, primarily classified into four categories: text, images, audio, and video. Among these file formats, images are widely used as cover object.

Steganalysis is the process of detecting hidden information within digital media, uncovering hidden data that has been secretly embedded using steganographic techniques. The goal of steganalysis is to collect sufficient evidence about the presence of embedded message and to break the security of its carrier. Thus defeating the purpose of steganography. The importance of steganalytic techniques that can reliably detect the presence of hidden information in images is increasing. Steganalysis finds its use in computer forensics, cyber warfare, tracking the criminal activities over the internet and gathering evidence for investigations particularly in case of anti-social elements. [15]

Image Steganography

Image Steganography is a steganography method where the hidden information is embedded into a image as carrier file. Among the various available formats of images, JPEG format is widely used for steganography. The figure below shows the glimpse of how a JPEG image is compressed.




Figure 1.1: Steps used in implementation of Compression Algorithm [7]

First the RGB color space is converted into YCbCr colorspace. After the YCbCr conversion, the image is partitioned into 8×8 non-overlapping blocks. After that each pixel is transferred from range of 0 to 255 to -128 to 127. Finally, Each of these blocks is then subjected to a 2-D Discrete Cosine Transform (DCT). The DCT transforms the spatial data in the block into frequency data. After the DCT, the coefficients are quantized, meaning they are divided by a factor determined by a quantization table. The quantization step is what actually removes information from the image, and it is this step that makes the JPEG compression process lossy.

$$C(u, v) = \alpha(u)\alpha(v) \sum_{x=0}^{N-1} \sum_{y=0}^{N-1} f(x, y) \cos\left[\frac{\pi(2x+1)u}{2N}\right] \cos\left[\frac{\pi(2y+1)v}{2N}\right] \quad (1.1)$$

for $u, v = 0, 1, 2, \dots, N-1$ and $f(x, y)$ is pixel position and $\alpha(u), \alpha(v)$ as

$$\alpha(u) = \begin{cases} \sqrt{\frac{1}{N}} & \text{for } u = 0 \\ \sqrt{\frac{2}{N}} & \text{for } u \neq 0 \end{cases} \quad (1.2)$$

$$\alpha(v) = \begin{cases} \sqrt{\frac{1}{N}} & \text{for } v = 0 \\ \sqrt{\frac{2}{N}} & \text{for } v \neq 0 \end{cases} \quad (1.3)$$

Equation (1.1), (1.2), (1.3) are the formulas to calculate DCT coefficients, $\alpha(u)$ and $\alpha(v)$ respectively. [9]

Some popular techniques of image steganography are listed below:

1. DCT-LSB Method:

The DCT-LSB method conceals data in an image by dividing it into 8×8 blocks, transforming each block using Discrete Cosine Transform (DCT), and then replacing the least significant bit of DCT coefficients with hidden data. [1]

2. F5 and nsF5 Algorithms:

The F5 steganography algorithm operates by manipulating Discrete Cosine Transform (DCT) coefficients. F5 adjusts coefficients by adding 1 to those with a positive value and subtracting 1 from those with a negative value, leaving zero-valued coefficients unchanged. However, a drawback known as the “shrinkage” problem arises when coefficients with values of 1 or -1 become zero during embedding, reducing the algorithm’s capacity. [3]

To overcome the shrinkage problem, the nsF5 algorithm, an advanced version of

F5, employs Wet Paper Codes (WPC). This technique designates certain coefficients as “non-modifiable”, preventing alterations after data embedding. This innovation addresses the shrinkage issue without sacrificing capacity. Even if new zeros are generated from coefficients with values of 1 or -1, the nsF5 algorithm records them, enhancing image quality and capacity compared to the common F5 method. [4]

3. **UERD (Universal Embedding Reduced Distortion):**

UERD (Universal Embedding Reduced Distortion) is a method that hides information in pictures so that it’s hard to notice. By strategically analyzing Discrete Cosine Transform (DCT) coefficients, UERD chooses those areas in the picture where changes won’t be obvious. UERD uses syndrome trellis coding (STC) to hide the message bits in the desired values. This further increases the security of the embedded data by making it harder to detect. [5]

4. **J-UNIWARD Algorithm:**

The J-UNIWARD algorithm operates in both the spatial domain and the frequency domain. In the spatial domain, it uses the Least Significant Bit (LSB) steganography technique to hide data in the least significant bits of the pixel values. In the frequency domain, it uses the Discrete Cosine Transform (DCT) to transform the image into the frequency domain, where it hides data in the DCT coefficients.

5. **HUGO Algorithm:**

HUGO, which stands for Highly Undetectable steGO, is a steganography algorithm designed to hide information within images. It achieves this by analyzing complex patterns and structures in an image, determining optimal locations to hide data. [6] [13]

1.2 Problem Statement

The continuous evolution of steganographic techniques poses a critical challenge to digital security. With the increasing sophisticated steganography methods, traditional steganalysis approaches are challenged by the need for improved accuracy and adaptability. Since two-thirds of the internet is composed of images and images play a major role in digital communication, the use of advanced steganographic techniques to hide malicious data inside another carrier information poses an intricate threat to the security of a system. Creative approaches are required since secretly implanted malicious programs are difficult for traditional steganalysis to accurately identify. The complexity of compression and encryption methods adds an additional level of difficulty in detection. Existing steganalysis, which was created for traditional steganography, is not flexible enough to detect the complex algorithms for steganography. This proposal aims to fill these gaps by developing ensemble classifiers based steganalysis models that will enhance accuracy and sensitivity of steganalysis. Thus, to protect the integrity of digital communication, this proposal seeks to propose an steganalysis process created with the help of ML to detect and tackle the subtle changes caused by the concealing of malicious data within unsuspecting carrier files.

1.3 Objectives

The main objectives of this project is to:

- To detect malicious information hidden in JPEG image.

Chapter 2

Literature Review

Some work has been done in image steganalysis. Various steganalysis tools use different approaches like feature extraction, shallow ML, and deep learning methods to detect steganographically altered images. This literature review seeks to portray the history, methodologies, implementation and applications of steganalysis.

Multiple research has been done to achieve excellent results in steganalysis. Krzysztof Szczypiorski et al. [17] used deep learning and ensemble classifiers to detect image steganography using different methods like DCTR and shallow machine learning classifiers. They found that performance depended heavily on the steganographic method used and on the density of the embedded hidden data. Detection of the content hidden with the nsF5 algorithm at the density 0.4 bpnzac was almost perfect while detection of data hidden using J-Uniward at 0.1 bpnzac was hardly possible. It is shown that steganalysis done using shallow ML is better in comparison to deep learning. This point is further proved by the fact that shallow ML consumes less resources and requires less time to be trained in comparison to deep ML and still provides accuracy similar or better than deep ML classifiers.

The document titled “*The Discrete Cosine Transform: Theory and Application*” [9] gives us a comprehensive overview of the Discrete Cosine Transform(DCT) and its application in digital image and video processing. The document discusses the properties of the DCT, including its decorrelation characteristics, energy compaction, and its ability to reduce entropy. It highlights the DCT’s role in efficient coding and compression, particularly in the context of image and video standards such as JPEG and MPEG. Additionally, The document addresses the inverse DCT operation and its impact on visual distortion, providing examples of reconstructed images at different quantization levels.

George Berg et al. [2] proposed an ML approach to steganalysis. This paper shows the feasibility of using a machine learning and data mining (ML/DM) approach to automatically build a steganography attack. This paper used three common data mining and learning techniques: decision trees, error back-propagation, artificial neural networks and the naïve Bayes classifier, to identify messages hidden in compression-(JPEG) and content based (GIF) images.

MT Hogan et al. [8] evaluated the statistical limits by using probability density functions (pdfs). ML tests based on DC-DM are presented in this paper. To effectively uncover hidden information in images, we need a steganalysis tool with sharp pattern

recognition skills. Sometimes, when we compare images that have been manipulated with certain tools to their original versions, we can spot a few noticeable visual irregularities – like odd pixels or changes in dimensions due to cropping or padding. If an image doesn't fit specific size criteria, it might get cropped or padded, and you'll see black spaces. Interestingly, most manipulated images don't give away obvious clues when compared to their originals. The simplest clue is a size increase between the manipulated and original images. Other signatures show up in how the colors are arranged in the image, such as a significant change in the number of colors or a gradual increase or decrease. Grayscale images follow a different pattern, increasing incrementally. Another strong indicator is an unusual number of black shades in a grayscale image.

“Steganalysis in high dimensions: Fusing classifiers built on random subspace” [10] provides core concepts of this project such as ensemble classifier and importance of selection of features. A distinctive subject which it has touched upon is the concept of Curse of Dimensionality (CoD) which shows the relation of complexity and increase in resource usage for computation. It is highlighted how ensemble classifiers can counter this problem by using reduced dimension for training its base learners.

“Ensemble Classifiers for Steganalysis of Digital Media” [11] highlights several key studies in the field of steganalysis, which provides a solid foundation for understanding the current state of steganalysis. The document discusses the implementation of ensemble based steganographically altered image classifier using many base learners for classification. The proposed base learners are trained using FLD analysis due to its ability to increase diversity. The performance of the proposed model even though gets trained in very less time in comparison to usually used classification method of G-SVM can classify with similar or better accuracy. It is highlighted that a G-SVM classifier takes about 8 hours to be properly trained while an ensemble classifier takes only 20 minutes.

“A fast and accurate steganalysis using Ensemble classifiers” [19] provides an in-depth insight into the use of an ensemble of classifiers for steganalysis, with a focus on machine learning. The ensemble-based steg analyzer uses feature vectors from multiple stegalyzers to create a decision algorithm that allows the combination of information from different steganalyzers. The resulting steganalyzer is also inherently suitable for multi-class classification scenarios. The paper presents a novel steganalysis decision framework using hierarchical classifiers, which addresses the limitations of existing steganalysis methods and provides a scalable and cost-effective approach to steganalysis. Ensemble classifiers are designed to overcome the limitations of individual classifiers by combining their outputs to achieve better performance. Steganalysis using ensemble classifiers is a powerful approach that utilizes the strength of multiple classifiers to help improve the detection of hidden information in images. It provides diverse steganographic techniques while also enhancing the overall accuracy. Ensemble classifiers are designed to overcome the limitations of individual classifiers by combining their outputs, thereby achieving better performance.

“J. Kodovský and J. Fridrich. Calibration revisited” [12] provide information on the pre features and their Cartesian calibrated and Non-cartesian calibrated form. *“A Markov Process Based Approach to Effective Attacking JPEG Steganography”* [18] and *“Merging Markov and DCT features for multi-class JPEGsteganalysis”* [16] guides the outlook of our project to a better angle as it provides very crucial details on the section of feature extraction. They provide more insight on the pre features which

can be utilized for better classification. These literature provided more insights on CC-PEv and CC-SHI which are different pre features used for steganalysis. “JPEG Image Steganalysis Utilizing both Intrablock and Interblock Correlations” provides more insight on the importance of considering relation between inter and intra block correlations during pre feature creation for better detection or classification.

The dataset we will be using on this project will be taken from IStego100k [20]. IStego 100K is a large-scale steganalysis consisting of 208,104 images with a size of 1024*1024 pixels. The training set consists of 200,000 images organized into 100,000 cover-setgo image pairs. The testing set comprises the remaining 8,104 images. Each image in the dataset has randomly assigned quality factors in the range of 75-95. Three well-known steganographic algorithms J-uniward, nsF5, and UERD [] [4] [5] are randomly selected for embedding in the images. The embedding rate for each image is randomly set in the range of 0.1-0.4 bpac.

The relevant papers that we studied to grab knowledge about this project are given in the review matrix below:

S.N.	Name	Year	Authors	Dataset	Findings
1	Searching for hidden messages Automatic detection of steganography	2003	George Berg, Ian Davidson, Ming-Yuan Duan, and Goutam Paul	BOSS	Images are commonly used to transmit hidden messages. Different strategies are used to hide messages in GIF and JPEG formats.
2	International Workshop on Information Hiding	2005	Jessica Fridrich, Miroslav Goljan, and David Soukal	NA	NA
3	On steganographic embedding efficiency	2007	Jessica Fridrich, Petr Lisonek, and David Soukal.	NA	NA
4	MI detection of steganography	2005	Mark T Hogan, Neil J Hurley, Guenole CM Silvestre, Felix Balado, and Kevin M Whelan	BOSS	NA
5	The discrete cosine transform (dct) theory and application	2003	Syed Ali Khayam.	NA	NA

S.N.	Name	Year	Author	Dataset	Findings
6	Steganalysis in high dimensions Fusing classifiers built on random subspaces	2011	Jan Kodovsky and Jessica Fridrich.	BOSS	The paper proposes ensemble classifiers as an alternative to support vector machines. Experiments with steganographic algorithms nsF5 and HUGO demonstrate the usefulness of this approach.
7	Ensemble classifiers for steganalysis of digital media	2012	Jan Kodovsky, Jessica Fridrich, and Vojtech Holub.	BOSS	Ensemble classifiers have improved detection accuracy for steganographic methods in JPEG images. The proposed framework allows for fast construction of steganography detectors.
8	Proceedings of the 11th ACM Workshop on Multimedia and Security	2009	Jan Kodovsky and Jessica Fridrich.	NA	NA
9	Merging markov and dct features for multi-class jpeg steganalysis	2007	Tomas Pevny and Jessica J. Fridrich	BOSS	The paper constructs a new multi-class JPEG steganalyzer with improved performance. The new feature set provides significantly more reliable results compared to previous work.

S.N.	Name	Year	Authors	Dataset	Findings
10	Detection of image steganography using deep learning and ensemble classifiers	2022	Mikołaj Płachta, Marek Krzemien, Krzysztof Szczypiorski, and Artur Janicki	BOSS	Ensemble classifiers performed well in steganography detection. Deep learning algorithms achieved better results for UERD and nsF5 steganographic algorithms.
11	A markov process based approach to effective attacking jpeg steganography	2007	Yun Q. Shi, Chunhua Chen, and Wen Chen.	BOSS	The proposed steganalyzer outperforms by a significant margin. The detection rates are higher while considering the introduced features.
12	A fast and accurate steganalysis using ensemble classifiers	2013	Arezoo Torkaman and Reza Safabakhsh	BOSS	The proposed method achieved a lower error rate of 46% compared to the ensemble classifier. The training time of the proposed method was 88% lower than the ensemble classifier.
13	Istego100k Large-scale image steganalysis dataset	2019	Zhongliang Yang, Ke Wang, Sai Ma, Yongfeng Huang, Xiangui Kang, and Xianfeng Zhao	IStego100K	The paper introduces a large-scale image steganalysis dataset called IStego100K. The performance of some steganalysis algorithms on IStego100K is tested.

Table 2.1: Review Matrix with Research Papers, authors and purpose

Chapter 3

Feasibility study

After the problem is clearly understood and solutions proposed, the next step is to conduct the feasibility study. Feasibility study is defined as evaluation or analysis of the potential impact of a proposed project or program. The objective is to determine whether the proposed system is feasible. There are three aspects of feasibility study which are discussed below.

Technical Feasibility:

For the technical part, we're getting our project data from the Kaggle and BOSS datasets which contain various datasets containing stenographically modified images. These images have been modified using different algorithms which creates diversity in the dataset used improving the reliability of the system. We're using free software to build the project, and the department is providing cloud resources like RAM and GPU for training our model. This setup makes sure our project is doable and integrates well with the currently existing system. Thus, we can conclude that it is technically feasible.

Economical Feasibility:

The only cost for the project is the computational power, covering processing and electricity. Since the department will be providing the processing power needed to train the model, the cost is almost zero. Therefore, this project is economically viable.

Operational Feasibility:

We have decided to use the Shallow ML approach which allows the model to be trained with less computational power in comparison to deep learning. For shallow machine learning we are planning to implement an ensemble classifier and each of its models will be trained using FLD to improve its effectiveness. Deep learning implements the CNN approach which requires higher computational power to be trained. Thus, we decided to use a simpler machine learning approach that doesn't need a lot of computational power, unlike the more complex deep learning method called Convolutional Neural Network (CNN). After we train the system, it's ready to use and can easily be added to a webpage or any other interface. This way, the system is practical and doesn't need a lot of resources making it able to be effectively implemented in real-life applications. Thus, it is operationally feasible.

Chapter 4

Methodology

4.1 Software Development Approach

is an iterative process-based approach to software development. In the Agile process model, work is broken down into more manageable, smaller iterations without requiring a lot of long-term planning. The requirements and scope of the project are determined early on, and the number, length, and scope of each iteration are preplanned. Each iteration is considered as a short time "frame" in the Agile process model, which lasts for a few weeks. In each iteration, teams move through the phases of the software development life cycle, which include planning, requirements analysis, design, coding, testing, and demonstration of a working product for client review. Agile places a significant value on flexibility, teamwork, and regular client feedback.

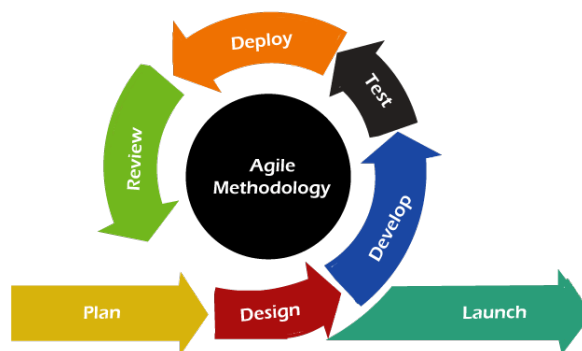


Figure 4.1: Agile Model

The main reason for which we choose this development process:

1. Very quick, flexible and efficient.
2. Risk minimization.
3. Projects are split into sprints for better management and productivity.
4. Through iterative testing and sprints, the final product contains less bugs.
5. Development period for application is reduced.

4.2 Block diagram of proposed system

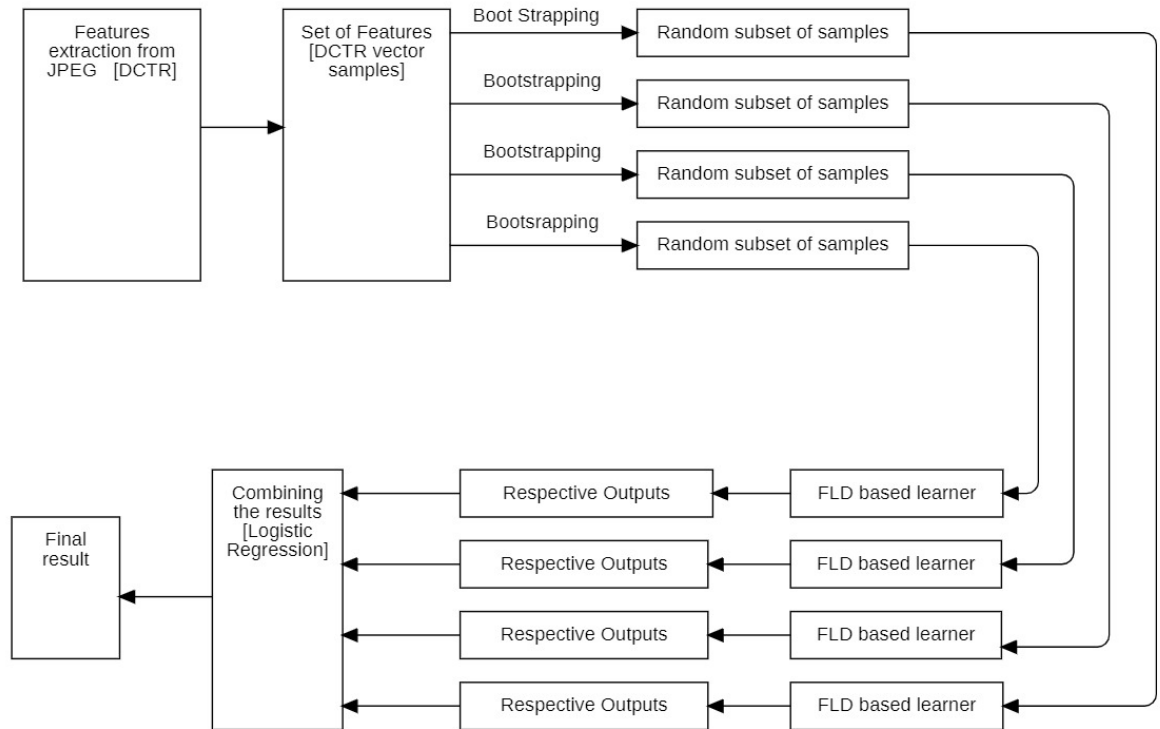


Figure 4.2: Block diagram of proposed system

Model Training Approach

Feature Extraction:

Initial extraction of DCTR (Discrete Cosine Transform Ratio) feature vector from images or .jpeg files is to be done. The selection of DCTR is based on its detection efficiency in comparison to other parameters such as PHARM and GFR.

Ensemble Classifier Selection:

The decision to choose ensemble classifiers over deep learning techniques was made due to their superior steganalysis detection efficiency and their need for lesser computational power.

Bootstrapping:

Bootstrapping is the process of splitting a large dataset into its smaller subsets. The gathered DCTR feature vectors are to be split into more manageable subsets. Utilizing these subsets, individual base models are to be trained independently.

Base Learner Training:

Based on the extracted features, each base learner independently processes its subset of feature vectors and finalizes a decision.

Aggregation:

To create an ensemble decision, the choices made by each individual base learner are aggregated and the final decision is to be made by using a voting system which finalizes the result by figuring out the most popular output.

Efficiency Considerations:

The proposed system prioritizes efficiency by leveraging shallow machine learning techniques, particularly ensemble classifiers instead of deep learning. The choice of DCT as a feature is intentional to increase efficiency and detection capability of the system.

4.3 System Architecture

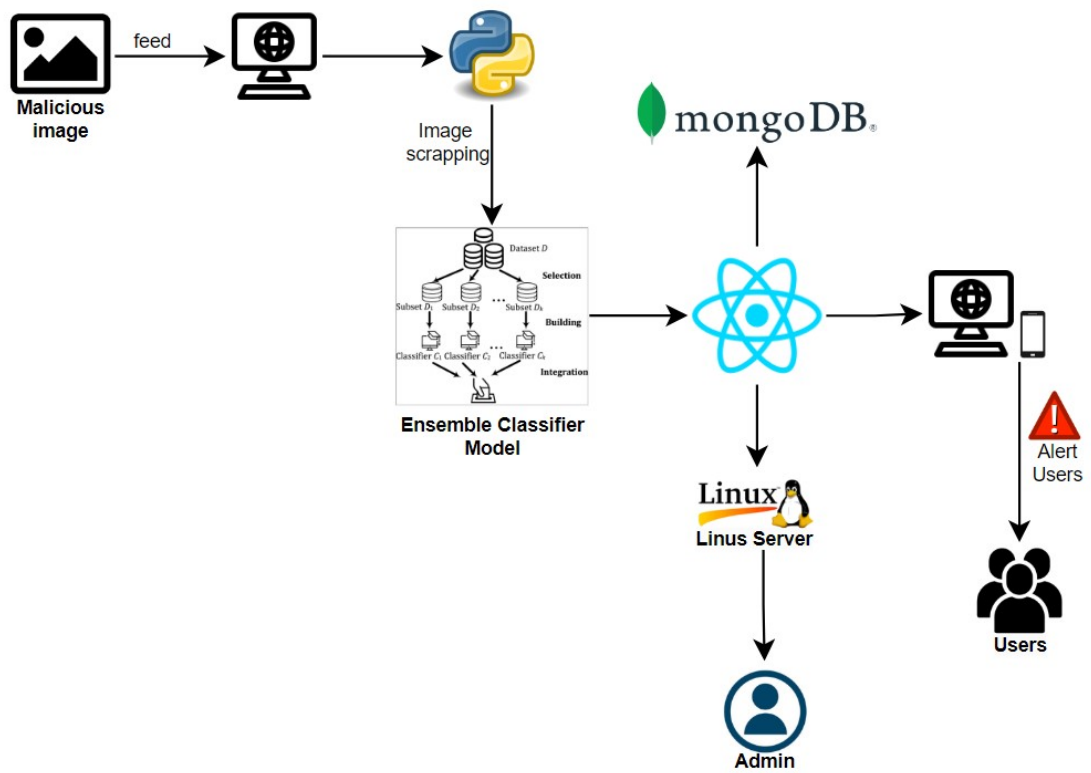


Figure 4.3: System Architecture

Chapter 5

Implementation Plan

5.1 Gantt Chart

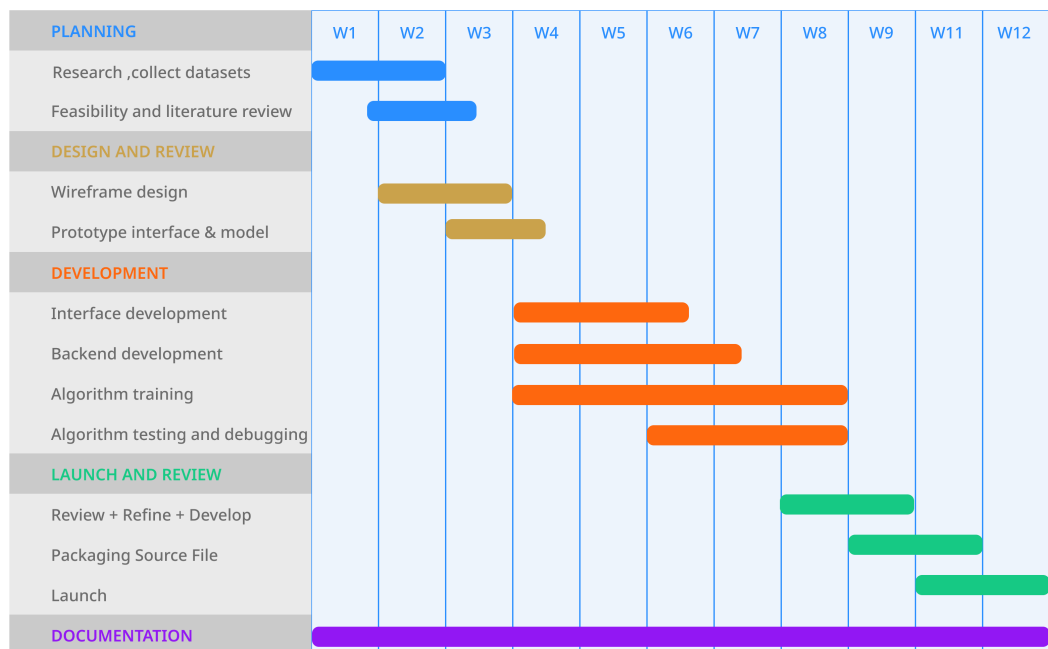


Figure 5.1: Gantt Chart

5.2 Software Requirement

- **Python:** Python is a versatile programming language commonly used for developing software applications. It can be used for various tasks in the system, such as backend development, data processing, and machine learning integration.
- **MongoDB:** MongoDB is a widely used NoSQL database, utilizes JSON-like documents for data storage, ensuring excellent performance and scalability. Its schema-less structure supports dynamic data modeling, making it well-suited for web applications. By employing collections instead of conventional tables and incorporating horizontal scaling, MongoDB efficiently handles diverse data types across multiple servers. This versatility positions it as a robust solution for contemporary, data-driven environments.
- **React** React is a JavaScript library for building user interfaces, particularly in single-page applications. Developed by Facebook, it uses a declarative approach for efficiently updating the DOM. With a component-based structure, React enhances modularity and reusability, making it a popular choice for creating interactive and scalable web applications.
- **Javascript:** JavaScript is a programming language commonly used for developing web-based applications. It can be used for front-end development, implementing interactive features on the system's web interface, and facilitating communication with the backend.
- **Tensorflow:** TensorFlow is an open-source machine-learning framework that provides a wide range of tools and libraries for building and deploying machine-learning models. It can be used for image recognition, object detection, and prediction algorithms in the Smart Parking Management System.
- **Keras:** Keras is a high-level neural networks API written in Python. It can be used as a user-friendly interface to TensorFlow, simplifying the process of designing and training deep learning models for tasks like number plate recognition or image analysis in the system.
- **VS Code:** VS Code is a popular and widely used source code editor that offers a range of features and extensions to enhance the development experience. It supports multiple programming languages, including Python, JavaScript, and React, making it suitable for working with the different components of the system.

5.3 Hardware Requirement

1. High dedicated RAM to handle memory-intensive tasks
2. NVIDIA GPU for optimal performance.
3. Dedicated GPU with CUDA support for accelerated parallel processing.
4. SSD storage for faster read/write speeds during image processing.
5. Additional high-capacity external storage for storing large datasets and image collections.
6. Smartphone or tablet for testing mobile applications

Chapter 6

Expected Outcomes

The proposed system is expected to detect steganographically modified images using ML model. It would be capable of detecting hidden information with high accuracy. It is expected to be able to identify specificity of steganalysis using shallow Machine Learning.

Chapter 7

Bibliography

- [1] Osama F AbdelWahab, Aziza I Hussein, Hesham FA Hamed, Hamdy M Kelash, Ashraf AM Khalaf, and Hanafy M Ali. Hiding data in images using steganography techniques with compression algorithms. *TELKOMNIKA (Telecommunication Computing Electronics and Control)*, 17(3):1168–1175, 2019.
- [2] George Berg, Ian Davidson, Ming-Yuan Duan, and Goutam Paul. Searching for hidden messages: Automatic detection of steganography. In John Riedl and Randall W. Hill Jr., editors, *Proceedings of the Fifteenth Conference on Innovative Applications of Artificial Intelligence, August 12-14, 2003, Acapulco, Mexico*, pages 51–56. AAAI, 2003.
- [3] Jessica Fridrich, Miroslav Goljan, and Dorin Hoge. Steganalysis of jpeg images: Breaking the f5 algorithm. In *Information Hiding: 5th International Workshop, IH 2002 Noordwijkerhout, The Netherlands, October 7-9, 2002 Revised Papers 5*, pages 310–323. Springer, 2003.
- [4] Jessica Fridrich, Miroslav Goljan, and David Soukal. Efficient wet paper codes. In *International Workshop on Information Hiding*, pages 204–218. Springer, 2005.
- [5] Jessica Fridrich, Petr Lisoněk, and David Soukal. On steganographic embedding efficiency. In *Information Hiding: 8th International Workshop, IH 2006, Alexandria, VA, USA, July 10-12, 2006. Revised Selected Papers 8*, pages 282–296. Springer, 2007.
- [6] Junjun Gan, Jiufen Liu, Xiangyang Luo, Chunfang Yang, and Fenlin Liu. Reliable steganalysis of higo steganography based on partially known plaintext. *Multimedia Tools and Applications*, 77(14):18007–18027, 2018.
- [7] Ojaas Hampiholi. Image compression — dct method, 2021. <https://www.towardsdatascience.com/image-compression-dct-method-f2bb79419587>.
- [8] Mark T Hogan, Neil J Hurley, Guénolé CM Silvestre, Félix Balado, and Kevin M Whelan. MI detection of steganography. In *Security, Steganography, and Watermarking of Multimedia Contents VII*, volume 5681, pages 16–27. SPIE, 2005.
- [9] Syed Ali Khayam. The discrete cosine transform (dct): theory and application. *Michigan State University*, 114(1):31, 2003.

- [10] Jan Kodovsky and Jessica Fridrich. Steganalysis in high dimensions: Fusing classifiers built on random subspaces. *Proceedings of SPIE - The International Society for Optical Engineering*, 02 2011.
- [11] Jan Kodovsky, Jessica Fridrich, and Vojtech Holub. Ensemble classifiers for steganalysis of digital media. *IEEE Transactions on Information Forensics and Security*, 7, 04 2012.
- [12] Jan Kodovský and Jessica Fridrich. Calibration revisited. In *Proceedings of the 11th ACM Workshop on Multimedia and Security, MM&Sec '09*, page 63–74, New York, NY, USA, 2009. Association for Computing Machinery.
- [13] Xiangyang Luo, Xiaofeng Song, Xiaolong Li, Weiming Zhang, Jicang Lu, Chunfang Yang, and Fenlin Liu. Steganalysis of hugo steganography based on parameter recognition of syndrome-trellis-codes. *Multimedia Tools and Applications*, 75:13557–13583, 2016.
- [14] Tayana Morkel, Jan HP Eloff, and Martin S Olivier. An overview of image steganography. In *ISSA*, volume 1, pages 1–11, 2005.
- [15] Arooj Nissar and Ajaz Hussain Mir. Classification of steganalysis techniques: A study. *Digital Signal Processing*, 20(6):1758–1770, 2010.
- [16] Tomáš Pevný and Jessica J. Fridrich. Merging markov and dct features for multi-class jpeg steganalysis. In *Electronic imaging*, 2007.
- [17] Mikołaj Płachta, Marek Krzemień, Krzysztof Szczypiorski, and Artur Janicki. Detection of image steganography using deep learning and ensemble classifiers. *Electronics*, 11(10):1565, 2022.
- [18] Yun Q. Shi, Chunhua Chen, and Wen Chen. A markov process based approach to effective attacking jpeg steganography. In Jan L. Camenisch, Christian S. Collberg, Neil F. Johnson, and Phil Sallee, editors, *Information Hiding*, pages 249–264, Berlin, Heidelberg, 2007. Springer Berlin Heidelberg.
- [19] Arezoo Torkaman and Reza Safabakhsh. A fast and accurate steganalysis using ensemble classifiers. In *2013 8th Iranian Conference on Machine Vision and Image Processing (MVIP)*, pages 22–26, 2013.
- [20] Zhongliang Yang, Ke Wang, Sai Ma, Yongfeng Huang, Xiangui Kang, and Xianfeng Zhao. Istego100k: Large-scale image steganalysis dataset. In *International Workshop on Digital Watermarking*. Springer, 2019.