



MALAD KANDIVALI EDUCATION SOCIETY'S

**NAGINDAS KHANDWALA COLLEGE OF COMMERCE, ARTS &
MANAGEMENT STUDIES & SHANTABEN NAGINDAS KHANDWALA
COLLEGE OF SCIENCE**

MALAD [W], MUMBAI – 64

AUTONOMOUS INSTITUTION

(Affiliated To University Of Mumbai)

Reaccredited 'A' Grade by NAAC | ISO 9001:2015 Certified

CERTIFICATE

Name: **Shravan Shivanand Kamat**

Roll No: **372**

Programme: BSc IT/CS

Semester: III

This is certified to be a bonafide record of practical works done by the above student in the college laboratory for the course **Hybrid Application Development(classcode: 2037UCSMD)** for the partial fulfilment of Third Semester of BSc IT/CS during the academic year 2020-21.

The journal work is the original study work that has been duly approved in the year 2020-21 by the undersigned.

External Examiner

Mr. Gangashankar Singh
(Subject-In-Charge)

Date of Examination:

(College Stamp)

Subject: Hybrid Application Development**INDEX**

Sr. No	Date	Topic	Sign
1	27/07/2020	AngularJS Data Binding	
2	7/08/2020	AngularJS Directives	
3	14/08/2020	AngularJS Controllers	
4	25/08/2020	AngularJS Events	
5	08/09/2020	Ionic Create and Build First Project	
6	12/09/2020	Ionic Adding Cordova Android Platform	
7	19/09/2020	Ionic Create, Generate and Add Pages	
8	29/09/2020	Ionic Use Tabs Starter Template	


Hybrid Application Development Practicals

Practical 1 : AngularJS Data Binding

What is Data Binding in AngularJS?

Data-binding in AngularJS apps is the automatic synchronization of data between the model and view components. While you could push values to and pull values from HTML, the application is easier to write, read, and maintain if you turn these tasks over to a binding framework. You simply declare bindings between binding sources, target HTML elements, and let the framework do the rest.


Code:

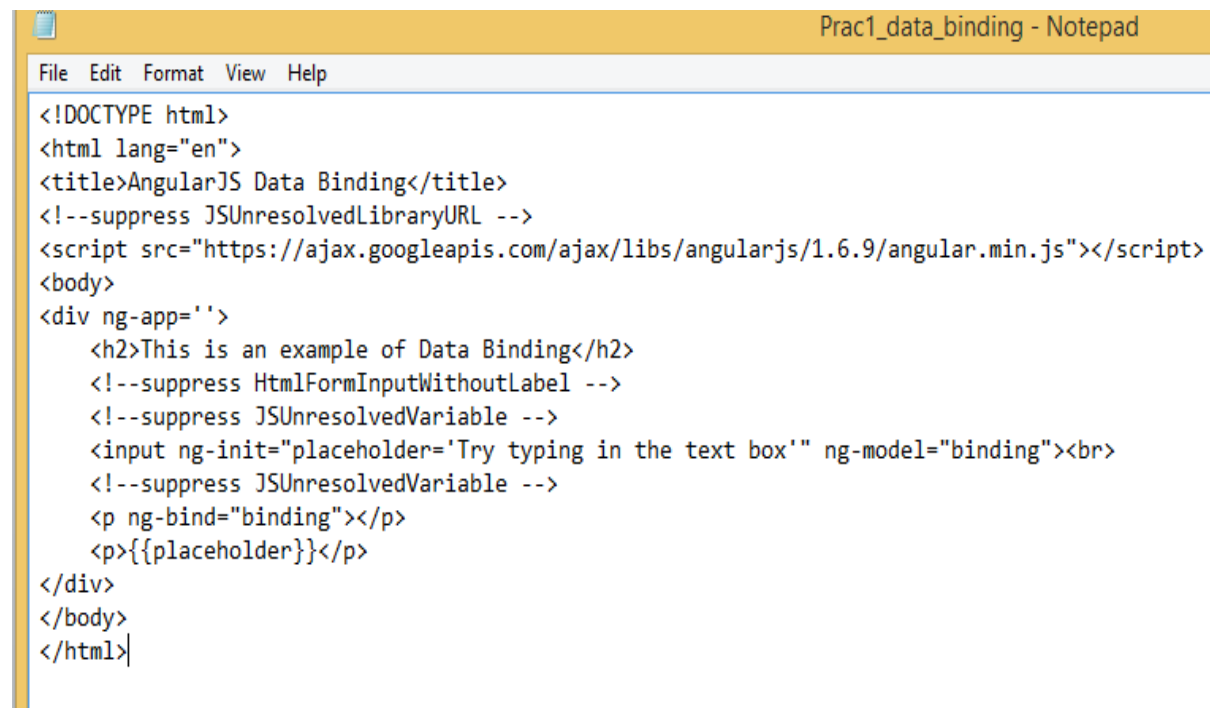


```
Prac1_data_binding - Notepad
File Edit Format View Help
<!DOCTYPE html>
<html lang="en">
<title>AngularJS Data Binding</title>
<!--suppress JSUnresolvedLibraryURL -->
<script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>
<body>
<div ng-app=''>
  <h2>This is an example of Data Binding</h2>
  <!--suppress HtmlFormInputWithoutLabel -->
  <!--suppress JSUnresolvedVariable -->
  <input ng-init="placeholder='Try typing in the text box'" ng-model="binding"><br>
  <!--suppress JSUnresolvedVariable -->
  <p ng-bind="binding"></p>
  <p>{{placeholder}}</p>
</div>
</body>
</html>
```

Output:

-Without any text

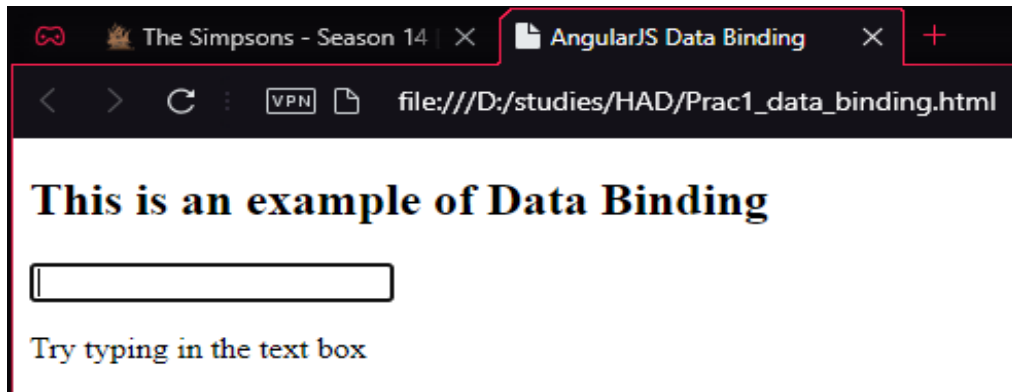


-With text

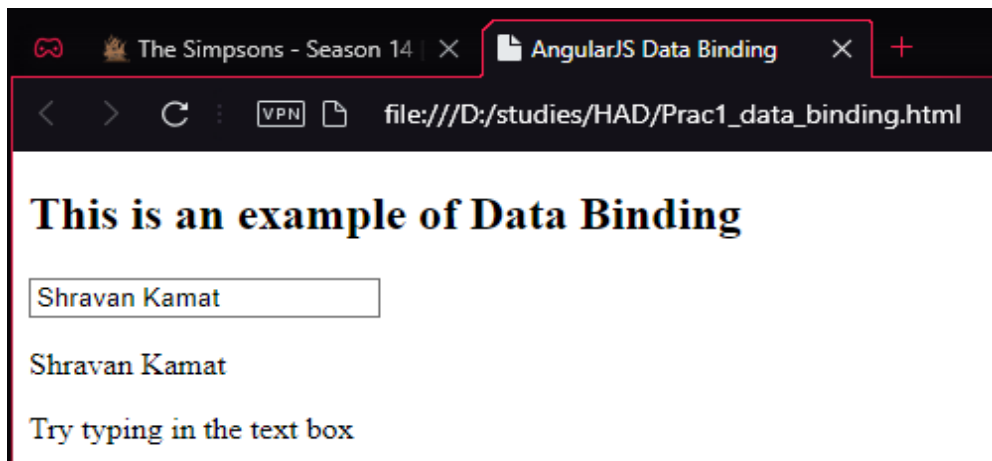

Output:

-Values entered



Some built-in directives are ng-app, ng-init, ng-repeat, ng-model, ng-bind

- Janki, Ayodhya
- Helge, Germany
- Kaikayi, Lanka

Quantity:

Costs:

Quantity: 150

Cost per unit: 10

Total : 1500\$

In addition to all the built-in AngularJS directives, you can create your own directives.


This was made by a custom directive

Practical 3 : AngularJS Controllers

What are Controllers in AngularJS?

AngularJS applications mainly rely on controllers to control the flow of data in the application. A controller is defined using ng-controller directive. A controller is a JavaScript object that contains attributes/properties, and functions. Each controller accepts \$scope as a parameter, which refers to the application/module that the controller needs to handle.


Code:

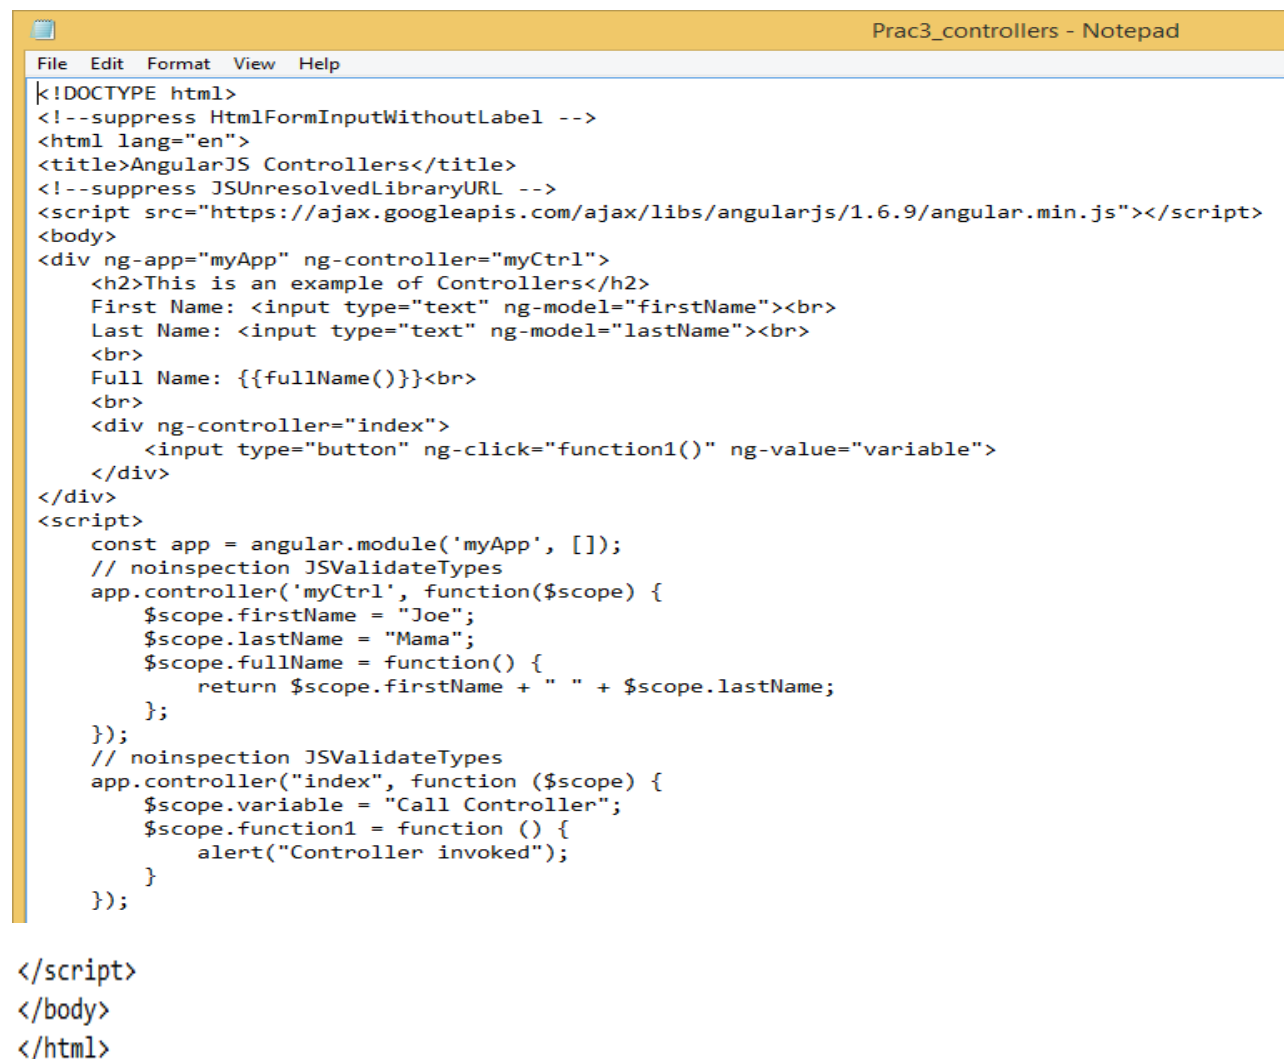


```
Prac3_controllers - Notepad
File Edit Format View Help
<!DOCTYPE html>
<!--suppress HtmlFormInputWithoutLabel -->
<html lang="en">
<title>AngularJS Controllers</title>
<!--suppress JSUnresolvedLibraryURL -->
<script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>
<body>
<div ng-app="myApp" ng-controller="myCtrl">
  <h2>This is an example of Controllers</h2>
  First Name: <input type="text" ng-model="firstName"><br>
  Last Name: <input type="text" ng-model="lastName"><br>
  <br>
  Full Name: {{fullName()}}<br>
  <br>
  <div ng-controller="index">
    <input type="button" ng-click="function1()" ng-value="variable">
  </div>
</div>
<script>
  const app = angular.module('myApp', []);
  // noinspection JSValidateTypes
  app.controller('myCtrl', function($scope) {
    $scope.firstName = "Joe";
    $scope.lastName = "Mama";
    $scope.fullName = function() {
      return $scope.firstName + " " + $scope.lastName;
    };
  });
  // noinspection JSValidateTypes
  app.controller("index", function ($scope) {
    $scope.variable = "Call Controller";
    $scope.function1 = function () {
      alert("Controller invoked");
    }
  })
</script>
</body>
</html>
```

Output:

-On initialising

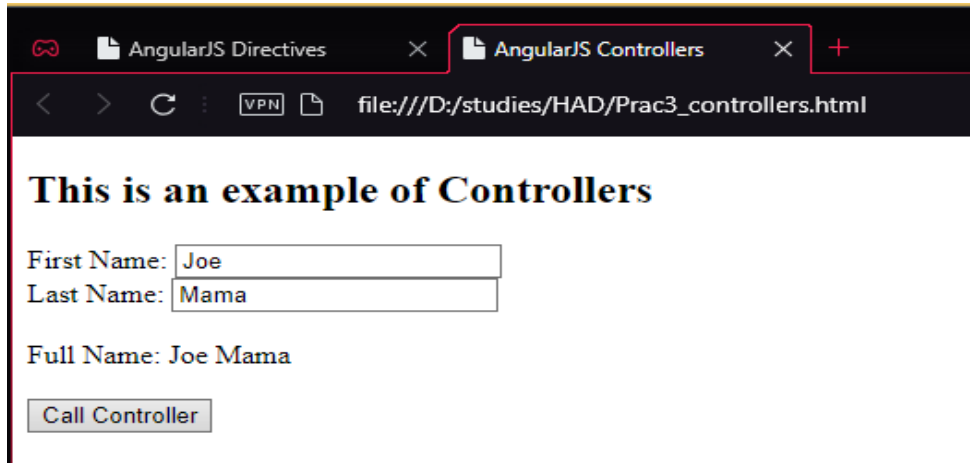

-After pressing the button

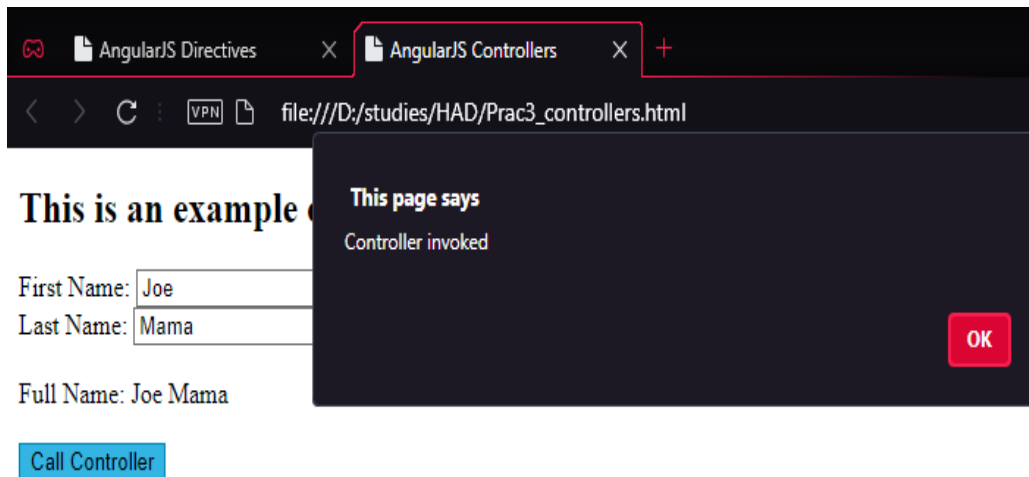

Practical 4 : AngularJS Events

What are Events in AngularJS?

AngularJS includes certain directives which can be used to provide custom behavior on various DOM events, such as click, mouseover etc.

An AngularJS event will not overwrite an HTML event, both events will be executed.

You can pass the \$event object as an argument when calling the function. The \$event object contains the browser's event object.

Code:

```

Prac4_events - Notepad
File Edit Format View Help
<!DOCTYPE html>
<html lang="en">
<title>AngularJS Events</title>
<!--suppress JSUnresolvedLibraryURL -->
<script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>
<body>
<div ng-app="event">
  <h2>This is an example of Events</h2>
  <div ng-controller="eventController1" ng-init="value=0">
    {{value}}&nbsp;
    <button ng-click="value=value+1">Increment Number</button>
    <br>
    <h4 ng-mouseover="mouseover()" ng-mouseleave="mouseleave()" style="width: fit-content;cursor: pointer">{{text}}</h4>
    <button ng-click="show()">Toggle Division</button>
    <div ng-show="showNames" ng-init="names=[
      {name:'Janki',country:'Ayodhya'},
      {name:'Helge',country:'Germany'},
      {name:'Kaikayi',country:'Lanka'}]">
      <ul>
        <li ng-repeat="x in names">
          {{ x.name + ', ' + x.country }}
        </li>
      </ul>
    </div>
    <h3 ng-mousemove="move($event)" style="width: fit-content">Move cursor over this text area</h3>
    <p>Coordinates: {{x + ', ' + y}}</p>
  </div>
</div>
<script>
  const app = angular.module('event', []);
  // noinspection JSTypes
  app.controller('eventController1', function ($scope) {
    $scope.text = "Hover the cursor over this text";
    $scope.mouseover = function() {
      $scope.text = "Cursor is over the textarea";
    }
    $scope.mouseleft = function() {
      $scope.text = "Cursor is not over the textarea";
    }
    $scope.showNames = false;
    $scope.show = function() {
      $scope.showNames = !$scope.showNames;
    }
    $scope.move = function(event_object) {
      $scope.x = event_object.clientX;
      $scope.y = event_object.clientY;
    }
  });
</script>
</body>
</html>

```

Activate
Go to PC s

Output:

-After triggering all events



Practical 5 : Ionic Create and Build First Project

What is a hybrid app?

Like native apps, run on the device, and are written with web technologies (HTML5, CSS and JavaScript). Hybrid apps run inside a native container, and leverage the device's browser engine (but not the browser) to render the HTML and process the JavaScript locally. A web-to-native abstraction layer enables access to device capabilities that are not accessible in Mobile Web applications, such as the accelerometer, camera and local storage. How to create and web app in Ionic:


Requirements:

1. Node.js with npm in path

Steps:

1. Open command prompt as administrator
2. Run `npm install -g ionic`
3. Create a folder for your ionic project by running `md <folder_name>`
4. Navigate to the folder by running `cd <folder_name>`
5. To create an ionic app run `ionic start <app_name> blank`
6. Then it will ask to choose a framework so choose Angular JS
7. Navigate to the folder by running `cd <app_name>`
8. Then to start running the ionic web page on the server type `ionic serve`
9. To access the web page go on <http://localhost:8100>

Code:

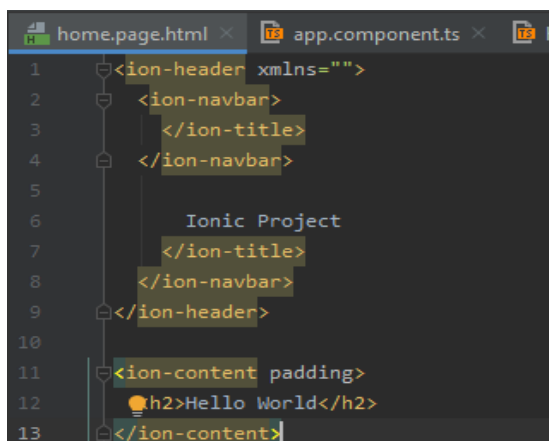

```
1 <ion-header xmlns="">
2   <ion-navbar>
3     </ion-title>
4   </ion-navbar>
5
6     Ionic Project
7   </ion-title>
8   </ion-navbar>
9 </ion-header>
10
11 <ion-content padding>
12   <h2>Hello World</h2>
13 </ion-content>
```

Output:

-Command Line (Step 8)

```
D:\android studio\myapps\myapps\src\app\home>ionic serve
> ng.cmd run app:serve --host=localhost --port=8100
[ng] chunk {} 0.js, 0.js.map () 31.2 kB [rendered]
[ng] WARNING in D:\android studio\myapps\myapps\src\test.ts is part of the TypeScript compilation but it's unused.
[ng] Add only entry points to the 'files' or 'include' properties in your tsconfig.
[ng] WARNING in D:\android studio\myapps\myapps\src\environments\environment.prod.ts is part of the TypeScript compilation but it's unused.
[ng] Add only entry points to the 'files' or 'include' properties in your tsconfig.
[ng] chunk {common} common.js, common.js.map (common) 14.7 kB [rendered]
[ng] chunk {focus-visible-15ada7f7-js} focus-visible-15ada7f7-js.js, focus-visible-15ada7f7-js.js.map (focus-visible-15ada7f7-js) 2.11 kB [rendered]
[ng] chunk {home-home-module} home-home-module.js, home-home-module.js.map (home-home-module) 7.85 kB [rendered]
[ng] chunk {input-shims-4f0dbb39-js} input-shims-4f0dbb39-js.js, input-shims-4f0dbb39-js.js.map (input-shims-4f0dbb39-js) 16.3 kB [rendered]
[ng] chunk {keyboard-dd970efc-js} keyboard-dd970efc-js.js, keyboard-dd970efc-js.js.map (keyboard-dd970efc-js) 6.16 kB [rendered]
[ng] chunk {main} main.js, main.js.map (main) 19.7 kB [initial] [rendered]
[ng] chunk {polyfills} polyfills.js, polyfills.js.map (polyfills) 268 kB [initial] [rendered]
[ng] chunk {polyfills-core-js} polyfills-core-js.js, polyfills-core-js.js.map (polyfills-core-js) 92.4 kB [rendered]
[ng] chunk {polyfills-css-shim} polyfills-css-shim.js, polyfills-css-shim.js.map (polyfills-css-shim) 10.5 kB [rendered]
[ng] chunk {polyfills-dom} polyfills-dom.js, polyfills-dom.js.map (polyfills-dom) 38.5 kB [rendered]
[ng] chunk {runtime} runtime.js, runtime.js.map (runtime) 9.53 kB [entry] [rendered]
[ng] chunk {shadow-css-c63963b5-js} shadow-css-c63963b5-js.js, shadow-css-c63963b5-js.js.map (shadow-css-c63963b5-js) 15.9 kB [rendered]
[ng] chunk {status-tap-0b3e89c4-js} status-tap-0b3e89c4-js.js, status-tap-0b3e89c4-js.js.map (status-tap-0b3e89c4-js) 1.6 kB [rendered]
[ng] chunk {styles} styles.js, styles.js.map (styles) 93 kB [initial] [rendered]
[ng] chunk {swipe-back-0a6a44c8-js} swipe-back-0a6a44c8-js.js, swipe-back-0a6a44c8-js.js.map (swipe-back-0a6a44c8-js) 3.05 kB [rendered]
[ng] chunk {swiper-bundle-95afeea2-js} swiper-bundle-95afeea2-js.js, swiper-bundle-95afeea2-js.js.map (swiper-bundle-95afeea2-js) 200 kB [rendered]
[ng] chunk {tap-click-252af35a-js} tap-click-252af35a-js.js, tap-click-252af35a-js.js.map (tap-click-252af35a-js) 6.22 kB [rendered]
[ng] chunk {vendor} vendor.js, vendor.js.map (vendor) 4.79 MB [initial] [rendered]
[ng] Date: 2020-11-07T14:57:37.095Z - Hash: 5e999d518c668a9dbfac - Time: 17119ms
```

```
[INFO] ... and 42 additional chunks
[ng] : Compiled successfully.






[INFO] Development server running!

      Local: http://localhost:8100

      Use Ctrl+C to quit this process

[INFO] Browser window opened to http://localhost:8100!
```

-Browser (Step 9)

 Google  (1) WhatsApp  Dashboard | Hacker...  Coursera | Online C...  Inbox (266) - kamat...

Ionic Project

Hello World

Practical 6 : Ionic Adding Cordova Android Platform

What is Cordova?

Apache Cordova is an open-source mobile development framework. It allows you to use standard web technologies - HTML5, CSS3, and JavaScript for cross-platform development. Applications execute within wrappers targeted to each platform, and rely on standards-compliant API bindings to access each device's capabilities such as sensors, data, network status, etc. Cordova can be used as an integration for Ionic to export Ionic web apps to Native mobile applications like an Android APK.

Requirements:


1. Java 8 in path and JAVA_HOME set
2. Android SDK with ANDROID_SDK_ROOT set
3. Gradle in path

Steps:

1. Install cordova resources by running `npm install -g cordova-res`
2. To add support for the Android platform run `ionic cordova platform add android`
3. To build a debug Android APK run `ionic cordova build android`
4. Install app-debug.apk in your device
from `{project_root}\platforms\android\app\build\outputs\apk\debug`

Output:

-Command Line (Step 2)

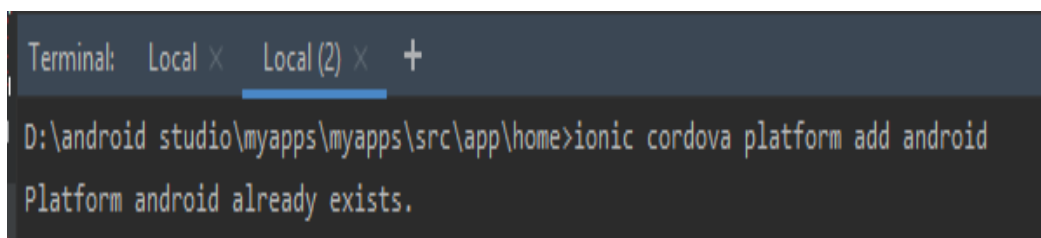

```
Terminal: Local x Local(2) x +
D:\android studio\myapps\myapps\src\app\home>ionic cordova platform add android
Platform android already exists.
```

-Command Line (Step 3)

```
D:\android_studio\myapps\myapps\src\app\home>ionic cordova build android
> ng.cmd run app:ionic-cordova-build --platform=android
Generating ES5 bundles for differential loading...
ES5 bundle generation complete.

chunk {polyfills} polyfills-es2015.js, polyfills-es2015.js.map (polyfills) 268 kB [initial] [rendered]
chunk {polyfills-es5} polyfills-es5.js, polyfills-es5.js.map (polyfills-es5) 736 kB [initial] [rendered]
chunk {3} 3-es2015.js, 3-es2015.js.map () 6.16 kB [rendered]
chunk {3} 3-es5.js, 3-es5.js.map () 8.09 kB [rendered]
chunk {0} 0-es2015.js, 0-es2015.js.map () 31.2 kB [rendered]
chunk {0} 0-es5.js, 0-es5.js.map () 37.8 kB [rendered]
chunk {6} 6-es2015.js, 6-es2015.js.map () 33.4 kB [rendered]
chunk {6} 6-es5.js, 6-es5.js.map () 37.9 kB [rendered]
chunk {4} 4-es2015.js, 4-es2015.js.map () 16.3 kB [rendered]
chunk {4} 4-es5.js, 4-es5.js.map () 20.6 kB [rendered]
chunk {1} 1-es2015.js, 1-es2015.js.map () 47.7 kB [rendered]
chunk {1} 1-es5.js, 1-es5.js.map () 56.8 kB [rendered]
chunk {2} 2-es2015.js, 2-es2015.js.map () 67.1 kB [rendered]
chunk {2} 2-es5.js, 2-es5.js.map () 92.8 kB [rendered]
chunk {10} 10-es2015.js, 10-es2015.js.map () 16.3 kB [rendered]
chunk {10} 10-es5.js, 10-es5.js.map () 20.7 kB [rendered]
chunk {9} 9-es2015.js, 9-es2015.js.map () 9.69 kB [rendered]
chunk {9} 9-es5.js, 9-es5.js.map () 11.1 kB [rendered]
chunk {7} 7-es2015.js, 7-es2015.js.map () 16.6 kB [rendered]
chunk {7} 7-es5.js, 7-es5.js.map () 19.7 kB [rendered]
chunk {5} 5-es2015.js, 5-es2015.js.map () 3.72 kB [rendered]
```

```
Terminal: Local x Local (2) x +
chunk {home-home-module} home-home-module-es5.js, home-home-module-es5.js.map (home-home-module) 9.07 kB [rendered]
chunk {cordova} cordova.js, cordova.js.map (cordova) 61.8 kB [entry] [rendered]
Date: 2020-11-07T15:11:58.953Z - Hash: a6dcc053c9512b02e6b2 - Time: 32041ms

WARNING in D:\android_studio\myapps\myapps\src\test.ts is part of the TypeScript compilation but it's unused.
Add only entry points to the 'files' or 'include' properties in your tsconfig.

WARNING in D:\android_studio\myapps\myapps\src\environments\environment.prod.ts is part of the TypeScript compilation but it's unused.
Add only entry points to the 'files' or 'include' properties in your tsconfig.
> cordova.cmd build android
Checking Java JDK and Android SDK versions
ANDROID_SDK_ROOT=C:\Users\Admin\AppData\Local\Android\Sdk (recommended setting)
ANDROID_HOME=undefined (DEPRECATED)
Using Android SDK: C:\Users\Admin\AppData\Local\Android\Sdk
Subproject Path: CordovaLib
Subproject Path: app
Starting a Gradle Daemon, 1 incompatible and 1 stopped Daemons could not be reused, use --status for details

Deprecated Gradle features were used in this build, making it incompatible with Gradle 7.0.
Use '--warning-mode all' to show the individual deprecation warnings.
See https://docs.gradle.org/6.5/userguide/command\_line\_interface.html#sec:command\_line\_warnings

BUILD SUCCESSFUL in 36s
40 actionable tasks: 2 executed, 38 up-to-date
Built the following apk(s):
D:\android_studio\myapps\myapps\platforms\android\app\build\outputs\apk\debug\app-debug.apk
```

-Android App (After Step 4)



Practical 7 : Ionic Create, Generate and Add Pages

What are Ionic Pages?

An Ionic page is just an Angular component.

The Ionic Page handles registering and displaying specific pages based on URLs. It's used underneath NavController so it will never have to be interacted with directly. When a new page is pushed with NavController, the URL is updated to match the path to this page.


Unlike traditional web apps, URLs don't dictate navigation in Ionic apps. Instead, URLs help us link to specific pieces of content as a breadcrumb. The current URL gets updated as we navigate, but we use the NavController push and pop, or NavPush and NavPop to move around. This makes it much easier to handle complicated nested navigation.

The ionic generate or ionic g command uses the Angular CLI to generate features such as pages, components, directives, services, etc.

Steps:

1. Open command prompt as administrator
2. Create a folder for your ionic project by running `md <folder_name>`
3. Navigate to the folder by running `cd <folder_name>`
4. To create an ionic app run `ionic start <app_name> blank`
5. Then it will ask to choose a framework so choose "Angular JS"
6. Navigate to the folder by running `cd <app_name>`
7. To generate and add a page run `ionic g page <page_name>`
8. This will create a folder with all the components of your page in `{project_root}\src\app\{page_name}`
9. Then to start running the ionic web page on the server type `ionic serve`
10. To access the web page go on http://localhost:8100/{page_name}

Code:

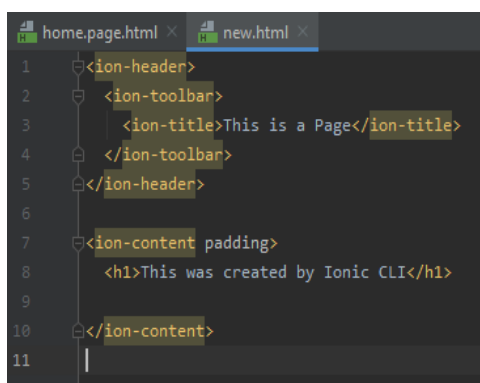


```
1 <ion-header>
2   <ion-toolbar>
3     <ion-title>This is a Page</ion-title>
4   </ion-toolbar>
5 </ion-header>
6
7 <ion-content padding>
8   <h1>This was created by Ionic CLI</h1>
9
10 </ion-content>
11
```


Output;

-Command Line (Step 7)

```
D:\android studio\myapps\myapps\src\app\home>ionic g page new  
> ng.cmd generate page new  
CREATE src/app/home/new/new-routing.module.ts (335 bytes)  
CREATE src/app/home/new/new.module.ts (451 bytes)  
CREATE src/app/home/new/new.page.html (122 bytes)  
CREATE src/app/home/new/new.page.spec.ts (626 bytes)  
CREATE src/app/home/new/new.page.ts (244 bytes)  
CREATE src/app/home/new/new.page.scss (0 bytes)  
UPDATE src/app/home/home-routing.module.ts (708 bytes)  
[OK] Generated page!
```

-Browser (Step 10)

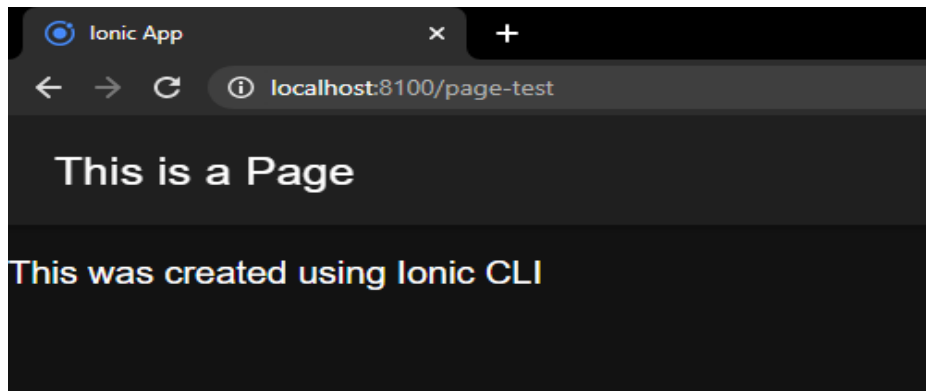

Practical 8 : Ionic Use Tabs Starter Template

What are Ionic Starter Templates?

Ionic Starter Templates are ready-to-go starter packs for your next Ionic app.

Between all project types, there are three templates available:

- tabs: A tab based layout
- sidemenu: A sidemenu based layout
- blank: An empty project with a single page

We will be using 'tabs' in the practical

Steps:

1. Open command prompt as administrator
2. Create a folder for your ionic project by running `md <folder_name>`
3. Navigate to the folder by running `cd <folder_name>`
4. To create an ionic app run `ionic start <app_name> tabs`
5. Then it will ask to choose a framework so choose Angular JS
6. Navigate to the folder by running `cd <app_name>`
7. Then to start running the ionic web page on the server type `ionic serve`
8. To access the web page go on <http://localhost:8100>

Code:

```
1  <ion-header [translucent]="true">
2    <ion-toolbar>
3      <ion-title>
4        Tab 2
5      </ion-title>
6    </ion-toolbar>
7  </ion-header>
8
9  <ion-content [fullscreen]="true">
10    <ion-header collapse="condense">
11      <ion-toolbar>
12        <ion-title size="large">Tab 2</ion-title>
13      </ion-toolbar>
14    </ion-header>
15
16    <app-explore-container name="Tab 2 page"></app-explore-container>
17  </ion-content>
```

Output:

-Command Line (Step 4)

```
D:\android studio\Newapp\comp\src\app\tab2>ionic start tab2 tabs

Pick a framework!

Please select the JavaScript framework to use for your new app. To bypass this prompt next time, supply a value for the
--type option.

? Framework: Angular
? You are already in an Ionic project directory. Do you really want to start another project here? Yes
✓ Preparing directory .\tab2 - done!
✓ Downloading and extracting tabs starter - done!

Installing dependencies may take several minutes.

_____

Ionic Enterprise, platform and solutions for teams by Ionic

Powerful library of native APIs
A supercharged platform for teams

Learn more: https://ion.link/enterprise

_____
```

```
> npm.cmd i
npm WARN deprecated request@2.88.2: request has been deprecated, see https://github.com/request/request/issues/3142
npm WARN deprecated chokidar@2.1.8: Chokidar 2 will break on node v14+. Upgrade to chokidar 3 with 15x less dependencies.
npm WARN deprecated har-validator@5.1.5: this library is no longer supported
npm WARN deprecated fsevents@1.2.13: fsevents 1 will break on node v14+ and could be using insecure binaries. Upgrade to fsevents 2.
npm WARN deprecated unix@0.1.0: Please see https://github.com/lydell/unix#deprecated
npm WARN deprecated resolve-url@0.2.1: https://github.com/lydell/resolve-url#deprecated

> core-js@3.6.4 postinstall D:\android studio\Newapp\comp\src\app\tab2\tab2\node_modules\core-js
> node -e "try{require('./postinstall')}catch(e){}"

Thank you for using core-js ( https://github.com/zloirock/core-js ) for polyfilling JavaScript standard library!

The project needs your help! Please consider supporting of core-js on Open Collective or Patreon:
> https://opencollective.com/core-js
> https://www.patreon.com/zloirock

Also, the author of core-js ( https://github.com/zloirock ) is looking for a good job -)

> @angular/cli@10.0.8 postinstall D:\android studio\Newapp\comp\src\app\tab2\tab2\node_modules\@angular\cli
> node ./bin/postinstall/script.js

npm notice created a lockfile as package-lock.json. You should commit this file.
npm WARN optional SKIPPING OPTIONAL DEPENDENCY: fsevents@~2.1.2 (node_modules\rollup\node_modules\fsevents):
npm WARN notsup SKIPPING OPTIONAL DEPENDENCY: Unsupported platform for fsevents@2.1.3: wanted {"os":"darwin","arch":"any"} (current: {"os":"win32","arch":"x64"})
```

-Browser (Step 8)

