


Compact strings with reference values, aligned value boxes, and consistent arrows

Node chain


The introductory Node chain: Cheese → Bread → Milk. Each item stays inside its Node; next references retain their existing arrows.

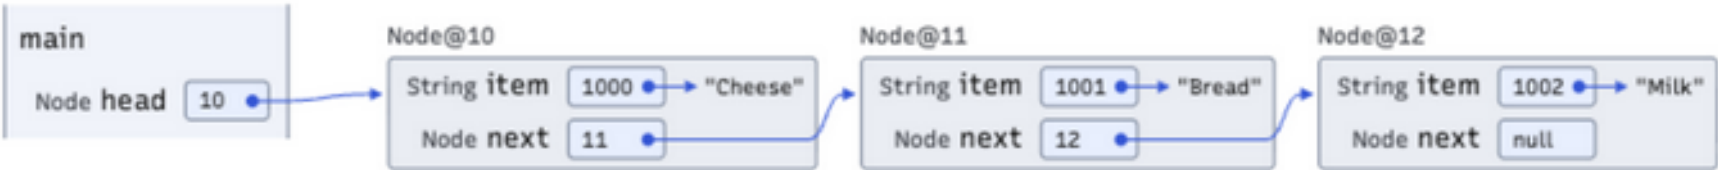

Compact strings with reference values, aligned value boxes, and consistent arrows

Three-node cycle


Additional fixture: Cheese → Bread → Milk → Cheese. The last Node points back to head, forming a three-node cycle.

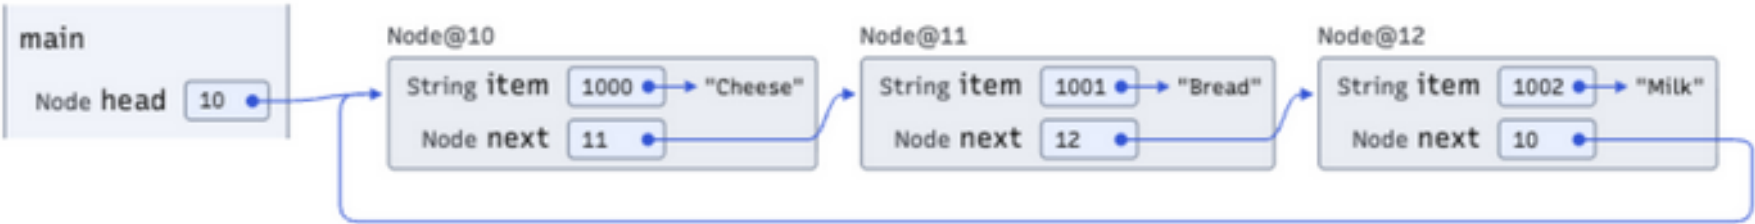

Compact strings with reference values, aligned value boxes, and consistent arrows

LinkBasedList


List interface variable backed by LinkBasedList, after four insertions.

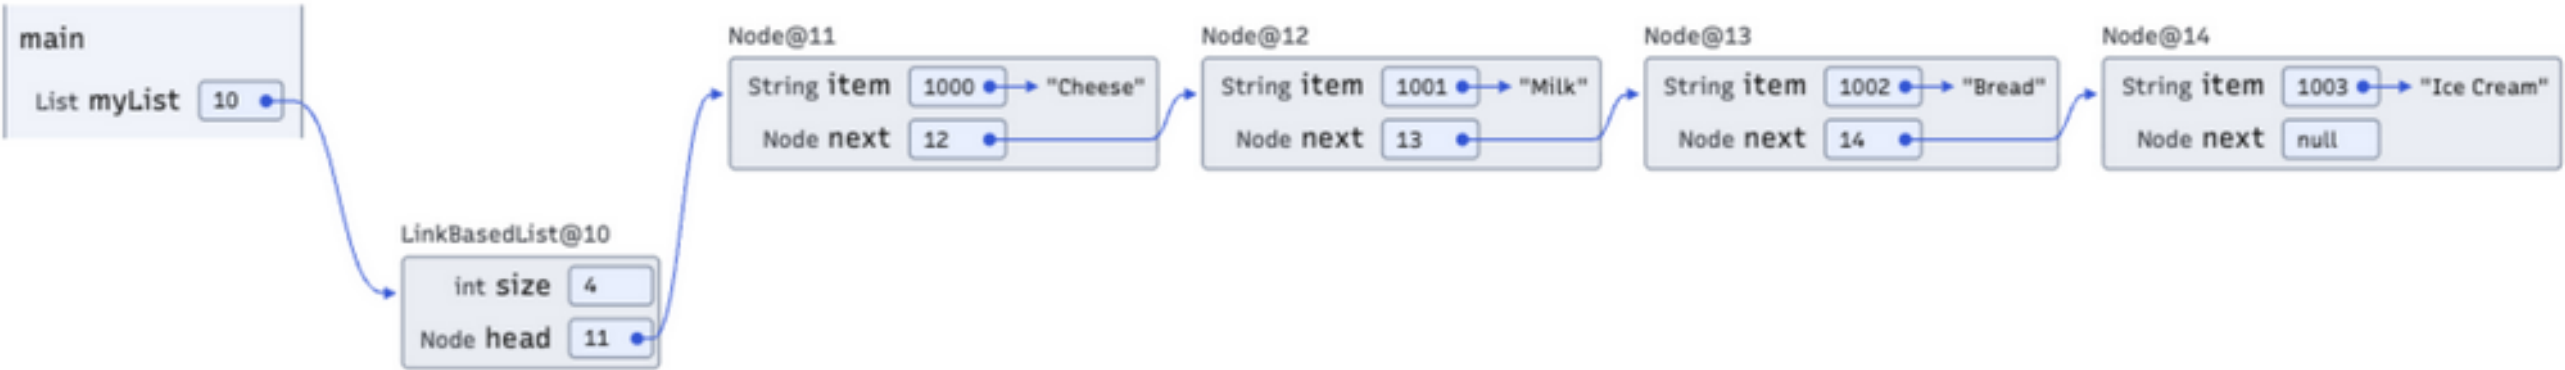

Compact strings with reference values, aligned value boxes, and consistent arrows

ArrayBasedList — horizontal array


List interface variable backed by ArrayBasedList. Four occupied components and one unused null component.

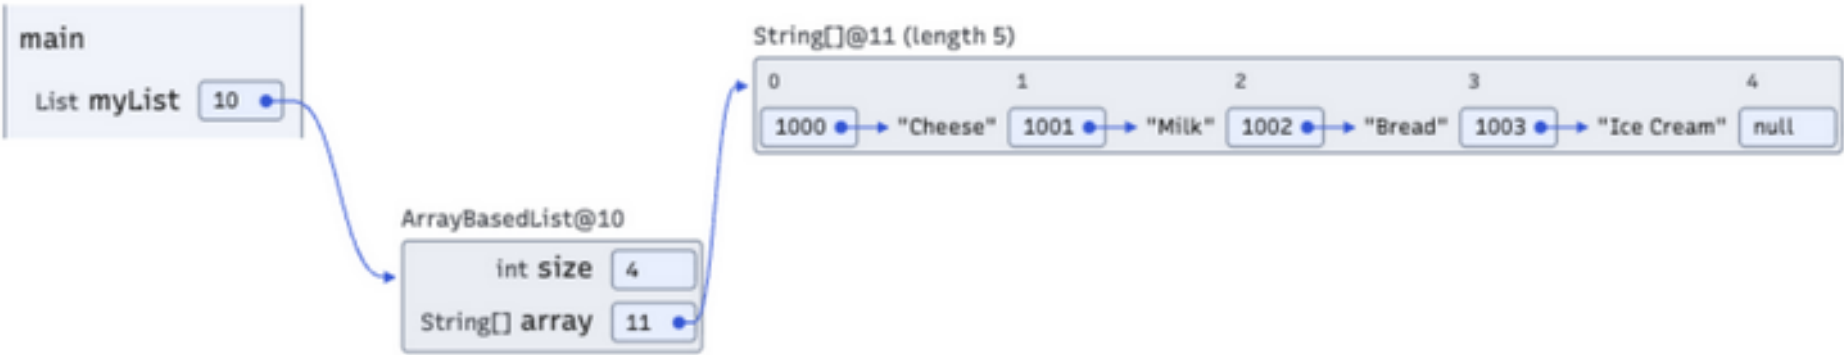

Compact strings with reference values, aligned value boxes, and consistent arrows

ArrayBasedList — vertical array


List interface variable backed by ArrayBasedList. Four occupied components and one unused null component.

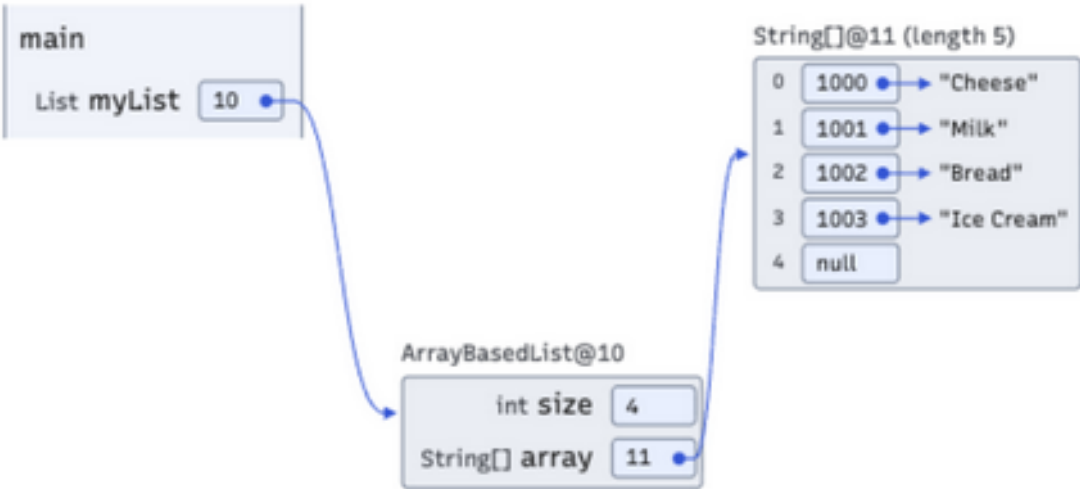

Compact strings with reference values, aligned value boxes, and consistent arrows

Both implementations after removal


Both implementations after removing Cheese: Milk, Bread, Ice Cream. The array retains capacity five.

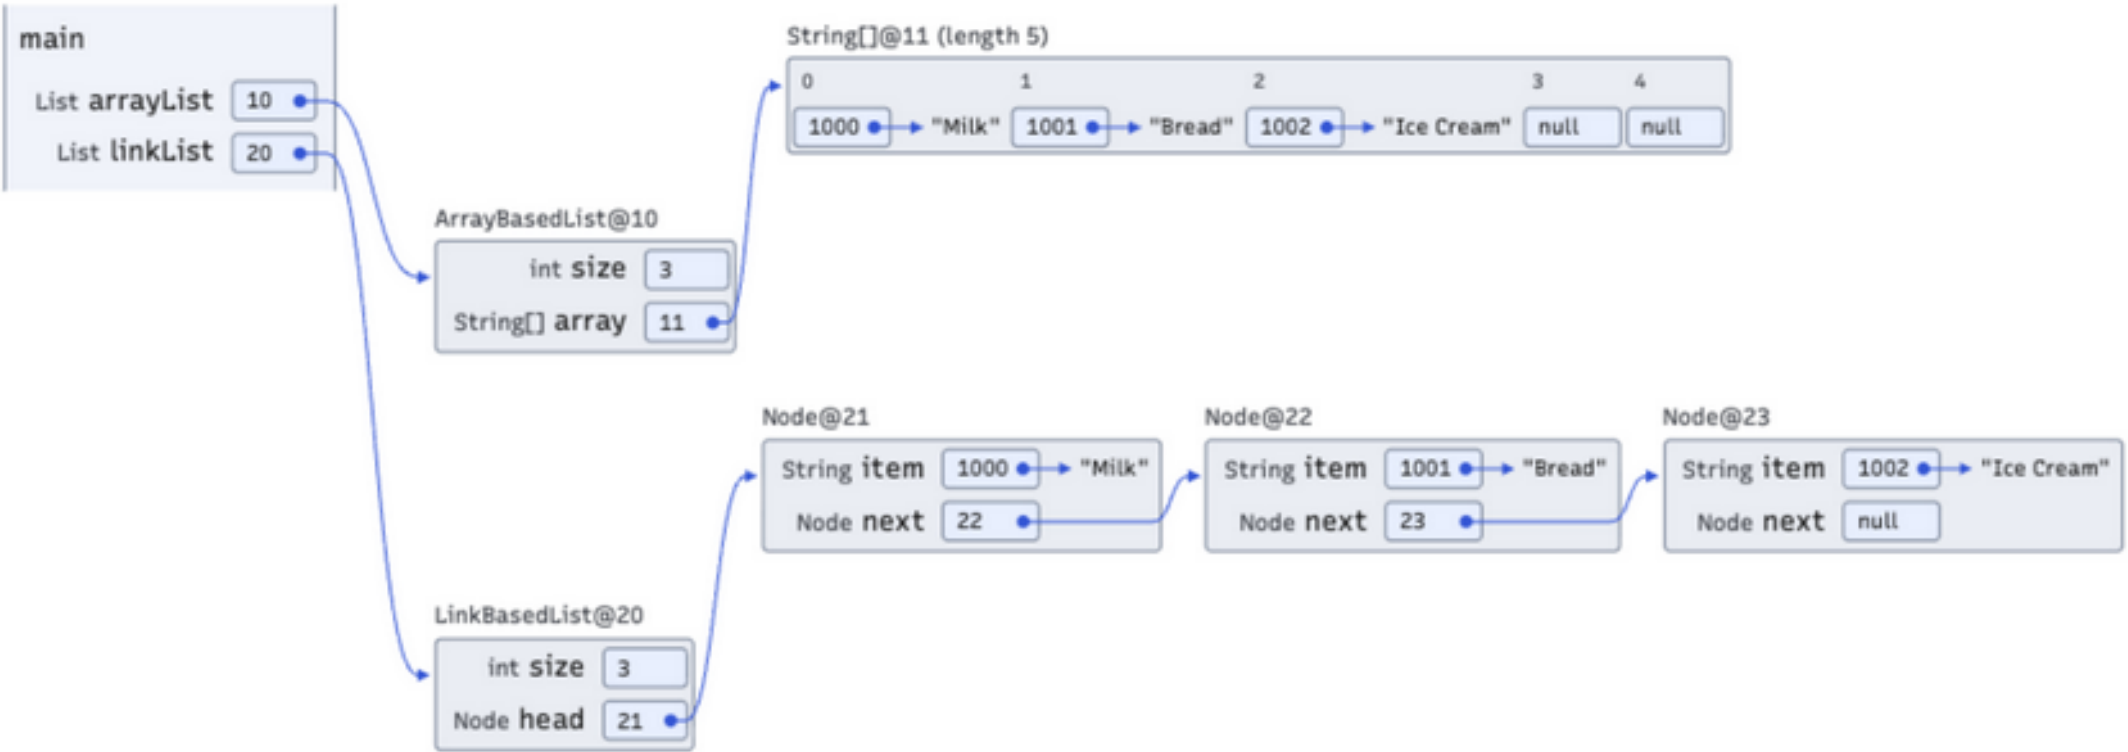

Compact strings with reference values, aligned value boxes, and consistent arrows

Both implementations after clear


After clear(): five null array components, a null head, and size zero in both lists. No compact arrows should appear.

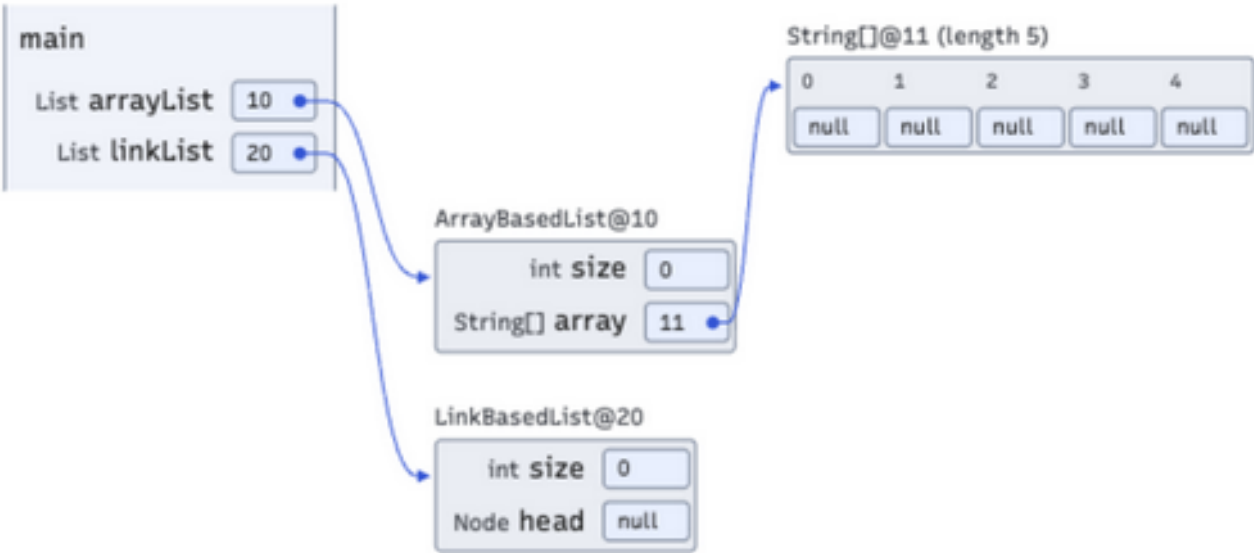

Compact strings with reference values, aligned value boxes, and consistent arrows

Shared string references

Additional fixture: one String is shared by a stack variable, two Node items, and two array components. Default shows identity; compact repeats the literal.

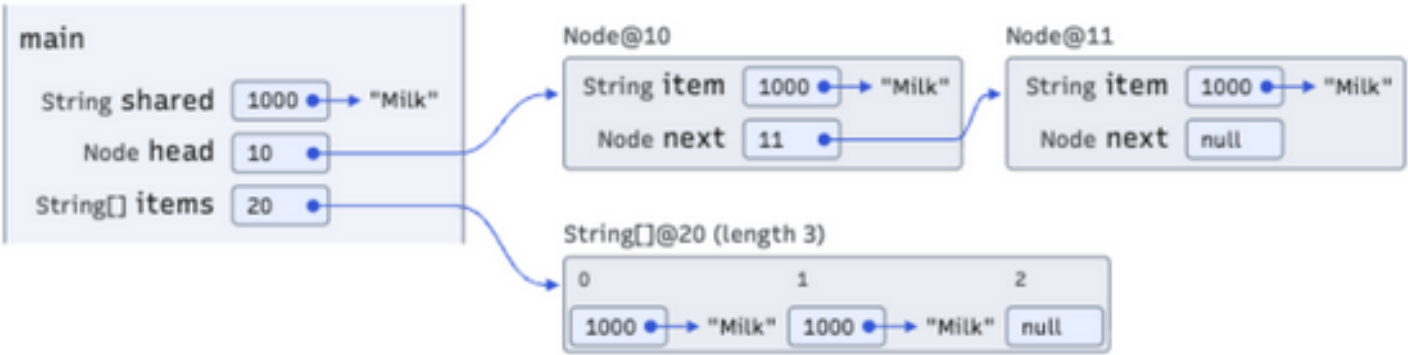

Compact strings with reference values, aligned value boxes, and consistent arrows

Long and empty strings — horizontal array

Additional fixture: full, unwrapped strings in the stack and both list implementations. Includes an empty string, a single character, embedded quotes, and unused capacity.



Compact strings with reference values, aligned value boxes, and consistent arrows

Long and empty strings — vertical array

Additional fixture: full, unwrapped strings in the stack and both list implementations. Includes an empty string, a single character, embedded quotes, and unused capacity.



Compact strings with reference values, aligned value boxes, and consistent arrows

Three-node cycle — dark theme

Additional fixture: Cheese → Bread → Milk → Cheese. The last Node points back to head, forming a three-node cycle.



Compact strings with reference values, aligned value boxes, and consistent arrows

ArrayBasedList — dark theme

List interface variable backed by ArrayBasedList. Four occupied components and one unused null component.

