


How Changing configuration from Insight is applied to switch

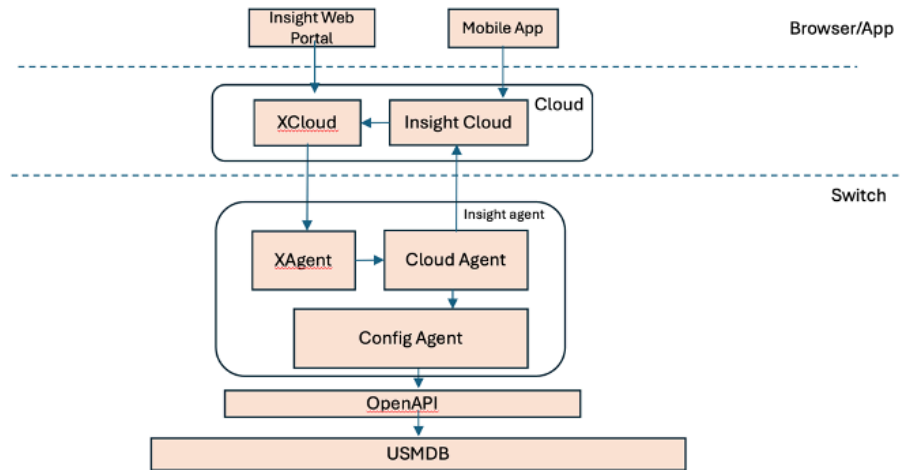

When a configuration change is initiated from the Insight cloud, the switch applies the new settings through a these steps:

- **Receive Cloud Notification**

- The process begins with processInsightCloudNotification, which receives the configuration change message from the Insight cloud.

- **Parse Configuration Buffer**

- The parseConfigBuff function is responsible for **parsing the message data received from the Insight Cloud** whenever a configuration change is triggered

- **Process Configuration Data**

- processConfData examines the message type (msgType) to determine which configuration element needs updating.

- **Example:**

If msgType = IP_ACL_NAME, the function setIpAcIList is invoked.

- **Trigger Local API Call**

- The appropriate function constructs an HTTP POST request using curl_post to apply the configuration locally.

- **Example URL:**

http://127.0.0.1:8444/api/v1/swsec_ipacl_list?aclName=<name>

Agent Daemon Handles Request

- The microhttpd daemon in Agent.c listens on **port 8444** for incoming requests.

- Upon receiving the POST request, it executes:
 - create_response – prepares the response object.
 - process_request – processes the HTTP request.
 - call_entry_handler – maps the URI to the correct handler function.
- **Handler Executes Configuration Logic**
 - The handler (e.g., security_mac_acl_list for swsec_ipacl_list) calls the relevant **OpenAPI functions** to apply the configuration changes on the switch.