

4 - viewing

Copyright 2019 Blair MacIntyre ((CC BY-NC-SA 4.0))

Viewing Transformations

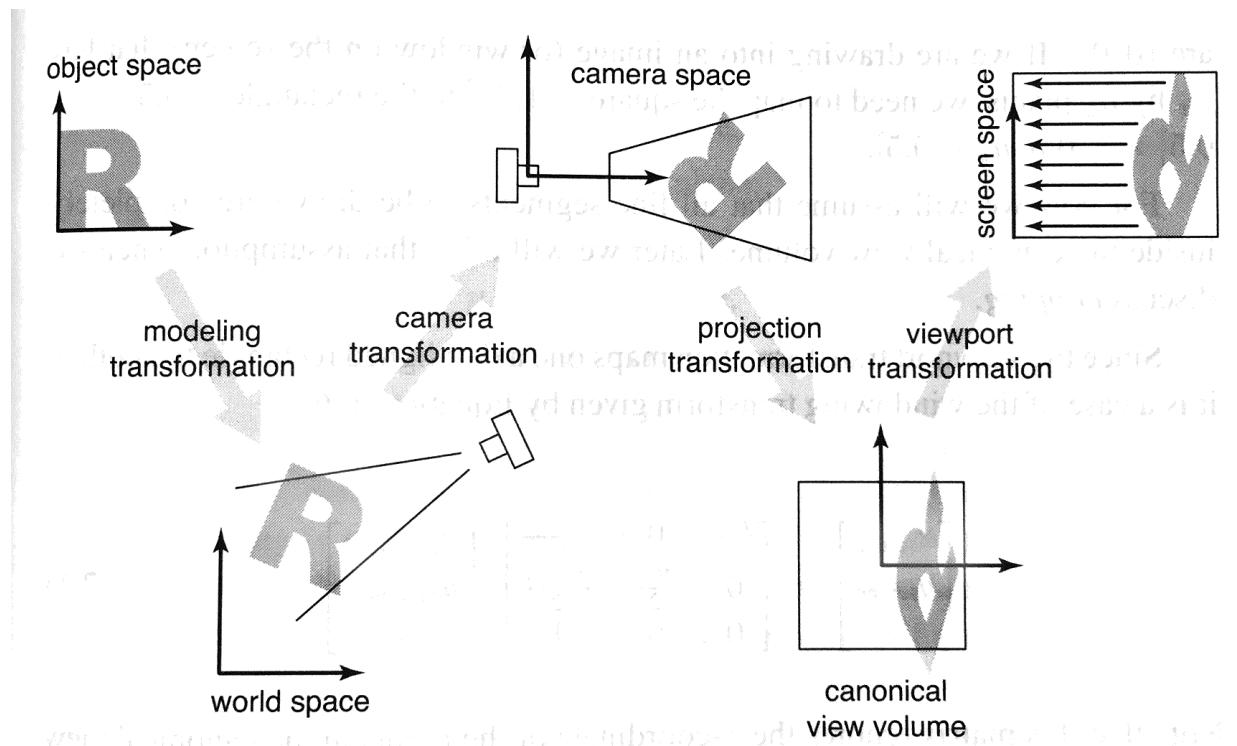


Figure 7.2. The sequence of spaces and transformations that gets objects from their original coordinates into screen space.
Copyright 2019 Blair MacIntyre ((CC BY-NC-SA 4.0)).

Goal: Matrices for everything


Want an M such that

$$M_{cam} = M_{vp} M_{projection} M_{cam}$$

Camera Transforms

M_{cam} = transformation to camera pose (viewpoint and direction)

Canonical View Volume

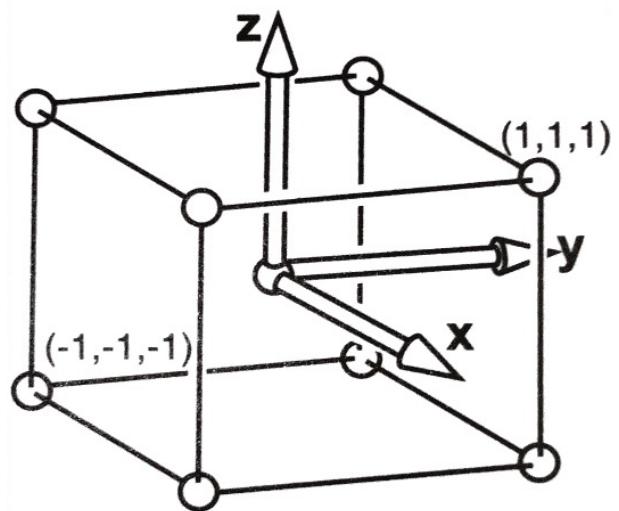

Copyright 2019 Blair MacIntyre ((CC BY-NC-SA 4.0))

Viewport Transformation

$$M_{\text{vp}} = \begin{bmatrix} \frac{n_x}{2} & 0 & 0 & \frac{n_x-1}{2} \\ 0 & \frac{n_y}{2} & 0 & \frac{n_y-1}{2} \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$


Copyright 2019 Blair MacIntyre ((CC BY-NC-SA 4.0))

Orthographic Projection Transform

$$\mathbf{M}_{\text{orth}} = \begin{bmatrix} \frac{2}{r-l} & 0 & 0 & -\frac{r+l}{r-l} \\ 0 & \frac{2}{t-b} & 0 & -\frac{t+b}{t-b} \\ 0 & 0 & \frac{2}{n-f} & -\frac{n+f}{n-f} \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

Copyright 2019 Blair MacIntyre ((CC BY-NC-SA 4.0))

Perspective


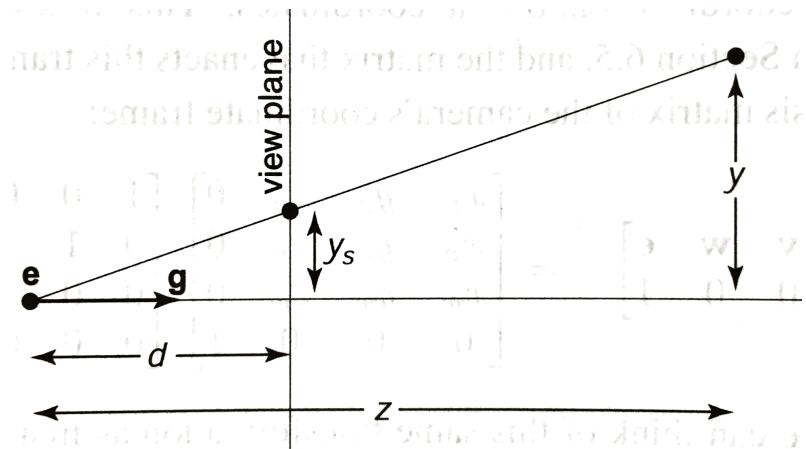


Homogeneous coordinates

Copyright 2019 Blair MacIntyre ((CC BY-NC-SA 4.0))

$$\mathbf{P} = \begin{bmatrix} n & 0 & 0 & 0 \\ 0 & n & 0 & 0 \\ 0 & 0 & n+f & -fn \\ 0 & 0 & 1 & 0 \end{bmatrix}$$

Properties of M_{per}

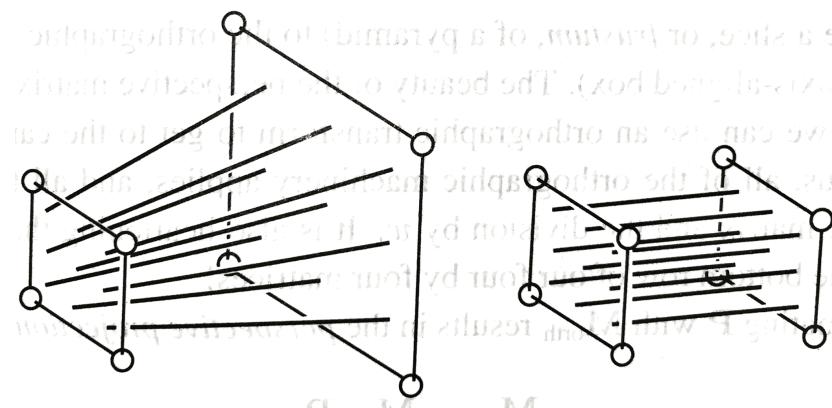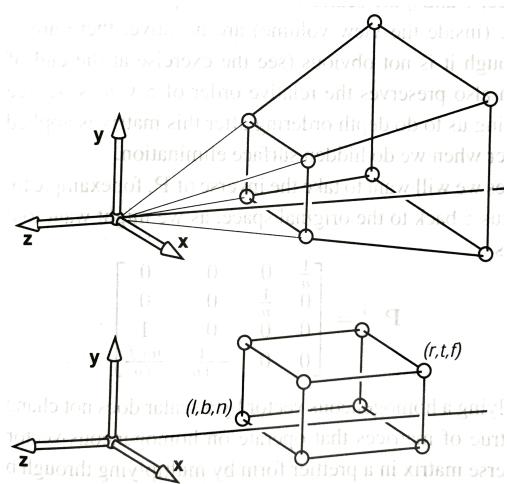

$$M_{per} = M_{orth} P$$

$$\mathbf{M}_{per} = \begin{bmatrix} \frac{2n}{r-l} & 0 & \frac{l+r}{l-r} & 0 \\ 0 & \frac{2n}{t-b} & \frac{b+t}{b-t} & 0 \\ 0 & 0 & \frac{f+n}{n-f} & \frac{2fn}{f-n} \\ 0 & 0 & 1 & 0 \end{bmatrix}$$

Field of View

