


CS 4110

# Programming Languages & Logics

---

## Lecture 23 Advanced Types

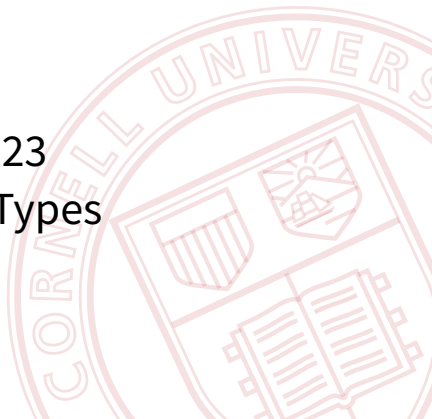

# Review

---

We've developed a type system for the  $\lambda$ -calculus and mathematical tools for proving its type soundness.

We also know how to extend the  $\lambda$ -calculus with new language features.

Today, we'll extend our *type system* with features commonly found in real-world languages: products, sums, references, and exceptions.

# Products (Pairs)

## Syntax

$$e ::= \dots \mid (e_1, e_2) \mid \#1\ e \mid \#2\ e$$
$$v ::= \dots \mid (v_1, v_2)$$

# Products (Pairs)

## Syntax

$$e ::= \dots \mid (e_1, e_2) \mid \#1\ e \mid \#2\ e$$

$$v ::= \dots \mid (v_1, v_2)$$

## Semantics

$$E ::= \dots \mid (E, e) \mid (v, E) \mid \#1\ E \mid \#2\ E$$

$$\frac{}{\#1\ (v_1, v_2) \rightarrow v_1}$$

$$\frac{}{\#2\ (v_1, v_2) \rightarrow v_2}$$

# Product Types

---

$$\tau_1 \times \tau_2$$

# Product Types

$$\tau_1 \times \tau_2$$

$$\frac{\Gamma \vdash e_1 : \tau_1 \quad \Gamma \vdash e_2 : \tau_2}{\Gamma \vdash (e_1, e_2) : \tau_1 \times \tau_2}$$

# Product Types

$$\tau_1 \times \tau_2$$

$$\frac{\Gamma \vdash e_1 : \tau_1 \quad \Gamma \vdash e_2 : \tau_2}{\Gamma \vdash (e_1, e_2) : \tau_1 \times \tau_2}$$

$$\frac{\Gamma \vdash e : \tau_1 \times \tau_2}{\Gamma \vdash \#1 e : \tau_1}$$

$$\frac{\Gamma \vdash e : \tau_1 \times \tau_2}{\Gamma \vdash \#2 e : \tau_2}$$

# Sums (Tagged Unions)

## Syntax

$$e ::= \dots \mid \text{inl}_{\tau_1 + \tau_2} e \mid \text{inr}_{\tau_1 + \tau_2} e \mid (\text{case } e_1 \text{ of } e_2 \mid e_3)$$
$$v ::= \dots \mid \text{inl}_{\tau_1 + \tau_2} v \mid \text{inr}_{\tau_1 + \tau_2} v$$



# Sums (Tagged Unions)

## Syntax

$$\begin{aligned} e &::= \dots \mid \text{inl}_{\tau_1 + \tau_2} e \mid \text{inr}_{\tau_1 + \tau_2} e \mid (\text{case } e_1 \text{ of } e_2 \mid e_3) \\ v &::= \dots \mid \text{inl}_{\tau_1 + \tau_2} v \mid \text{inr}_{\tau_1 + \tau_2} v \end{aligned}$$

## Semantics

$$E ::= \dots \mid \text{inl}_{\tau_1 + \tau_2} E \mid \text{inr}_{\tau_1 + \tau_2} E \mid (\text{case } E \text{ of } e_2 \mid e_3)$$

$$\frac{}{\text{case inl}_{\tau_1 + \tau_2} v \text{ of } e_2 \mid e_3 \rightarrow e_2 v}$$

$$\frac{}{\text{case inr}_{\tau_1 + \tau_2} v \text{ of } e_2 \mid e_3 \rightarrow e_3 v}$$

# Sum Types

---

$$\tau ::= \cdots \mid \tau_1 + \tau_2$$

# Sum Types

$$\tau ::= \cdots \mid \tau_1 + \tau_2$$

$$\frac{\Gamma \vdash e : \tau_1}{\Gamma \vdash \text{inl}_{\tau_1 + \tau_2} e : \tau_1 + \tau_2}$$

$$\frac{\Gamma \vdash e : \tau_2}{\Gamma \vdash \text{inr}_{\tau_1 + \tau_2} e : \tau_1 + \tau_2}$$

# Sum Types

$$\tau ::= \cdots \mid \tau_1 + \tau_2$$

$$\frac{\Gamma \vdash e : \tau_1}{\Gamma \vdash \text{inl}_{\tau_1 + \tau_2} e : \tau_1 + \tau_2}$$

$$\frac{\Gamma \vdash e : \tau_2}{\Gamma \vdash \text{inr}_{\tau_1 + \tau_2} e : \tau_1 + \tau_2}$$

$$\frac{\Gamma \vdash e : \tau_1 + \tau_2 \quad \Gamma \vdash e_1 : \tau_1 \rightarrow \tau \quad \Gamma \vdash e_2 : \tau_2 \rightarrow \tau}{\Gamma \vdash \text{case } e \text{ of } e_1 \mid e_2 : \tau}$$

# Example

```
let  $f = \lambda a:\mathbf{int} + (\mathbf{int} \rightarrow \mathbf{int}). \text{case } a \text{ of } (\lambda y. y + 1) \mid (\lambda g. g \ 35) \text{ in}$   
let  $h = \lambda x:\mathbf{int}. x + 7 \text{ in}$   
 $f(\text{inr}_{\mathbf{int} + (\mathbf{int} \rightarrow \mathbf{int})} h)$ 
```

# References

## Syntax

$$e ::= \dots \mid \text{ref } e \mid !e \mid e_1 := e_2 \mid \ell$$
$$v ::= \dots \mid \ell$$

# References

## Syntax

$$\begin{aligned} e &::= \dots \mid \text{ref } e \mid !e \mid e_1 := e_2 \mid \ell \\ v &::= \dots \mid \ell \end{aligned}$$

## Semantics

$$E ::= \dots \mid \text{ref } E \mid !E \mid E := e \mid v := E$$

$$\frac{\ell \notin \text{dom}(\sigma)}{\langle \sigma, \text{ref } v \rangle \rightarrow \langle \sigma[\ell \mapsto v], \ell \rangle} \qquad \frac{\sigma(\ell) = v}{\langle \sigma, !\ell \rangle \rightarrow \langle \sigma, v \rangle}$$

$$\frac{}{\langle \sigma, \ell := v \rangle \rightarrow \langle \sigma[\ell \mapsto v], v \rangle}$$

# Reference Types

$$\tau ::= \dots \mid \tau \mathbf{ref}$$



# Reference Types

$$\tau ::= \dots \mid \tau \mathbf{ref}$$

$$\frac{\Gamma \vdash e : \tau}{\Gamma \vdash \mathbf{ref} \, e : \tau \mathbf{ref}}$$

# Reference Types

$$\tau ::= \dots \mid \tau \mathbf{ref}$$

$$\frac{\Gamma \vdash e : \tau}{\Gamma \vdash \mathbf{ref} \, e : \tau \mathbf{ref}}$$

$$\frac{\Gamma \vdash e : \tau \mathbf{ref}}{\Gamma \vdash !e : \tau}$$

# Reference Types

$$\tau ::= \dots \mid \tau \mathbf{ref}$$

$$\frac{\Gamma \vdash e : \tau}{\Gamma \vdash \mathbf{ref} \, e : \tau \mathbf{ref}}$$

$$\frac{\Gamma \vdash e : \tau \mathbf{ref}}{\Gamma \vdash !e : \tau}$$

$$\frac{\Gamma \vdash e_1 : \tau \mathbf{ref} \quad \Gamma \vdash e_2 : \tau}{\Gamma \vdash e_1 := e_2 : \tau}$$

# Question

---

Is this type system sound?

# Question

---

Is this type system sound?

Well... what is the type of a location  $\ell$ ?

# Question

---

Is this type system sound?

Well... what is the type of a location  $\ell$ ? (Oops!)

# Store Typings

---

Let  $\Sigma$  range over partial functions from locations to types.

# Store Typings

Let  $\Sigma$  range over partial functions from locations to types.

$$\frac{\Gamma, \Sigma \vdash e : \tau}{\Gamma, \Sigma \vdash \text{ref } e : \tau \textbf{ ref}}$$



# Store Typings

Let  $\Sigma$  range over partial functions from locations to types.

$$\frac{\Gamma, \Sigma \vdash e : \tau}{\Gamma, \Sigma \vdash \text{ref } e : \tau \textbf{ref}}$$

$$\frac{\Gamma, \Sigma \vdash e : \tau \textbf{ref}}{\Gamma, \Sigma \vdash !e : \tau}$$

# Store Typings

Let  $\Sigma$  range over partial functions from locations to types.

$$\frac{\Gamma, \Sigma \vdash e : \tau}{\Gamma, \Sigma \vdash \text{ref } e : \tau \textbf{ref}}$$

$$\frac{\Gamma, \Sigma \vdash e : \tau \textbf{ref}}{\Gamma, \Sigma \vdash !e : \tau}$$

$$\frac{\Gamma, \Sigma \vdash e_1 : \tau \textbf{ref} \quad \Gamma, \Sigma \vdash e_2 : \tau}{\Gamma, \Sigma \vdash e_1 := e_2 : \tau}$$

# Store Typings

Let  $\Sigma$  range over partial functions from locations to types.

$$\frac{\Gamma, \Sigma \vdash e : \tau}{\Gamma, \Sigma \vdash \text{ref } e : \tau \textbf{ref}}$$

$$\frac{\Gamma, \Sigma \vdash e : \tau \textbf{ref}}{\Gamma, \Sigma \vdash !e : \tau}$$

$$\frac{\Gamma, \Sigma \vdash e_1 : \tau \textbf{ref} \quad \Gamma, \Sigma \vdash e_2 : \tau}{\Gamma, \Sigma \vdash e_1 := e_2 : \tau}$$

$$\frac{\Sigma(\ell) = \tau}{\Gamma, \Sigma \vdash \ell : \tau \textbf{ref}}$$

# Reference Types Metatheory

## Definition

Store  $\sigma$  is *well-typed* with respect to typing context  $\Gamma$  and store typing  $\Sigma$ , written  $\Gamma, \Sigma \vdash \sigma$ , if  $\text{dom}(\sigma) = \text{dom}(\Sigma)$  and for all  $\ell \in \text{dom}(\sigma)$  we have  $\Gamma, \Sigma \vdash \sigma(\ell) : \Sigma(\ell)$ .

# Reference Types Metatheory

## Definition

Store  $\sigma$  is *well-typed* with respect to typing context  $\Gamma$  and store typing  $\Sigma$ , written  $\Gamma, \Sigma \vdash \sigma$ , if  $\text{dom}(\sigma) = \text{dom}(\Sigma)$  and for all  $\ell \in \text{dom}(\sigma)$  we have  $\Gamma, \Sigma \vdash \sigma(\ell) : \Sigma(\ell)$ .

## Theorem (Type soundness)

If  $\cdot, \Sigma \vdash e : \tau$  and  $\cdot, \Sigma \vdash \sigma$  and  $\langle e, \sigma \rangle \rightarrow^* \langle e', \sigma' \rangle$  then either  $e'$  is a value, or there exists  $e''$  and  $\sigma''$  such that  $\langle e', \sigma' \rangle \rightarrow \langle e'', \sigma'' \rangle$ .

# Reference Types Metatheory

## Definition

Store  $\sigma$  is *well-typed* with respect to typing context  $\Gamma$  and store typing  $\Sigma$ , written  $\Gamma, \Sigma \vdash \sigma$ , if  $\text{dom}(\sigma) = \text{dom}(\Sigma)$  and for all  $\ell \in \text{dom}(\sigma)$  we have  $\Gamma, \Sigma \vdash \sigma(\ell) : \Sigma(\ell)$ .

## Theorem (Type soundness)

If  $\cdot, \Sigma \vdash e : \tau$  and  $\cdot, \Sigma \vdash \sigma$  and  $\langle e, \sigma \rangle \rightarrow^* \langle e', \sigma' \rangle$  then either  $e'$  is a value, or there exists  $e''$  and  $\sigma''$  such that  $\langle e', \sigma' \rangle \rightarrow \langle e'', \sigma'' \rangle$ .

## Lemma (Preservation)

If  $\Gamma, \Sigma \vdash e : \tau$  and  $\Gamma, \Sigma \vdash \sigma$  and  $\langle e, \sigma \rangle \rightarrow \langle e', \sigma' \rangle$  then there exists some  $\Sigma' \supseteq \Sigma$  such that  $\Gamma, \Sigma' \vdash e' : \tau$  and  $\Gamma, \Sigma' \vdash \sigma'$ .

# Landin's Knot

---

Using references, we (re)gain the ability define recursive functions!

```
let  $r = \text{ref } \lambda x:\text{int}. 0$  in
```

# Landin's Knot

---

Using references, we (re)gain the ability define recursive functions!

```
let  $r = \text{ref } \lambda x:\text{int}. 0$  in  
let  $f = (\lambda x:\text{int}. \text{if } x = 0 \text{ then } 1 \text{ else } x \times (!r) (x - 1))$  in
```



# Landin's Knot

---

Using references, we (re)gain the ability define recursive functions!

```
let  $r = \text{ref } \lambda x:\text{int}. 0$  in  
let  $f = (\lambda x:\text{int}. \text{if } x = 0 \text{ then } 1 \text{ else } x \times (!r) (x - 1))$  in  
let  $a = (r := f)$  in
```

# Landin's Knot

Using references, we (re)gain the ability define recursive functions!

```
let  $r = \text{ref } \lambda x:\text{int}. 0$  in  
let  $f = (\lambda x:\text{int}. \text{if } x = 0 \text{ then } 1 \text{ else } x \times (!r) (x - 1))$  in  
let  $a = (r := f)$  in  
 $f\ 5$ 
```

# Fixed Points

## Syntax

$$e ::= \dots \mid \text{fix } e$$

# Fixed Points

## Syntax

$$e ::= \dots \mid \text{fix } e$$

## Semantics

$$E ::= \dots \mid \text{fix } E$$

$$\overline{\text{fix } \lambda x:\tau. e \rightarrow e\{(\text{fix } \lambda x:\tau. e)/x\}}$$

# Fixed Points

## Syntax

$$e ::= \dots \mid \text{fix } e$$

## Semantics

$$E ::= \dots \mid \text{fix } E$$

$$\frac{}{\text{fix } \lambda x:\tau. e \rightarrow e\{(\text{fix } \lambda x:\tau. e)/x\}}$$

The typing rule for fix is on the homework...