


Webhook options: <https://docs.quartzy.com/api/#tag/Webhook>

- List and filter webhooks
- Create a Webhook
- Get a Webhook
- Update a Webhook


Create a new webhook configuration

1. To create a new webhook configuration, click the Add webhook button.
2. In the new modal called Add webhook, enter the three mandatory fields a. Name: The display name of your webhook configuration b. URL: The URL that would receive the webhook c. Event Types: The event(s) occurring in Quartzy for which you want to receive webhooks
3. Click **Save**
4. In the new modal called **New webhook**, you will notice a field displaying the Secret Key. Click the copy icon to copy this secret key in a safe location. Click Close after you are done copying the secret key.

Go to Manage Labs by clicking the gear icon

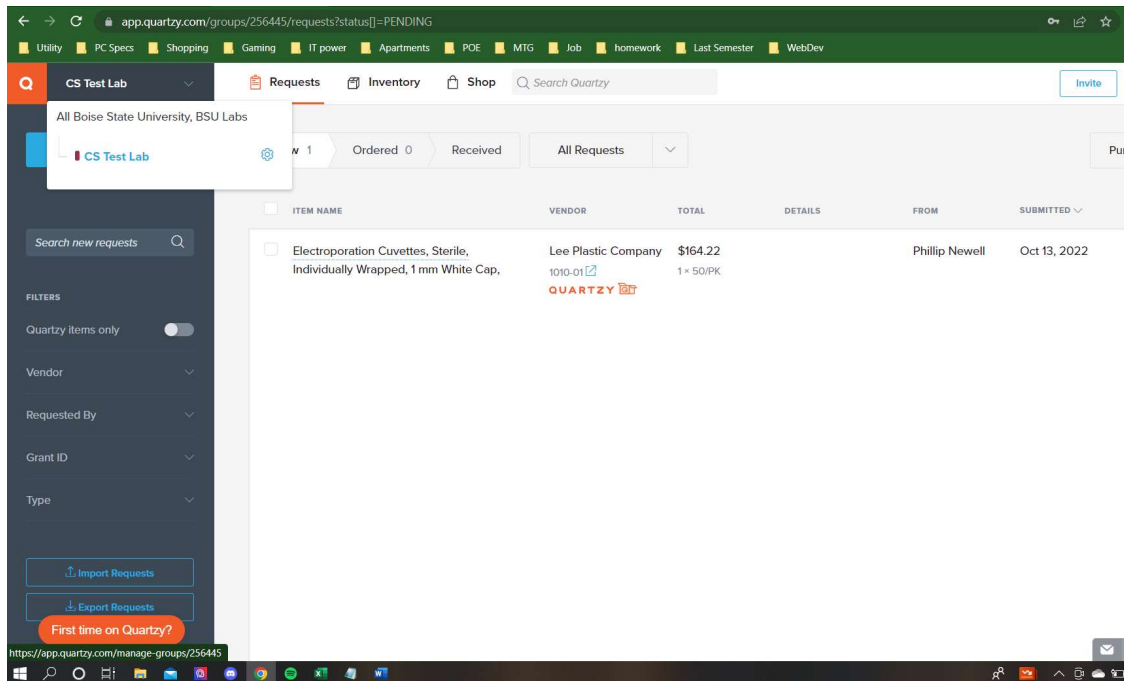

Go to Developers and add webhook configuration

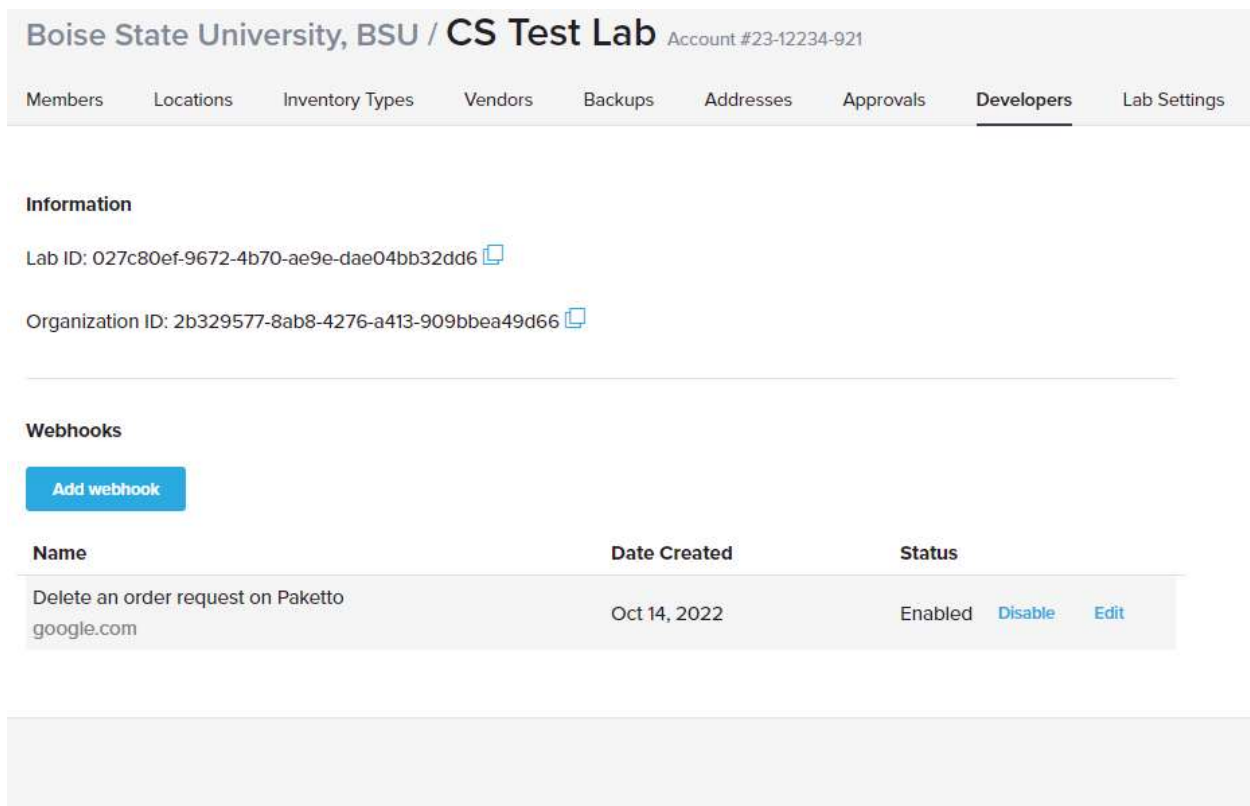

In the new modal called Add webhook, enter the three mandatory fields a. Name: The display name of your webhook configuration b. URL: The URL that would receive the webhook c. Event Types: The event(s) occurring in Quartzzy for which you want to receive webhooks

## Add webhook

\* Name  
Delete an inventory item in パッケージ

\* URL  
google.com

Event Types

<input type="checkbox"/>	inventory-item.created
<input type="checkbox"/>	Inventory item updated inventory-item.updated
<input checked="" type="checkbox"/>	Inventory item deleted inventory-item.deleted
<input type="checkbox"/>	Order request created order-request.created

**Save** Cancel

