


Special note: public API is early access and require email support to enable.

- Inventory item
 - Created
 - Deleted
 - Updated
- Order request
 - Created
 - Deleted
 - Ordered
 - Received
- Sales Order
 - Placed
- Shipment
 - Created
 - Delivered
- Type
 - Created
 - Deleted
 - Updated


Create a new webhook configuration

1. To create a new webhook configuration, click the Add webhook button.
2. In the new modal called Add webhook, enter the three mandatory fields a. Name: The display name of your webhook configuration b. URL: The URL that would receive the webhook c. Event Types: The event(s) occurring in Quartzly for which you want to receive webhooks
3. Click **Save**
4. In the new modal called **New webhook**, you will notice a field displaying the Secret Key. Click the copy icon to copy this secret key in a safe location. Click Close after you are done copying the secret key.

Go to Manage Labs by clicking the gear icon

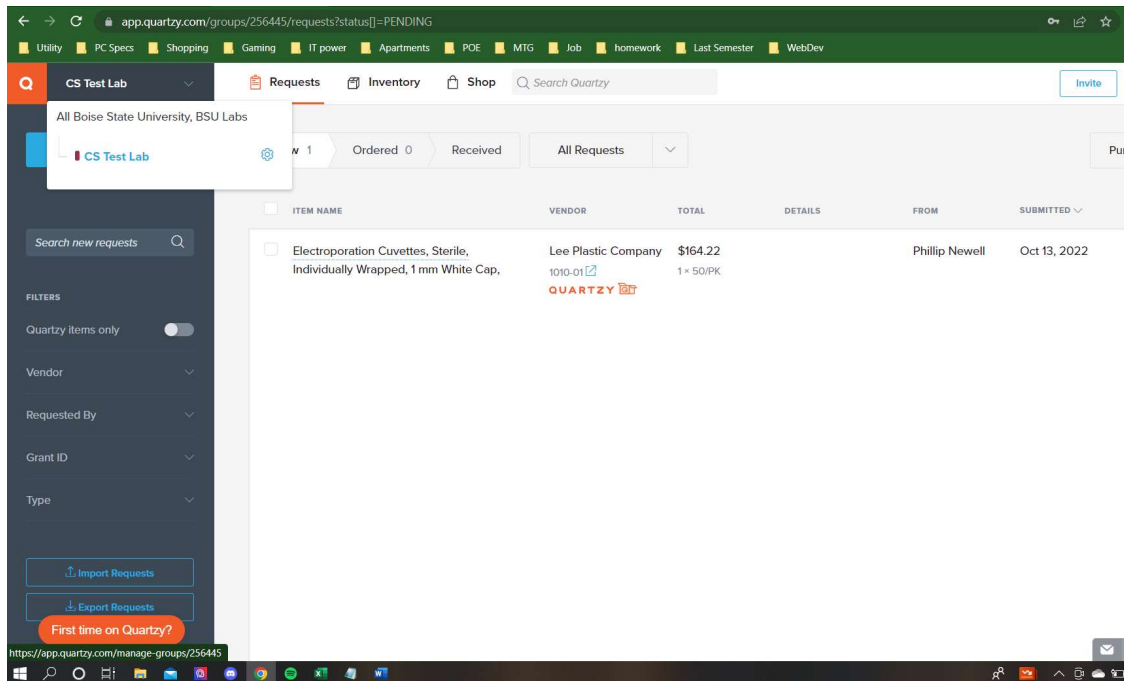

Go to Developers and add webhook configuration

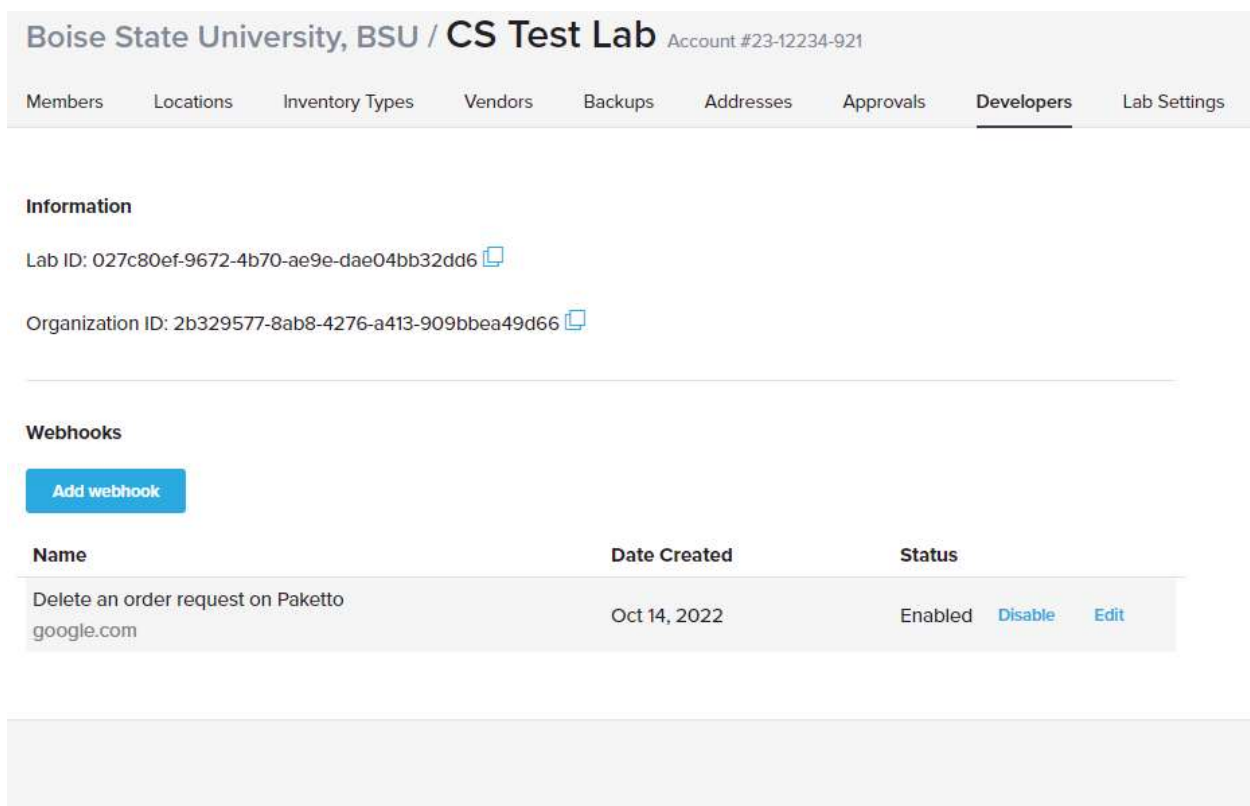

In the new modal called Add webhook, enter the three mandatory fields a. Name: The display name of your webhook configuration b. URL: The URL that would receive the webhook c. Event Types: The event(s) occurring in Quartzzy for which you want to receive webhooks

Add webhook

• Name

Delete an inventory item in パッケージ

• URL

google.com

Event Types

<input type="checkbox"/>	inventory-item.created
<input type="checkbox"/>	Inventory item updated inventory-item.updated
<input checked="" type="checkbox"/>	Inventory item deleted inventory-item.deleted
<input type="checkbox"/>	Order request created order-request.created

Save Cancel