

(Following Paper ID and Roll No. to be filled in your Answer Book)

PAPER ID : 0110

Roll No.

--	--	--	--	--	--	--	--	--	--

B.Tech.

(SEM. III) ODD SEMESTER THEORY

EXAMINATION 2012-13

DATA STRUCTURES USING C

Time : 3 Hours

Total Marks : 100

Note :- (i) Attempt **all** questions.

(ii) All questions carry equal marks.

1. Attempt any **four** parts of the following :- **(5×4=20)**

- Determine addressing formula to find the location of $(i, j)^{\text{th}}$ element of a $m \times n$ matrix stored in column major order.
- Write an algorithm to multiply two matrices and determine complexity of the algorithm.
- Write the algorithm/function to insert an element in a doubly linked list at specified location.
- Write a C program to reverse the links of a given singly linked list.
- What is complexity of an algorithm ? Explain various notations used to express the complexity of an algorithm.
- Explain the method to represent the polynomial equation using linked list. Write and explain method to add two polynomial equations using linked list.

2. Attempt any **two** parts of the following : (10×2=20)

- (a) Write algorithm to convert a postfix expression into an infix expression. Consider the following arithmetic expression in postfix notation :


7 5 2 + * 4 1 5 - / -

- (i) Find the value of the expression.
- (ii) Find the equivalent prefix form of the above expression.
- (b) The efficient method used in evaluating a polynomial of the form $P_n(x) = a_0 x^n + a_1 x^{n-1} + a_2 x^{n-2} + a_3 x^{n-3} + \dots + a_{n-1} x + a_n$ is by nesting using Horner's rule, as shown below :
- $$P_n(x) = (\dots(((a_0 x + a_1) x + a_2) x + \dots + a_{n-1}) \dots)x + a_n$$
- show how this can be carried out using stack.
- (c) (i) Write a program or function in C to find out duplicate elements in the queue.
- (ii) Describe a procedure to convert a recursive algorithm to a non recursive algorithm.

3. Attempt any **two** parts of the following : (10×2=20)


- (a) Define tree, binary tree, complete binary tree and full binary tree. Write algorithms or function to obtain traversals of a binary tree in preorder, postorder and inorder.
- (b) What is binary search tree ? Write the important applications of binary search tree. Write algorithm to delete a node from a binary search tree.

- (c) Show that the maximum number of nodes in a binary tree of height h is $2^{h+1} - 1$.
4. Attempt any **two** parts of the following : (10×2=20)
- (a) Find the minimum spanning tree for following graph using Prim's and Krushkal's algorithms.

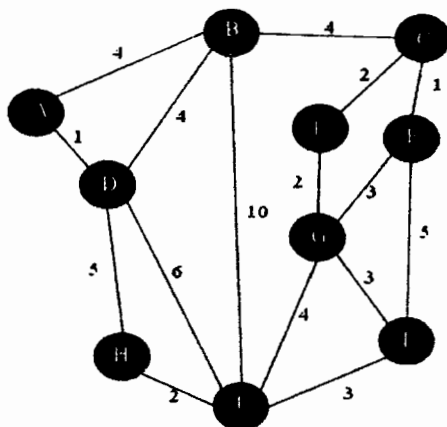

- (b) Write and explain an algorithm for finding shortest path between any two nodes of a given graph.
- (c) Describe the various representations of graph.
5. Describe any **two** parts of the following : (10×2=20)
- (a) Write the characteristics of B-Tree. Construct a B-tree on following sequence of inputs
 10,20,30,40,50,60,70,80,90
 Assume that the order of the B tree is 3.

- (b) (i) Consider the following AVL Tree and insert 2, 12, 7 and 10 as new node. Show proper rotation to maintain the tree as AVL.

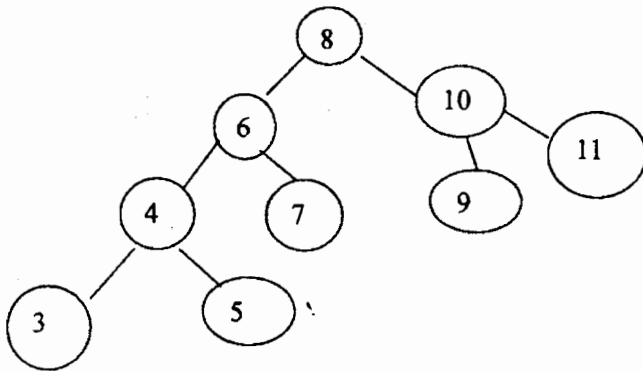

- (ii) Describe two way merge sort method. Explain the complexities of merge sort method.
- (c) Write short notes on :
- (i) Garbage Collection
 - (ii) Radix Sort.