



Universidad  
Autónoma de  
Bucaramanga



## Reunión LAGO 2025

LAGO ARTI & Meiga

C. Sarmiento-Cano<sup>1\*</sup>

<sup>1</sup>Universidad Industrial de Santander

<sup>2</sup>Instituto en Tecnologías de Detección y Astropartículas


\*csarmiento32@unab.edu.co




## Sinopsis:

- Flujo de rayos cósmicos
- Cadena de simulación LAGO
- Simulación del flujo

# Introducción a los Rayos Cósmicos

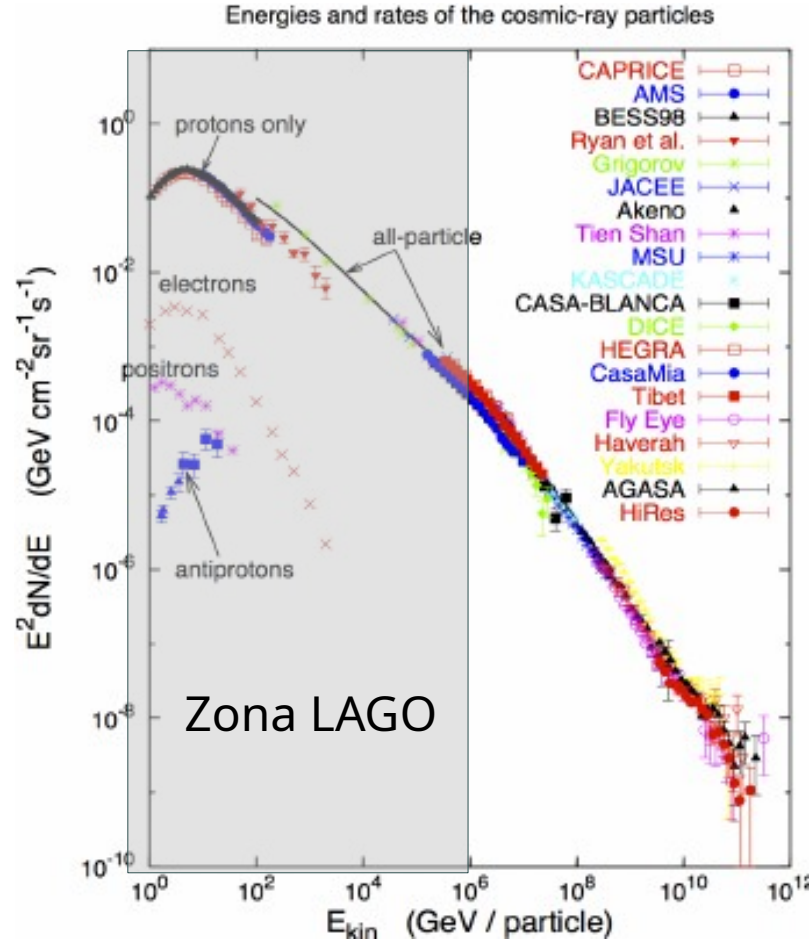

# Flujo de partículas secundarias

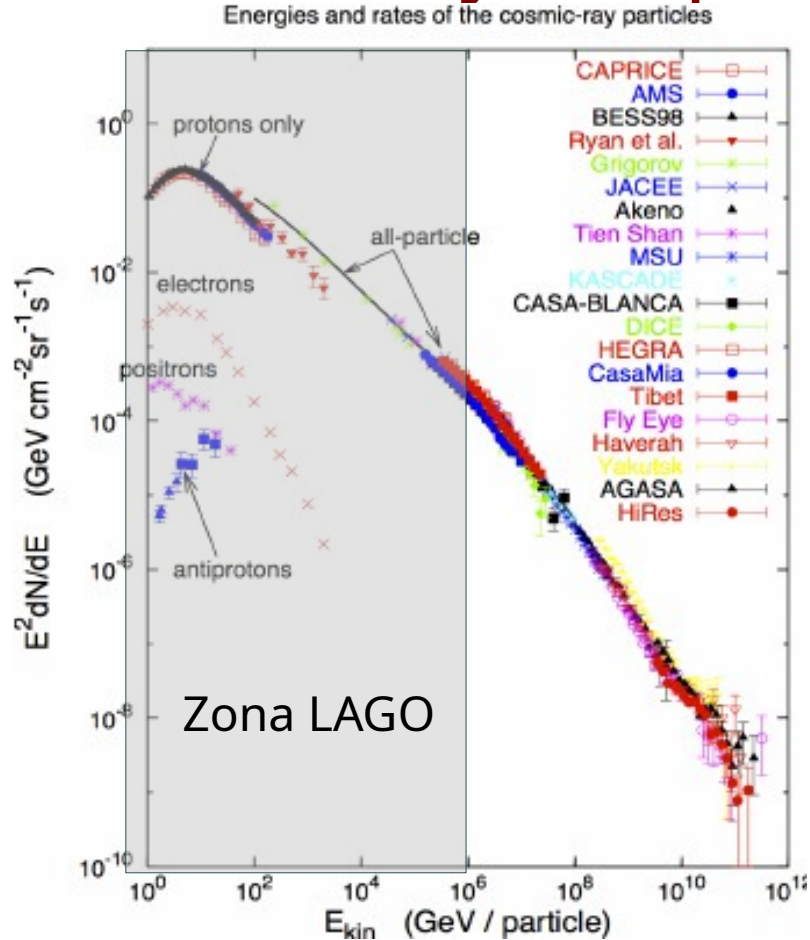


$$j(E) = j_0 E^\alpha,$$


$$j(E) = \frac{dJ}{dE} = \frac{dN(E)}{dS \, d\Omega \, dt \, dE},$$

$$N = \int_{\Delta E} \int_{\Delta \Omega} \int_{\Delta t} \int_S \left( \frac{dN(E)}{dS \, d\Omega \, dt \, dE} \right) dS \, dt \, d\Omega \, dE,$$


# Flujo de partículas secundarias

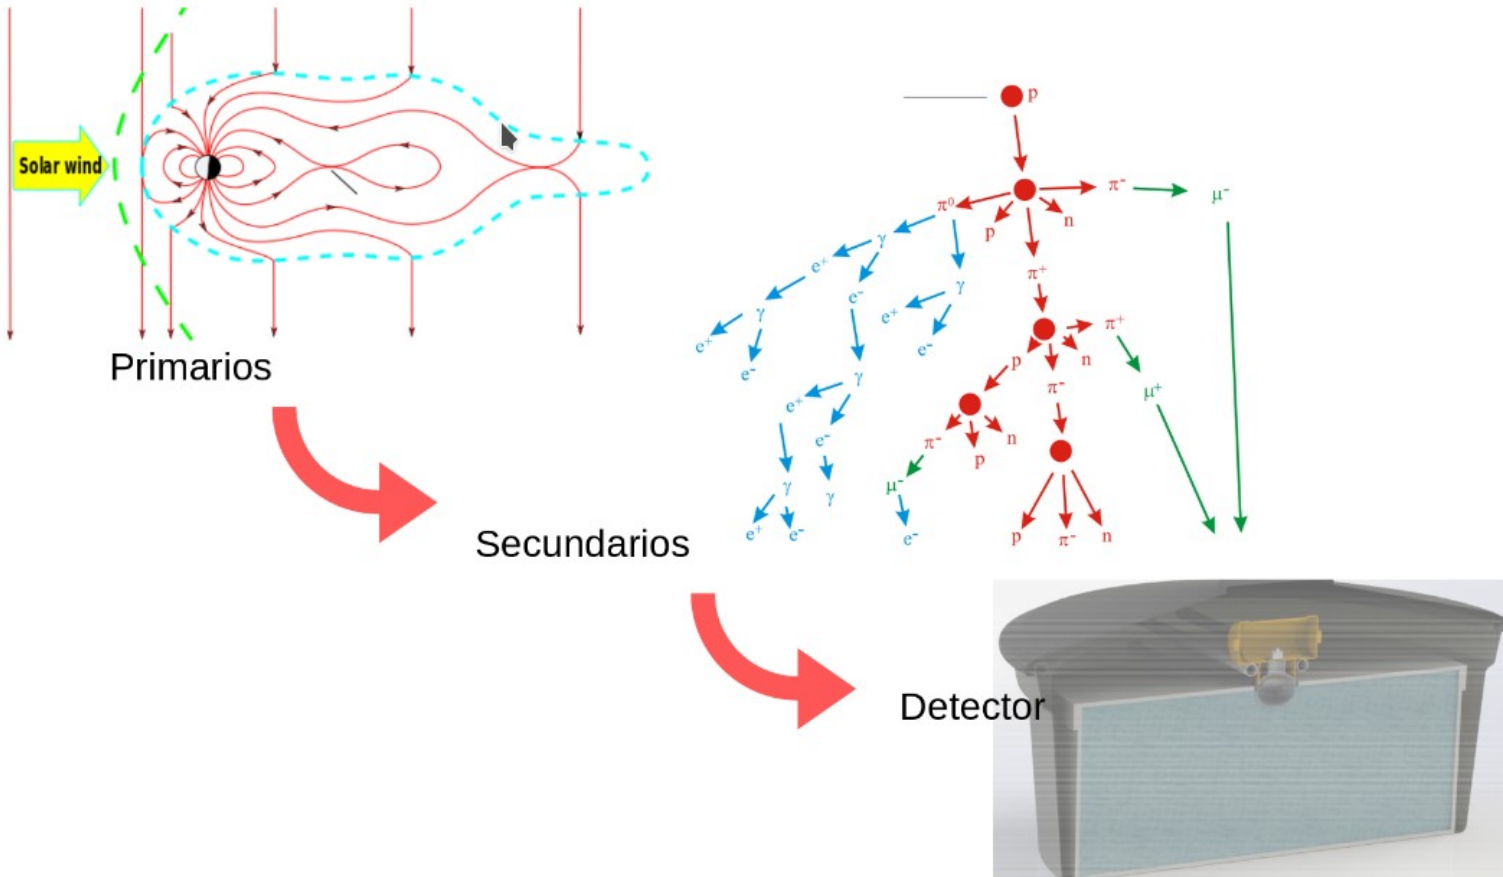

# Flujo de partículas secundarias

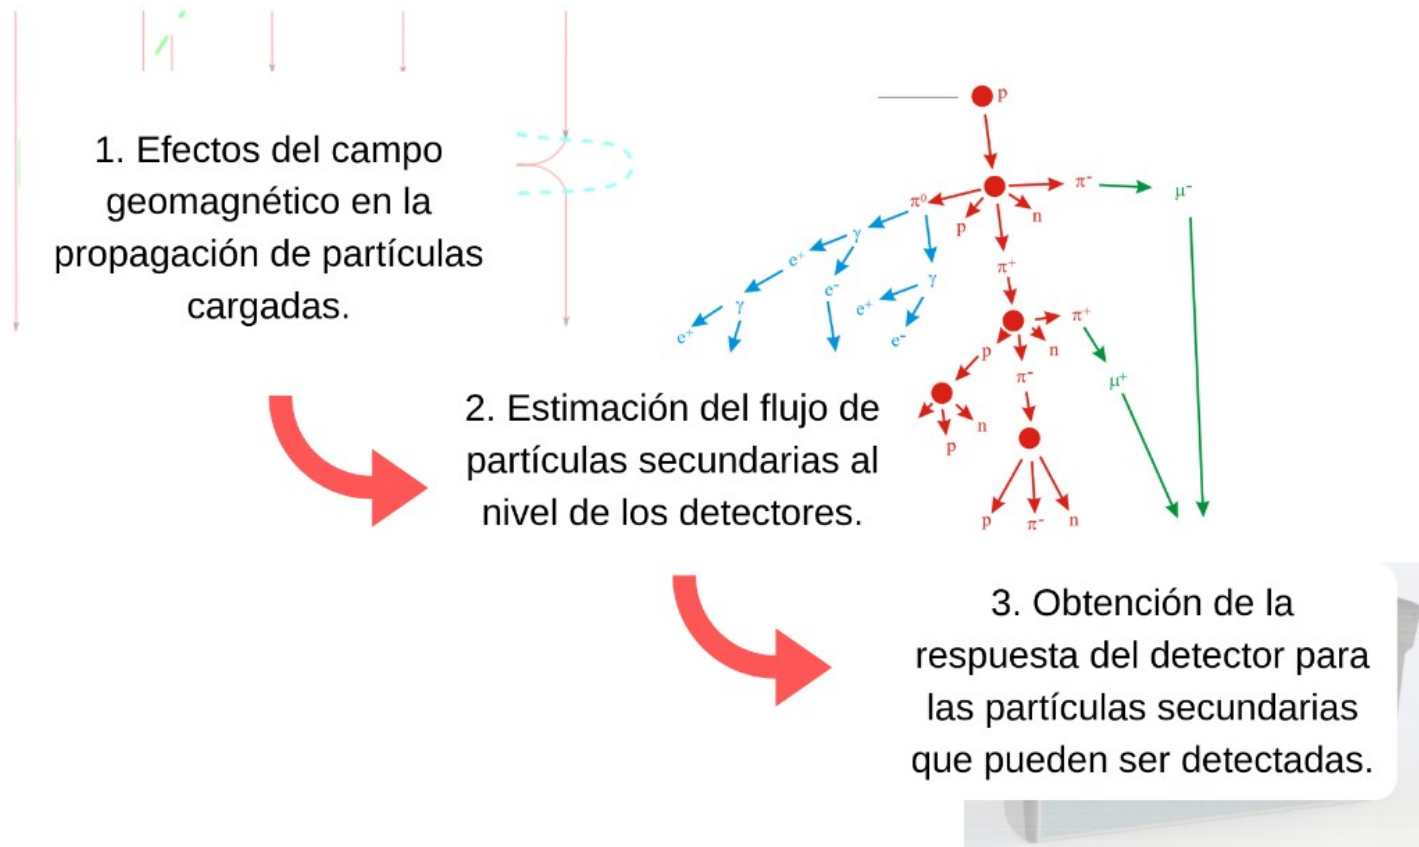

# Flujo de partículas secundarias

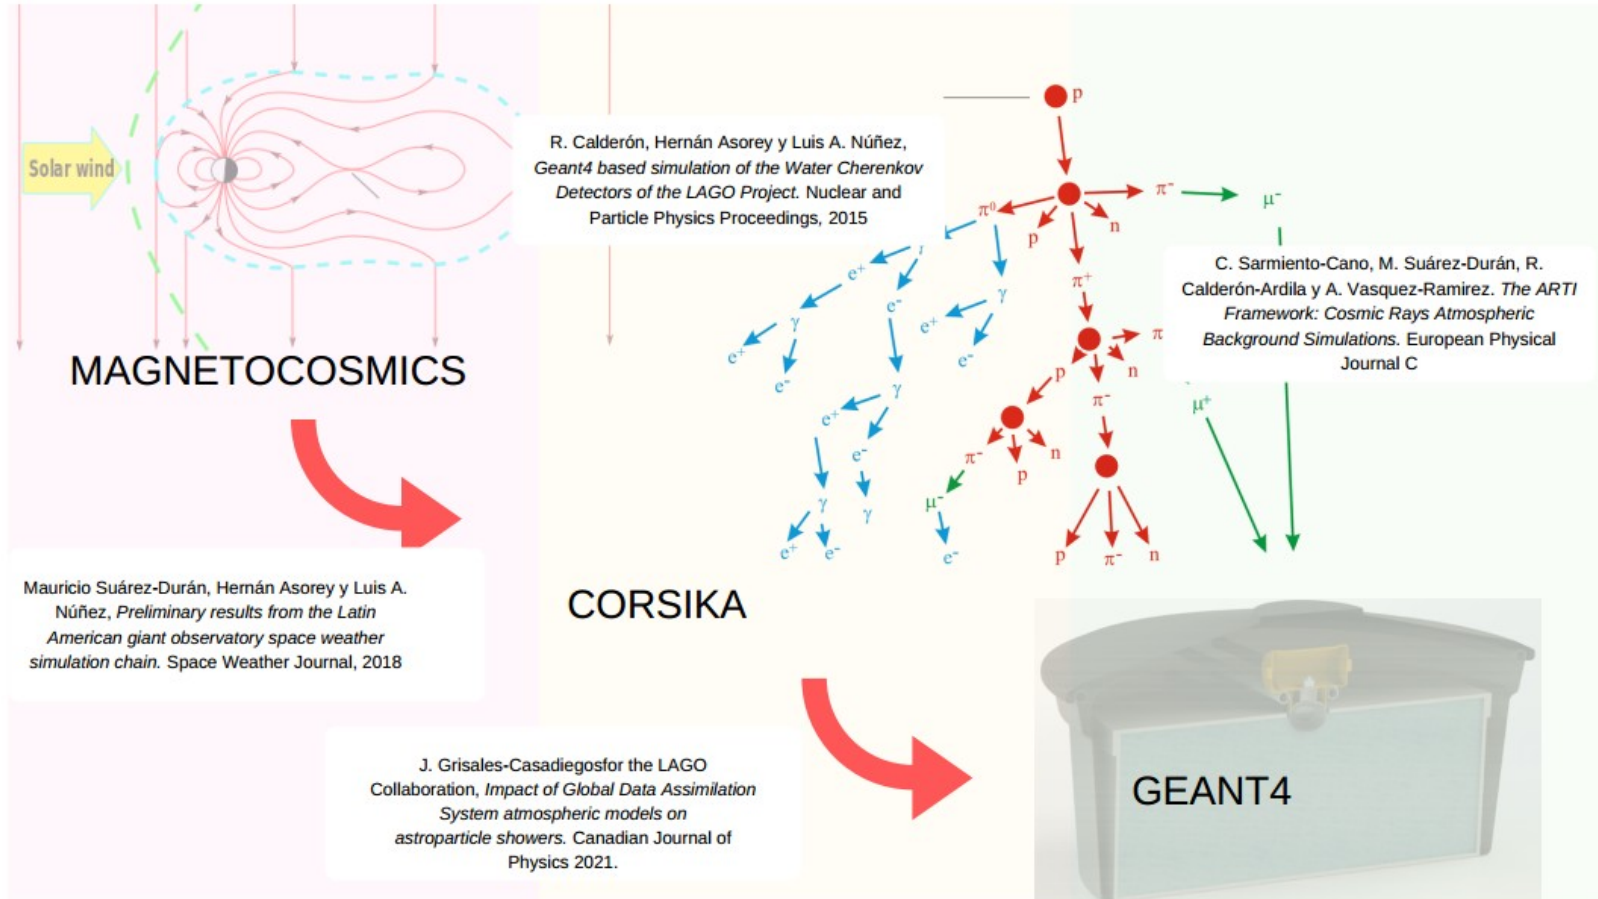



# ARTI(Corsika)

`./do_sims.sh -?`

```
USAGE ./do_sims.sh:
Simulation parameters
  -w <working dir>          : Working directory, where bin (run) files are located
  -p <project name>         : Project name (suggested format: NAMEXX)
  -v <CORSIKA version>      : CORSIKA version
  -h <HE Int Model (EPOS|QGSII)> : Define the high interaction model to be used
  -u <user name>            : User Name.
  -j <procs>                : Number of processors to use
Physical parameters
  -t <flux time>            : Flux time (in seconds) for simulations
  -m <Low edge zenith angle> : Low edge of zenith angle.
  -n <High edge zenith angle> : High edge of zenith angle.
  -r <Low primary particle energy> : Lower limit of the primary particle energy.
  -i <Upper primary particle energy> : Upper limit of the primary particle energy.
  -a <high energy ecuts>      : High energy cuts for ECUTS; (if set value in GV = enabled).
  -y                          : Select volumetric detector mode (default=flat array)
Site parameters
  -s <site>                 : Location (several options)
  -k <altitude, in cm>       : Fix altitude, even for predefined sites
  -c <atm_model>             : Fix Atmospheric Model even for predefined sites.
  -o <BX>                   : Horizontal comp. of the Earth's mag. field.
  -q <BZ>                   : Vertical comp. of the Earth's mag. field.
  -b <rigidity cutoff>       : Rigidity cutoff; (if set value in GV = enabled).
Modifiers
  -l                         : Enables SLURM cluster compatibility (with sbatch).
  -e                         : Enable CHERENKOV mode
  -d                         : Enable DEBUG mode
  -x                         : Enable other defaults (It doesn't prompt user for unset parameters)
  -?                         : Shows this help and exit.
```



# ARTI(Corsika)

```
USAGE ./do_sims.sh:
Simulation parameters
  -w <working dir>      : Working directory, where bin (run) files are located
  -p <project name>     : Project name (suggested format: NAMEXX)
  -v <CORSIKA version>  : CORSIKA version
  -h <HE Int Model (EPOS|QGSII)> : Define the high interaction model to be used
  -u <user name>        : User Name.
  -j <procs>            : Number of processors to use
Physical parameters
  -t <flux time>        : Flux time (in seconds) for simulations
  -m <Low edge zenith angle> : Low edge of zenith angle.
  -n <High edge zenith angle> : High edge of zenith angle.
  -r <Low primary particle energy> : Lower limit of the primary particle energy.
  -i <Upper primary particle energy> : Upper limit of the primary particle energy.
  -a <high energy ecuts> : High energy cuts for ECUTS; (if set value in GV = enabled).
  -y                    : Select volumetric detector mode (default=flat array)
Site parameters
  -s <site>              : Location (several options)
  -k <altitude, in cm>   : Fix altitude, even for predefined sites
  -c <atm_model>         : Fix Atmospheric Model even for predefined sites.
  -o <BX>                : Horizontal comp. of the Earth's mag. field.
  -q <BZ>                : Vertical comp. of the Earth's mag. field.
  -b <rigidity cutoff>   : Rigidity cutoff; (if set value in GV = enabled).
Modifiers
  -l                     : Enables SLURM cluster compatibility (with sbatch).
  -e                     : Enable CHERENKOV mode
  -d                     : Enable DEBUG mode
  -x                     : Enable other defaults (It doesn't prompt user for unset parameters)
  -?                     : Shows this help and exit.
```

```
./do_sims.sh -w ../../lago-corsika-77402/run/ -p lagoW -v 77402 -u csarmiento -t 60 -s bga
```

# ARTI(Corsika)

```
0 1 H 140581 -> -----
4 2 He 14149 -> -----
12 6 C 365 -> -----
16 8 O 353 -> -----
7 3 Li 144 -> -----
11 5 B 99 -> -----
24 12 Mg 84 -> -----
28 14 Si 81 -> -----
14 7 N 74 -> -----
20 10 Ne 65 -> -----
56 26 Fe 49 -> -----
9 4 Be 42 -> -----
55 25 Mn 15 -> -----
52 24 Cr 14 -> -----
32 16 S 13 -> -----
51 23 V 12 -> -----
27 13 Al 11 -> -----
23 11 Na 10 -> -----
48 22 Ti 9 -> -----
40 20 Ca 8 -> -----
19 9 F 7 -> -----
45 21 Sc 6 -> -----
40 18 Ar 5 -> -----
39 19 K 4 -> -----
31 15 P 3 -> -----
35 17 Cl 2 -> -----
```

# ARTI(Corsika)

```
0 1 H 140581 -> -----
4 2 He 14149 -> -----
12 6 C 365 -> -----
16 8 O 353 -> -----
7 3 Li 144 -> -----
11 5 B 99 -> -----
24 12 Mg 84 -> -----
28 14 Si 81 -> -----
14 7 N 74 -> -----
20 10 Ne 65 -> -----
56 26 Fe 49 -> -----
9 4 Be 42 -> -----
55 25 Mn 15 -> -----
52 24 Cr 14 -> -----
32 16 S 13 -> -----
51 23 V 12 -> -----
27 13 Al 11 -> -----
23 11 Na 10 -> -----
48 22 Ti 9 -> -----
40 20 Ca 8 -> -----
19 9 F 7 -> -----
45 21 Sc 6 -> -----
40 18 Ar 5 -> -----
39 19 K 4 -> -----
31 15 P 3 -> -----
35 17 Cl 2 -> -----
```

```
cd ../../lago-corsika-77402/run/
```

```
go-lagoW-all-02.sh go-lagoW-pr-3.sh
go-lagoW-all-03.sh go-lagoW-pr-4.sh
go-lagoW-all-04.sh go-lagoW-pr-5.sh
go-lagoW-all-05.sh go-lagoW-pr-6.sh
go-lagoW-all-06.sh go-lagoW-pr-7.sh
go-lagoW-he.sh go-lagoW-pr-8.sh
go-lagoW-pr-1.sh gr3.txt
go-lagoW-pr-2.sh lagoW
```

# Análisis de los datos

- Extraer información del binario:

```
for i in DAT?????.bz2; do j=$(echo $i | sed -e 's/.bz2//');  
u=$(echo $j | sed -e 's/DAT//'); bzip2 -d -k $i; echo $j  
| ../../../../arti/analysis/lagocrkread |  
../../../../arti/analysis/analysis -p -v $u; rm $j; done
```

- Analisis de los secundarios:

```
bzcat *sec.bz2 | ../../../../arti/analysis/showers -a 10 -d 10 -c 5100. -n  
1 1 -v salida_apx
```

# Análisis de los datos

- Extraer información de los binarios:

```
for i in DAT?????.bz2; do j=$(echo $i | sed -e 's/.bz2//'); u=$(echo $j | sed -e 's/DAT//'); bzip2 -d -k $i; echo $j |  
../.../arti/analysis/lagocrkread | ../.../arti/analysis/analysis -p  
-v $u; rm $j; done
```

- Analisis de los secundarios:

```
bzcat *sec.bz2 | ../.../arti/analysis/showers -a 10 -d 10 -c 5100. -n 1 1  
-v salida_apx
```


- Salida:

salida\_apx.dst→ Distribución lateral de los secundarios en el piso

salida\_apx.hst→ Distribución de la energía de los secundarios

salida\_apx.dse→ Distribución de la energía de los secundarios con respecto a la distancia.

# Análisis de los datos

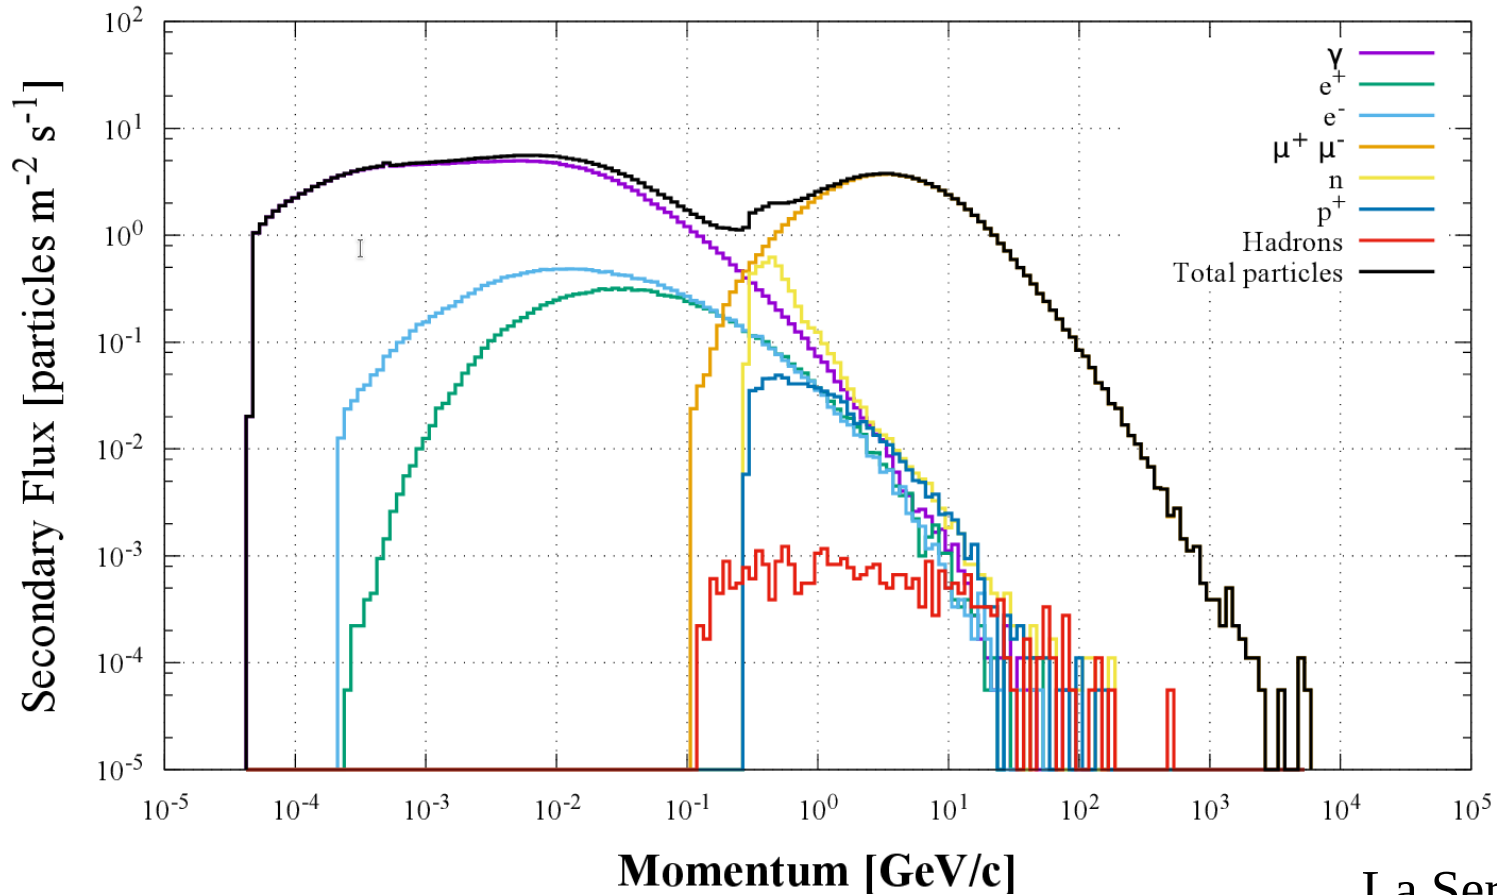


La Serena, Chile

# Algunos enlaces de interés

- Wiki LAGO: <http://wiki.lagoproject.net>
- Manual de Corsika:  
<https://www.iap.kit.edu/corsika/70.php>
- Artículo sobre ARTI: <https://arxiv.org/abs/2010.14591>
- Procceding sobre GRBs LAGO:  
<https://pos.sissa.it/395/929/pdf>



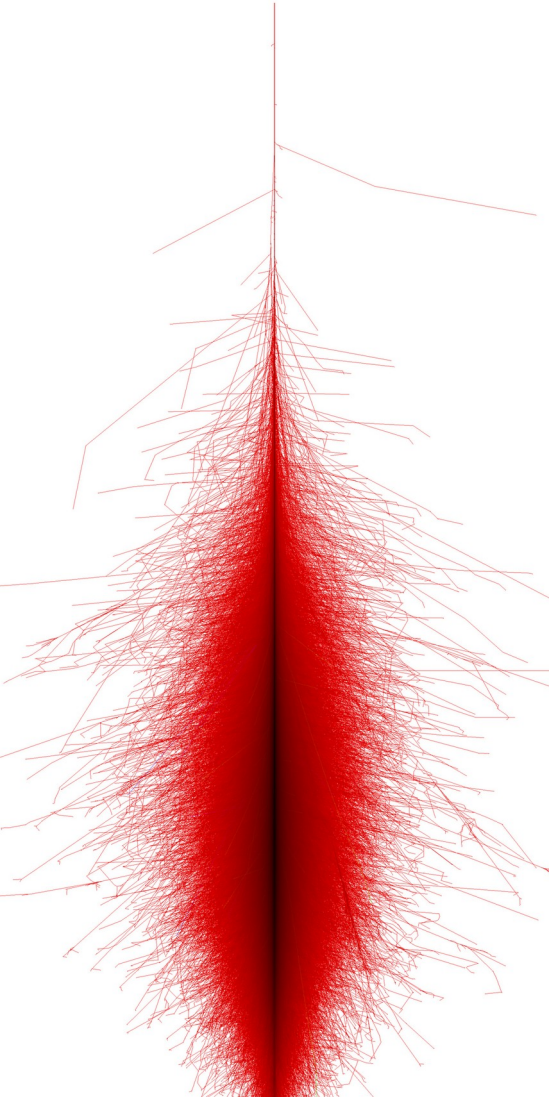

¡Gracias por su atención!

## #Espectro de energia del flujo de secundarios

```
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
from matplotlib import pyplot

import os

plt.rc('axes', labelsiz=22)
plt.rc('xtick', labelsiz=20)
plt.rc('ytick', labelsiz=20)

#A partir de aquí python sabe en que carpeta se encuentran los datos
os.chdir("/home/christian/MEGA/PostDoc_UIS/LAGO/Workshop_LAGO")
os.getcwd()

df= pd.read_table(r"salida_flujo_bga60.hst", delimiter=" ", skiprows=7, skipinitialspace=True, skipfooter=7,
names=["distance_in_bin", "N_phot", "N_e+", "N_e-", "N_mu+", "N_mu-", "N_pi0",
        "N_pi+", "N_pi-", "N_n", "N_p", "N_pbar", "N_others", "Total_per_bin"])

plt.figure(figsize=(10,8))
plt.step(df["distance_in_bin"], df["Total_per_bin"]/60, c="b", label=r"total")
plt.step(df["distance_in_bin"], df["N_phot"]/60, c="k", label=r"$\gamma$")
plt.step(df["distance_in_bin"], (df["N_e+"]+df["N_e-"])/60, c="r", label=r"$e^{+}e^{-}$")
plt.step(df["distance_in_bin"], (df["N_mu+"]+df["N_mu-"])/60, c="g", label=r"$\mu^{+}\mu^{-}$")
plt.step(df["distance_in_bin"], (df["N_n"])/60, c="m", label=r"$n$")
plt.xscale("log")
plt.yscale("log")
plt.ylim(1, 30)
plt.title(r"Flujo para BGA", fontsize=22)
plt.xlabel("Momentum, GeV/c")
plt.ylabel(r"part $\cdot$ m$^{-2}$ $\cdot$ s$^{-1}$")
plt.legend(fontsize=20)
```