


2. Q is computed on the logit of AUC, not on AUC itself

A difference of 0.01 in AUC is not the same precision everywhere between 0 and 1.
The logit is the scale on which the weights, the mean, and Q are calculated.

Both studies on the logit scale

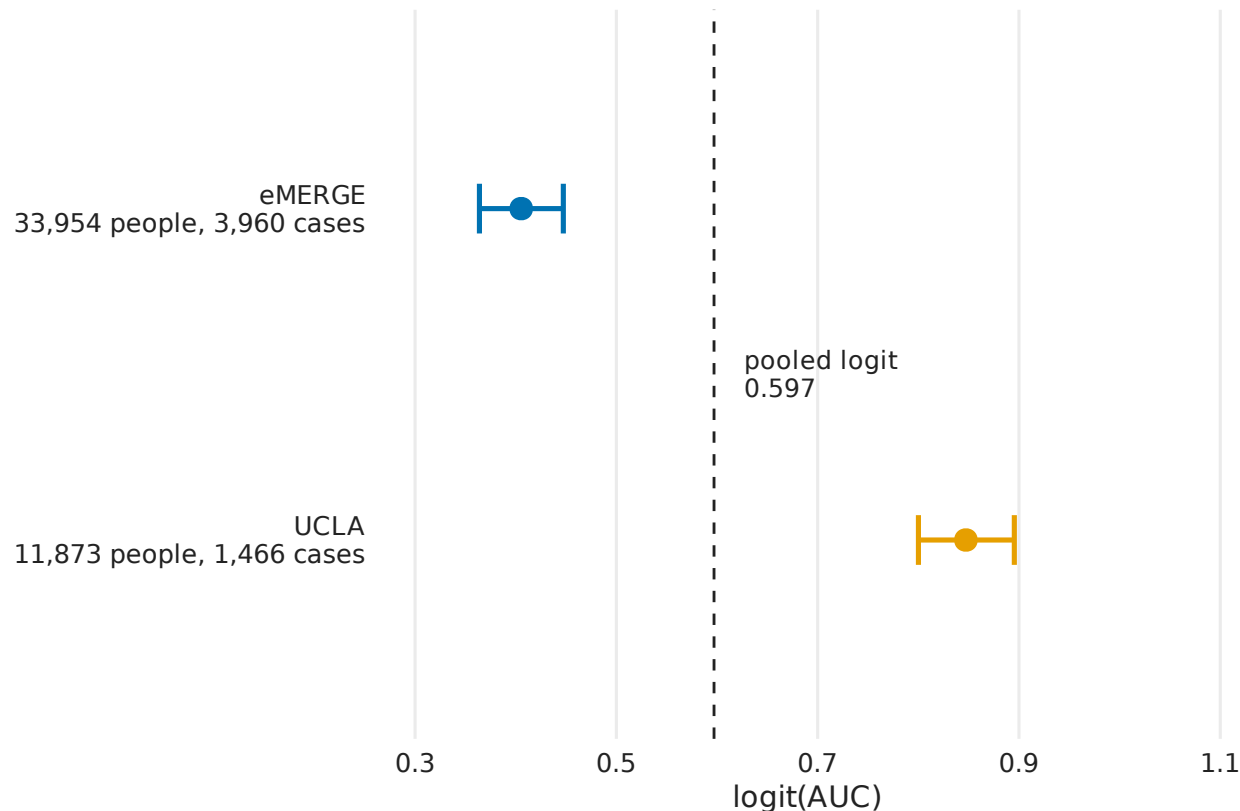

Basic functions, one study at a time

eMERGE

```
AUC = 0.60000
eta = log(AUC / (1 - AUC)) = 0.405
logit interval = 0.364 to 0.447
SE = (upper - lower) / (2 x 1.96) = 0.0213
```

UCLA

```
AUC = 0.70000
eta = log(AUC / (1 - AUC)) = 0.847
logit interval = 0.800 to 0.895
SE = (upper - lower) / (2 x 1.96) = 0.0243
```

eMERGE has the smaller SE,
so it receives more of the weight.
The logit, not the head count, sets that weight.

The dashed line is the weighted mean of the two logits. Mapping it back with `plogis()` returns the pooled AUC in plot 1.