2. Q is computed on the logit of AUC, not on AUC itself

A difference of 0.01 in AUC is not the same precision everywhere between 0 and 1.
The logit is the scale on which the weights, the mean, and Q are calculated.

Both studies on the logit scale

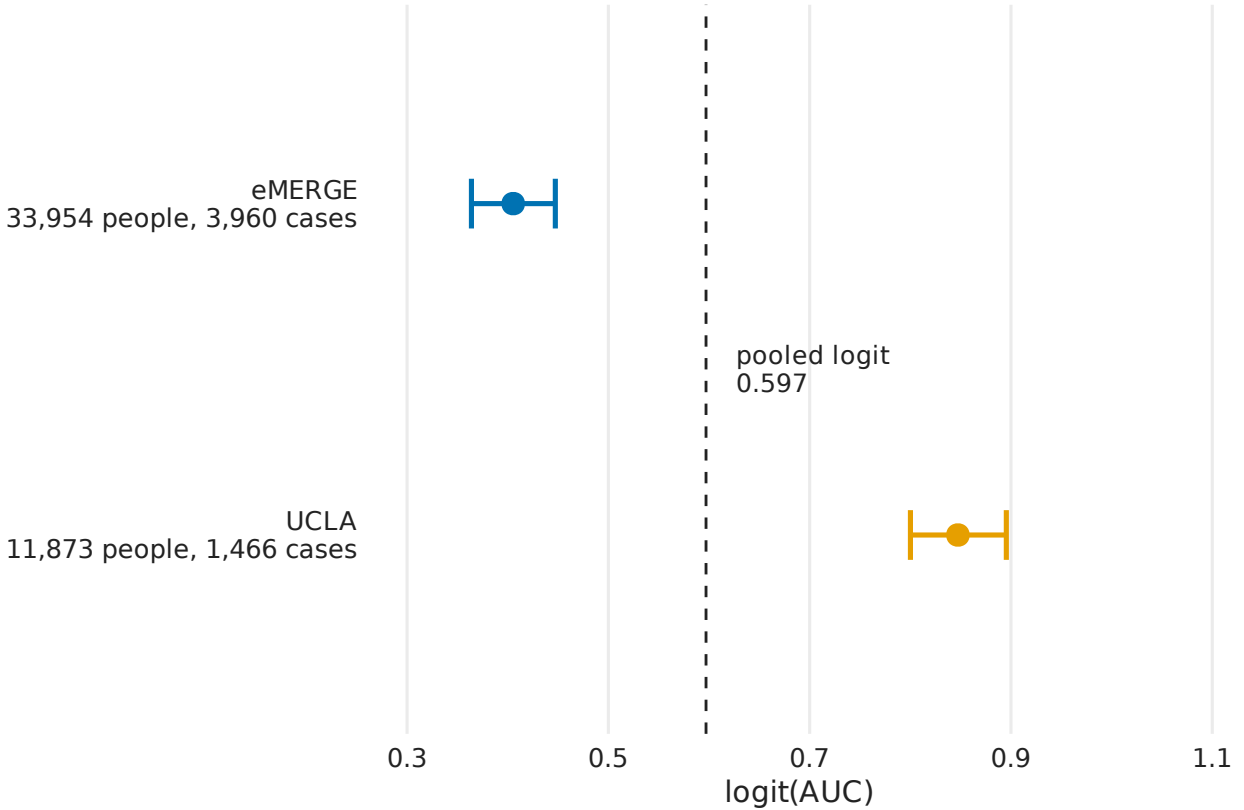


```
Basic functions, one study at a time

eMERGE
  AUC = 0.60000
  eta = log(AUC / (1 - AUC)) = 0.405
  logit interval = 0.364 to 0.447
  SE = (upper - lower) / (2 x 1.96) = 0.0213

UCLA
  AUC = 0.70000
  eta = log(AUC / (1 - AUC)) = 0.847
  logit interval = 0.800 to 0.895
  SE = (upper - lower) / (2 x 1.96) = 0.0243

eMERGE has the smaller SE,
so it receives more of the weight.
The logit, not the head count, sets that weight.
```

The dashed line is the weighted mean of the two logits. Mapping it back with plogis() returns the pooled AUC in plot 1.