




Linux IO Redirection

CSE 232 – Dr. Josh Nahum

Reading:

No Readings

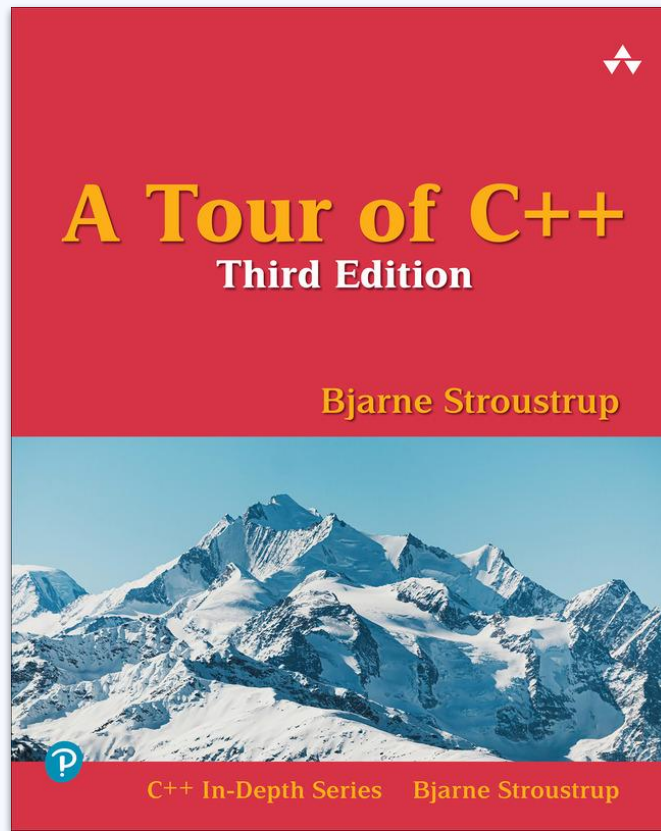

Redirecting I/O



>

```
program > x.txt
```

The output from the executable named `program` is written to the file named `x.txt`



<

```
program < x.txt
```

The input from for the executable named `program` is read from the file named `x.txt`




|

```
program | other
```

The output from the executable named `program` is redirected to be the input for the executable named `other`

**Useful of
testing
programs!**

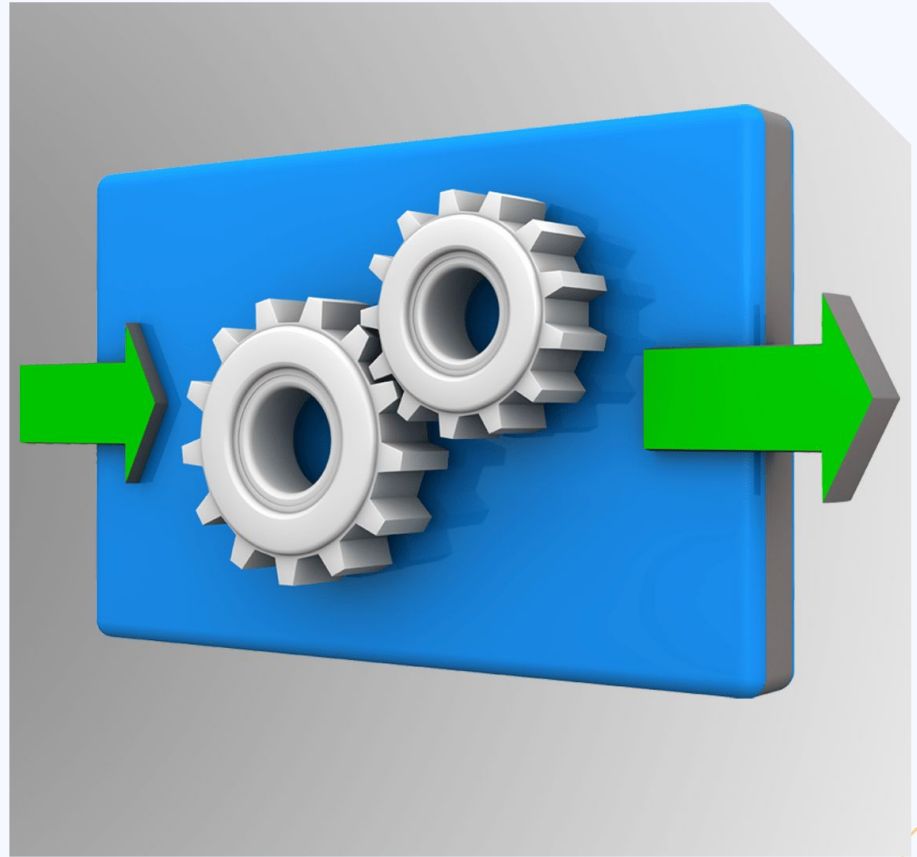

Live Coding Example



Attribution

Please ask questions via Piazza

Dr. Joshua Nahum

www.nahum.us

EB 3504



CREDITS: This presentation template was created by [Slidesgo](#), and includes icons by [Flaticon](#), and infographics & images by [Freepik](#)

© Michigan State University – CSE 232 – Introduction to Programming II