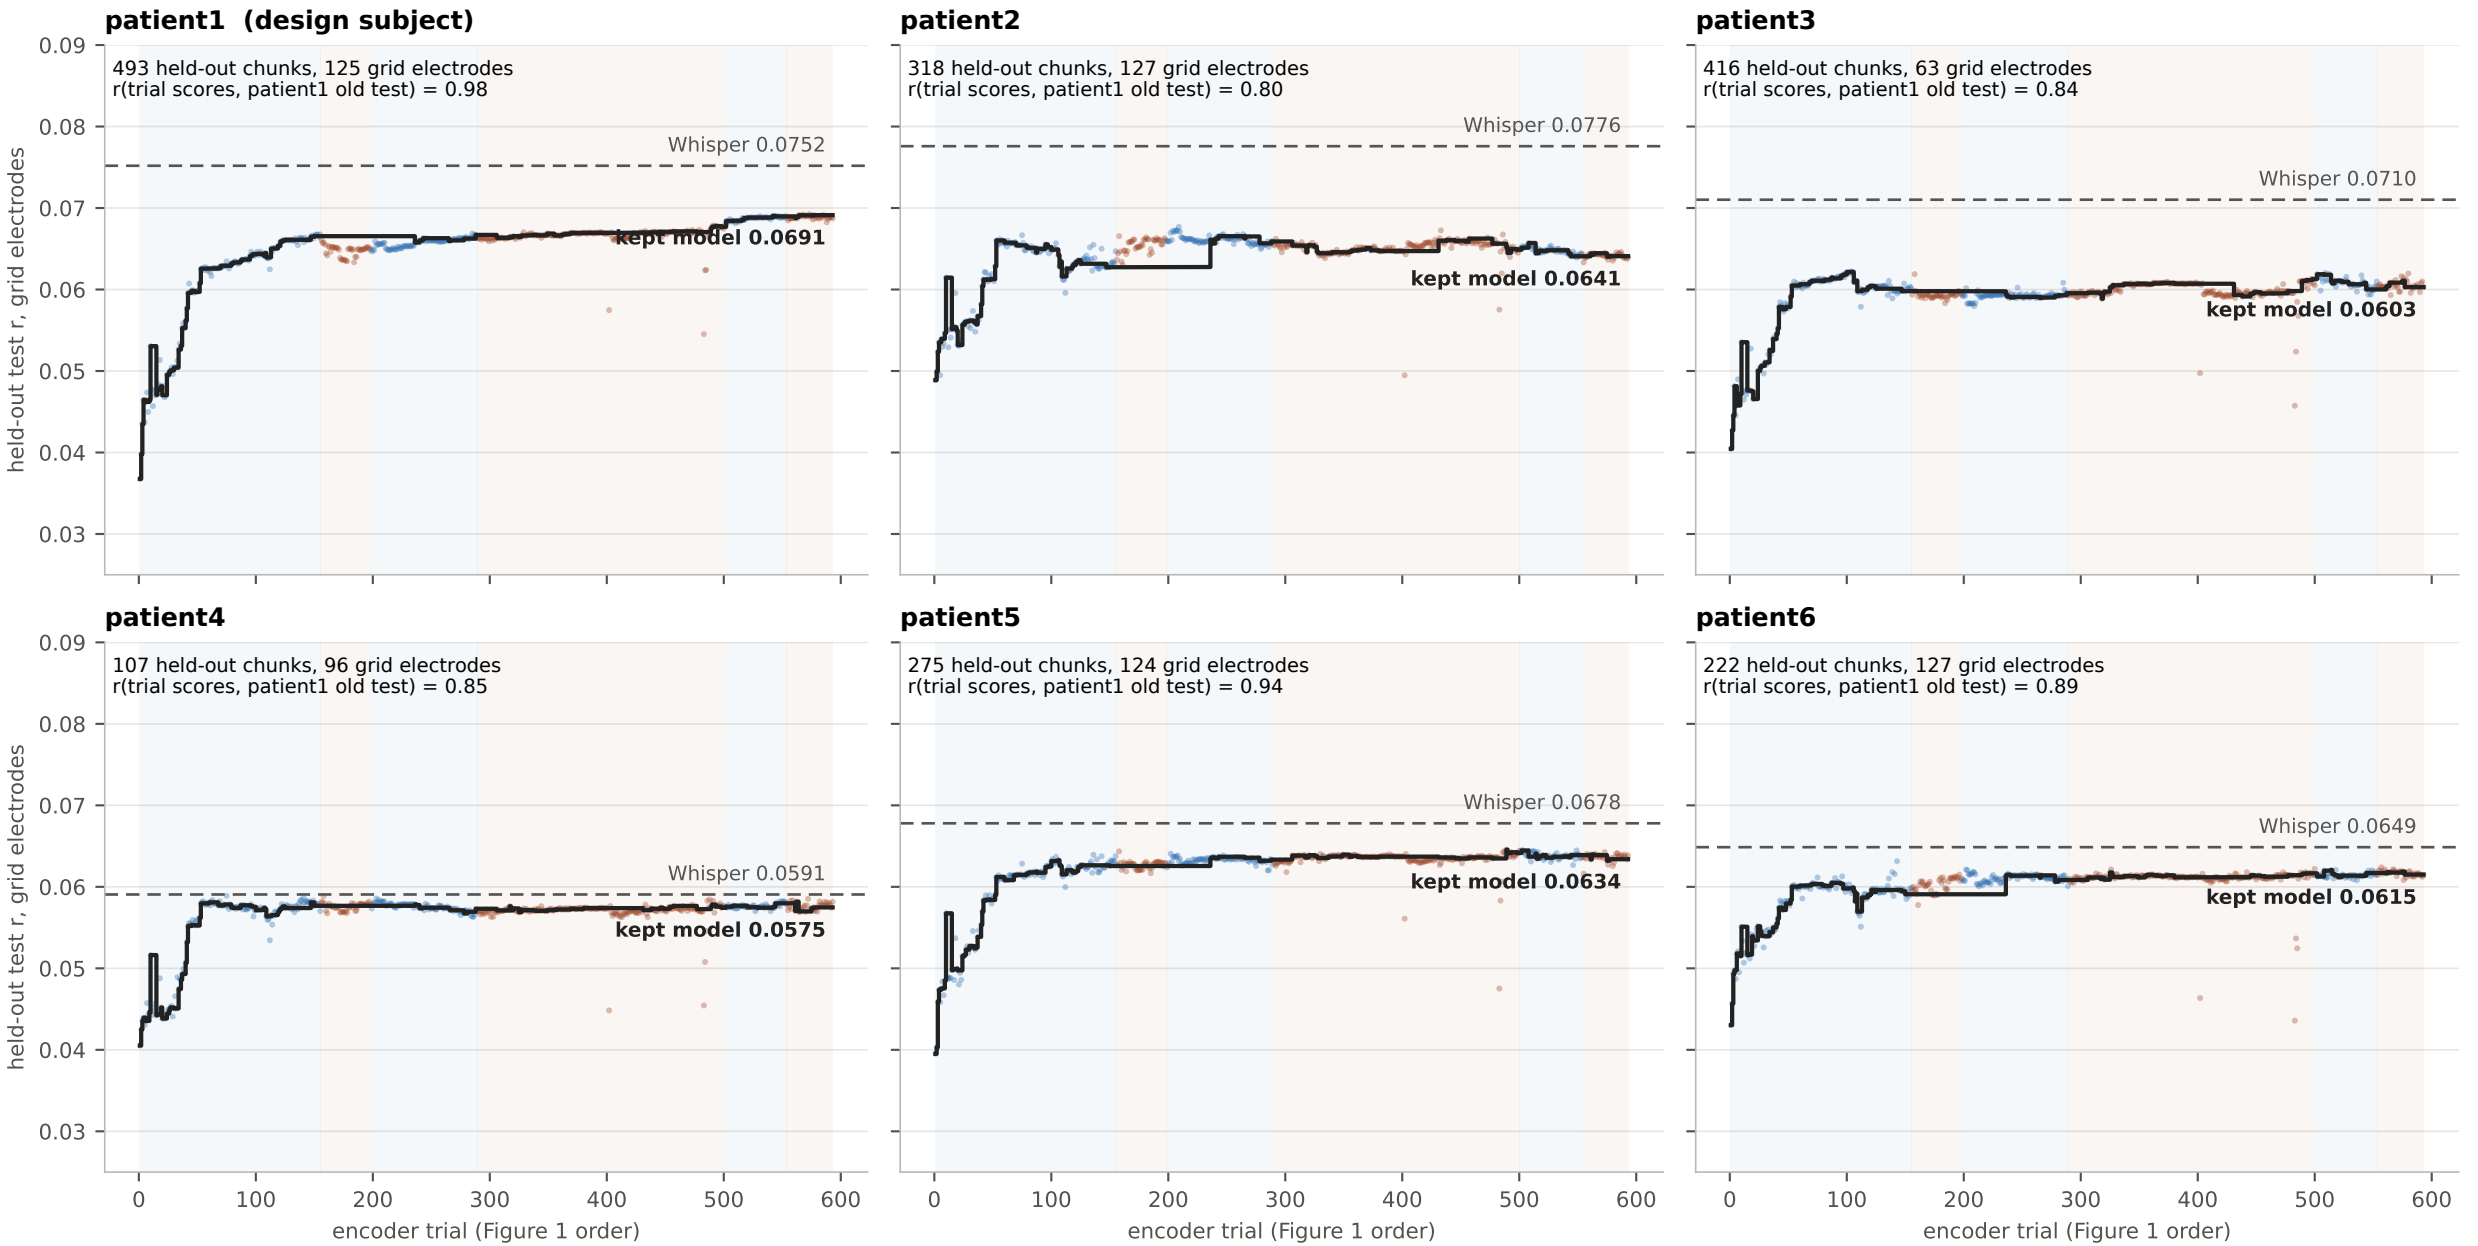

LEAN search history rerun on six subjects, each scored on a held-out session (dots: trials; black: model the search kept on patient1)
patient1 (design subject)
493 held-out chunks, 125 grid electrodes
r(trial scores, patient1 old test) = 0.98
Whisper 0.0752
kept model 0.0691
patient2
318 held-out chunks, 127 grid electrodes
r(trial scores, patient1 old test) = 0.80
Whisper 0.0776
kept model 0.0641
patient3
416 held-out chunks, 63 grid electrodes
r(trial scores, patient1 old test) = 0.84
Whisper 0.0710
kept model 0.0603
patient4
107 held-out chunks, 96 grid electrodes
r(trial scores, patient1 old test) = 0.85
Whisper 0.0591
kept model 0.0575
patient5
275 held-out chunks, 124 grid electrodes
r(trial scores, patient1 old test) = 0.94
Whisper 0.0678
kept model 0.0634
patient6
222 held-out chunks, 127 grid electrodes
r(trial scores, patient1 old test) = 0.89
Whisper 0.0649
kept model 0.0615
held-out test r, grid electrodes
0.09
0.08
0.07
0.06
0.05
0.04
0.03
0
100
200
300
400
500
600
encoder trial (Figure 1 order)