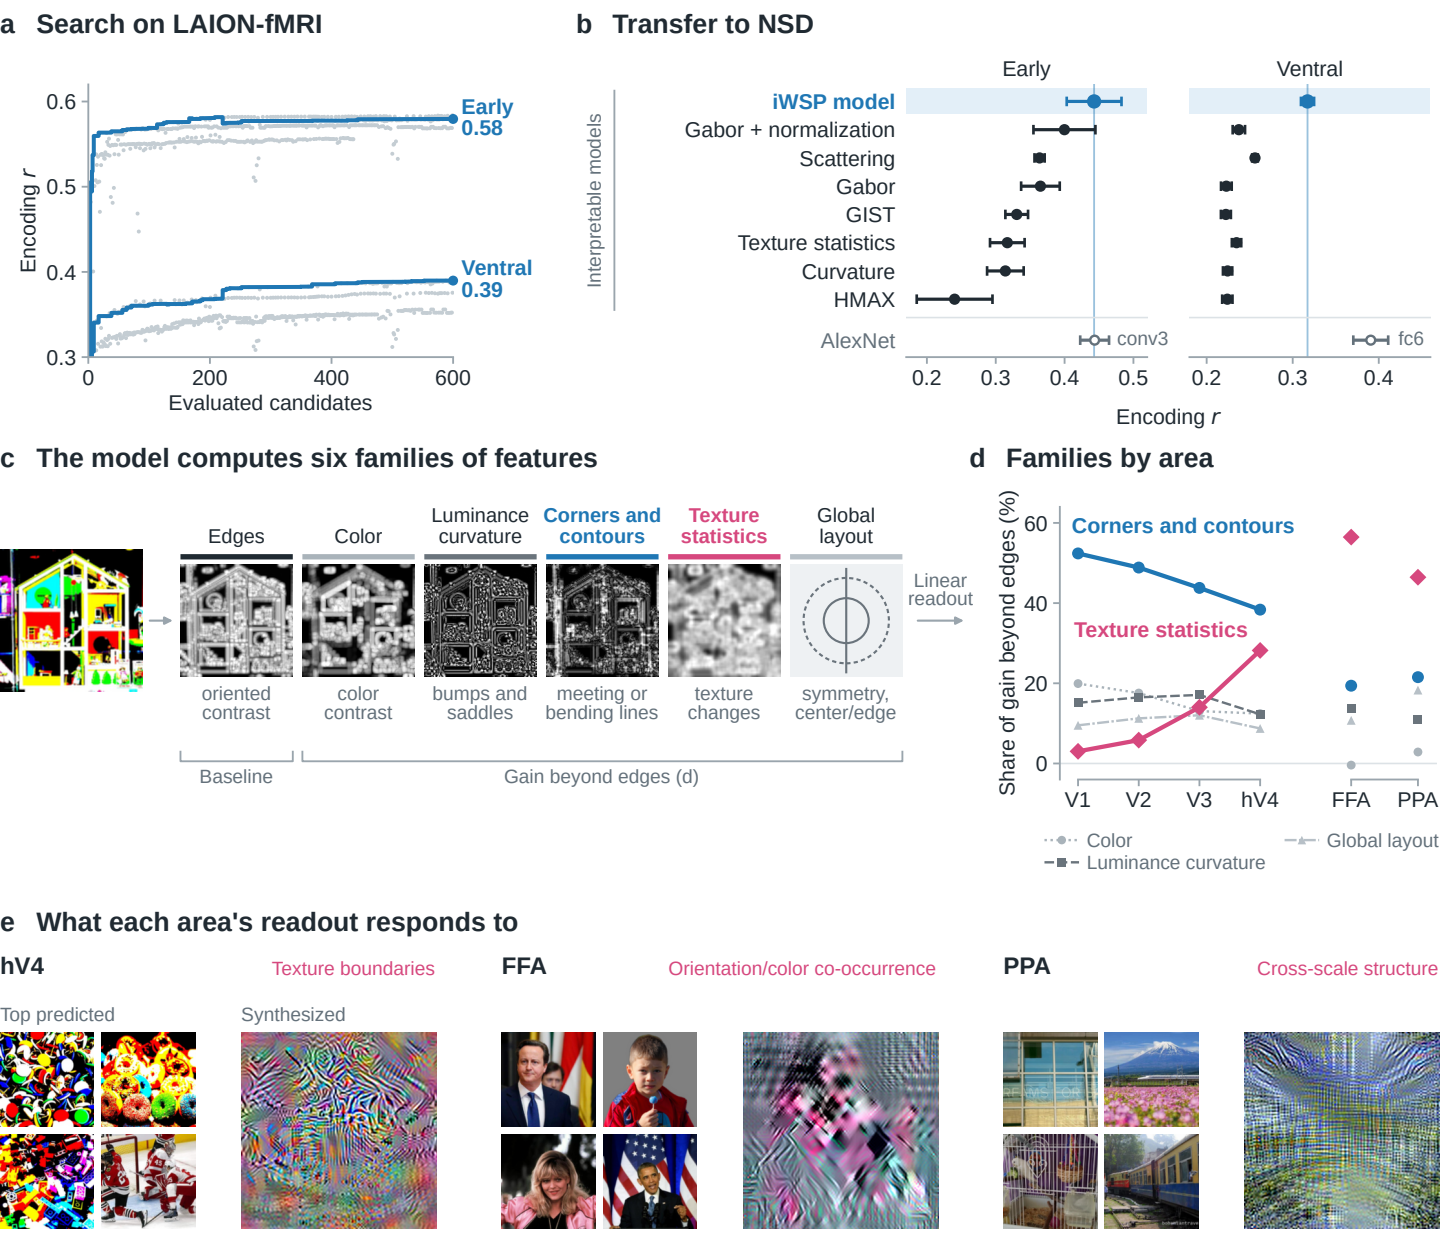

a Search on LAION-fMRI
Encoding r
Evaluated candidates
Early
0.58
Ventral
0.39
b Transfer to NSD
Interpretable models
iWSP model
Gabor + normalization
Scattering
Gabor
GIST
Texture statistics
Curvature
HMAX
AlexNet
conv3
fc6
Early
Ventral
Encoding r
c The model computes six families of features
Edges
Color
Luminance curvature
Corners and contours
Texture statistics
Global layout
Linear readout
oriented contrast
color contrast
bumps and saddles
meeting or bending lines
texture changes
symmetry, center/edge
Baseline
Gain beyond edges (d)
d Families by area
Share of gain beyond edges (%)
Corners and contours
Texture statistics
V1
V2
V3
hV4
FFA
PPA
Color
Luminance curvature
Global layout
e What each area's readout responds to
hV4
Texture boundaries
Top predicted
Synthesized
FFA
Orientation/color co-occurrence
PPA
Cross-scale structure