

000 054
 001 055
 002 056
 003 057
 004 058
 005 059
 006 060
 007 061
 008 062
 009 063
 010 064
 011 065
 012 066
 013 067
 014 068
 015 069
 016 070
 017 071
 018 072
 019 073
 020 074
 021 075
 022 076
 023 077
 024 078
 025 079
 026 080
 027 081
 028 082
 029 083
 030 084
 031 085
 032 086
 033 087
 034 088
 035 089
 036 090
 037 091
 038 092
 039 093
 040 094
 041 095
 042 096
 043 097
 044 098
 045 099
 046 100
 047 101
 048 102
 049 103
 050 104
 051 105
 052 106
 053 107

Supplementary Materials to ‘‘Multi-channel Weighted Nuclear Norm Minimization for Real Color Image Denoising’’

Anonymous ICCV submission

Paper ID 572

In this supplementary file, we provide:

1. The proof of the Theorem 1 in the main paper;
2. More denoising results on the Kodak PhotoCD dataset;
3. More visual comparisons of denoised images on the real noisy images of dataset [1];
4. More visual comparisons of denoised images on the real noisy images of dataset [2].

1. Proof of Theorem 1.

Theorem 1. Assume that the weights in w are in a non-descending order, the sequence $\{\mathbf{X}_k\}$, $\{\mathbf{Z}_k\}$, and $\{\mathbf{A}_k\}$ generated in Algorithm 1 satisfy:

$$(a) \lim_{k \rightarrow \infty} \|\mathbf{X}_{k+1} - \mathbf{Z}_{k+1}\|_F = 0; \quad (b) \lim_{k \rightarrow \infty} \|\mathbf{X}_{k+1} - \mathbf{X}_k\|_F = 0; \quad (c) \lim_{k \rightarrow \infty} \|\mathbf{Z}_{k+1} - \mathbf{Z}_k\|_F = 0. \quad (1)$$

Proof. 1. Firstly, we prove that the sequence $\{\mathbf{A}_k\}$ generated by Algorithm 1 is upper bounded. Let $\mathbf{X}_{k+1} + \rho_k^{-1} \mathbf{A}_k = \mathbf{U}_k \Sigma_k \mathbf{V}_k^\top$ be its singular value decomposition (SVD) [3] in the $(k+1)$ -th iteration. According to Corollary 1 of [4], we can have the SVD of \mathbf{Z}_{k+1} as $\mathbf{Z}_{k+1} = \mathbf{U}_k \hat{\Sigma}_k \mathbf{V}_k^\top = \mathbf{U}_k \mathcal{S}_{\frac{w}{\rho_k}}(\Sigma_k) \mathbf{V}_k^\top$. Then we have

$$\|\mathbf{A}_{k+1}\|_F = \|\mathbf{A}_k + \rho_k(\mathbf{X}_{k+1} - \mathbf{Z}_{k+1})\|_F = \rho_k \|\rho_k^{-1} \mathbf{A}_k + \mathbf{X}_{k+1} - \mathbf{Z}_{k+1}\|_F \quad (2)$$

$$= \rho_k \|\mathbf{U}_k \Sigma_k \mathbf{V}_k^\top - \mathbf{U}_k \mathcal{S}_{\frac{w}{\rho_k}}(\Sigma_k) \mathbf{V}_k^\top\|_F = \rho_k \|\Sigma_k - \mathcal{S}_{\frac{w}{\rho_k}}(\Sigma_k)\|_F \quad (3)$$

$$= \rho_k \sqrt{\sum_i (\Sigma_k^{ii} - \mathcal{S}_{\frac{w}{\rho_k}}(\Sigma_k^{ii}))^2} \leq \rho_k \sqrt{\sum_i (\frac{w_i}{\rho_k})^2} = \sqrt{\sum_i w_i^2}. \quad (4)$$

The inequality in the second last step can be proved as follows: given the diagonal matrix Σ_k , we define Σ_k^{ii} as the i -th element of Σ_k^{ii} . If $\Sigma_k^{ii} \geq \frac{w_i}{\rho_k}$, we have $\mathcal{S}_{\frac{w}{\rho_k}}(\Sigma_k^{ii}) = \Sigma_k^{ii} - \frac{w_i}{\rho_k}$. If $\Sigma_k^{ii} < \frac{w_i}{\rho_k}$, we have $\mathcal{S}_{\frac{w}{\rho_k}}(\Sigma_k^{ii}) = 0$. Overall, we have $|\Sigma_k^{ii} - \mathcal{S}_{\frac{w}{\rho_k}}(\Sigma_k^{ii})| \leq \frac{w_i}{\rho_k}$ and hence the inequality holds. Hence, the sequence $\{\mathbf{A}_k\}$ is upper bounded.

2. Secondly, we prove that the sequence of Lagrangian function $\{\mathcal{L}(\mathbf{X}_{k+1}, \mathbf{Z}_{k+1}, \mathbf{A}_k, \rho_k)\}$ is also upper bounded. Since we have the globally optimal solution of \mathbf{X} and \mathbf{Z} in their corresponding subproblems, we always have

$$\mathcal{L}(\mathbf{X}_{k+1}, \mathbf{Z}_{k+1}, \mathbf{A}_k, \rho_k) \leq \mathcal{L}(\mathbf{X}_k, \mathbf{Z}_k, \mathbf{A}_k, \rho_k). \quad (5)$$

Based on the updating rule that $\mathbf{A}_{k+1} = \mathbf{A}_k + \rho_k(\mathbf{X}_{k+1} - \mathbf{Z}_{k+1})$, we have

$$\mathcal{L}(\mathbf{X}_{k+1}, \mathbf{Z}_{k+1}, \mathbf{A}_{k+1}, \rho_{k+1}) \quad (6)$$

$$= \mathcal{L}(\mathbf{X}_{k+1}, \mathbf{Z}_{k+1}, \mathbf{A}_k, \rho_k) + \langle \mathbf{A}_{k+1} - \mathbf{A}_k, \mathbf{X}_{k+1} - \mathbf{Z}_{k+1} \rangle + \frac{\rho_{k+1} - \rho_k}{2} \|\mathbf{X}_{k+1} - \mathbf{Z}_{k+1}\|_F^2 \quad (7)$$

$$= \mathcal{L}(\mathbf{X}_{k+1}, \mathbf{Z}_{k+1}, \mathbf{A}_k, \rho_k) + \frac{\rho_{k+1} + \rho_k}{2\rho_k^2} \|\mathbf{A}_{k+1} - \mathbf{A}_k\|_F^2. \quad (8)$$

108 Since the sequence $\{\mathbf{A}_k\}$ is upper bounded, the sequence $\{\mathbf{A}_{k+1} - \mathbf{A}_k\}$ is also upper bounded. Denote by a the upper bound
 109 of $\{\mathbf{A}_{k+1} - \mathbf{A}_k\}$, we have
 110

$$\begin{aligned} 111 \quad \mathcal{L}(\mathbf{X}_{k+1}, \mathbf{Z}_{k+1}, \mathbf{A}_{k+1}, \rho_{k+1}) &\leq \mathcal{L}(\mathbf{X}_1, \mathbf{Z}_1, \mathbf{A}_0, \rho_0) + a \sum_{k=0}^{\infty} \frac{\rho_{k+1} + \rho_k}{2\rho_k^2} \\ 112 \end{aligned} \quad (9)$$

$$\begin{aligned} 113 \quad &= \mathcal{L}(\mathbf{X}_1, \mathbf{Z}_1, \mathbf{A}_0, \rho_0) + a \sum_{k=0}^{\infty} \frac{\mu + 1}{2\mu^k \rho_0} \\ 114 \end{aligned} \quad (10)$$

$$\begin{aligned} 115 \quad &\leq \mathcal{L}(\mathbf{X}_1, \mathbf{Z}_1, \mathbf{A}_0, \rho_0) + \frac{a}{\rho_0} \sum_{k=0}^{\infty} \frac{1}{\mu^{k-1}}. \\ 116 \end{aligned} \quad (11)$$

117 The last inequality holds since $\mu > 1$ and $\mu + 1 < 2\mu$. Therefore, we have $\sum_{k=0}^{\infty} \frac{1}{\mu^{k-1}} < \infty$ and the sequence of Lagrangian
 118 function $\{\mathcal{L}(\mathbf{X}_{k+1}, \mathbf{Z}_{k+1}, \mathbf{A}_{k+1}, \rho_{k+1})\}$ is upper bounded.
 119

120 3. Thirdly, we prove that the sequences of $\{\mathbf{X}_k\}$ and $\{\mathbf{Z}_k\}$ are upper bounded. Since
 121

$$\begin{aligned} 122 \quad \|\mathbf{W}(\mathbf{Y} - \mathbf{X}_k)\|_F^2 + \|\mathbf{Z}_k\|_{\mathbf{w},*}^2 &= \mathcal{L}(\mathbf{X}_k, \mathbf{Z}_k, \mathbf{A}_{k-1}, \rho_{k-1}) - \langle \mathbf{A}_k, \mathbf{X}_k - \mathbf{Z}_k \rangle - \frac{\rho_k}{2} \|\mathbf{X}_k - \mathbf{Z}_k\|_F^2 \\ 123 \end{aligned} \quad (12)$$

$$\begin{aligned} 124 \quad &= \mathcal{L}(\mathbf{X}_k, \mathbf{Z}_k, \mathbf{A}_{k-1}, \rho_{k-1}) + \frac{1}{2\rho_k} (\|\mathbf{A}_{k-1}\|_F^2 - \|\mathbf{A}_k\|_F^2), \\ 125 \end{aligned} \quad (13)$$

126 both $\{\mathbf{W}(\mathbf{Y} - \mathbf{X}_k)\}$ and $\{\mathbf{Z}_k\}$ are upper bounded, and hence the sequence $\{\mathbf{X}_k\}$ is bounded by the Cauchy-Schwarz
 127 inequality and triangle inequality. We can obtain that
 128

$$\lim_{k \rightarrow \infty} \|\mathbf{X}_{k+1} - \mathbf{Z}_{k+1}\|_F = \lim_{k \rightarrow \infty} \rho_k^{-1} \|\mathbf{A}_{k+1} - \mathbf{A}_k\|_F = 0, \quad (14)$$

129 and the equation (a) is proved.
 130

131 4. Then we can prove that

$$\begin{aligned} 132 \quad \lim_{k \rightarrow \infty} \|\mathbf{X}_{k+1} - \mathbf{X}_k\|_F &= \lim_{k \rightarrow \infty} \|(\mathbf{W}^\top \mathbf{W} + \frac{\rho_k}{2} \mathbf{I})^{-1} (\mathbf{W}^\top \mathbf{W} \mathbf{Y} - \mathbf{W}^\top \mathbf{W} \mathbf{Z}_k - \frac{1}{2} \mathbf{A}_k) - \rho_k^{-1} (\mathbf{A}_k - \mathbf{A}_{k-1})\|_F \\ 133 \end{aligned} \quad (15)$$

$$\begin{aligned} 134 \quad &\leq \lim_{k \rightarrow \infty} \|(\mathbf{W}^\top \mathbf{W} + \frac{\rho_k}{2} \mathbf{I})^{-1} (\mathbf{W}^\top \mathbf{W} \mathbf{Y} - \mathbf{W}^\top \mathbf{W} \mathbf{Z}_k - \frac{1}{2} \mathbf{A}_k)\|_F + \rho_k^{-1} \|\mathbf{A}_k - \mathbf{A}_{k-1}\|_F \\ 135 \end{aligned} \quad (16)$$

$$= 0, \quad (17)$$

136 and hence the equation (b) is proved.
 137

138 5. Finally, the equation (c) can be proved by checking that

$$\begin{aligned} 139 \quad \lim_{k \rightarrow \infty} \|\mathbf{Z}_{k+1} - \mathbf{Z}_k\|_F &= \lim_{k \rightarrow \infty} \|\mathbf{X}_k + \rho_k^{-1} \mathbf{A}_{k-1} - \mathbf{Z}_k + \mathbf{X}_{k+1} - \mathbf{X}_k + \rho_k^{-1} \mathbf{A}_{k-1} + \rho_k^{-1} \mathbf{A}_k - \rho_k^{-1} \mathbf{A}_{k+1}\|_F \\ 140 \end{aligned} \quad (18)$$

$$\leq \lim_{k \rightarrow \infty} (\|\Sigma_{k-1} - \mathcal{S}_{\mathbf{w}/\rho_{k-1}}(\Sigma_{k-1})\|_F + \|\mathbf{X}_{k+1} - \mathbf{X}_k\|_F + \rho_k^{-1} \|\mathbf{A}_{k-1} + \mathbf{A}_{k+1} - \mathbf{A}_k\|_F) \quad (19)$$

$$\leq \lim_{k \rightarrow \infty} (\rho_{k-1}^{-1} \|\mathbf{w}\|_F + \|\mathbf{X}_{k+1} - \mathbf{X}_k\|_F + \rho_k^{-1} \|\mathbf{A}_{k-1} + \mathbf{A}_{k+1} - \mathbf{A}_k\|_F) \quad (20)$$

$$= 0, \quad (21)$$

141 where $\mathbf{U}_{k-1} \Sigma_{k-1} \mathbf{V}_{k-1}^\top$ is the SVD of the matrix $\mathbf{X}_k + \rho_{k-1} \mathbf{A}_{k-1}$. □
 142

143

153 2. More denoising results on the Kodak PhotoCD dataset

154 In the main paper, we have given the PSNR results of the competing methods on the 24 high quality images from the
 155 Kodak PhotoCD dataset when the standard deviations of the additive white Gaussian noise (AWGN) are $\sigma_r = 40, \sigma_g = 20, \sigma_b = 30$ for R, G, B channels, respectively. Here we provide more denoising results on this dataset. In Tables 1-3,
 156 we give the PSNR results on these images when the noise standard deviations are $\sigma_r = 40, \sigma_g = 20, \sigma_b = 30$ in Table 1,
 157 $\sigma_r = 30, \sigma_g = 10, \sigma_b = 50$ in Table 2 and $\sigma_r = 5, \sigma_g = 30, \sigma_b = 15$ in Table 3, respectively. In Figures 1-6, we give the
 158 visual comparisons of the denoised images by different methods.
 159

160

Table 1. PSNR(dB) results of different denoising methods on the Kodak PhotoCD dataset.

Image#	$\sigma_r = 40, \sigma_g = 20, \sigma_b = 30$								
	CBM3D	MLP	TNRD	NI	NC	WNNM-1	WNNM-2	WNNM-3	MC-WNNM
1	25.24	25.70	25.74	23.85	24.90	26.01	25.95	25.58	26.66
2	28.27	30.12	30.21	25.90	25.87	30.08	30.11	29.80	30.20
3	28.81	31.19	31.49	26.00	28.58	31.58	31.61	31.20	32.25
4	27.95	29.88	29.86	25.82	25.67	30.13	30.16	29.84	30.49
5	25.03	26.00	26.18	24.38	25.15	26.44	26.39	25.32	26.82
6	26.24	26.84	26.90	24.65	24.74	27.39	27.30	26.88	27.98
7	27.88	30.28	30.40	25.63	27.69	30.47	30.54	29.70	30.98
8	25.05	25.59	25.83	24.02	25.30	26.71	26.75	25.26	26.90
9	28.44	30.75	30.81	25.94	27.44	30.86	30.92	30.29	31.49
10	28.27	30.38	30.57	25.87	28.42	30.65	30.68	29.95	31.26
11	26.95	28.00	28.14	25.32	24.67	28.19	28.16	27.61	28.63
12	28.76	30.87	31.05	26.01	28.37	30.97	31.06	30.58	31.48
13	23.76	23.95	23.99	23.53	22.76	24.27	24.15	23.52	24.89
14	26.02	26.97	27.11	24.94	25.68	27.20	27.15	26.55	27.57
15	28.38	30.15	30.44	26.06	28.21	30.52	30.60	30.13	30.81
16	27.75	28.82	28.87	25.69	26.66	29.27	29.21	29.02	29.96
17	27.90	29.57	29.80	25.85	28.32	29.78	29.79	29.16	30.40
18	25.77	26.40	26.41	24.74	25.70	26.63	26.56	26.01	27.22
19	27.30	28.67	28.81	25.40	26.52	29.19	29.22	28.67	29.57
20	28.96	30.40	30.76	24.95	25.90	30.79	30.83	29.97	31.07
21	26.54	27.53	27.60	25.06	26.48	27.80	27.75	27.12	28.34
22	27.05	28.17	28.27	25.36	26.60	28.21	28.16	27.81	28.64
23	29.14	32.31	32.51	26.13	23.24	31.89	31.97	31.21	32.34
24	25.75	26.41	26.53	24.55	25.73	27.10	27.03	26.18	27.59
Average	27.13	28.54	28.68	25.24	26.19	28.84	28.83	28.22	29.31

Table 2. PSNR(dB) results of different denoising methods on the Kodak PhotoCD dataset.

Image#	$\sigma_r = 30, \sigma_g = 10, \sigma_b = 50$								
	CBM3D	MLP	TNRD	NI	NC	WNNM-1	WNNM-2	WNNM-3	MC-WNNM
1	23.38	26.49	26.50	24.82	23.59	26.40	25.60	24.76	27.81
2	25.19	30.94	30.90	26.82	27.79	30.89	29.75	29.21	30.96
3	25.39	32.03	32.09	27.52	27.41	32.20	31.17	30.39	32.89
4	24.96	30.55	30.47	27.34	27.00	30.74	29.71	29.10	31.19
5	23.29	26.65	26.73	25.72	26.67	26.74	25.98	24.68	27.60
6	24.09	27.76	27.70	26.10	26.12	27.85	26.96	26.01	29.15
7	24.89	30.70	30.72	27.17	28.07	30.91	29.94	28.87	31.37
8	23.30	26.12	26.27	25.59	26.11	26.87	26.33	24.74	27.44
9	25.20	31.35	31.31	27.74	28.33	31.30	30.45	29.44	32.08
10	25.13	31.01	31.05	27.60	28.53	31.12	30.17	29.21	31.83
11	24.54	28.79	28.82	26.72	24.40	28.73	27.79	26.94	29.60
12	25.43	31.60	31.60	27.82	29.01	31.59	30.62	29.91	32.11
13	22.50	24.71	24.73	24.96	23.36	24.70	23.85	22.86	25.96
14	23.91	27.69	27.72	26.26	23.08	27.62	26.81	25.91	28.57
15	25.45	31.09	31.05	27.36	28.49	31.29	30.21	29.46	31.39
16	24.89	29.79	29.73	27.35	27.10	29.84	28.85	28.13	31.10
17	25.12	30.26	30.24	27.15	27.54	30.11	29.35	28.43	31.08
18	23.83	27.26	27.26	26.05	26.15	27.32	26.18	25.28	28.32
19	24.63	29.40	29.39	27.06	27.41	29.78	28.87	28.05	30.53
20	26.43	31.16	31.27	26.43	26.92	31.25	30.43	29.41	31.55
21	24.24	28.26	28.27	26.66	27.18	28.22	27.45	26.40	29.29
22	24.51	29.03	29.06	26.83	27.64	29.02	27.81	27.18	29.57
23	25.55	32.87	32.75	27.60	23.75	32.58	31.46	30.50	32.34
24	23.85	27.06	27.13	25.86	27.05	27.50	26.63	25.55	28.32
Average	24.57	29.27	29.28	26.69	26.61	29.36	28.43	27.52	30.09

324 Table 3. PSNR(dB) results of different denoising methods on the Kodak PhotoCD dataset. 378
325 $\sigma_r = 5, \sigma_g = 30, \sigma_b = 15$ 379

Image#	CBM3D	MLP	TNRD	NI	NC	WNNM-1	WNNM-2	WNNM-3	MC-WNNM
1	27.25	28.06	28.62	25.00	29.55	28.16	27.95	28.15	30.20
2	29.70	31.30	32.70	27.80	29.69	32.54	31.60	31.73	34.04
3	30.34	31.98	34.07	28.02	31.93	33.91	33.68	33.52	35.55
4	29.47	31.10	32.56	27.70	32.56	32.68	31.85	31.90	34.06
5	27.31	28.59	29.35	26.14	30.00	28.83	29.00	28.91	30.05
6	28.20	29.10	29.90	26.15	28.81	29.55	29.46	29.62	31.64
7	29.73	31.60	33.46	27.22	31.63	33.09	33.29	32.86	34.24
8	27.47	28.16	28.91	25.34	30.16	29.15	29.24	29.03	29.91
9	30.07	31.63	33.55	27.86	31.54	33.19	33.20	32.95	34.53
10	29.96	31.37	33.20	27.74	33.44	32.98	33.02	32.74	34.38
11	28.73	29.85	30.87	26.98	30.16	30.45	30.14	30.21	32.10
12	30.20	31.50	33.31	27.97	31.69	33.22	32.71	32.65	34.64
13	26.18	26.69	26.98	25.14	27.97	26.49	26.42	26.62	28.30
14	27.86	29.07	29.87	26.67	29.21	29.36	29.14	29.30	31.18
15	29.91	31.58	33.13	28.04	31.17	33.22	32.34	32.36	34.27
16	29.29	30.35	31.54	27.46	32.18	31.34	31.05	31.21	33.72
17	29.50	31.09	32.52	27.81	32.80	32.09	32.00	31.85	33.61
18	27.72	28.74	29.36	26.57	28.63	28.88	28.76	28.89	30.56
19	28.98	30.18	31.35	27.25	29.79	31.34	30.77	30.95	33.10
20	30.63	31.78	33.27	27.89	29.52	33.00	32.55	32.58	34.18
21	28.50	29.58	30.54	26.86	30.99	30.02	30.03	30.03	31.69
22	28.61	29.78	30.82	27.19	30.50	30.47	29.82	30.10	32.08
23	30.60	32.66	35.06	28.17	32.82	34.72	34.37	33.94	35.16
24	27.97	28.81	29.61	26.01	30.75	29.47	29.35	29.39	30.93
Average	28.92	30.19	31.44	27.04	30.73	31.17	30.91	30.89	32.67

350

3. More visual comparisons of denoised images on the real noisy images of dataset [1]

 404
351

In this section, we give more comparisons of the state-of-the-art denoising methods on dataset [1]. The real noisy images in dataset [1] have no “ground truth” images and hence we only compare the visual quality of the denoised images by different methods. As can be seen from Figures 7-10, the proposed MC-WNNM method performs better than the competing methods.

355

4. More visual comparisons of denoised images on the real noisy images of dataset [2]

 409
356

In this section, we provide more comparisons of the proposed method with the state-of-the-art denoising methods on the 15 cropped real noisy images used in [2]. In this dataset, each scene was shot 500 times under the same camera and camera setting. The mean image of the 500 shots is roughly taken as the “ground truth”, with which the PSNR can be computed. As can be seen from Figures 11-14, in most cases, our proposed method achieves better performance than the the competing methods. This validates the effectiveness of the proposed MC-WNNM method for real noisy image denoising.

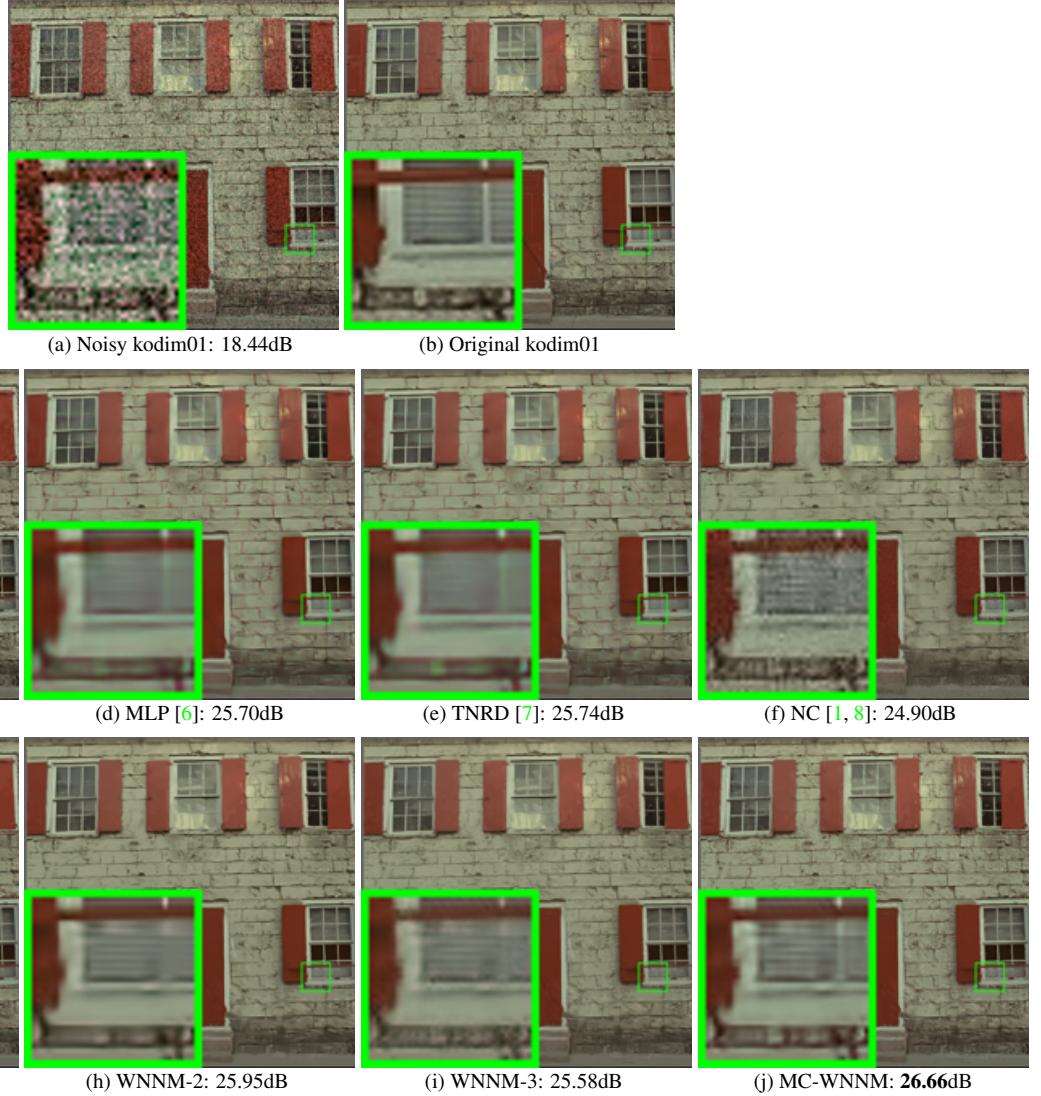
432
433
434
435
436
437
438
439
440486
487
488
489
490
491
492
493
494441
442
443
444
445
446
447
448
449
450495
496
497
498
499
500
501
502
503
504451
452
453
454
455
456
457
458
459
460
461
462505
506
507
508
509
510
511
512
513
514
515
516
517

Figure 1. Denoised images of different methods on the image “kodim01” degraded by AWGN with different standard deviations of $\sigma_r = 40$, $\sigma_g = 20$, $\sigma_b = 30$ on R, G, B channels, respectively. The images are better to be zoomed in on screen.

477
478
479
480
481
482
483
484
485529
530
531
532
533
534
535
536
537
538
539

540
541
542
543
544
545
546
547
548594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613549
550
551
552
553
554
555
556
557
558603
604
605
606
607
608
609
610
611
612
613

559

614

560
561
562
563
564
565
566
567
568
569
570615
616
617
618
619
620
621
622
623
624

571

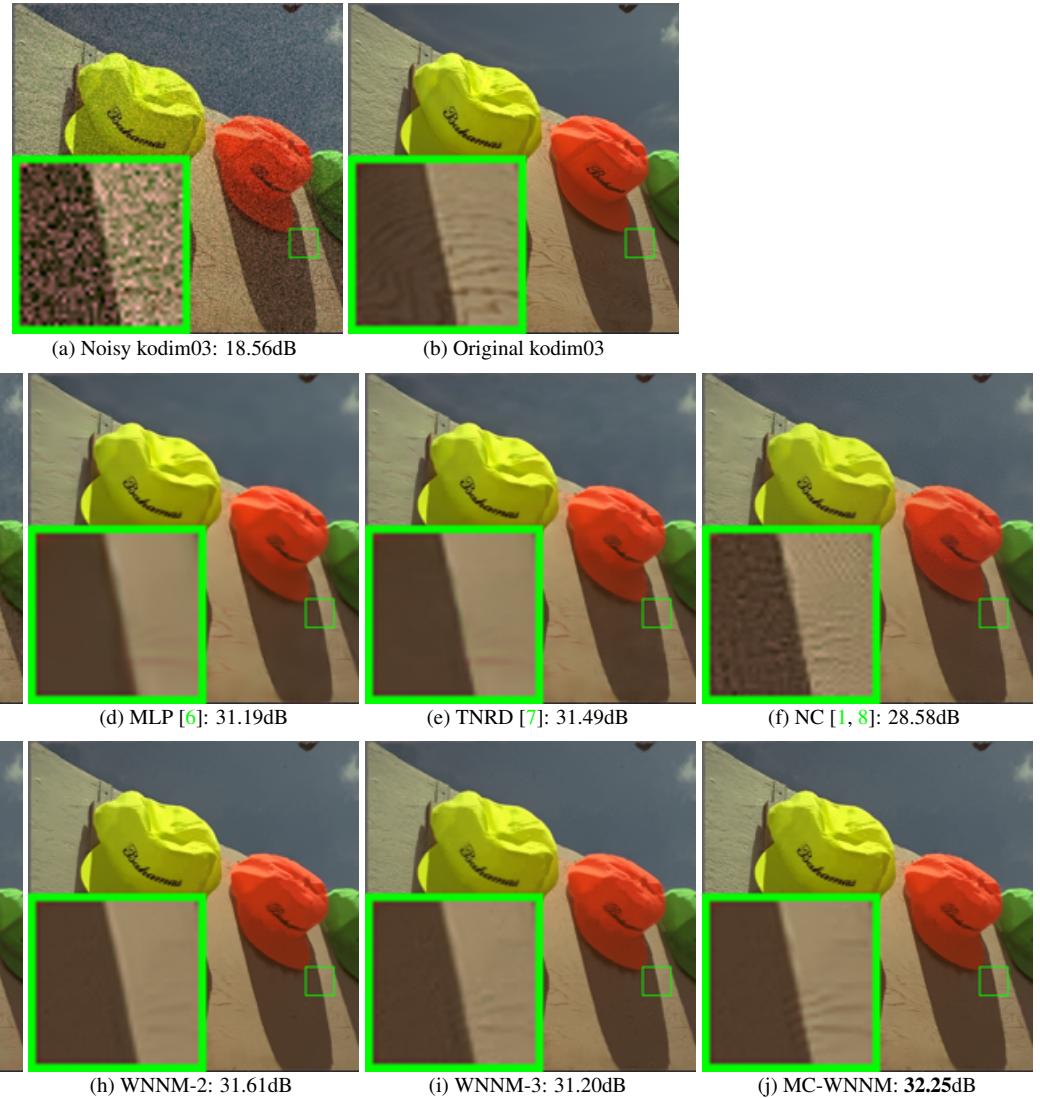
625
626
627
628
629
630
631
632
633
634
635572
573
574
575
576
577
578
579
580
581636
637
638
639
640
641
642
643
644582
583
584
585
586
587
588
589
590
591
592
593645
646
647

Figure 2. Denoised images of different methods on the image “kodim03” degraded by AWGN with different standard deviations of $\sigma_r = 40$, $\sigma_g = 20$, $\sigma_b = 30$ on R, G, B channels, respectively. The images are better to be zoomed in on screen.

648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755

Figure 3. Denoised images of different methods on the image “kodim17” degraded by AWGN with different standard deviations of $\sigma_r = 30$, $\sigma_g = 10$, $\sigma_b = 50$ on R, G, B channels, respectively. The images are better to be zoomed in on screen.

756

757

758

759

760

761

762

763

764

765

766

767

768

769

770

771

772

773

774

775

776

777

778

779

780

781

782

783

784

785

786

787

788

789

790

791

792

793

794

795

796

797

798

799

800

801

802

803

804

805

806

807

808

809

810

811

812

813

814

815

816

817

818

819

820

821

822

823

824

825

826

827

828

829

830

831

832

833

834

835

836

837

838

839

840

841

842

843

844

845

846

847

848

849

850

851

852

853

854

855

856

857

858

859

860

861

862

863



Figure 4. Denoised images of different methods on the image “kodim19” degraded by AWGN with different standard deviations of $\sigma_r = 30$, $\sigma_g = 10$, $\sigma_b = 50$ on R, G, B channels, respectively. The images are better to be zoomed in on screen.

864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
910
911
912
913
914
915
916
917

918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971

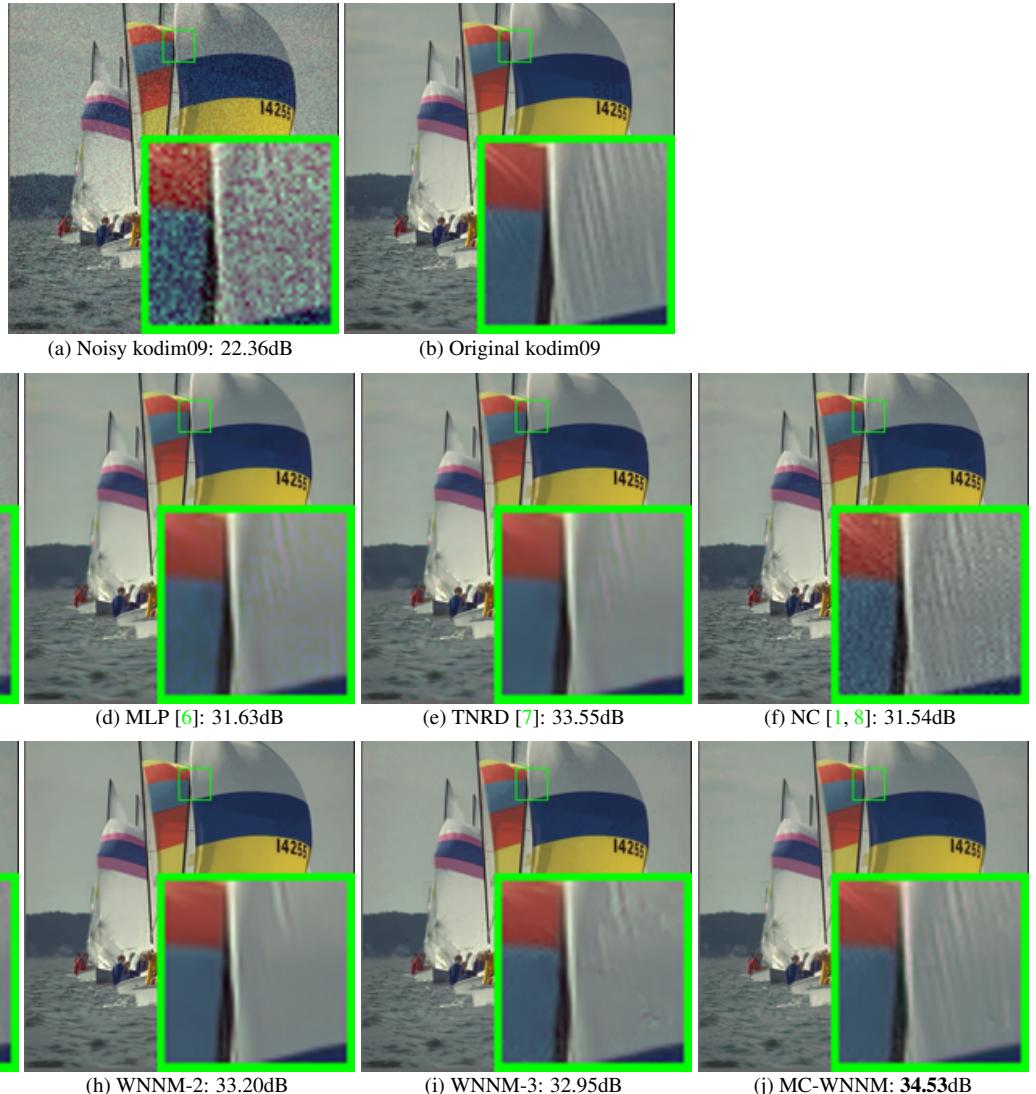


Figure 5. Denoised images of different methods on the image “kodim09” degraded by AWGN with different standard deviations of $\sigma_r = 5$, $\sigma_g = 30$, $\sigma_b = 15$ on R, G, B channels, respectively. The images are better to be zoomed in on screen.

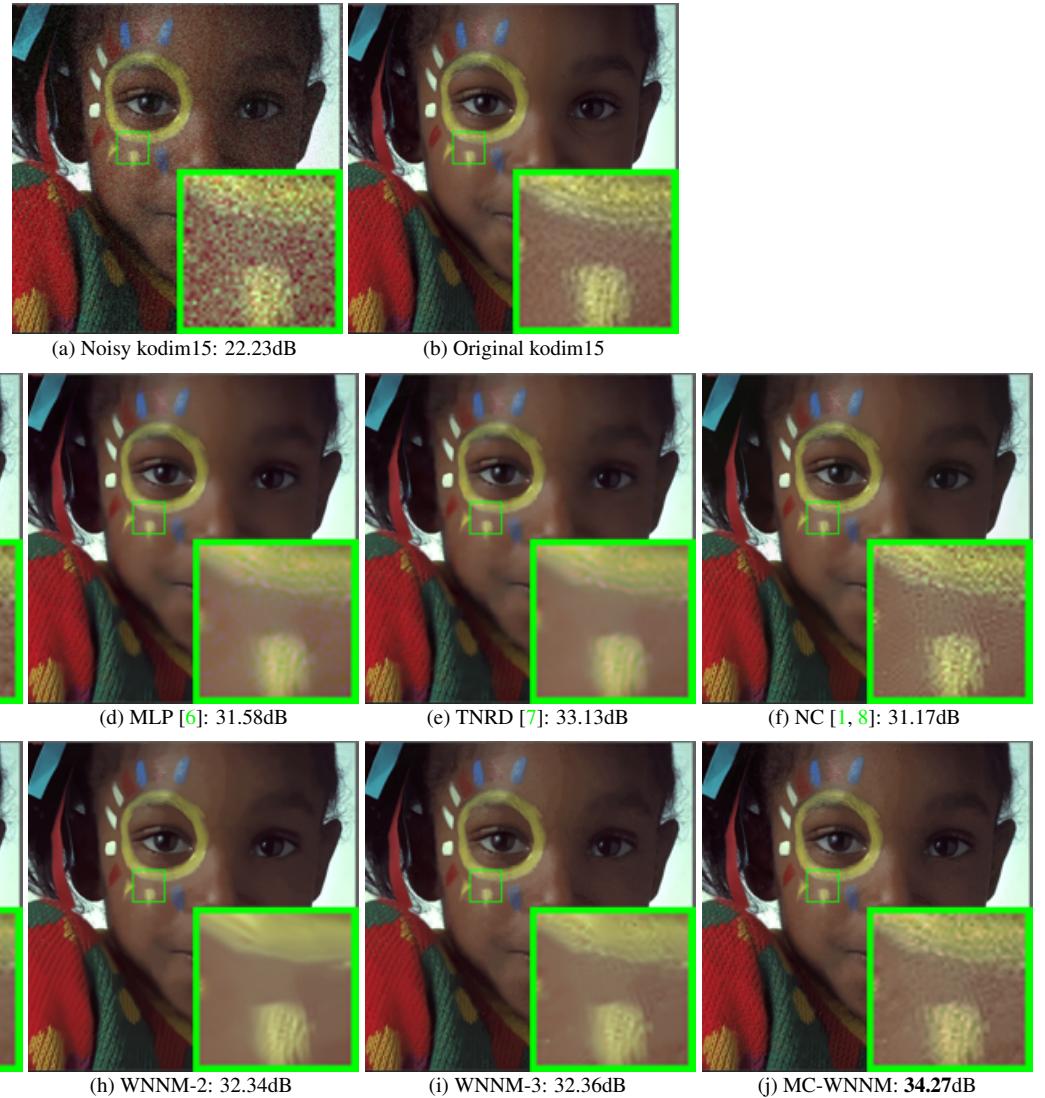


Figure 6. Denoised images of different methods on the image “kodim15” degraded by AWGN with different standard deviations of $\sigma_r = 5$, $\sigma_g = 30$, $\sigma_b = 15$ on R, G, B channels, respectively. The images are better to be zoomed in on screen.

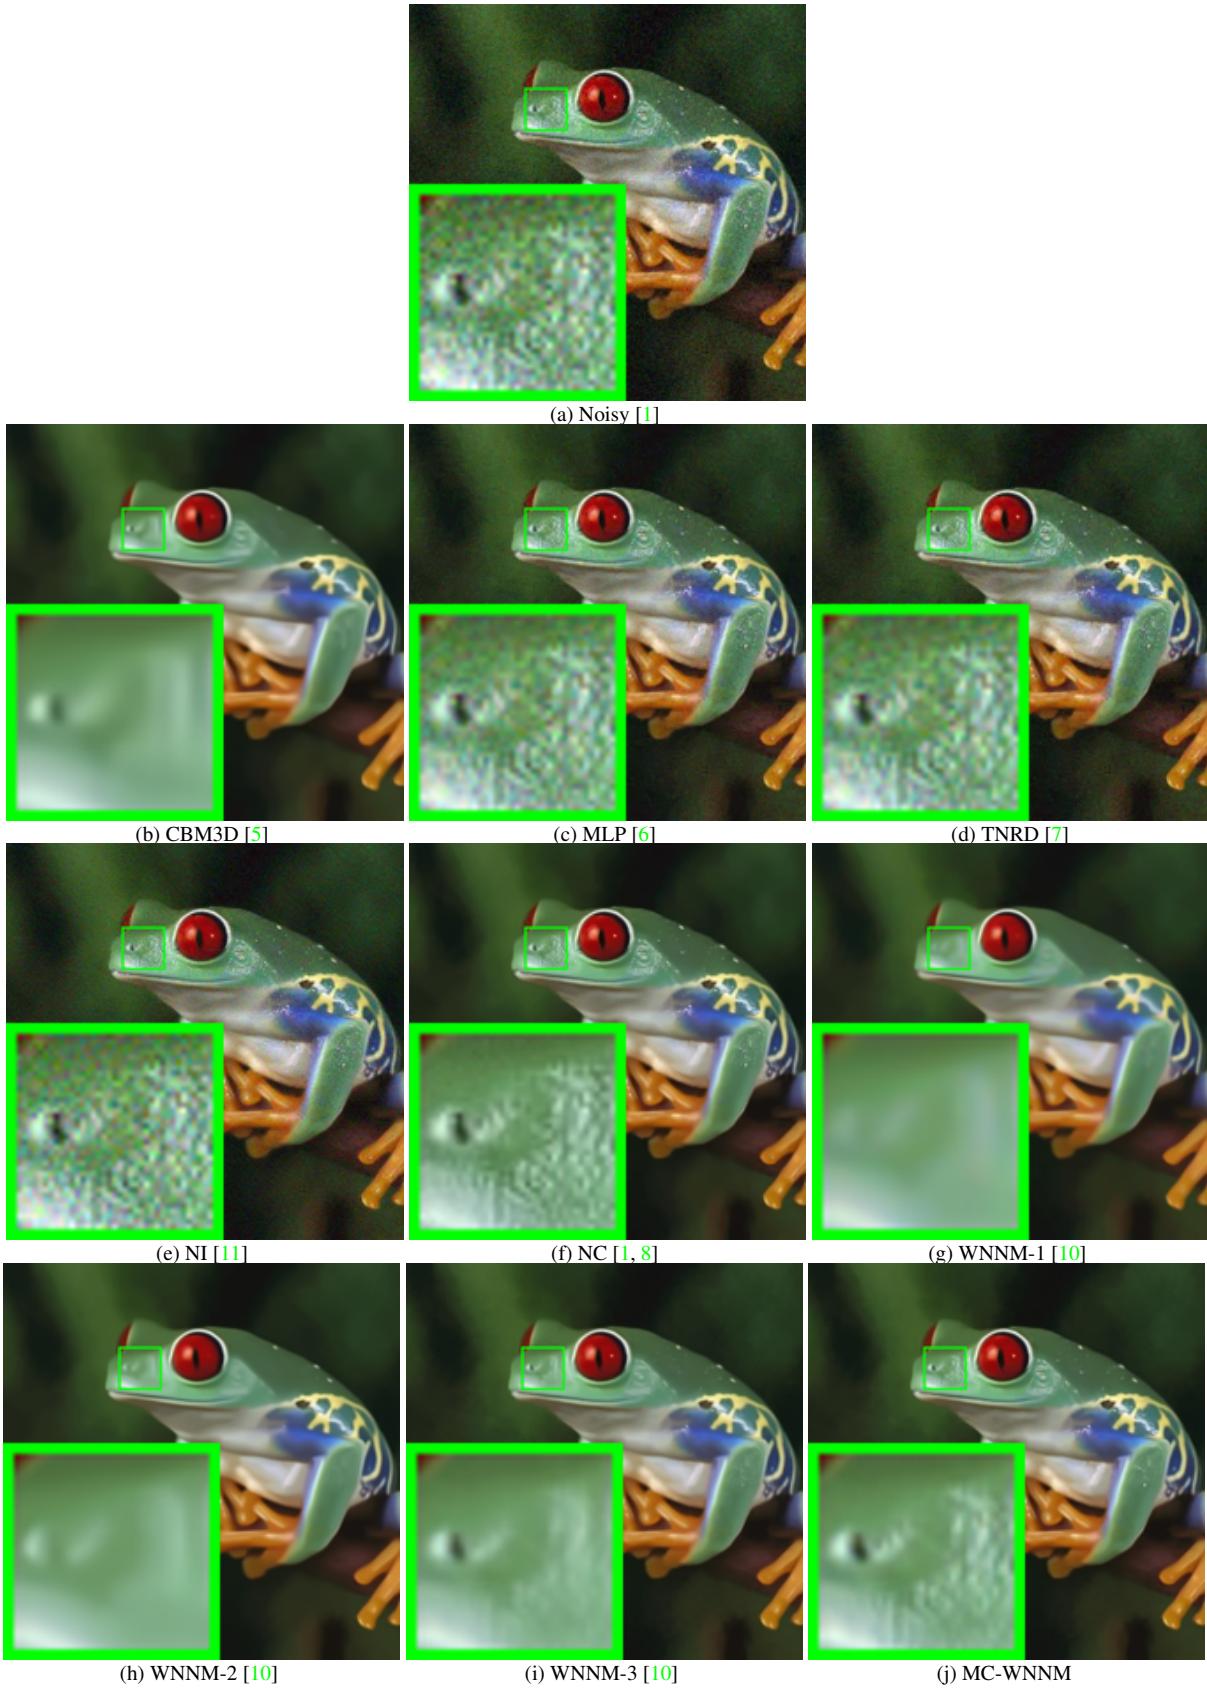


Figure 7. Denoised images of the real noisy image “Frog” [1] by different methods. The images are better to be zoomed in on screen.


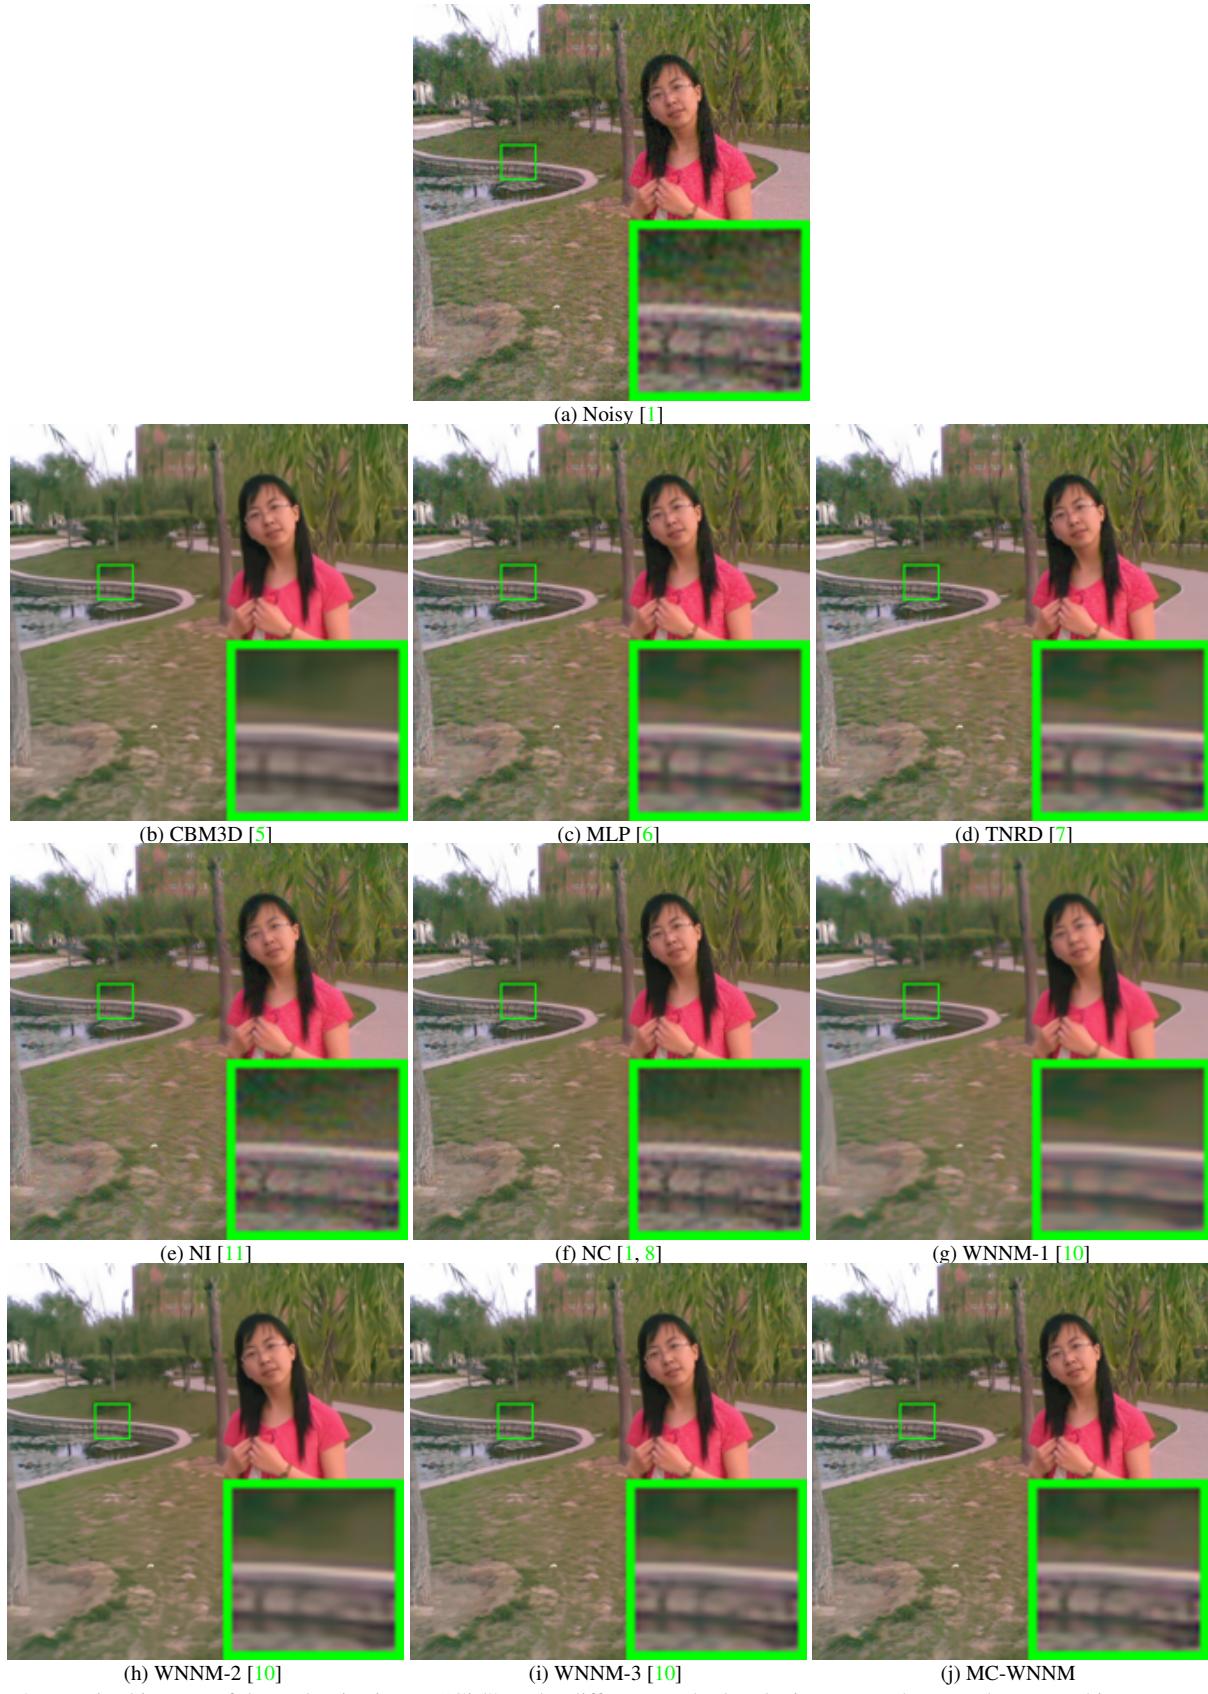



Figure 8. Denoised images of the real noisy image “Girl” [1] by different methods. The images are better to be zoomed in on screen.

1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308


1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362

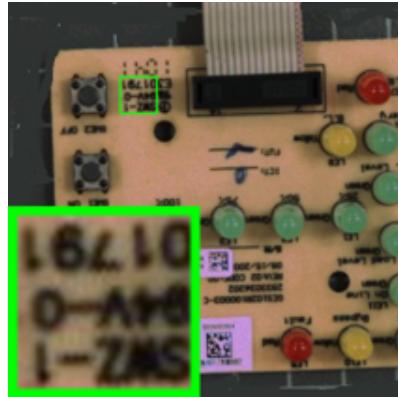


(a) Noisy [1]

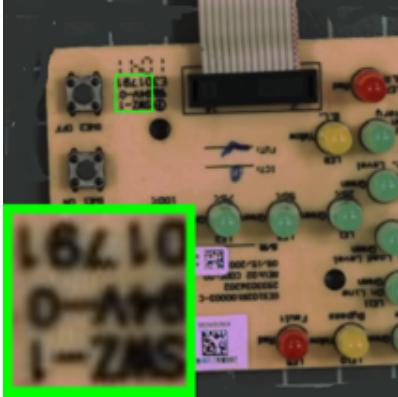


(b) CBM3D [5]

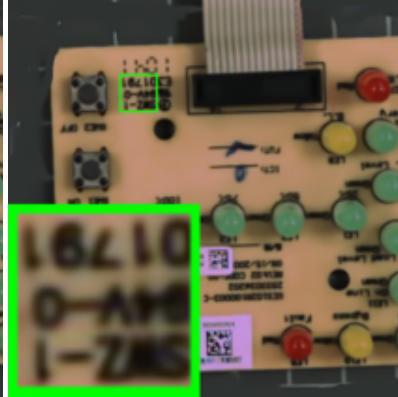


(c) MLP [6]

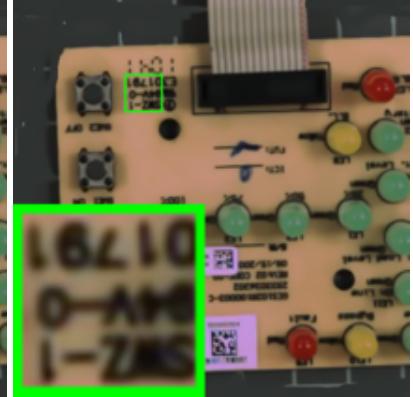


(d) TNRD [7]

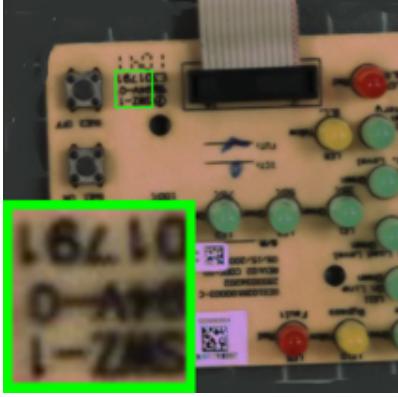


(e) NI [1]

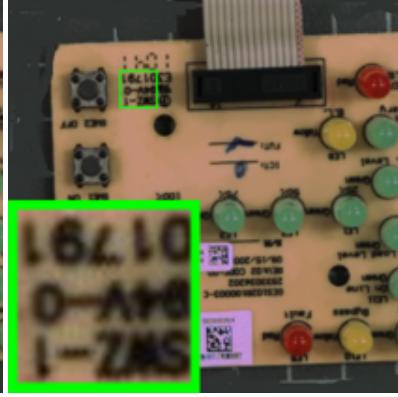


(f) NC [1, 8]

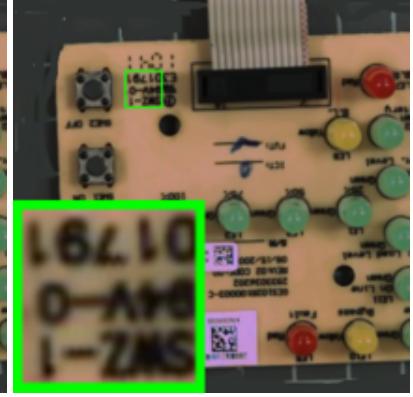


(g) WNNM-1 [10]

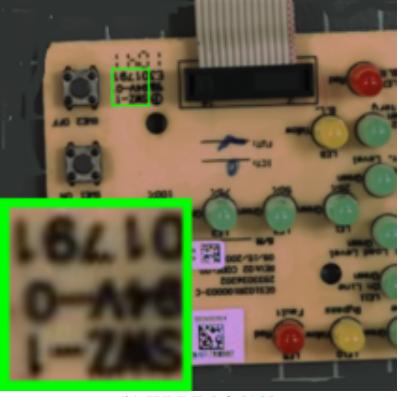

(h) WNNM-2 [10]

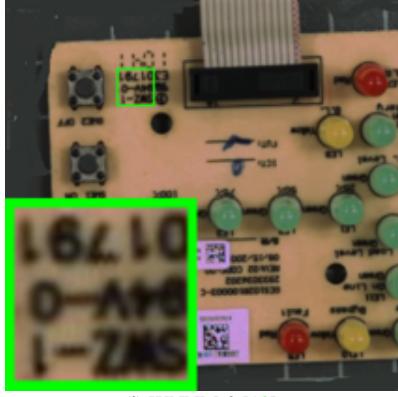

(i) WNNM-3 [10]

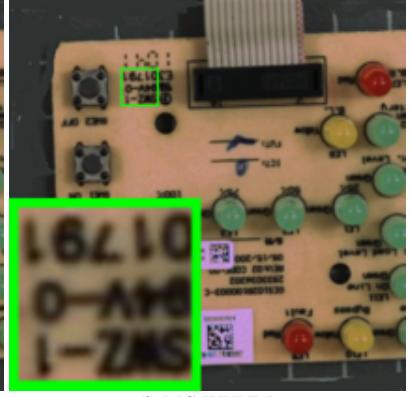

(j) MC-WNNM

1348
1349

1402
1403

Figure 9. Denoised images of the real noisy image “Circuit” [1] by different methods. The images are better to be zoomed in on screen.

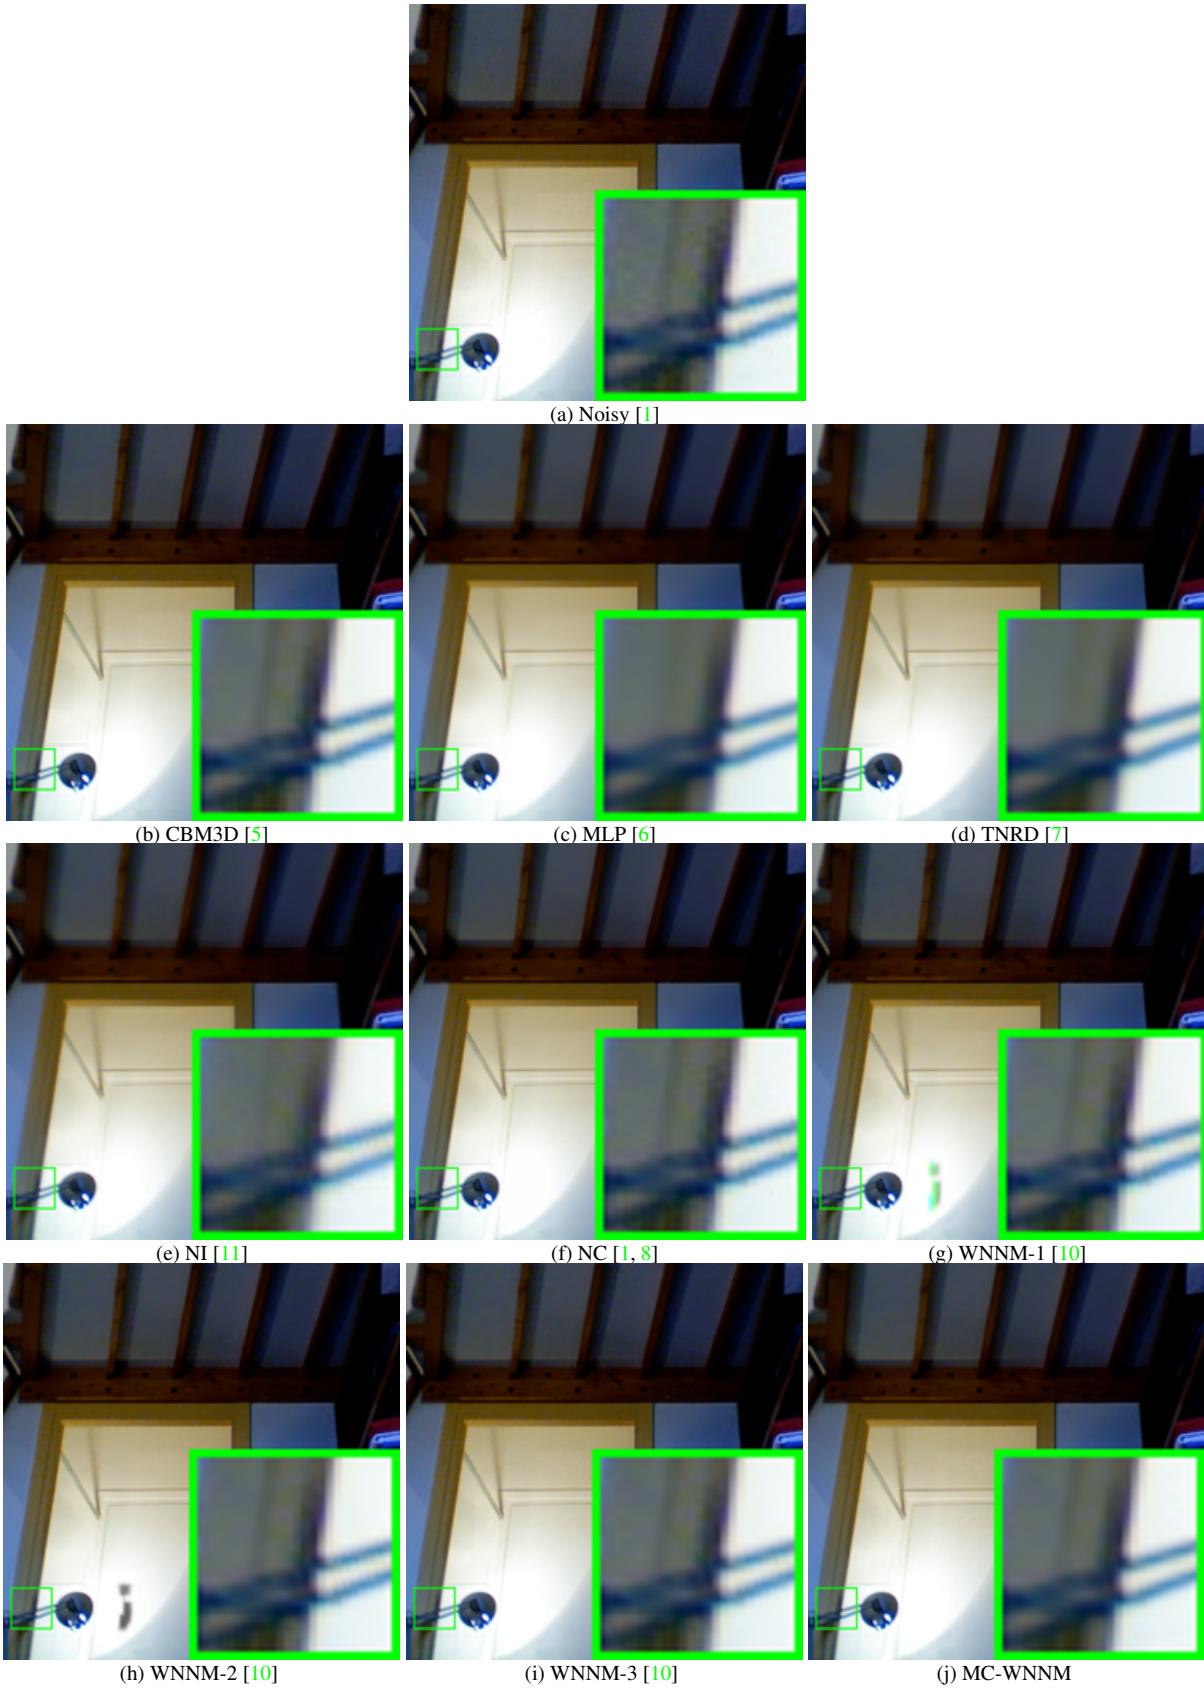


Figure 10. Denoised images of the real noisy image “Room” [1] by different methods. The images are better to be zoomed in on screen.

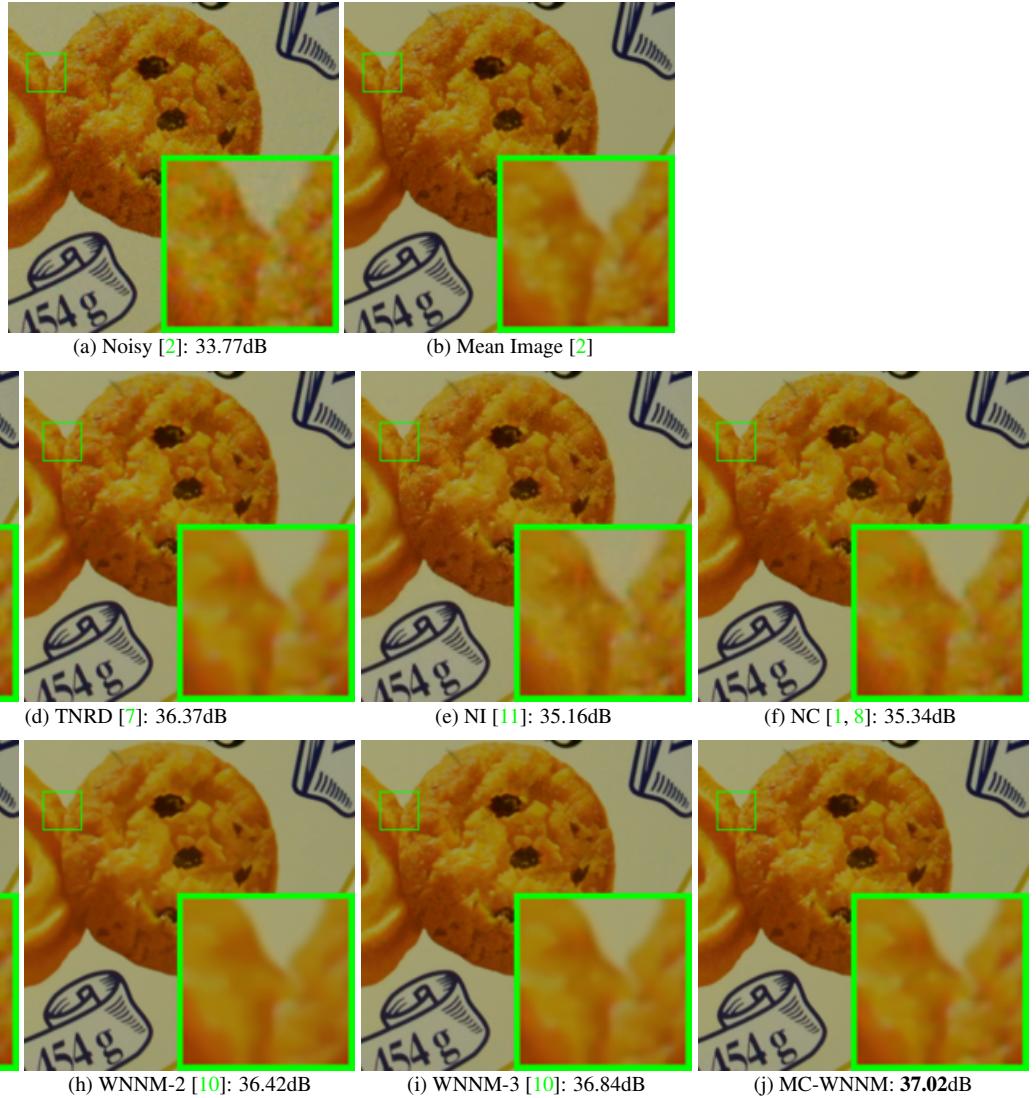


Figure 11. Denoised images of a region cropped from the real noisy image “Nikon D600 ISO 3200 2” [2] by different methods. The images are better to be zoomed in on screen.

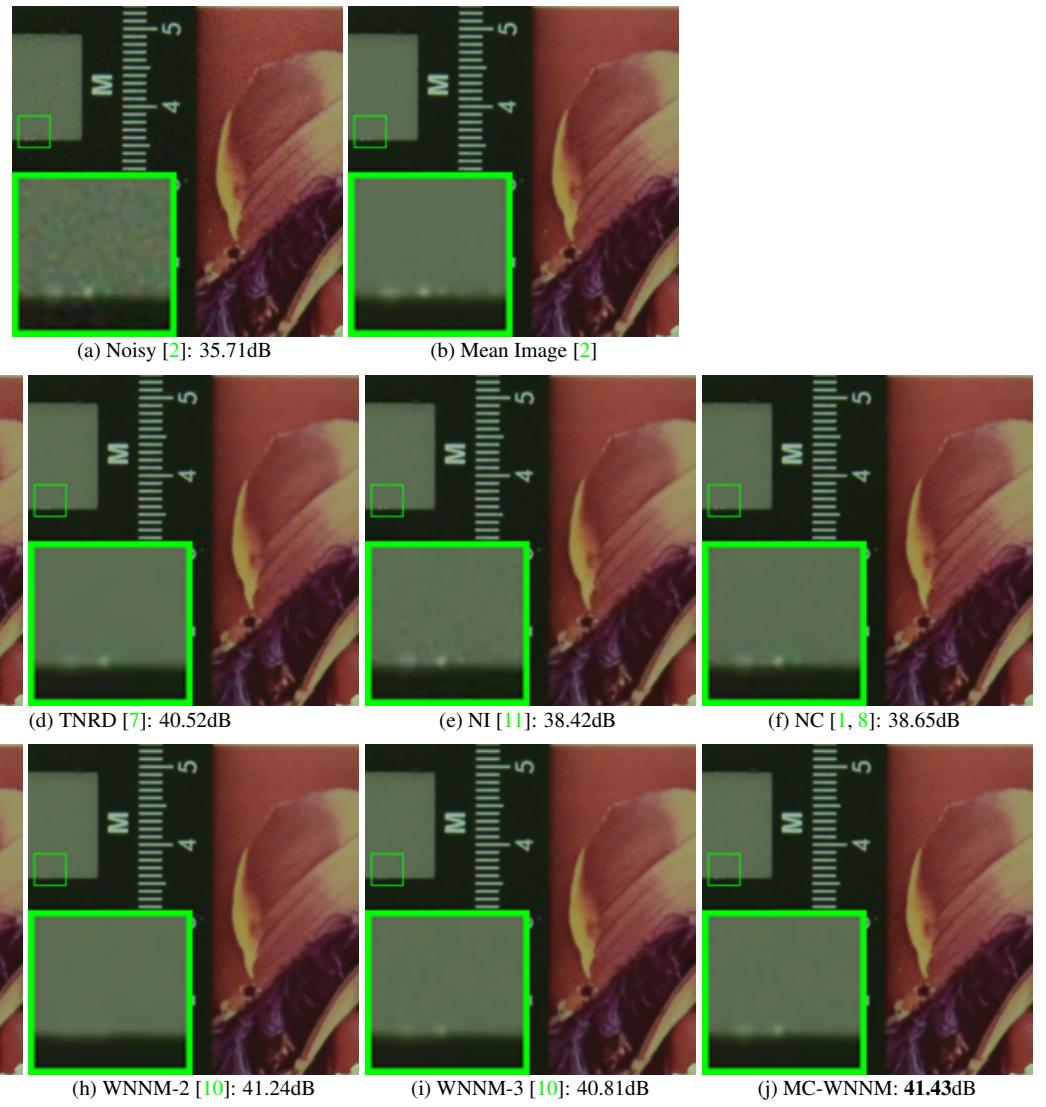


Figure 12. Denoised images of a region cropped from the real noisy image “Nikon D800 ISO 1600 2” [2] by different methods. The images are better to be zoomed in on screen.

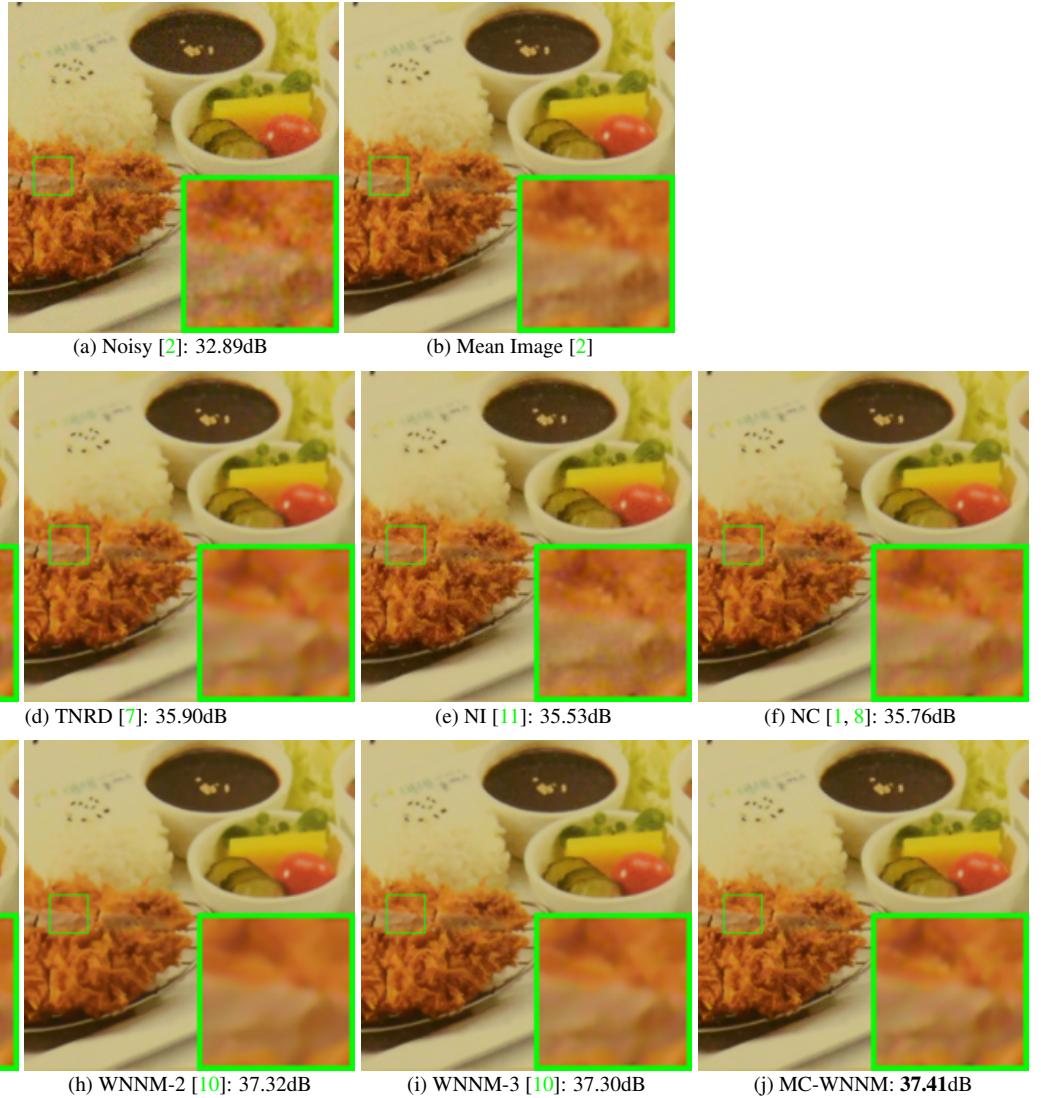


Figure 13. Denoised images of a region cropped from the real noisy image “Nikon D800 ISO 3200 2” [2] by different methods. The images are better to be zoomed in on screen.

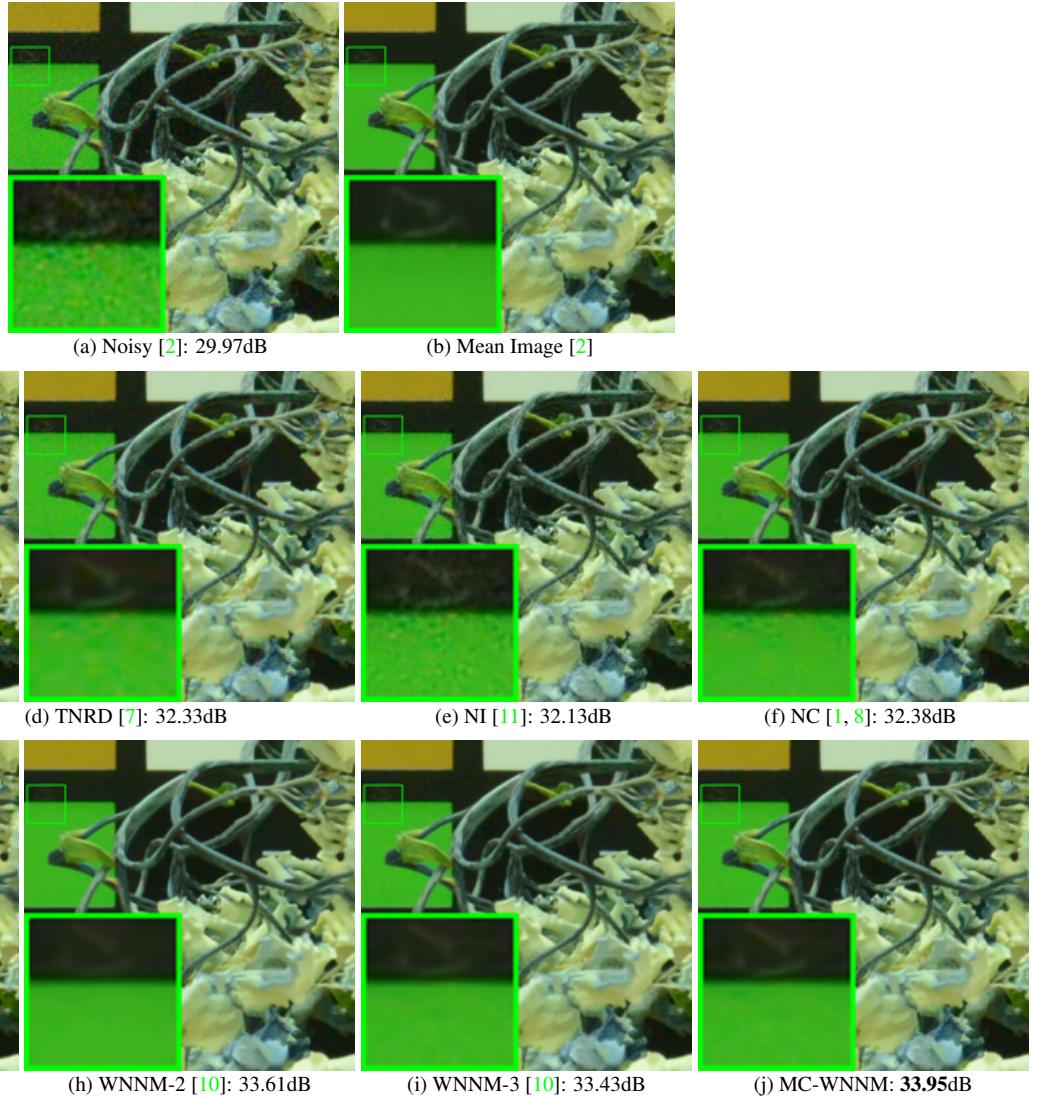


Figure 14. Denoised images of a region cropped from the real noisy image “Nikon D800 ISO 6400 2” [2] by different methods. The images are better to be zoomed in on screen.

1944 **References**

1998

- 1945 [1] M. Lebrun, M. Colom, and J. M. Morel. The noise clinic: a blind image denoising algorithm. [http://www.ipol.im/pub/
art/2015/125/](http://www.ipol.im/pub/art/2015/125/). Accessed 01 28, 2015. 1, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 1999
- 1946 [2] S. Nam, Y. Hwang, Y. Matsushita, and S. J. Kim. A holistic approach to cross-channel image noise modeling and its application to 2000 image denoising. *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 1683–1691, 2016. 1, 4, 15, 16, 17, 18 2001
- 1947 [3] C. Eckart and G. Young. The approximation of one matrix by another of lower rank. *Psychometrika*, 1(3):211–218, 1936. 1 2002
- 1948 [4] S. Gu, Q. Xie, D. Meng, W. Zuo, X. Feng, and L. Zhang. Weighted nuclear norm minimization and its applications to low level 2003 vision. *International Journal of Computer Vision*, pages 1–26, 2016. 1 2004
- 1949 [5] K. Dabov, A. Foi, V. Katkovnik, and K. Egiazarian. Color image denoising via sparse 3D collaborative filtering with grouping 2005 constraint in luminance-chrominance space. *IEEE International Conference on Image Processing (ICIP)*, pages 313–316, 2007. 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 2006
- 1950 [6] H. C. Burger, C. J. Schuler, and S. Harmeling. Image denoising: Can plain neural networks compete with BM3D? *IEEE Conference 2007 on Computer Vision and Pattern Recognition (CVPR)*, pages 2392–2399, 2012. 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 2008
- 1951 [7] Y. Chen, W. Yu, and T. Pock. On learning optimized reaction diffusion processes for effective image restoration. *IEEE Conference 2009 on Computer Vision and Pattern Recognition (CVPR)*, pages 5261–5269, 2015. 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 2010
- 1952 [8] M. Lebrun, M. Colom, and J.-M. Morel. Multiscale image blind denoising. *IEEE Transactions on Image Processing*, 24(10):3149– 2011 3161, 2015. 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 2012
- 1953 [9] K. Dabov, A. Foi, V. Katkovnik, and K. Egiazarian. Image denoising by sparse 3-D transform-domain collaborative filtering. *IEEE 2013 Transactions on Image Processing*, 16(8):2080–2095, 2007. 15, 16, 17, 18 2014
- 1954 [10] S. Gu, L. Zhang, W. Zuo, and X. Feng. Weighted nuclear norm minimization with application to image denoising. *IEEE Conference 2015 on Computer Vision and Pattern Recognition (CVPR)*, pages 2862–2869, 2014. 11, 12, 13, 14, 15, 16, 17, 18 2016
- 1955 [11] Neatlab ABSoft. Neat Image. <https://ni.neatvideo.com/home>. 11, 12, 13, 14, 15, 16, 17, 18 2017
- 1956 [12] 2018
- 1957 [13] 2019
- 1958 [14] 2020
- 1959 [15] 2021
- 1960 [16] 2022
- 1961 [17] 2023
- 1962 [18] 2024
- 1963 [19] 2025
- 1964 [20] 2026
- 1965 [21] 2027
- 1966 [22] 2028
- 1967 [23] 2029
- 1968 [24] 2030
- 1969 [25] 2031
- 1970 [26] 2032
- 1971 [27] 2033
- 1972 [28] 2034
- 1973 [29] 2035
- 1974 [30] 2036
- 1975 [31] 2037
- 1976 [32] 2038
- 1977 [33] 2039
- 1978 [34] 2040
- 1979 [35] 2041
- 1980 [36] 2042
- 1981 [37] 2043
- 1982 [38] 2044
- 1983 [39] 2045
- 1984 [40] 2046
- 1985 [41] 2047
- 1986 [42] 2048
- 1987 [43] 2049
- 1988 [44] 2050
- 1989 [45] 2051
- 1990 [46]
- 1991 [47]
- 1992 [48]
- 1993 [49]
- 1994 [50]
- 1995 [51]
- 1996 [52]
- 1997 [53]