

RECURSION, TREE RECURSION Solutions

COMPUTER SCIENCE MENTORS 61A

September 21, 2026 - September 25, 2026

1 Recursion Basics

1. What are components of every recursive function?

1. One or more base case(s)
2. One or more ways to break the problem down into a smaller problem
3. Solve the smaller problem(s) recursively and combine the results to solve the original problem

2. What is wrong with the following function? How can we fix it?

```
def factorial(n):  
    return n * factorial(n)
```

There is no base case and the recursive call is made on the same n.

```
def factorial(n):  
    if n == 0:  
        return 1  
    else:  
        return n * factorial(n - 1)
```

3. Complete the definition for `sum_prime_digits`, which returns the sum of all the prime digits of `n`. Recall that 1 is not prime. Assume you have access to a function `is_prime`; `is_prime(n)` returns `True` if `n` is prime, and `False` otherwise.

```
def sum_prime_digits(n):  
    """  
    >>> sum_prime_digits(12345)  
    10 # 2 + 3 + 5  
    >>> sum_prime_digits(4681029)  
    2 # 2 is the only prime number  
    """  
    if _____:  
        return _____  
  
    if _____:  
        return _____  
  
    return _____  
  
    if n == 0:  
        return 0  
    if is_prime(n % 10):  
        return n % 10 + sum_prime_digits(n // 10)  
    return sum_prime_digits(n // 10)
```

2 Writing Recursive Functions

1. Implement the function `num_digits`, which takes in a number `n` and returns the number of digits it has. Implement the function recursively.

```
def num_digits(n):
    """Takes in an positive integer and returns the number of
    digits.

    >>> num_digits(0)
    1
    >>> num_digits(1)
    1
    >>> num_digits(7)
    1
    >>> num_digits(1093)
    4
    """

    if n < 10:
        return 1
    else:
        return 1 + num_digits(n // 10)
```

2. (Spring 2015 MT1 Q3C) Implement the `combine` function, which takes a non-negative integer `n`, a two-argument function `f`, and a number `result`. It applies `f` to the first digit of `n` and the result of combining the rest of the digits of `n` by repeatedly applying `f` (see the doctests). If `n` has no digits (because it is zero), `combine` returns `result`.

```
def combine(n, f, result):
    """
    Combine the digits in non-negative integer n using f.

    >>> combine(3, mul, 2) # mul(3, 2)
    6
    >>> combine(43, mul, 2) # mul(4, mul(3, 2))
    24
    >>> combine(6502, add, 3) # add(6, add(5, add(0, add(2, 3))))
    16
    >>> combine(239, pow, 0) # pow(2, pow(3, pow(9, 0)))
    8
    """
    if n == 0:
        return result
    else:
        return combine(_____, _____,
                       _____)
```

```
def combine(n, f, result):
    if n == 0:
        return result
    else:
        return combine(n // 10, f, f(n % 10, result))
```

3 Recursive Helper Functions

1. Suppose the **position** of the rightmost digit of a number is defined as 1. The position of a digit increases from right to left.

- (a) Fill in the `positionizer` function below. It takes in a non-negative integer `n` and returns a non-negative integer. For each digit `d` in `n`, `positionizer` either changes `d` to be the remainder of `d` divided by its position, or leaves `d` the same if it is equal to its position.

```
def positionizer(n):
    """
    >>> positionizer(12)
    10
    >>> positionizer(23)
    20
    >>> positionizer(12345)
    12300
    """
    def helper(n, pos):
        if _____:
            return _____

        rest = _____
        if n % 10 == pos:
            return rest + _____
        else:
            return rest + _____

    return helper(_____, _____)
```

```
def positionizer(n):  
    def helper(n, pos):  
        if n == 0:  
            return 0  
        rest = helper(n // 10, pos + 1) * 10  
        if n % 10 == pos:  
            return rest + n % 10  
        else:  
            return rest + (n % 10) % pos  
    return helper(n, 1)
```

- (b) Now fill in the `max_positionizer` function below. Given a list of digits, it returns the k -digit number with the highest value when positionized. The digits must stay in the same order. (ex: for $k = 2$ and `lst = [1, 2, 3]`, you can't form 21). You may use `positionizer` in your solution.

Hint: Use the helper to create a list of all possible k digit numbers formed from `lst`.

```
def max_positionizer(k, lst):
    """
    >>> max_positionizer(2, [1, 2, 3]) # positionized version
                                         # of 12, 13, 23 are
                                         # 10, 10, 20

    23
    >>> max_positionizer(3, [2, 5, 3, 1])
    251
    """
    def make_nums(k, lst):

        if _____:

            return _____

        elif _____:

            return []

        a = [_____ \

                for rest in _____]

        b = _____
        return a + b

    return _____(make_nums(_____, _____), _____)

def max_positionizer(k, lst):
    def make_nums(k, lst):
        if k == 0: # Note that the check for k must come first
                    # (what should be returned if k == 0 and
                    # len(lst) == 0?)

            return [0]
        elif len(lst) == 0:

            return []
        a = [lst[0] * 10**(k - 1) + rest \
                for rest in make_nums(k - 1, lst[1:])]
        b = make_nums(k, lst[1:])
        return a + b
    return max(make_nums(k, lst), key=positionizer)
```

4 Tree Recursion

1. What is the difference between recursion and tree recursion? Give an example of a problem that might require tree recursion.

In the recursive functions we've seen so far, each recursive call makes only one call to itself. In tree recursion, a single function call can make multiple recursive calls, causing the calls to branch out like the branches of a tree (rather than a single chain).

Despite this difference, tree recursive problems are solved the exact same way as any other recursive problem: find the base case(s), take the recursive leap of faith by trusting that each of our recursive calls correctly solves its subproblem, and combine the results of our subproblems to solve the original problem. The only real difference is that we may need to combine *more than one* subproblem's result to get our answer.

Tree recursion often comes up in counting problems (how many ways are there to do something?) and optimization problems (what is the max/min number of ways to do something?). For example, counting the number of ways to make change for an amount using a set of coin denominations, or computing the n th Fibonacci number, both require branching into multiple recursive calls per frame.

Because tree recursive functions have more moving pieces, it can help to break the design process into three questions.

- Base case(s): What are the simplest possible arguments to the function? (Doctests are often a good hint here.)
- Recursive calls: What options should be recursively explored at each step? (Drawing a tree diagram of the recursive calls can help visualize this.)
- Combining: How should the results of these subproblems be combined? (Trust the recursive leap of faith, then combine the results with a mathematical or logical operator.)

Even though a tree recursive function may branch into many, many recursive calls, we only need to reason about one level of the tree at a time – the recursive leap of faith handles the rest.

2. The *Gibonacci sequence* is a recursively defined sequence of integers; we denote the n th Gibonacci number g_n . The first three terms of the sequence are $g_0 = 0, g_1 = 1, g_2 = 2$. For $n \geq 3$, g_n is defined as the sum of the previous three terms in the sequence.

Complete the function `gib`, which takes in an integer `n` and returns the n th Gibonacci number, g_n . Also, identify the three parts of recursive function design as they are used in your solution.

```
def gib(n):  
    """  
    >>> gib(0)  
    0  
    >>> gib(1)  
    1  
    >>> gib(2)  
    2  
    >>> gib(3) # gib(2) + gib(1) + gib(0) = 3  
    3  
    >>> gib(4) # gib(3) + gib(2) + gib(1) = 6  
    6  
    """  
    if _____:  
        return _____  
  
    return _____
```


```
def gib(n):  
    if n <= 2:  
        return n  
    return gib(n - 1) + gib(n - 2) + gib(n - 3)
```

- Base case: `if n <= 2: return n`
- Recursive calls: `gib(n - 1), gib(n - 2), gib(n - 3)`
- Solving the larger problem: adding the results of the three recursive calls.

3. Including the original call, how many calls are made to `gib` when you evaluate `gib(5)`?

13.

There are a few ways you could determine this. First, you could draw out a call graph that shows all of the calls that are made. <https://tinyurl.com/gibsol>

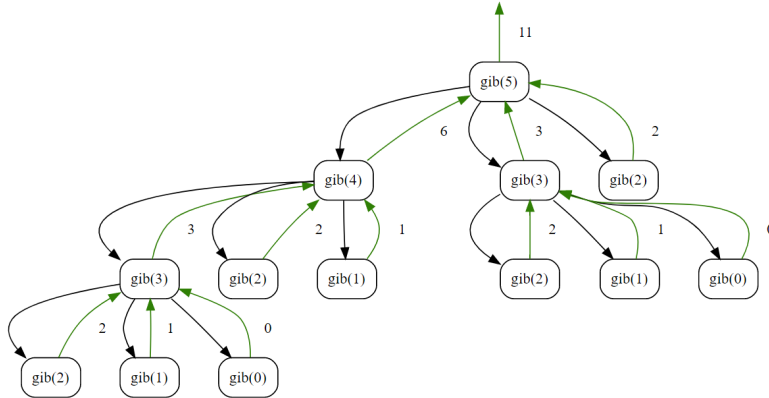

You could also build things from the ground up using recursive intuition.

- `gib(0)` takes one call because it's a base case.
- `gib(1)` takes one call because it's a base case.
- `gib(2)` takes one call because it's a base case.
- `gib(3)` takes four calls: one for the original call, one for `gib(0)`, one for `gib(1)`, and one for `gib(2)`.
- `gib(4)` takes seven calls: one for the original call, four for `gib(3)`, one for `gib(2)`, and one for `gib(1)`.
- `gib(5)` takes 13 calls: one for the original call, seven for `gib(4)`, four for `gib(3)`, and one for `gib(2)`.

This second method is much faster, especially for higher values of n .

4. Mario needs to get from one end of a level to the other, but there are deadly Piranha plants in his way! Mario only moves forward and can either *step* (move forward one space) or *jump* (move forward two spaces) from each position. A level is represented as a series of ones and zeros, with zeros denoting the location of Piranha plants. Mario can step on ones but not on zeros. How many different ways can Mario traverse a level without stepping or jumping into a Piranha plant? Assume that every level begins with a 1 (where Mario starts) and ends with a 1 (where Mario must end up).



Hint: Does it matter whether Mario goes from left to right or right to left? Which one is easier to check?

```

def mario_number(level):
    """
    >>> mario_number(10101)
    1
    >>> mario_number(11101)
    2
    >>> mario_number(100101)
    0
    """
    if _____:
        _____

    elif _____:
        _____

    else:
        _____

def mario_number(level):
    if level == 1:
        return 1
    elif level % 10 == 0:
        return 0
    else:
        return mario_number(level // 10) + mario_number((level // 10) //
10)

```

You can think about this tree recursion problem as testing out all of the possible ways Mario can traverse the level, and adding 1 every time you find a possible traversal.

Here it doesn't matter whether Mario goes left to right or right to left; either way we'll end up with the same number of ways to traverse the `level`. In that case, we can simply choose for Mario to start from the right, and then we can process the level like we process other numbers in digit-parsing related questions by using floor division (`//`) and modulo (`%`)

At each point in time, Mario can either step or jump. We use a single floor division (`//`) of `level` by 10 to represent taking one step (if we took a step, then the entire `level` would be left except for the last number), while two floor divisions by 10 (or equivalently one floor division by 100) corresponds to a jump at this point in the `level` (if we took a jump, then the entire `level` would be left except for the last two numbers).

To think of the base cases, you can consider the two ways that Mario ends his journey. The first, corresponding to `level == 1`, means that Mario has successfully reached the end of the level. You can **return** 1 here, because this means you've found one additional path to the end. The second, corresponding to `level % 10 == 0`, means that Mario has landed on a Piranha plant. This returns 0 because it's a failed traversal of the `level`, so you don't want to add anything to your result.

In tree recursion, you need to find a way to combine separate recursive calls. In this case, because `mario_number` returns an integer and the base cases are integers and you're trying to count the total number of ways of traversal, it makes sense to add your recursive calls.

5. Implement the function `make_change`, which takes in a non-negative integer amount in cents `n` and returns the minimum number of coins needed to make change for `n` using 1-cent, 3-cent, and 4-cent coins.

```
def make_change(n):  
    """  
    >>> make_change(5) # 5 = 4 + 1 (not 3 + 1 + 1)  
    2  
    >>> make_change(6) # 6 = 3 + 3 (not 4 + 1 + 1)  
    2  
    """  
  
    if _____:  
        return 0  
  
    elif _____:  
        _____  
  
    elif _____:  
        _____  
  
    else:  
        _____  
  
  
def make_change(n):  
    if n == 0:  
        return 0  
    elif n < 3:  
        return 1 + make_change(n - 1)  
    elif n < 4:  
        return 1 + min(make_change(n - 1), make_change(n - 3))  
    else:  
        return 1 + min(make_change(n - 1), make_change(n - 3),  
                        make_change(n - 4))
```