

Chapter 4: Threads

肖卿俊


办公室：九龙湖校区计算机楼212室

电邮：csqjxiao@seu.edu.cn

主页：<https://csqjxiao.github.io/PersonalPage>

电话：025-52091022



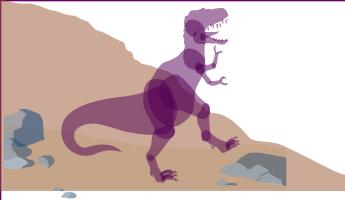

Chapter 4: Threads


■ Overview

■ Multithreading Models

■ Thread Libraries

■ Threading Issues

■ Operating System Examples

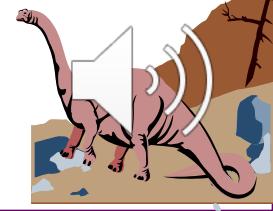




What is a thread?

- A *thread*, also known as *lightweight process* (LWP), is a basic unit of CPU execution.
- A thread has a **thread ID**, a **program counter (instruction pointer)**, a **register set**, and a **stack**. Thus, it is similar to a process has.
- However, a thread **shares** with other threads in the **same** process its code section, data section, and other OS resources (e.g., files and signals).
- A *process*, or *heavyweight process*, has a *single* thread of control after its creation.






Single and Multithreaded Processes

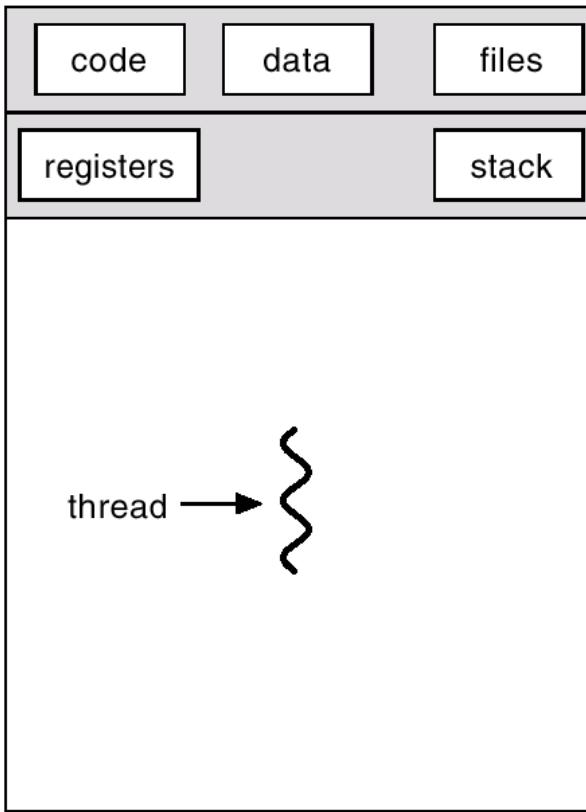


single-threaded

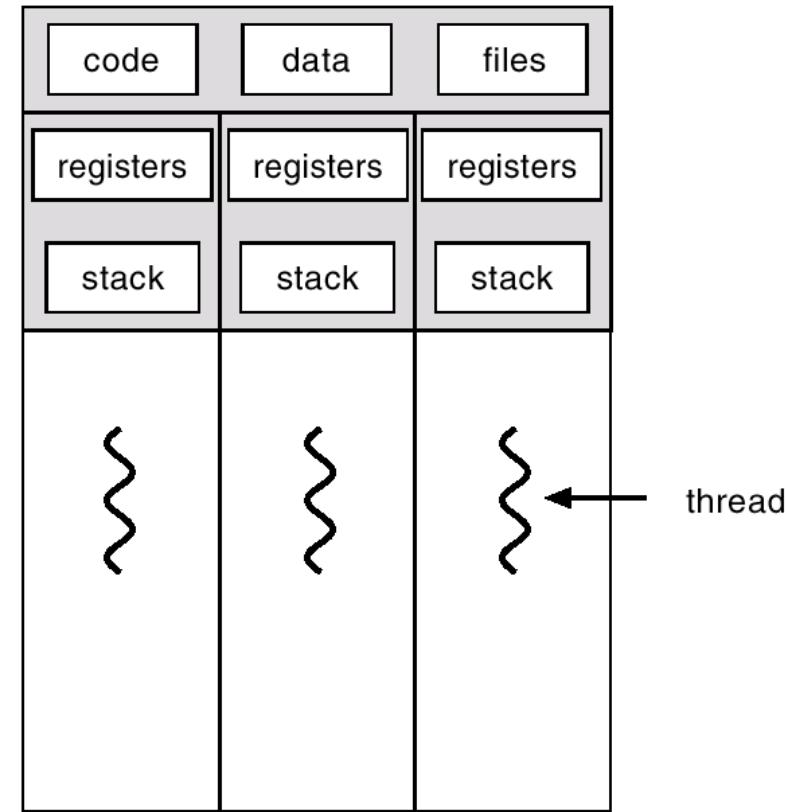

multithreaded

- Threads in a same process are _____
 - tightly coupled or
 - loosely coupled?

- How is the heap space shared among threads?

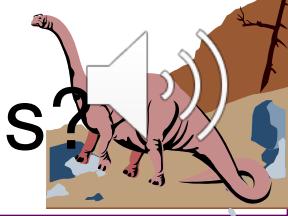



■ Items shared by all threads in a process


Per process items

Address space
Global variables
Open files
Child processes
Pending alarms
Signals and signal handlers
Accounting information

■ Items private to each thread

Per thread items

Program counter
Registers
Stack
State

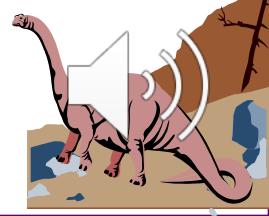



Thread Usage (1)

Four score and seven years ago, our fathers brought forth upon this continent a new nation, conceived in liberty, and dedicated to the proposition that all men are created equal. Now we are engaged in a great civil war, testing whether that

nation, or any nation so conceived and so dedicated, can long endure. We are met on a great battlefield of that war.


We have come to dedicate a portion of that field as a final resting place for those who here gave their lives that this nation might live. It is altogether fitting and proper that we should do this.

But, in a larger sense, we cannot dedicate, we cannot consecrate, we cannot hallow this ground. The brave men, living and dead,

who struggled here have consecrated it, far above our poor power to add or detract. The world will little note, nor long remember, what we say here, but it can never forget what they did here. It is for us the living, rather, to be dedicated here to the unfinished work which they who fought here have thus far so nobly advanced. It is rather for us to be here dedicated to the great task remaining before us, that from these honored dead we take increased devotion to that cause for which

they gave the last full measure of devotion, that we here highly resolve that these dead shall not have died in vain that this nation, under God, shall have a new birth of freedom and that government of the people, by the people, for the people

MVC paradigm

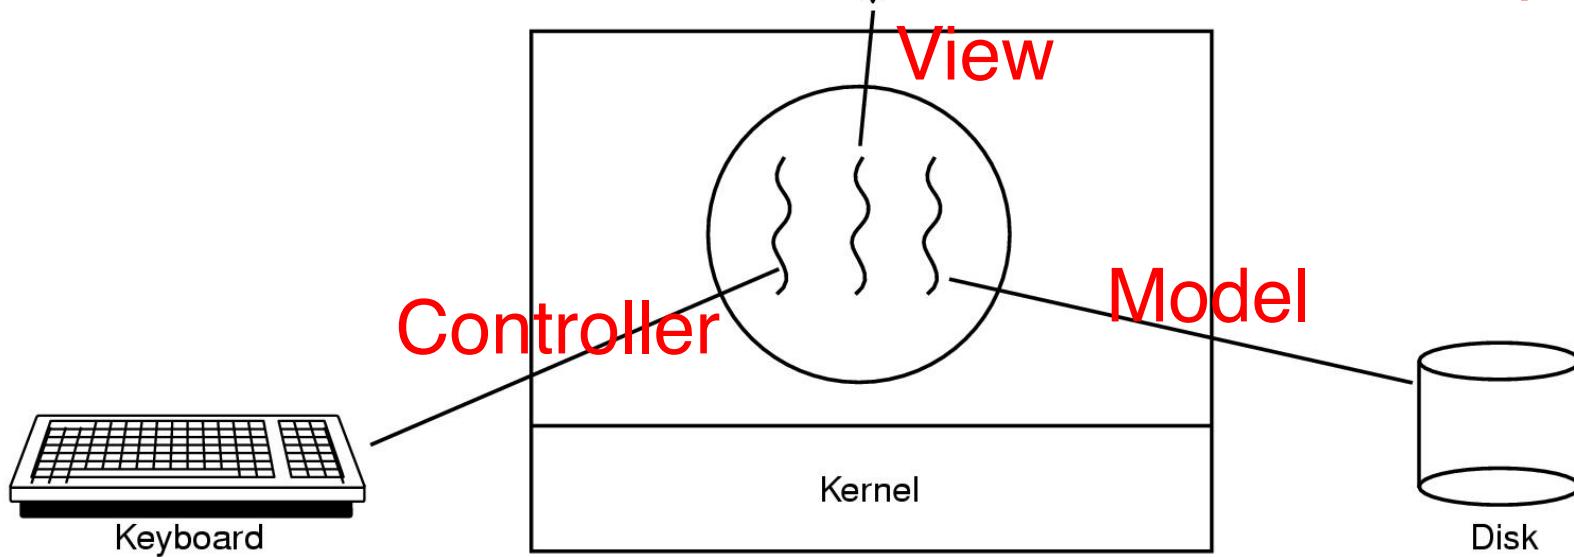



A word processor with three threads






HTTP协议 交互过程

Thread Usage (2)

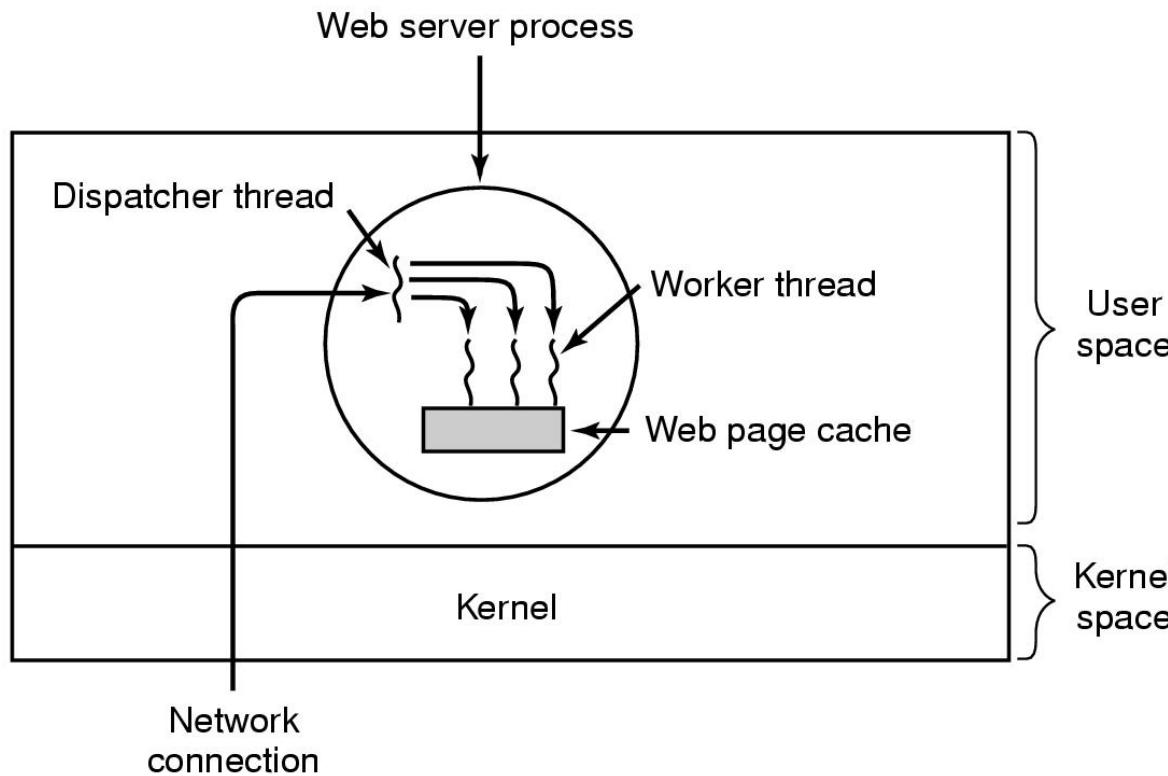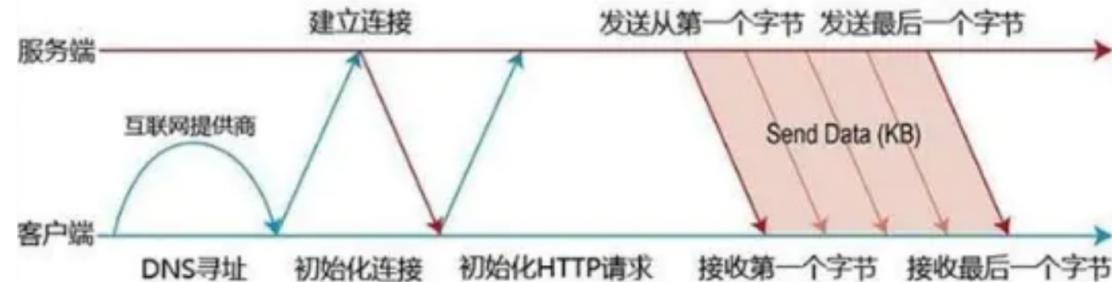

A multithreaded Web server





Thread Usage (3)

■ Rough outline of code for previous slide

- (a) Dispatcher thread
- (b) Worker thread

Note: An Event-Driven Framework

```
while (TRUE) {  
    get_next_request(&buf);  
    handoff_work(&buf);  
}
```

(a)

```
while (TRUE) {  
    wait_for_work(&buf)  
    look_for_page_in_cache(&buf, &page);  
    if (page_not_in_cache(&page))  
        read_page_from_disk(&buf, &page);  
    return_page(&page);  
}
```


(b)






Benefits

- Responsiveness
- Resource Sharing
- Economy
- Utilization of MP Architectures

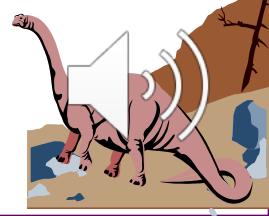


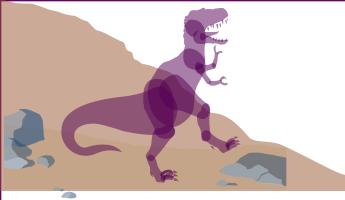

Economy for Creation

- Compare timing of fork() and pthread_create()
 - ◆ Timings reflect 50,000 process/thread creations, were performed with the time utility, and units are in seconds, no optimization flags.

Platform	fork()			pthread_create()		
	real	user	sys	real	user	sys
AMD 2.4 GHz Opteron (8cpus/node)	41.07	60.08	9.01	0.66	0.19	0.43
IBM 1.9 GHz POWER5 p5-575 (8cpus/node)	64.24	30.78	27.68	1.75	0.69	1.10
IBM 1.5 GHz POWER4 (8cpus/node)	104.05	48.64	47.21	2.01	1.00	1.52
INTEL 2.4 GHz Xeon (2 cpus/node)	54.95	1.54	20.78	1.64	0.67	0.90
INTEL 1.4 GHz Itanium2 (4 cpus/node)	54.54	1.07	22.22	2.03	1.26	0.67

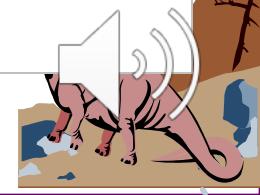




Economy for Context Switching

- Process (notes: Process Control Block in OS Kernel)
- Light-weight Process and Kernel Threads
- User Threads

Lower Cost in Creation and Context Switching

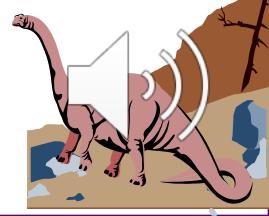



User Threads

■ Thread management done by user-level threads library

- ◆ Context switching of threads in the same process is done in user mode

■ Examples

- **POSIX *Pthreads*** (see scope parameter of `pthread_create`: `PTHREAD_SCOPE_PROCESS` or `PTHREAD_SCOPE_SYSTEM`)
- Mach *C-threads*
- Solaris UI-*threads*


<http://www.yolinux.com/TUTORIALS/LinuxTutorialPosixThreads.html#CREATIONTERMINATION>






User Threads (Cont.)

- A user-level thread library provides all support for thread creation, termination, joining, and scheduling.

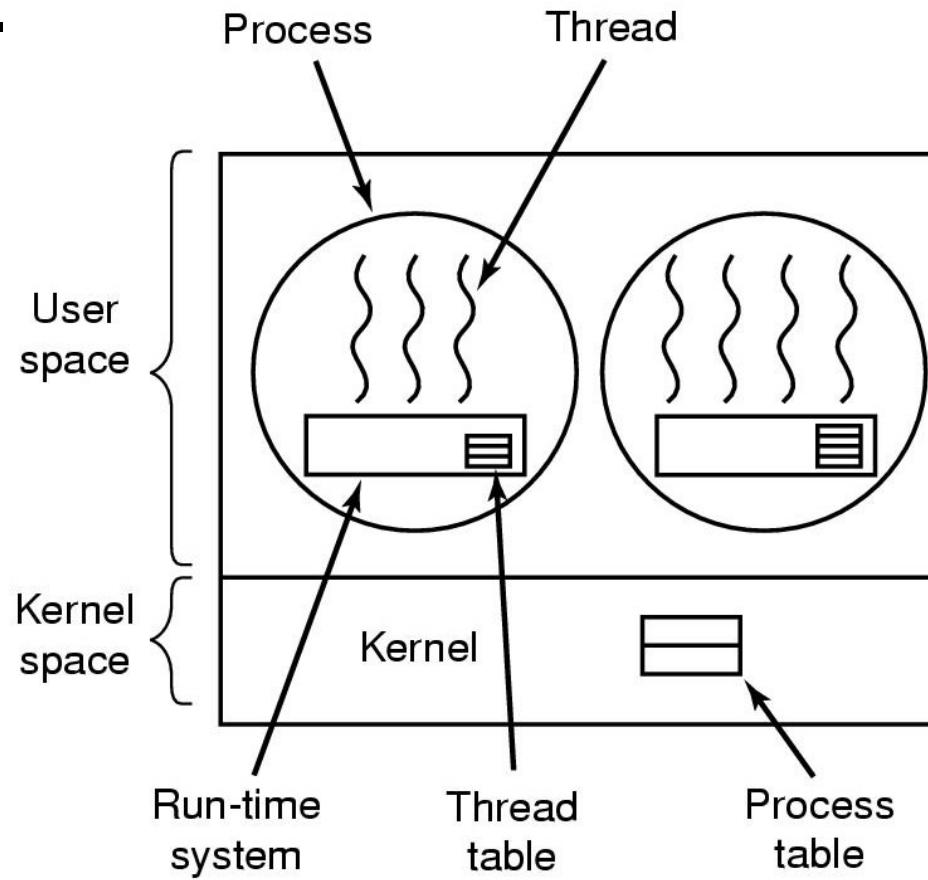


A user-level threads package

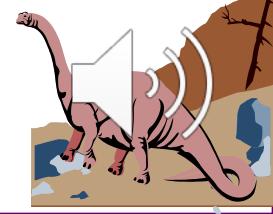



Pros and Cons of User Threads

- User threads are supported at the **user level**. The kernel **is not aware** of user threads.
- Because there is no kernel intervention, user threads are usually **more efficient**.
- Unfortunately, since the kernel only recognizes the containing process (of the threads), *if one thread is blocked, each other threads of the same process are also blocked* since the containing process is blocked.
- Question: Can two user threads in a same process run simultaneously on two different CPU cores?

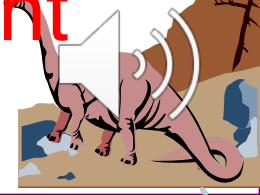



What is Coroutine?


■ **Coroutines** are computer program components that generalize **subroutines** for **non-preemptive** multitasking, by allowing execution to be suspended and resumed.

<https://en.wikipedia.org/wiki/Coroutine>

`var q := new queue`


coroutine produce
loop

while q is not full
 create some new items
 add the items to q
 yield to consume

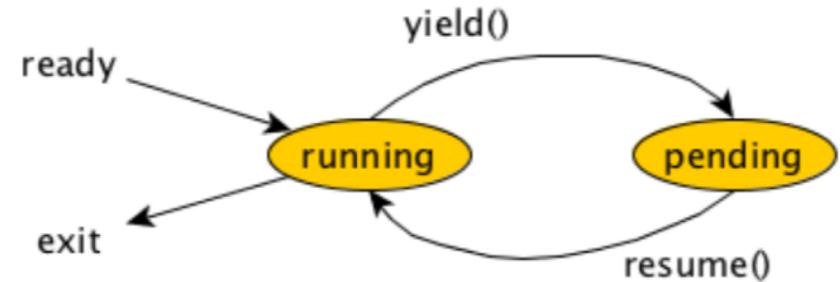

coroutine consume
loop

while q is not empty
 remove some items from q
 use the items
 yield to produce

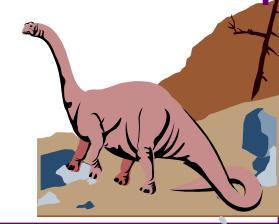



协程（Coroutine）是什么？

- 协程这个概念近年流行起来。尤其 golang 语言问世之后，内置的协程特性，完全屏蔽了操作系统线程的复杂细节；甚至 go 开发者“只知有协程，不知有线程”
- 对称协程的执行模型类似于用户态线程
- 解决问题：
 - ◆ 编写高性能网络服务器程序从来都不是件容易的事情。Linux 底层 IO 框架 epoll/kqueue 等提供非阻塞、异步编程接口；但事件驱动框架的编程复杂
 - ◆ 协程并发模式可利用同步阻塞式 IO 接口，极大简化服务器端的十/百万高并发网络 IO 的开发过程





Libco: 微信后台大规模使用的C/C++协程库

■ 2013年起，稳定运行在微信后台数万台机器上

■ Libco特性

<https://github.com/Tencent/libco>

- ◆ 无需侵入业务逻辑，把多进程、多线程服务改造成协程服务，并发能力得到百倍提升；
- ◆ 类pthread接口设计，通过co_create、co_resume等简单清晰接口即可完成协程的创建与恢复；
- ◆ 可选的共享栈模式，单机轻松接入千万连接(New)；
- ◆ 基于epoll/kqueue实现的小而轻的网络框架，基于时间轮盘实现的高性能定时器；
- ◆ 库里面提供了socket族函数的hook，使得后台逻辑服务几乎不用修改逻辑代码就可以完成异步化改造





其他的C++开源协程库

- **玩具级**：实现协程调度，无需用户手动处理协程上下文切换；特点没有HOOK；代表作：libmill
- **工业级**：以部分正确的方式HOOK了网络io相关的syscall，可以少改甚至不改代码的兼容大多数第三方库；特点：没有完整生态，代表作：腾讯libco
- **框架级**：以100%行为模拟的方式HOOK了网络io相关的syscall，可以完全不改代码兼容大多数第三方库；依照专为协程而生的语言的使用经验，提供了协程开发所必须的完整生态；代表作：魅族libgo
- **语言级**：语言级的协程实现；代表作：golang语言；这一层次的协程库，开发者的一切行为都是受限行为，可以实现无死角的完善的协程







Kernel Threads

■ Supported by the Kernel

■ Examples

- Windows 95/98/NT/2000
- Solaris
- Tru64 UNIX
- BeOS
- Linux and POSIX Thread

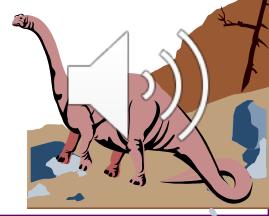

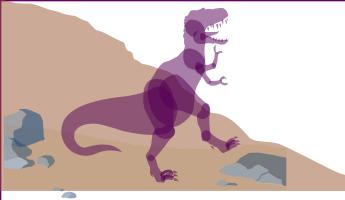


Kernel Threads (Cont.)

- Kernel threads are directly supported by the kernel. The kernel does thread creation, termination, joining, and scheduling in kernel space.
- Kernel threads are usually **slower** than the user threads.
- However, *blocking one thread will not cause other threads of the same process to block*. The kernel simply runs other threads.
- In a multiprocessor environment, the kernel can schedule threads on different processors






Implementing Threads in the Kernel

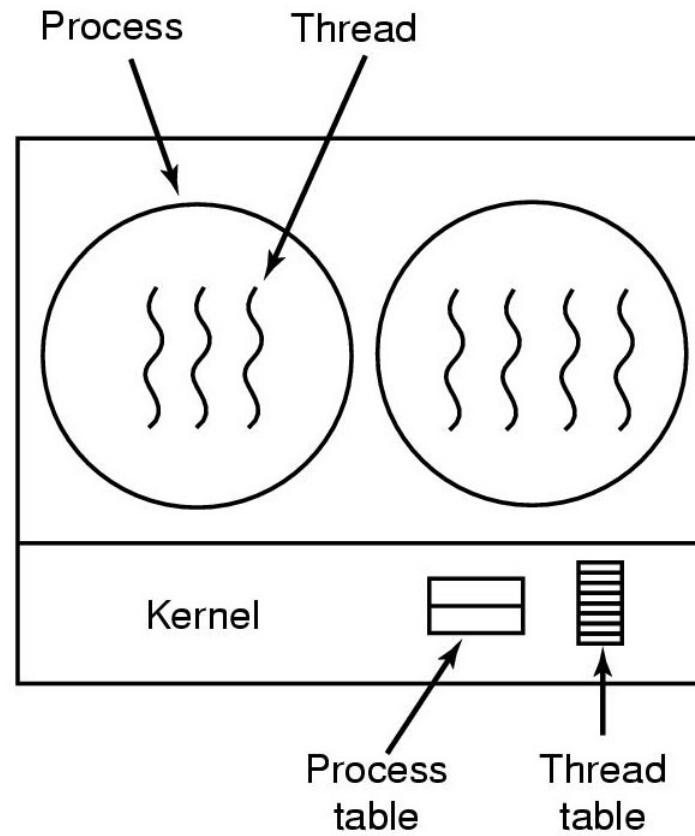


A threads package managed by the kernel
(Note: POSIX *Pthreads* library supports
the creation of kernel threads)

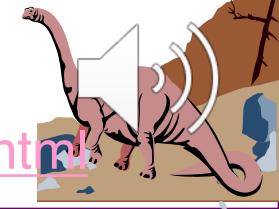




Chapter 4: Threads

- Overview
- Multithreading Models
- Threading Issues
- Windows XP Threads
- Linux Threads
- Java Threads
- Pthreads
- Windows Threads API

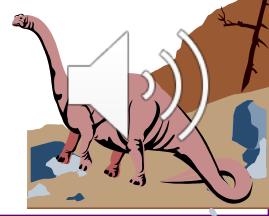

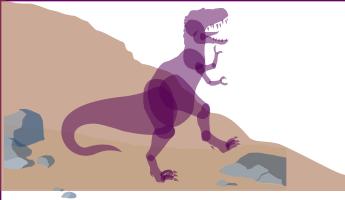


Multithreading Models

■ Many-to-One

■ One-to-One


■ Many-to-Many





Many-to-One

- Many user-level threads mapped to a single kernel thread.


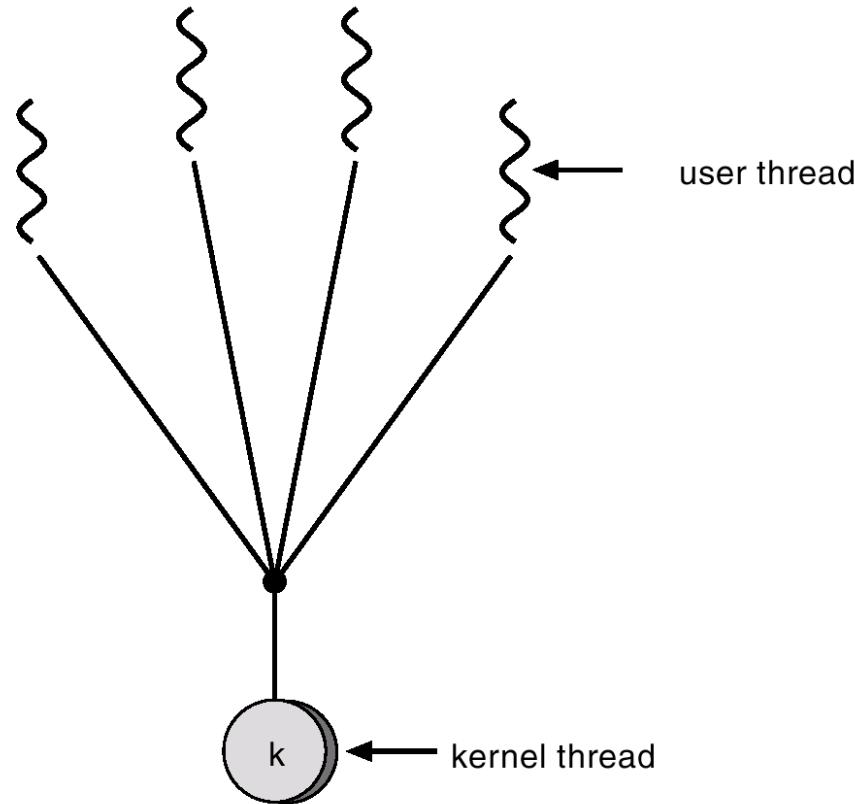


- Used on systems that do not support kernel threads.






Many-to-One Model (Cont.)

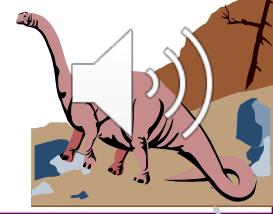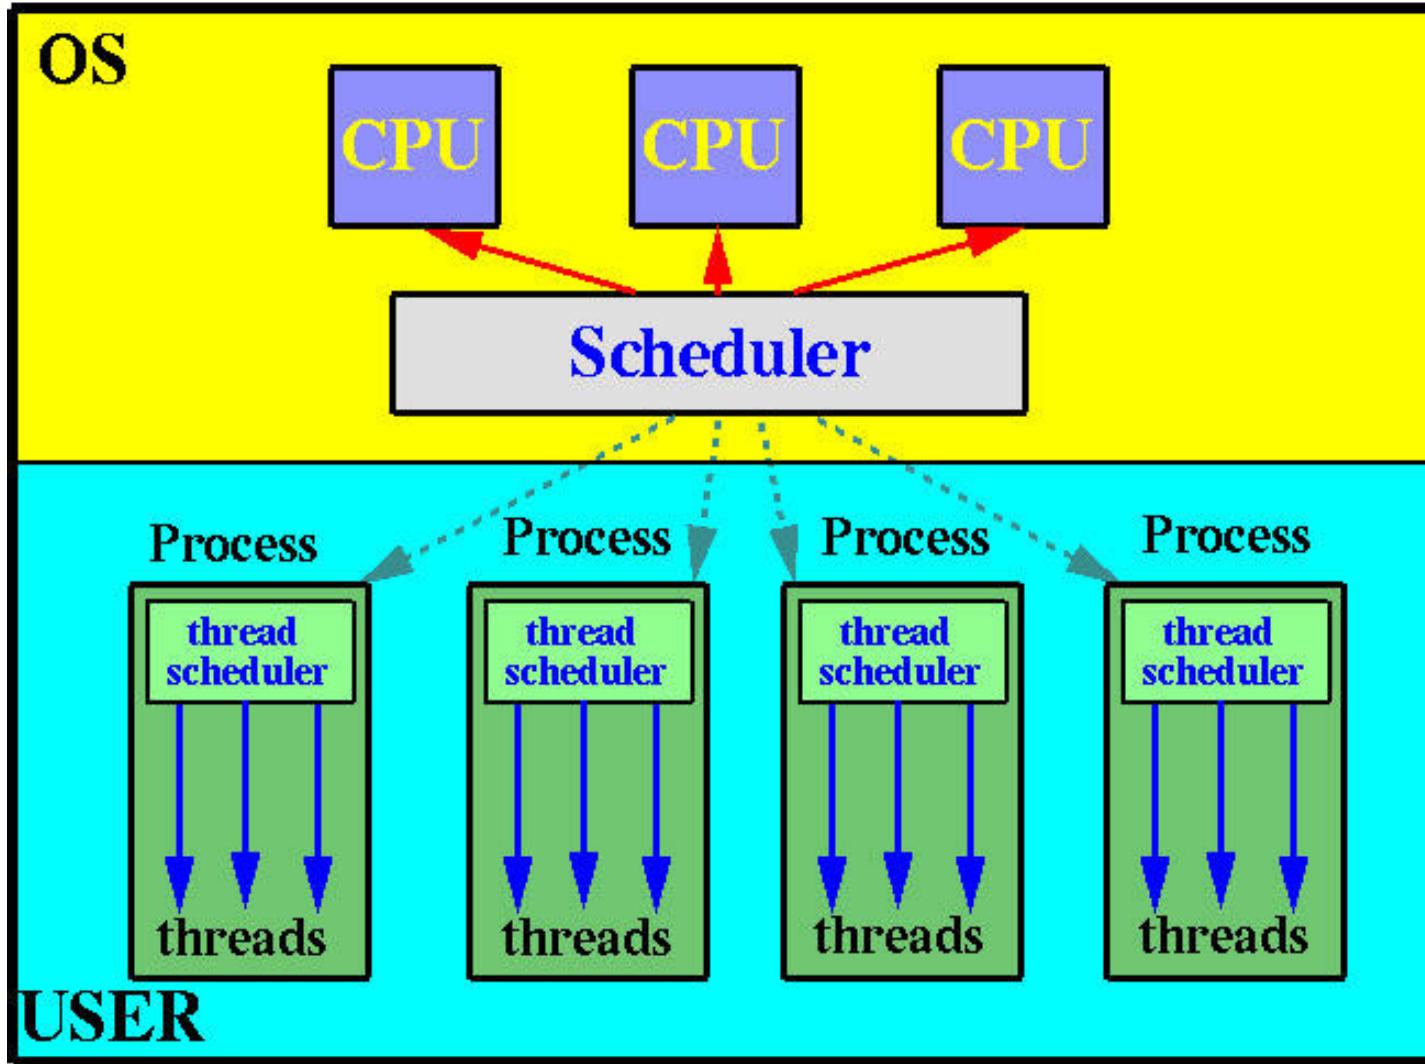




One-to-One

- Each user-level thread maps to kernel thread

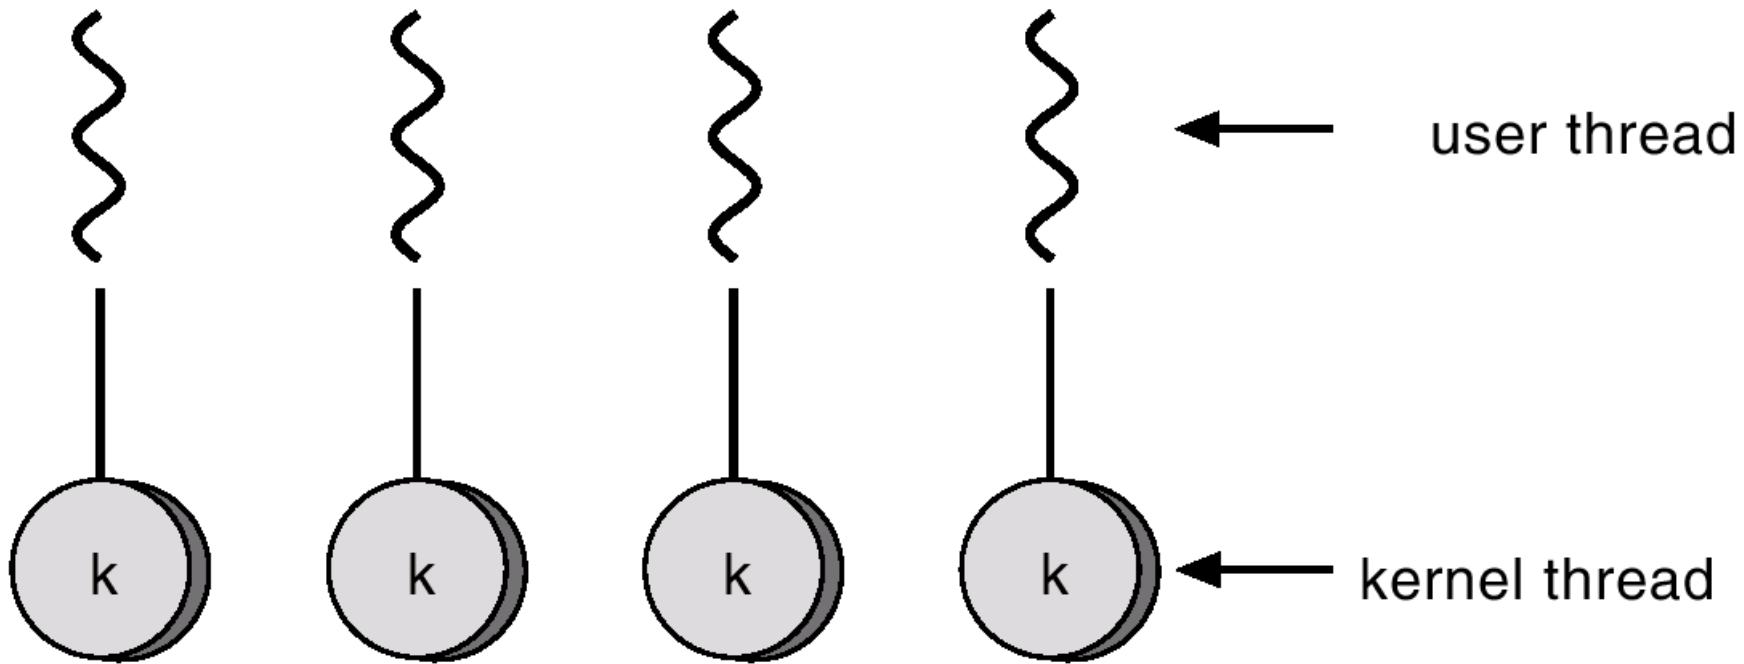



- Examples

- Windows 95/98/NT/2000
- OS/2

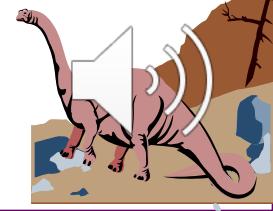




One-to-one Model (Cont.)

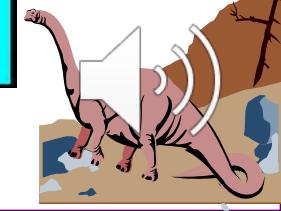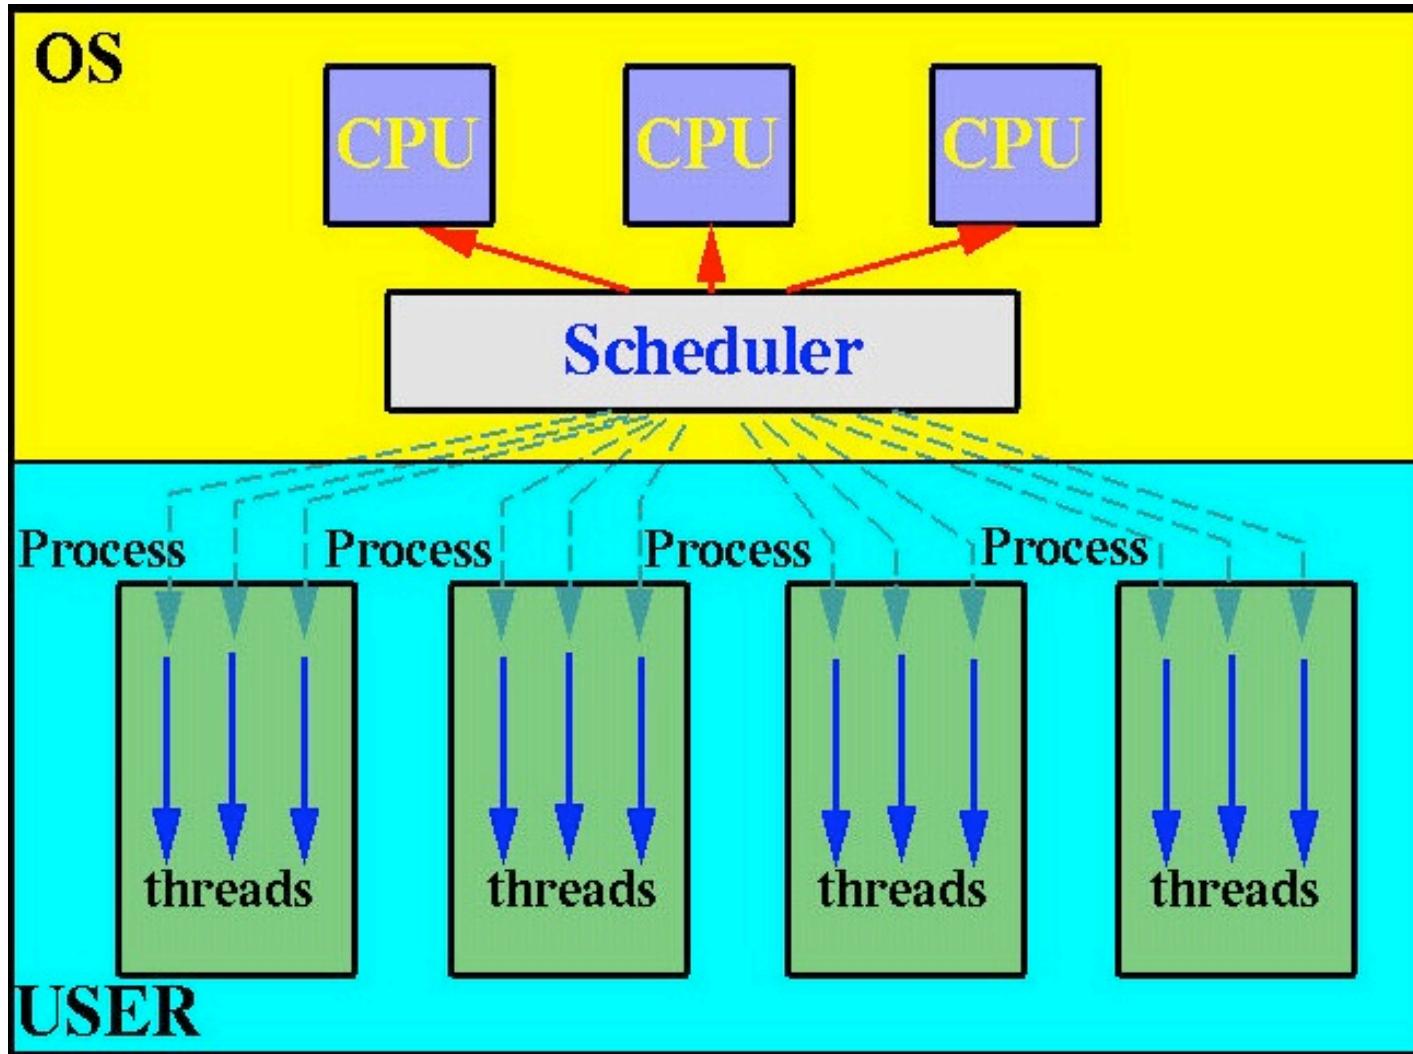



Many-to-Many Model

- Allows many user level threads to be mapped to many kernel threads.
- Allows the operating system to create a sufficient number of kernel threads.


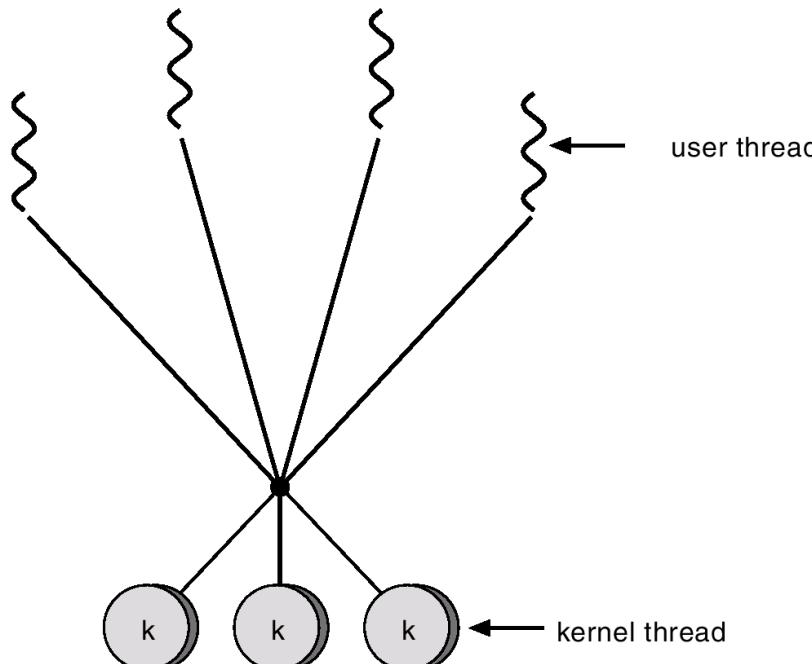


- Windows NT/2000 with *ThreadFiber* package
- Solaris 2






Many-to-Many Model (Cont.)

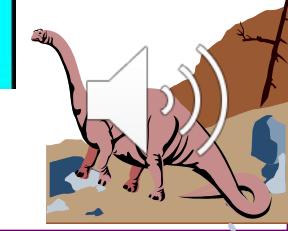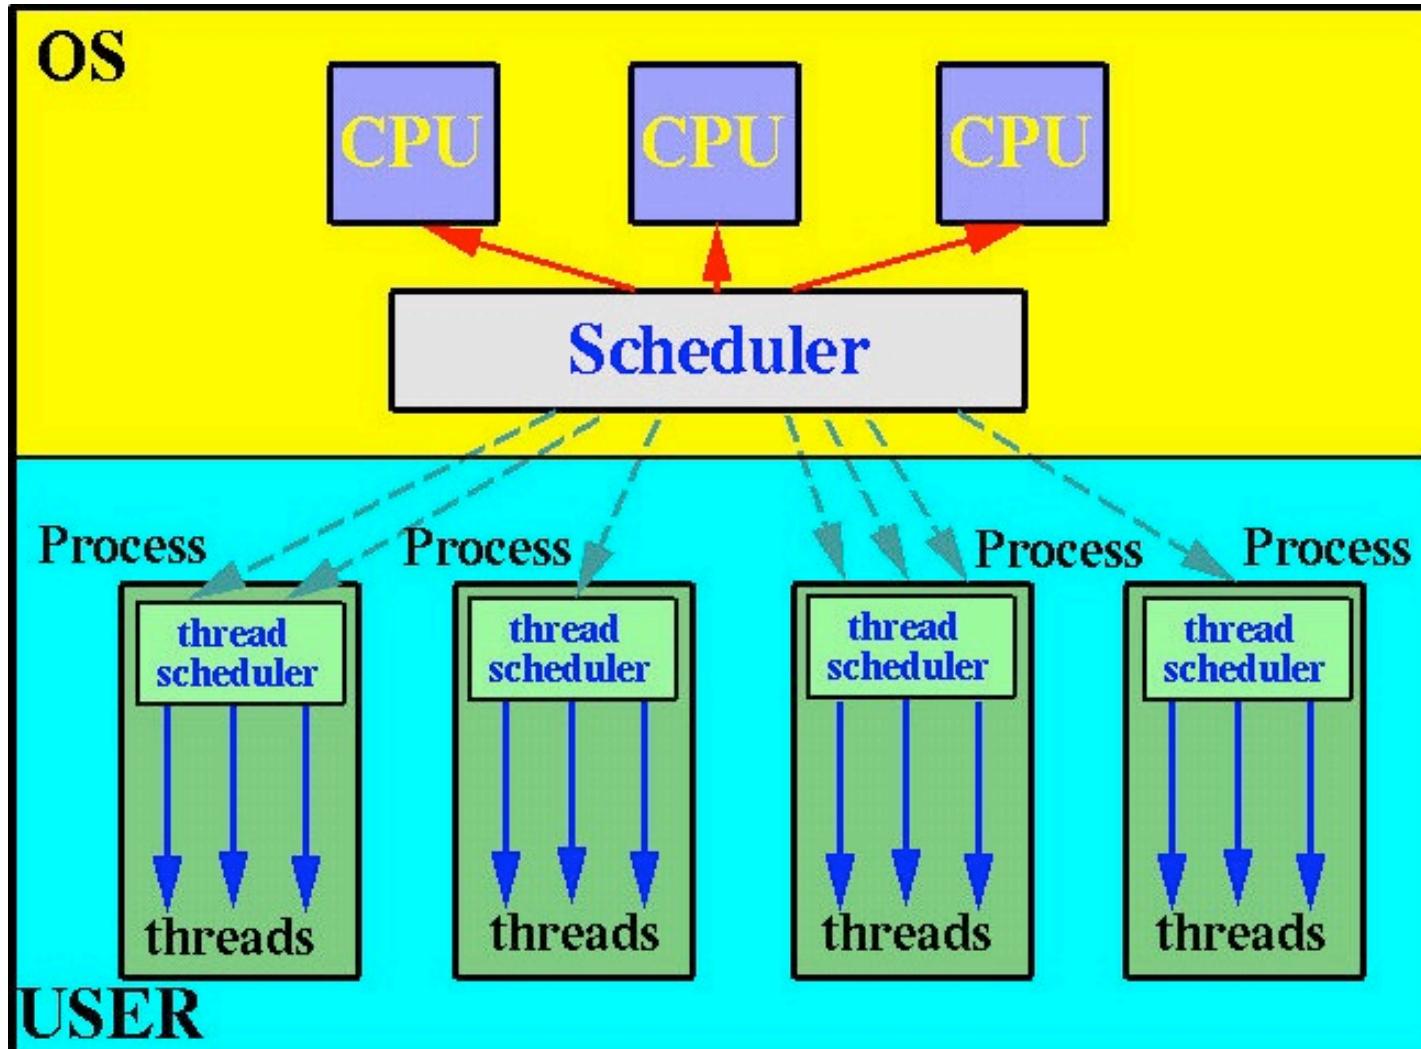





Chapter 4: Threads

- Overview
- Multithreading Models
- Threading Issues
- Windows XP Threads
- Linux Threads
- Java Threads
- Pthreads
- Windows Threads API

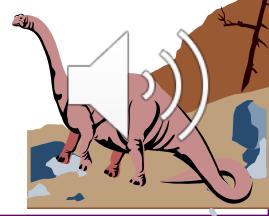





Solaris 2 Threads

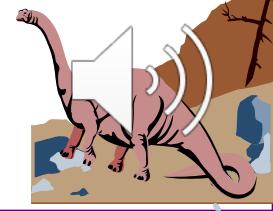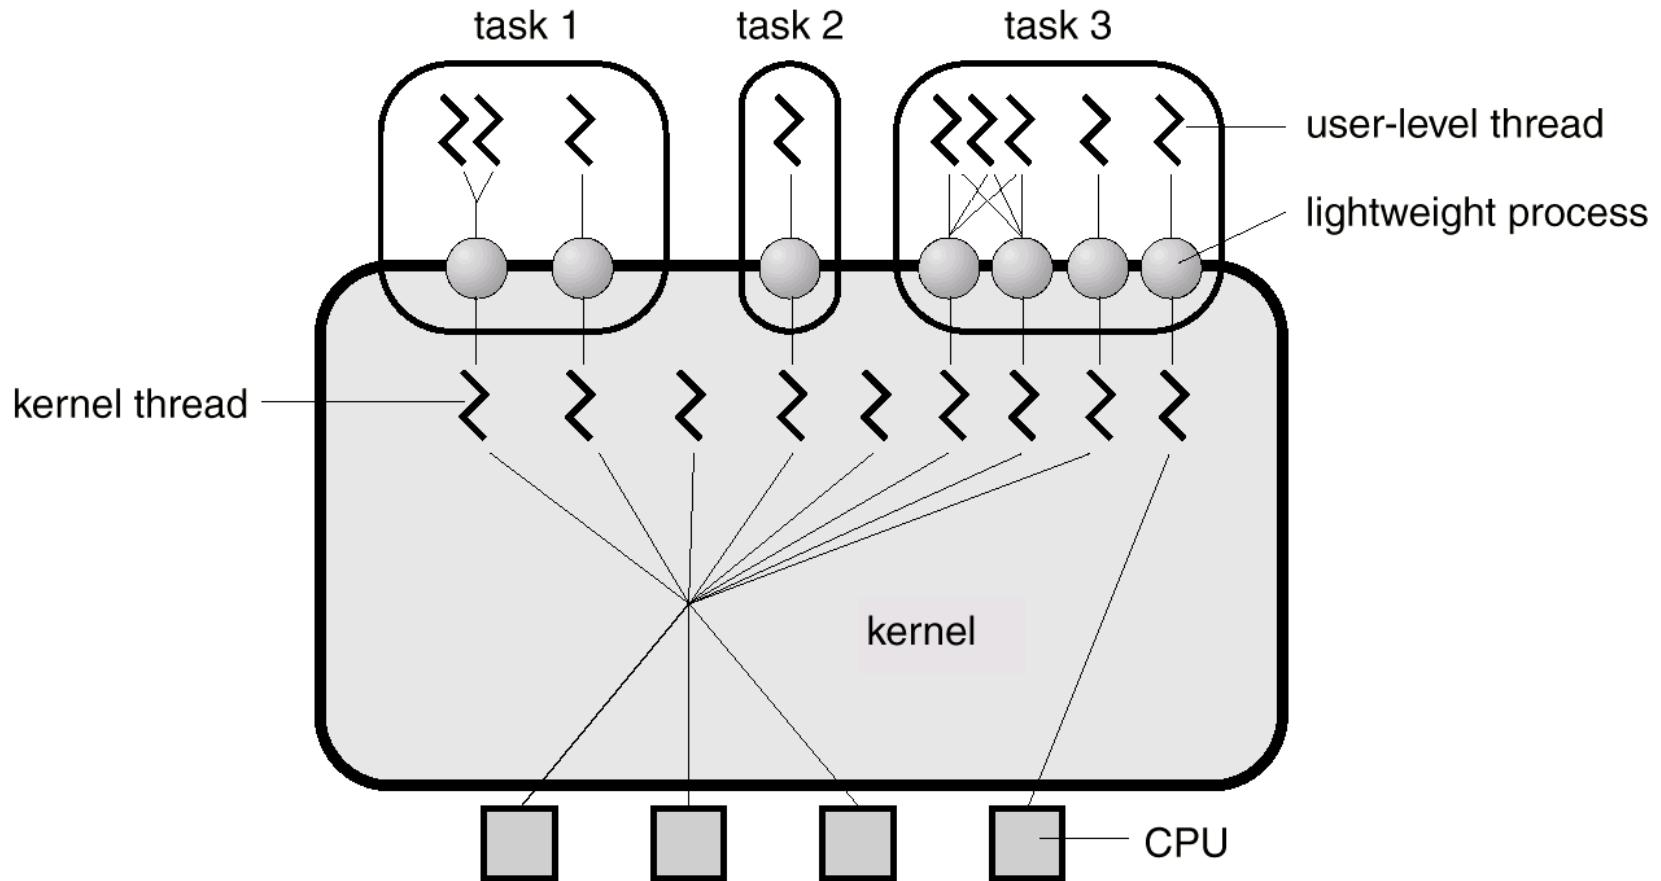


Solaris Process

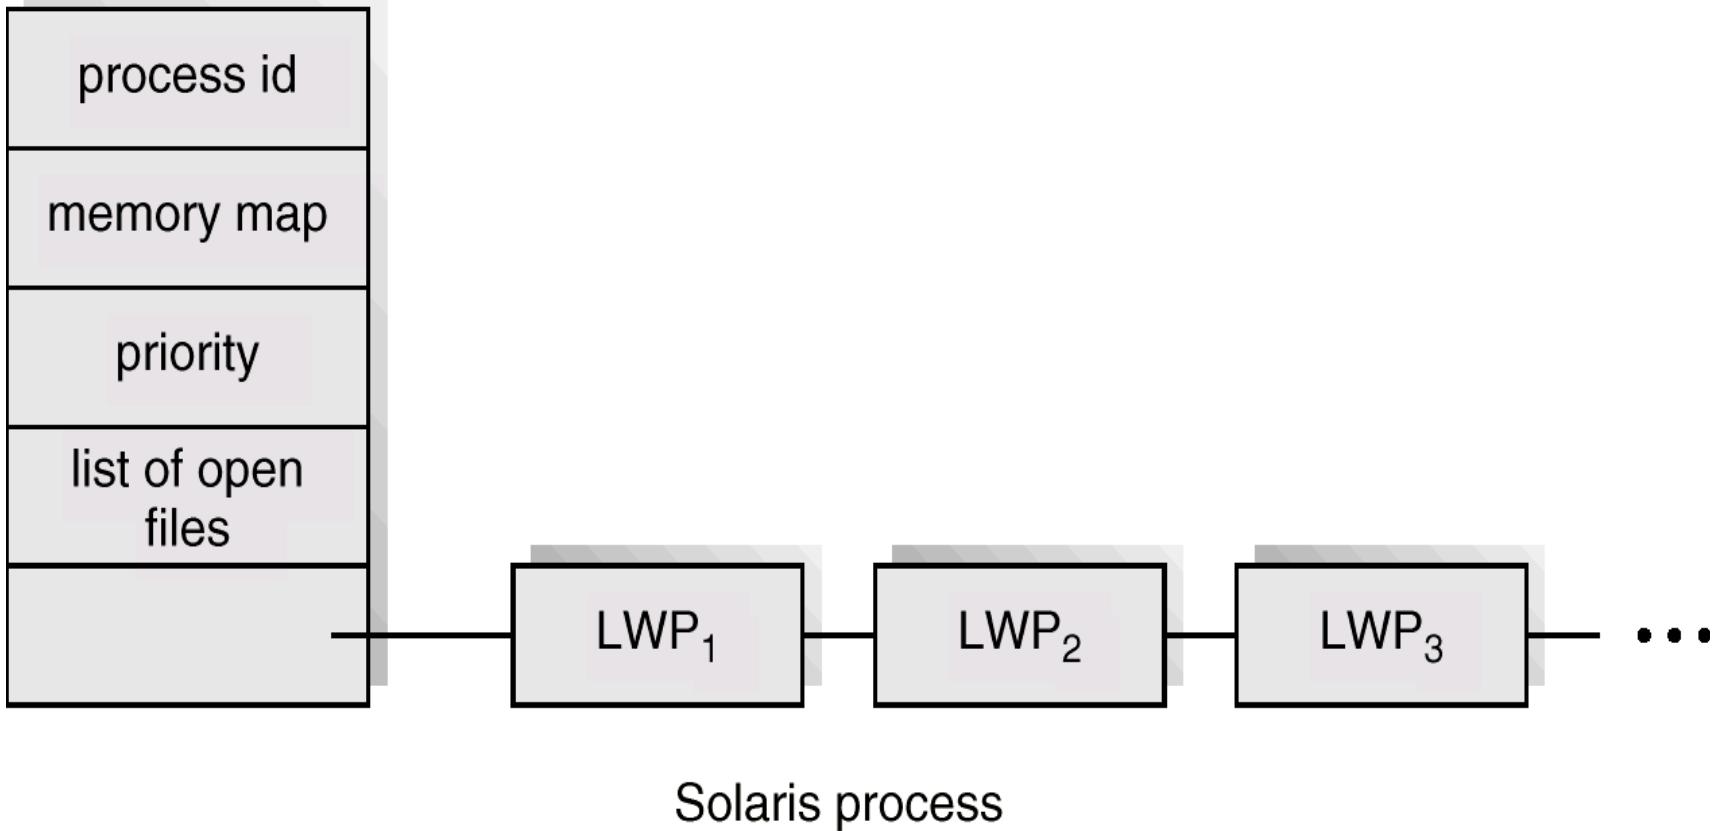

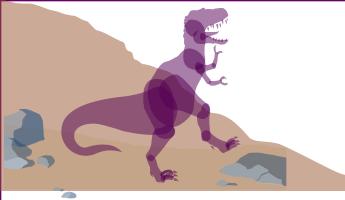


Windows XP Threads

- Implements the one-to-one mapping.
- Each thread has a corresponding thread control block in kernel, which contains
 - a thread id
 - register set
 - separate user and kernel stacks
 - private data storage area

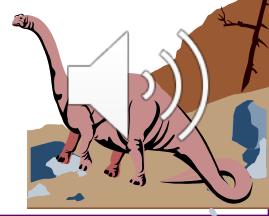


Thread Block

ETHREAD

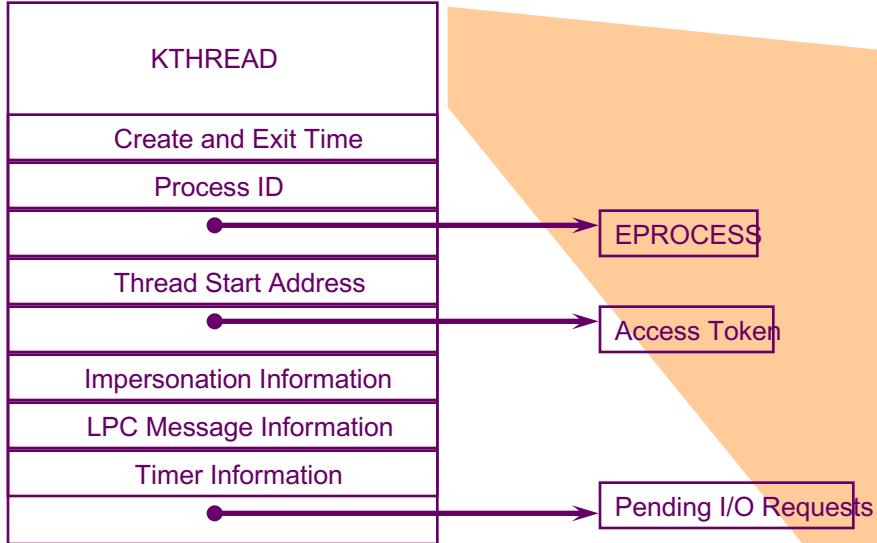

KTHREAD

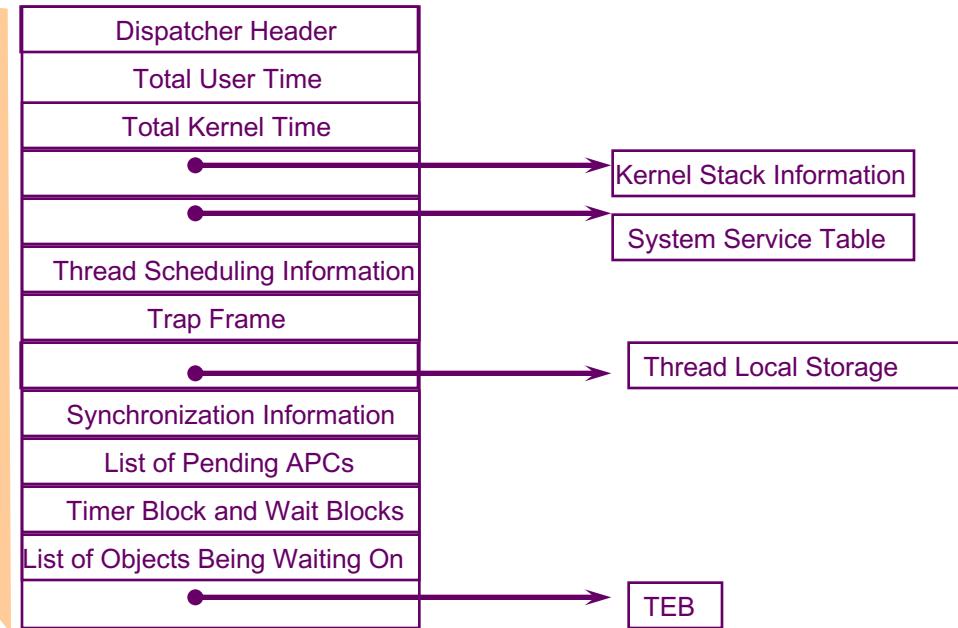




Linux Threads (not POSIX pthreads Library)

- Linux refers to them as *tasks* rather than *threads*.
- Thread creation is done through clone() system call.
- Clone() allows a child task to share the address space of the parent task (process)
- What is the difference between fork() and clone()?

<http://linux.die.net/man/2/clone>

<http://www.ibm.com/developerworks/cn/linux/kernel/l-threads/>






Java Threads

■ Java threads may be created by:



- ◆ Extending Thread class
- ◆ Implementing the Runnable interface

■ Java threads are managed by the JVM.

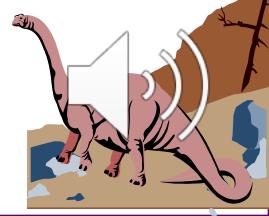




Java Thread States

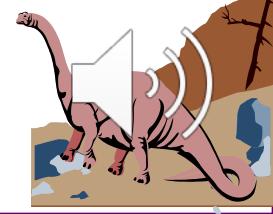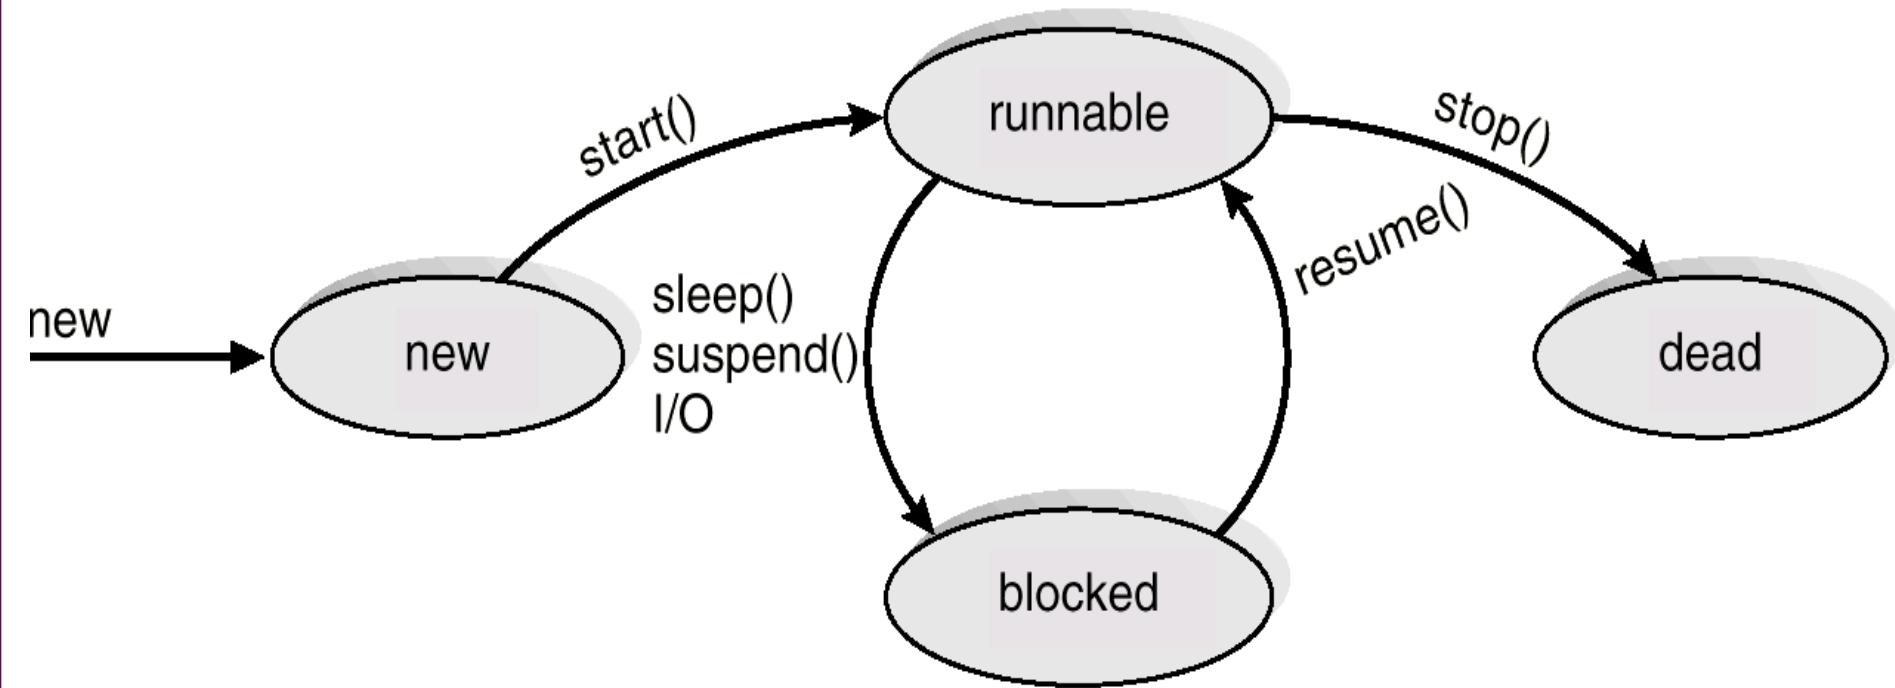



Chapter 4: Threads

- Overview
- Multithreading Models
- Threading Issues
- Windows XP Threads
- Linux Threads
- Java Threads
- Pthreads
- Windows Threads API

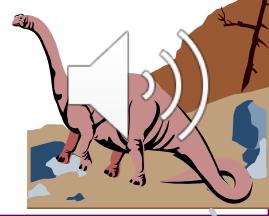



Pthreads

■ a POSIX standard (IEEE 1003.1c) API for thread creation and synchronization.

- ◆ API specifies behavior of the thread library,
- ◆ Implementation is up to development of the library


POSIX 1003.1 Commands : <http://www.unix.com/man-page-posix-repository.php>

■ Common in UNIX operating systems.

■ Implemented over Linux operating system by Native POSIX Thread Library (NPTL)

- ◆ NPTL is a 1×1 threads library, in that threads created by the user are in 1-1 correspondence with schedulable entities (i.e., task) in the kernel




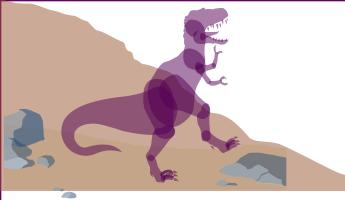


pthread_create

```
int pthread_create(pthread_t * tid, const pthread_attr_t * attr, void *(*function) (void *), void *arg);
```

- **pthread_t * tid**
 - ◆ handle or ID of created thread
- **const pthread_attr_t *attr**
 - ◆ attributes of thread to be created
- **void *(*function) (void *)**
 - ◆ function to be mapped to thread
- **void *arg**
 - ◆ single argument to function
- **Integer return value for error code**

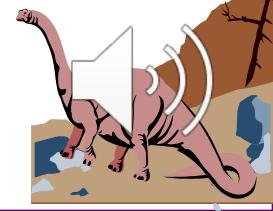

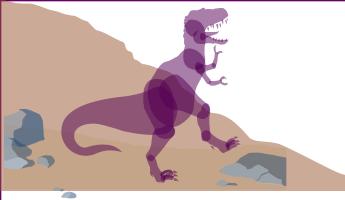

pthread_create explained

spawn a thread running the function;
thread handle returned via pthread_t structure

- specify *NULL* to use default attributes


a single argument sent to function

- If no argument to function, specify *NULL*

check error codes!

EAGAIN – insufficient resources to create thread


EINVAL – invalid attribute

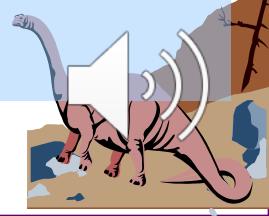



Threads states

- pthread threads have two states
 - ◆ joinable and detached
- threads are joinable by default
 - ◆ Resources are kept until *pthread_join*.
 - ◆ When a joinable thread terminates, some of the thread resources are kept allocated, and released only when another thread performs *pthread_join* on that thread.
 - ◆ can be reset with attribute or API call
- detached thread can not be joined
 - ◆ resources can be reclaimed at termination
 - ◆ cannot reset to be *joinable*

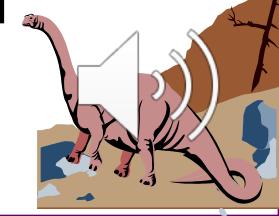



Waiting for a thread


```
int pthread_join(pthread_t *tid, void **val_ptr);
```

- `pthread_t *tid`

- ◆ handle of joinable thread

- `void **val_ptr`

- ◆ exit value returned by joined thread

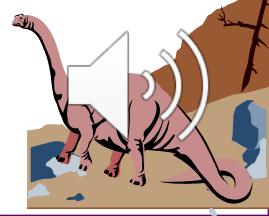



pthread_join explained

calling thread waits for the thread with handle tid to terminate

- only one thread can be joined

- thread must be joinable


exit value is returned from joined thread

- Type returned is (void *)

- use NULL if no return value expected

ESRCH – thread not found

EINVAL – thread not joinable

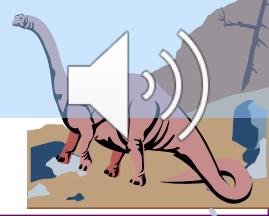




Example 1

```
1 #include <stdio.h>
2 #include <assert.h>
3 #include <pthread.h>
4
5 void *mythread(void *arg) {
6     printf("%s\n", (char *) arg);
7     return NULL;
8 }
9
10 int
11 main(int argc, char *argv[]) {
12     pthread_t p1, p2;
13     int rc;
14     printf("main: begin\n");
15     rc = pthread_create(&p1, NULL, mythread, "A"); assert(rc == 0);
16     rc = pthread_create(&p2, NULL, mythread, "B"); assert(rc == 0);
17     // join waits for the threads to finish
18     rc = pthread_join(p1, NULL); assert(rc == 0);
19     rc = pthread_join(p2, NULL); assert(rc == 0);
20     printf("main: end\n");
21     return 0;
22 }
```

Q1: Guess what are the possible outputs?

Q2: What if we remove the two Pthread_join() function calls?
Note: the termination of main thread will cause the automatic termination of children threads





Example 2


```
volatile int counter = 0; // shared global variable
```

```
14 void *
15 mythread(void *arg)
16 {
17     printf("%s: begin\n", (char *) arg);
18     int i;
19     for (i = 0; i < 1e7; i++) {
20         counter = counter + 1;
21     }
22     printf("%s: done\n", (char *) arg);
23     return NULL;
24 }
```

// The **volatile** keyword forces the compiler to always reads the current value of a volatile object from the memory location rather than keeping its value in temporary register at the point it is requested

Q1: Guess what is the possible output

```
32 int
33 main(int argc, char *argv[])
34 {
35     pthread_t p1, p2;
36     printf("main: begin (counter = %d)\n", counter);
37     Pthread_create(&p1, NULL, mythread, "A");
38     Pthread_create(&p2, NULL, mythread, "B");
39
40     // join waits for the threads to finish
41     Pthread_join(p1, NULL);
42     Pthread_join(p2, NULL);
43     printf("main: done with both (counter = %d)\n", counter)
44     return 0;
45 }
```

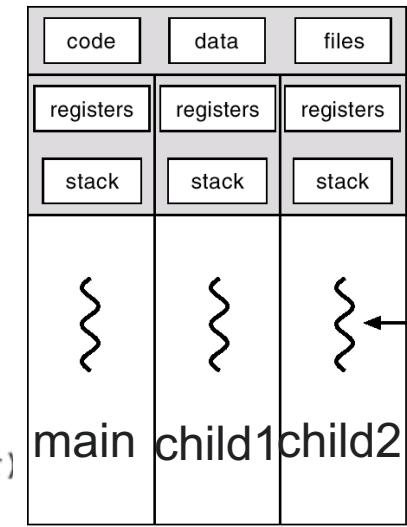

multithreaded






Discussion

- Why not deterministic?
- The Heart Of The Problem: Uncontrolled Scheduling
- What happens when executing “counter = counter + 1;” ?
- Understand the code sequence that the compiler generates for the update to counter.

```
        mov 0x8049a1c, %eax
        add $0x1, %eax
        mov %eax, 0x8049a1c
```

- Now, you may tell the reason

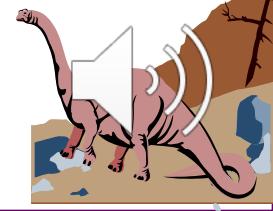



用gcc -S命令简单验证一下

■ GCC的选项-S使GCC在执行完汇编后停止

```
$ gcc -S t1.c -o t1.s // 汇编代码  
$ gcc -c t1.s -o t1.o // 二进制代码  
$ ld t1.o -o t1 // 链接后可执行代码
```

■ 看t1.s汇编代码

```
void *  
mythread(void *arg)  
{  
    printf("%s: begin\n", (char *) arg);  
    int i;  
    for (i = 0; i < 1e7; i++) {  
        counter = counter + 1;  
    }  
    printf("%s: done\n", (char *) arg);  
    return NULL;  
}
```


```
int  
main(int argc, char *argv[])  
{  
    pthread_t p1, p2;  
    printf("main: begin (counter = %d)\n", counter);  
    Pthread_create(&p1, NULL, mythread, "A");  
    Pthread_create(&p2, NULL, mythread, "B");  
  
    // join waits for the threads to finish  
    Pthread_join(p1, NULL);  
    Pthread_join(p2, NULL);  
    printf("main: done with both (counter = %d)\n", counter);  
    return 0;  
}
```

```
mythread:  
    .cfi_startproc  
    ...  
    movl    _counter(%rip), %eax  
    addl    $1, %eax  
    movl    %eax, _counter(%rip)  
    ...  
    .cfi_endproc  
    ## -- End function  
    ## @mythread  
  
main:  
    .cfi_startproc  
    ...  
    .cfi_endproc  
    .section  
        __TEXT,__cstring,cstring_literals  
    ...  
    .globl _counter ## @counter
```



Uncontrolled Scheduling


Thread1 Thread2

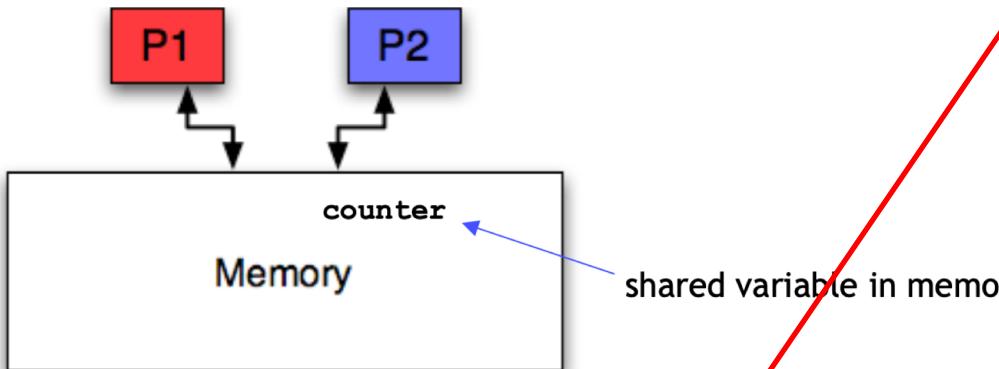

`movl _counter(%rip), %eax`

%rip-relative addressing for global variables
x86-64 code often refers to globals using %rip-relative addressing: a global variable named a is referenced as a(%rip). This style of reference supports *position-independent code (PIC)*, a security feature. It specifically supports *position-independent executables (PIEs)*, which are programs that work independently of where their code is loaded into memory.

OS	Thread 1	Thread 2	(after instruction)		
			PC	%eax	counter
	<i>before critical section</i>		100	0	50
	<code>mov 0x8049a1c, %eax</code>		105	50	50
	<code>add \$0x1, %eax</code>		108	51	50
interrupt					
<i>save T1's state</i>					
<i>restore T2's state</i>					
			100	0	50
			105	50	50
			108	51	50
			113	51	51
interrupt					
<i>save T2's state</i>					
<i>restore T1's state</i>					
	<code>mov %eax, 0x8049a1c</code>		108	51	51
			113	51	51






Uncontrolled Scheduling

Race condition

- ◆ Several processes (threads) access and **manipulate the same data** concurrently and the outcome of the execution depends on the **particular order** in which the access takes place.
- ◆ Result indeterminate.

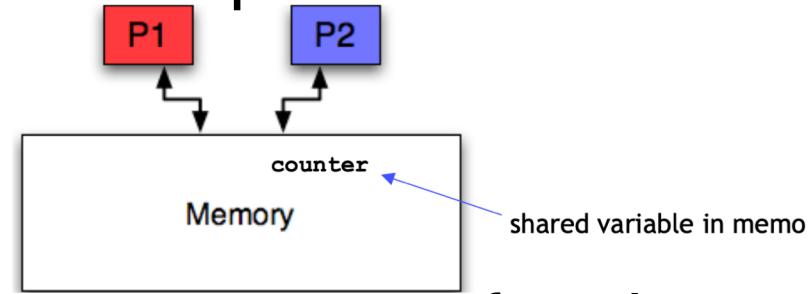

Critical section

- ◆ Multiple threads executing a segment of code, which can result in a **race condition**.

What we want: **Mutual exclusion**


- ◆ The property guarantees that if one thread is executing within the **critical section**, the others will be prevented from doing so.





Revisit the Threading Model

- “Data” is a public memory segment shared by all threads, which may incur race condition
- Stack is a private memory segment of a thread
- Question: What if a thread accesses the data variables on the stack of another thread?

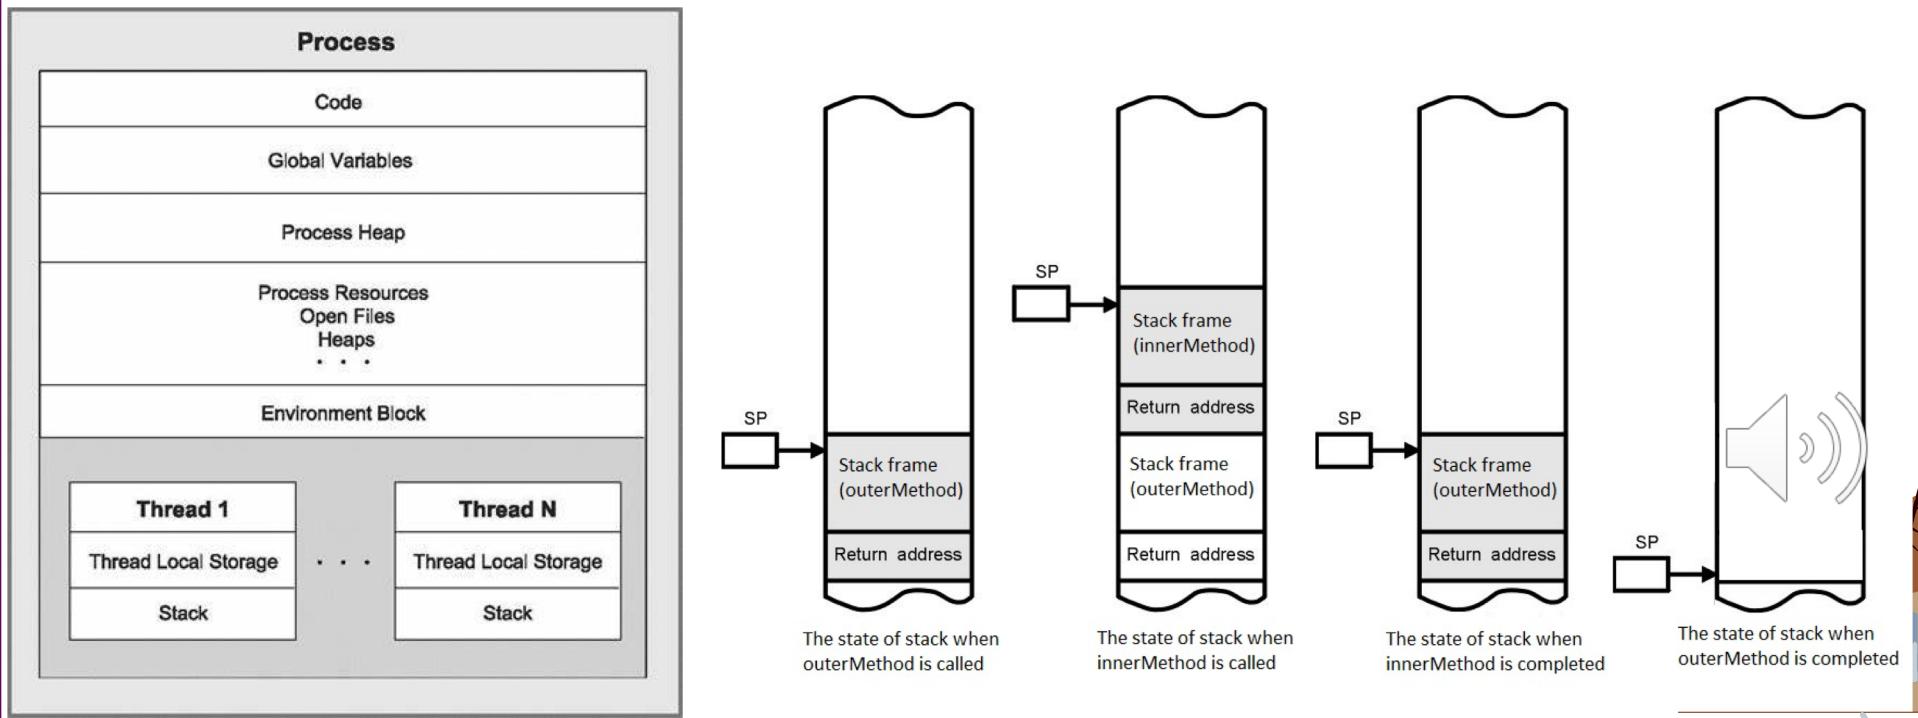



What are possible outputs of the program

```
void * helloFunc ( void * ptr ) {  
    int *data;  
    data = (int *) ptr;  
    printf("I'm Thread %d \n", *data);  
}  
  
int main() {  
    pthread_t hThread[4];  
    for (int i = 0; i < 4; i++)  
        pthread_create(&hThread[i], NULL, helloFunc, (void *)&i);  
    for (int i = 0; i < 4; i++)  
        pthread_join(hThread[i], NULL);  
    return 0;  
}
```



注意： race condition， 多个子线程T0、 T1、 T2、 T3同时访问主线程栈上的局部变量 i， 导致读写冲突。





Fix the problem by threat-local states


```
void * helloFunc ( void * ptr ) {  
    int *data;  
    data = (int *) ptr;  
    printf("I'm Thread %d \n", *data);  
}  
  
int main() {  
    pthread_t hThread[4];  
    int thread_name[4];  
    for (int i = 0; i < 4; i++) {  
        thread_name[i] = i;  
        pthread_create(&hThread[i], NULL,  
    helloFunc, (void *)&thread_name[i]);  
    }  
    for (int i = 0; i < 4; i++)  
        pthread_join(hThread[i], NULL);  
    return 0;  
}
```

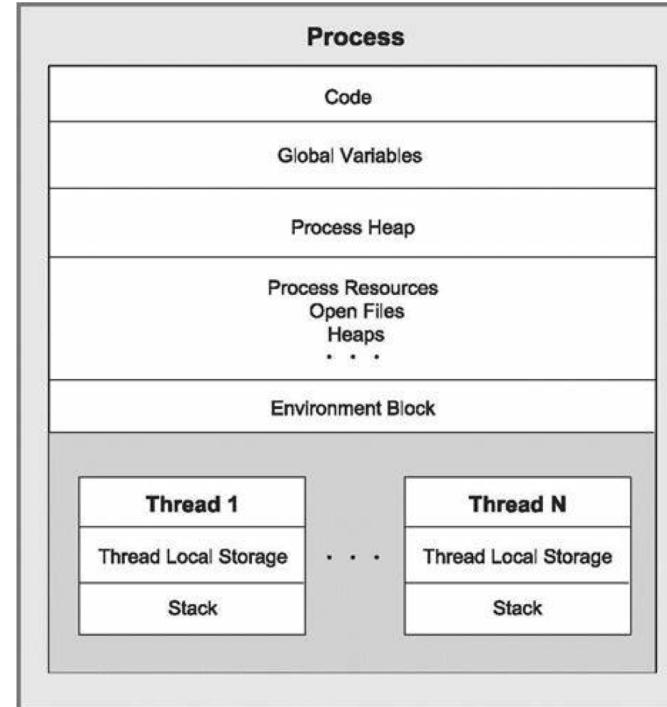



Chapter 4: Threads

- Overview
- Multithreading Models
- Threading Issues
- Windows XP Threads
- Linux Threads
- Java Threads
- Pthreads
- Windows Thread APIs






Windows Thread APIs

- CreateThread
- ExitThread
- TerminateThread
- GetExitCodeThread

- GetCurrentThreadId - returns global ID
- GetCurrentThread - returns handle
- SuspendThread/ResumeThread
- GetThreadTimes





Windows API Thread Creation

```
HANDLE CreateThread (
    LPSECURITY_ATTRIBUTES lpsa,
    DWORD cbStack,
    LPTHREAD_START_ROUTINE lpStartAddr,
    LPVOID lpvThreadParm,
    DWORD fdwCreate,
    LPDWORD lpIDThread)
```

cbStack == 0: thread's stack size defaults to primary thread's size

- lpstartAddr points to function declared as
DWORD WINAPI ThreadFunc(LPVOID)
- lpvThreadParm is 32-bit argument
- lpIDThread points to DWORD that receives thread ID
non-NULL pointer !






Windows API Thread Termination

```
VOID ExitThread( DWORD devExitCode )
```

- When the last thread in a process terminates, the process itself terminates

```
BOOL GetExitCodeThread (  
    HANDLE hThread, LPDWORD lpdwExitCode)
```

- Returns exit code or **STILL_ACTIVE**






Suspending and Resuming Threads

- Each thread has suspend count
- Can only execute if suspend count == 0
- Thread can be created in suspended state

```
DWORD ResumeThread (HANDLE hThread)  
DWORD SuspendThread(HANDLE hThread)
```

- Both functions return suspend count or
0xFFFFFFFF on failure







Example: Thread Creation

```
#include <stdio.h>
#include <windows.h>

DWORD WINAPI helloFunc(LPVOID arg) {
    printf("Hello Thread\n");
    return 0;
}


main() {
    HANDLE hThread =
        CreateThread(NULL, 0, helloFunc,
                    NULL, 0, NULL);
}
```

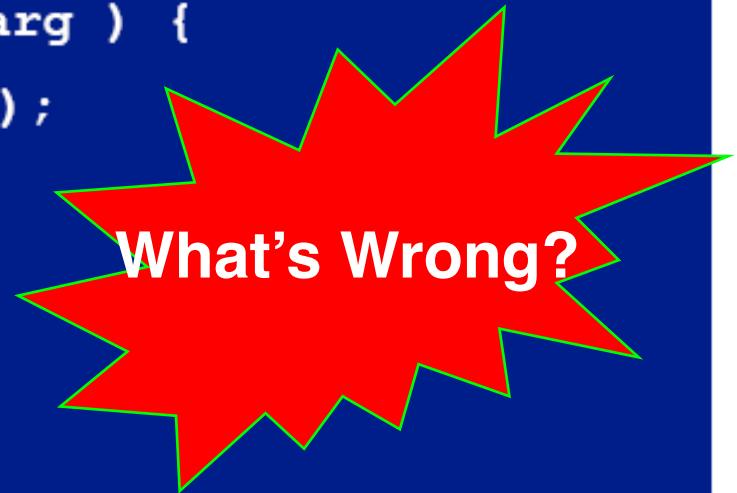



Example Explained

- Main thread is process
- When process goes, all threads go
- Need some methods of waiting for a thread to finish






Waiting for Windows* Thread

```
#include <stdio.h>
#include <windows.h>
BOOL thrdDone = FALSE;

DWORD WINAPI helloFunc(LPVOID arg) {
    printf("Hello Thread\n");
    return 0;
}

main() {
    HANDLE hThrea
    CreateT
        NULL, 0, NULL );
    while (!thrdDone);
}
```

A callout bubble points from the line `return 0;` to the assignment `thrdDone = TRUE;`. A large green callout box contains the text `Not a good idea!`. Another callout bubble points from the `CreateT` line to the condition `while (!thrdDone);`.

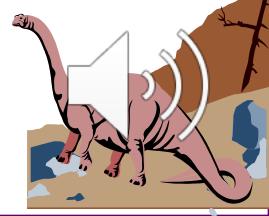



Waiting for a Thread


Wait for one object (thread)

```
DWORD WaitForSingleObject(  
    HANDLE hHandle,  
    DWORD dwMilliseconds );
```

Calling thread waits (blocks) until

- Time expires
 - Return code used to indicate this
- Thread exits (handle is signaled)
 - Use **INFINITE** to wait until thread termination

Does not use CPU cycles





Waiting for Many Threads


Wait for up to 64 objects (threads)

```
DWORD WaitForMultipleObjects(  
    DWORD nCount,  
    CONST HANDLE *lpHandles, // array  
    BOOL fWaitAll, // wait for one or all  
    DWORD dwMilliseconds)
```

Wait for all: `fWaitAll==TRUE`

Wait for any: `fWaitAll==FALSE`


- Return value is first array index found





Notes on WaitFor* Functions

- Handle as parameter
- Used for different types of objects
- Kernel objects have two states
 - ◆ Signaled
 - ◆ Non-signaled
- Behavior is defined by object referred to by handle
 - ◆ Thread: signaled means terminated





Example: Waiting for multiple threads

```
#include <stdio.h>
#include <windows.h>
const int numThreads = 4;

DWORD WINAPI helloFunc(LPVOID arg) {
    printf("Hello Thread\n");
    return 0; }

main() {
    HANDLE hThread[numThreads];
    for (int i = 0; i < numThreads; i++)
        hThread[i] =
            CreateThread(NULL, 0, helloFunc, NULL, 0, NULL);
    WaitForMultipleObjects(numThreads, hThread,
                          TRUE, INFINITE);
}
```






Example: HelloThreads

■ Modify the previous example code to print out

- ◆ appropriate “Hello Thread” message
- ◆ Unique thread number
 - ✓ use for-loop variable of CreateThread loop

■ Sample output:

```
Hello from Thread #0  
  
Hello from Thread #1  
  
Hello from Thread #2  
  
Hello from Thread #3
```






What's Wrong?

```
DWORD WINAPI threadFunc(LPVOID pArg) {  
    int* p = (int*)pArg;  
    int myNum = *p;  
    printf("Thread number %d\n", myNum);  
}  
.  
.  
.  
// from main():  
for (int i = 0; i < numThreads; i++) {  
    hThread[i] =  
        CreateThread(NULL, 0, threadFunc, &i, 0, NULL);  
}
```


What is printed for myNum?





Hello Threads Timeline


Time	<i>main</i>	<i>Thread 0</i>	<i>Thread 1</i>
T ₀	i = 0	---	----
T ₁	create(&i)	---	---
T ₂	i++ (i == 1)	launch	---
T ₃	create(&i)	p = pArg	---
T ₄	i++ (i == 2)	myNum = *p myNum = 2	launch
T ₅	wait	print(2)	p = pArg
T ₆	wait	exit	myNum = *p myNum = 2





Race Conditions

- Concurrent access of same variable by multiple threads
 - ◆ Read/Write conflict
 - ◆ Write/Write conflict
- Most common error in concurrent programs
- May not be apparent at all times
- How to avoid data races?
 - ◆ Local storage
 - ◆ Control shared access with critical regions






Hello Thread: Local Storage solution

```
DWORD WINAPI threadFunc(LPVOID pArg)
{
    int myNum = *((int*)pArg);
    printf( "Thread number %d\n", myNum);
}

. . .


// from main():
for (int i = 0; i < numThreads; i++) {
    tNum[i] = i;
    hThread[i] =
        CreateThread(NULL, 0, threadFunc, &tNum[i],
                    0, NULL);
}
```





Chapter 4: Threads


- Overview
- Multithreading Models
- Threading Issues
- Windows XP Threads
- Linux Threads
- Java Threads
- Pthreads
- Windows Threads API





Threading Issues


1. Semantics of fork() and exec() system calls.
2. Thread cancellation.
3. Signal handling
4. Thread pools
5. Thread specific data
6. Scheduler Activations

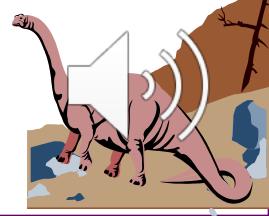



Semantics of fork() and exec()


- Does **fork()** duplicate only the calling thread or all threads?
- In a Pthreads-compliant implementation, the **fork()** call always creates a new child process with a single thread, regardless of how many threads its parent may have had at the time of the call.
- Furthermore, the child's thread is a replica of the thread in the parent that called **fork**






Thread Cancellation


- Terminating a thread before it has finished
- Two general approaches:
 - ◆ **Asynchronous cancellation** terminates the target thread immediately
 - ◆ **Deferred cancellation** allows the target thread to periodically check if it should be cancelled
 - ✓ The point a thread can terminate itself is a **cancellation point**.



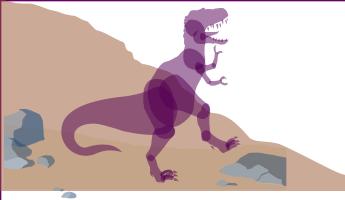

Thread Cancellation (Cont.)

- With **asynchronous cancellation**, if the target thread owns some system-wide resources, the system may not be able to reclaim all resources
- With **deferred cancellation**, the target thread determines the time to terminate itself. Reclaiming resources is not a problem.
- Most systems implement asynchronous cancellation for processes (e.g., use the **kill** system call) and threads.
- **Pthread** supports **deferred cancellation**.





An example of deferred cancellation

```
#include <pthread.h>
#include <stdio.h>
#include "check.h"

void *threadfunc(void *parm) {
    printf("Entered secondary thread\n");
    while (1) {
        printf("Secondary thread is looping\n");

/* The pthread_testcancel() function creates a
cancellation point in the calling thread. Be careful to
insert pthread_testcancel() only in sequences where it
is safe to cancel a thread. */
        pthread_cancel(pthread_self());

        sleep(1);
    }
    return NULL;
}
```

```
int main(int argc, char **argv) {
    pthread_t             thread;
    int                  rc=0;

    printf("Entering testcase\n");

    /* Create a thread using default attributes */
    printf("Create thread using the NULL attributes\n");
    rc = pthread_create(&thread, NULL, threadfunc, NULL);
    checkResults("pthread_create(NULL)\n", rc);

    /* sleep() is not a very robust way to wait for the thread
     * to complete
    sleep(2);

    printf("Cancel the thread\n");
    rc = pthread_cancel(thread);
    checkResults("pthread_cancel()\n", rc);

    /* sleep() is not a very robust way to wait for the thread
     * to complete
    sleep(3);
    printf("Main completed\n");
    return 0;
```



Output of deferred cancellation example

Entering testcase

Create thread using the NULL attributes


Entered secondary thread

Secondary thread is looping

Secondary thread is looping

Cancel the thread


Main completed





Signal Handling


- **Signals** are used in UNIX systems to notify a process that a particular event has occurred
- All signals follow the same pattern:
 1. Signal is generated by particular event
 2. Signal is delivered to a process
 3. Signal is handled
- A **signal handler** is used to process signals





Signal Handling (Cont.)

- How to handle a signal when its target process has multiple threads?
- Options:
 1. Deliver the signal to the thread to which the signal applies
 2. Deliver the signal to every thread in the process
 3. Deliver the signal to certain threads in the process
 4. Assign a specific thread to receive all signals for the process






Thread Pools

■ Create a number of threads in a pool where they await work

■ Advantages:

- ◆ Usually slightly faster to service a request with an existing thread than create a new thread
- ◆ Allows the number of threads in the application(s) to be bound to the size of the pool

https://en.wikipedia.org/wiki/Thread_pool






Thread Specific Data

- Allows each thread to have its own copy of data
- Useful when you do not have control over the thread creation process (i.e., when using a thread pool)
- Pthreads library supports thread specific data

https://en.wikipedia.org/wiki/Thread-local_storage#Pthreads_implementation







Thread Scheduler Activations

■ **Background:** Server-version operating systems often use many-to-many and two-level thread models

- ◆ The thread library needs to maintain the appropriate number of kernel threads allocated to the process
- ◆ Requires kernel-user space communication to do it

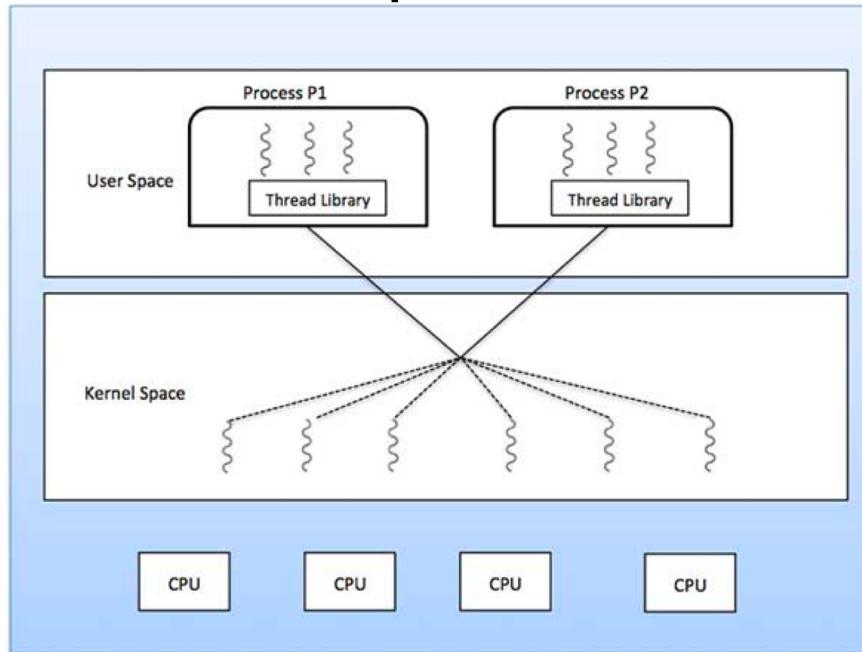



Thread Scheduler Activations

- Scheduler activations provide **upcalls**: a communication mechanism from the kernel to the user-mode thread lib
- When the kernel knows a thread has blocked/resumed, it notifies the process' run-time system about this event
- This communication allows an application to maintain the correct number of available kernel threads

