

Comp 424 - Client-side Web Design

Fall Semester 2016 - Week 14

Dr Nick Hayward

Contents

- Final presentation & demo
- Final report
- Project status report
- Data visualisation library - D3.js
 - *drawing*
 - *interaction*
- Extras...

Final Presentation & Report

- team presentation on 5th December @ 4.15pm
- team report due on 12th December by 4.15pm

Final Assessment Outline

- continue to develop your app concept and prototypes
- working app (as close as possible...)
- explain design decisions
 - *describe patterns used in design of UI and interaction*
 - *layout choices...*
- show and explain implemented differences from DEV week
 - *where and why did you update the app?*
 - *perceived benefits of the updates?*
- how did you respond to peer review?
- any other useful or pertinent information

n.b. 10 minutes maximum per group

Final Assessment Report

- report outline - demo and report

Project Status Report

- what is currently working?
- which data store?
- what is left to add or fix?
 - *features, UI elements, interactions...*
- who is working on what?
 - *logic, design, testing, research...*

Teams

- Group 1 - Team STA - Wanderlust
- Group 2 - Team Meet in Time
- Group 3 - Team Mom & Me
- Group 4 - Team PowerUp Reviews
- Group 5 - Team Boex-Dyer
- Group 6 - Team Yauheni - Slack Inspector
- Group 7 - Team JKZ - BeYou
- Group 8 - Team GM
- Group 9 - Team NP - goFAST
- Group 10 - Team JC - Runnin Rhythm
- Group 11 - Team AARK - WeatherSpot
- Group 12 - Team IRF

Image - D3 Basic Elements

Testing - D3

Home | d3 basic element

Basic - add text

some sample text...

Basic - add element

p element...

p element...

p element...

p element...

p element...

p element...

Basic - add array value to element (with colour)

0

1

2

3

4

5

Basic - add key & value to element

key = 0, value = 0

key = 1, value = 1

key = 2, value = 2

key = 3, value = 3

key = 4, value = 4

key = 5, value = 5

D3 - basic elements

Data visualisation - D3

Drawing - intro - part I

1. drawing divs

- one of the easiest ways to draw a rectangle, for example, is with a HTML `<div>`
- an easy way to start drawing a bar chart for our stats
- start with standard HTML elements, then consider more powerful option of drawing with SVG
- semantically incorrect, we could use `<div>` to output bars for a bar chart
 - *use of an empty `<div>` for purely visual effect*
- using D3, add a class to an empty element using `selection.attr()` method

2. setting attributes

- `attr()` is used to set an HTML attribute and its value on an element
- After selecting the required element in the DOM
 - *assign an attributes as follows*

```
.attr("class", "barchart")
```


Data visualisation - D3

Drawing - intro - part 2

- use D3 to draw a set of bars in divs as follows

```
var dataset = [ 1, 2, 3, 4, 5 ];

d3.select("body").selectAll("div")
  .data(dataset)
  .enter()
  .append("div")
  .attr("class", "bar");
```

- above sample outputs the values from our dataset with no space between them
 - *effectively as a bar chart of equal height*
- modify the height of each representative bar
 - *by setting height of each bar as a function of its corresponding data value*
 - *eg: append the following to our example chain*

```
.style("height", function(d) {
  return d + "px";
});
```

- make each bar in our chart more clearly defined by modifying style

```
.style("height", function(d) {
  var barHeight = d * 3;
  return barHeight + "px";
});
```

Data visualisation - D3

Drawing - intro - part 3

1. drawing SVGs

- properties of SVG elements are specified as **attributes**
- represented as property/value pairs within each element tag

```
<element property="value">...</element>
```

- SVG elements exist in the DOM
 - we can still use D3 methods *append()* and *attr()*
 - create new HTML elements and set their attributes

2. create SVG

- need to create an element for our SVG
- allows us to draw and output all of our required shapes

```
d3.select("body").append("svg");
```

- variable effectively works as a reference
 - points to the newly created SVG object
 - allows us to use this reference to access this element in the DOM
- DEMO - Drawing with SVG

Image - D3 Basic Drawing

Testing - D3

[Home](#) | [d3 basic drawing](#)

[Basic drawing - add text](#)

genius is 1% inspiration, 99% perspiration

[Basic drawing - add circles](#)



[Basic drawing - add rectangles](#)



[D3 - basic drawing](#)

Data visualisation - D3

Drawing - SVG barchart - part I

- create a new barchart using SVG, need to set the required size for our SVG output

```
//width & height
```

```
var w = 750;
```

```
var h = 200;
```

- then use D3 to create an empty SVG element, and add it to the DOM

```
var svg = d3.select("body")
```

```
  .append("svg")
```

```
  .attr("width", w)
```

```
  .attr("height", h);
```

- instead of creating DIVs as before, we generate *rects* and add them to the *svg* element.

```
svg.selectAll("rect")
```

```
  .data(dataset)
```

```
  .enter()
```

```
  .append("rect")
```

```
  .attr("x", 0)
```

```
  .attr("y", 0)
```

```
  .attr("width", 10)
```

```
  .attr("height", 50);
```

Data visualisation - D3

Drawing - SVG barchart - part 2

- this code selects all of the `rect` elements within `svg`
- initially none, D3 still needs to select them before creating them
- `data()` then checks the number of values in the specified dataset
 - *hands those values to the `enter` method for processing*
- `enter` method then creates a placeholder
 - *for each data value without a corresponding `rect`*
 - *also appends a rectangle to the DOM for each data value*
- then use `attr` method to set `x`, `y`, `width`, `height` values for each rectangle
- still only outputs a single bar due to an overlap issue
- need to amend our code to handle the width of each bar
 - *implement flexible, dynamic coordinates to fit available SVG width and height*
 - *visualisation scales appropriately with the supplied data*

```
.attr("x", function(d, i) {  
    return i * (w / dataset.length);  
})
```

Data visualisation - D3

Drawing - SVG barchart - part 3

- now linked the x value directly to the width of the SVG `w`
 - and the number of values in the dataset, `dataset.length`
 - the bars will be evenly spaced regardless of the number of values
- if we have a large number of data values
 - bars still look like one horizontal bar
 - unless there is sufficient width for parent SVG and space between each bar
- try to solve this as well by setting the bar width to be proportional
 - narrower for more data, wider for less data

```
var w = 750;  
var h = 200;  
var barPadding = 1;
```

- now set each bar's width
 - as a fraction of the SVG width and number of data points, minus our padding value

```
.attr("width", w / dataset.length - barPadding)
```

- our bar widths and x positions scale correctly regardless of data values

Data visualisation - D3

Drawing - SVG barchart - part 4

- encode our data as the *height* of each bar

```
.attr("height", function(d) {  
    return d * 4;  
});
```

- our bar chart will size correctly, albeit from the top down
 - *due to the nature of SVG*
 - *SVG adheres to a top left pattern for rendering shapes*
- to correct this issue
 - *need to calculate the top position of our bars relative to the SVG*
- top of each bar expressed as a relationship
 - *between the height of the SVG and the corresponding data value*

```
.attr("y", function(d) {  
    //height minus data value  
    return h - d;  
});
```

- bar chart will now display correctly from the bottom upwards
- DEMO - Drawing with SVG - barcharts

Image - D3 Barcharts

Testing - D3

[Home](#) | [d3 data drawing bar](#)

Bar chart 1 - no correction



Bar chart 2 - correction



D3 - drawing barcharts

Data visualisation - D3

Drawing - SVG barchart - part 5

1. add some colour

- adding a colour per bar simply a matter of setting an attribute for the fill colour

```
.attr("fill", "blue");
```

- set many colours using the data itself to determine the colour

```
.attr("fill", function(d) {  
    return "rgb(0, 0, " + (d * 10) + ")";  
});
```

2. add text labels

- also set dynamic text labels per bar, which reflect the current dataset

```
svg.selectAll("text")  
  .data(dataset)  
  .enter()  
  .append("text")
```

- extend this further by positioning our text labels

```
.attr("x", function(d, i) {  
    return i * (w / dataset.length);  
})  
.attr("y", function(d, i) {  
    return h - (d * 4);  
});
```

- then position them relative to the applicable bars, add some styling, colours...

```
.attr("font-family", "sans-serif")  
.attr("font-size", "11px")  
.attr("fill", "white");
```


- DEMO - Drawing with SVG - barcharts, colour, and text labels

Image - D3 Barcharts


Testing - D3

[Home](#) | [d3 github commits barchart](#)

Total commits per month - calendar

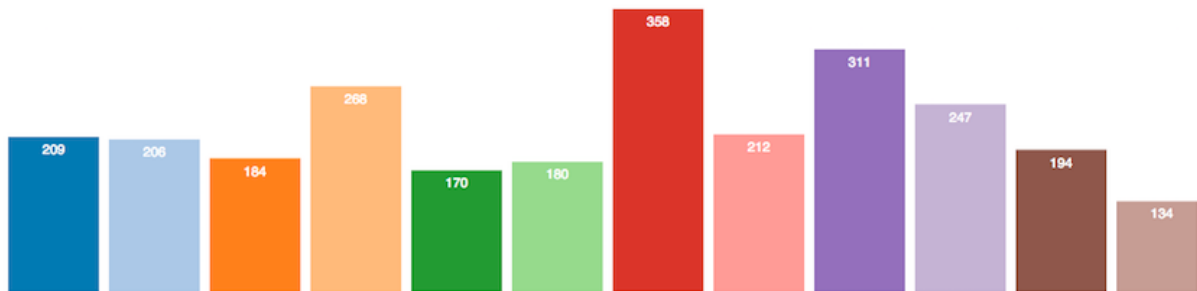

Total commits per month - cumulative

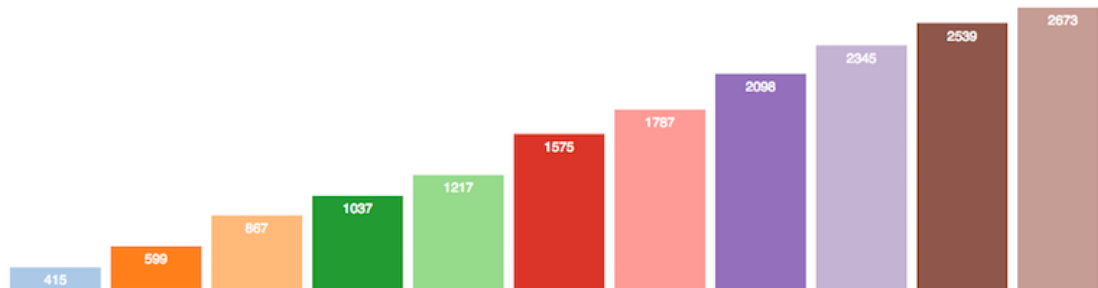

D3 - drawing barcharts with colour and text

Data visualisation - D3

Drawing - add interaction - listeners

- event listeners apply to any DOM element for interaction
 - *from a button to a <p> with the body of a HTML page*

```
<p>this is a HTML paragraph...</p>
```

- add a listener to this DOM element

```
d3.select("p")  
  .on("click", function() {  
    //do something with the element...  
  });
```

- above sample code selects the <p> element
 - *then adds an event listener to that element*
- event listener is an anonymous function
 - *listens for .on event for a specific element or group of elements*
- in our example,
 - *on () function takes two arguments*

Data visualisation - D3

Drawing - add interaction - update visuals

- achieved by combining
 - *event listener*
 - *modification of the visuals relative to changes in data*

```
d3.select("p")
  .on("click", function() {

    dataset = [...];

    //update all of the rects
    svg.selectAll("rect")
      .data(dataset)
      .attr("y", function(d) {
        return h - yScale(d);
      });
      .attr("height", function(d) {
        return yScale(d);
      });
  });
```

- above code triggers a change to visuals for each call to the event listener
- eg: change the colours
 - *add call to `fill()` to update bar colours*


```
.attr("fill", function( d) {
  return "rgb( 0, 0, " + (d * 10) + ")";
});
```

- DEMO - update bar colours

Image - D3 Barcharts



Bar chart 3 - colours

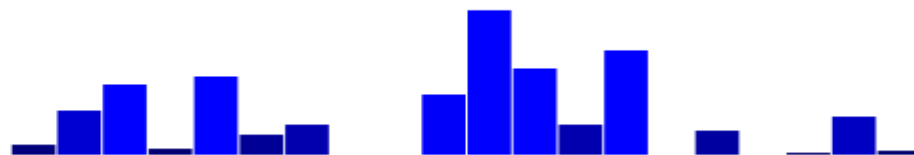

D3 - drawing colour updates for barcharts

Data visualisation - D3

Drawing - add interaction - transitions

- adding a fun transition in D3 is as simple as adding the following,

```
.transition()
```

- add this to above code chain to get a fun and useful transition in the data
- animation reflects the change from the old to the new data
- add a call to the `duration()` function
 - *allows us to specify a time delay for the transition*
 - *quick, slow...we can specify each based upon time*
- chain the `duration()` function after `transition()`

```
.transition().duration(1000)
```

- if we want to specify a constant easing to the transition
 - *use `ease()` with a `linear` parameter*

```
.ease(linear)
```

- other built-in options, including
 - *circle - gradual ease in and acceleration until elements snap into place*
 - *elastic - best described as springy*
 - *bounce - like a ball bouncing, and then coming to rest...*

Data visualisation - D3

Drawing - add interaction - transitions

- add a delay using the `delay ()` function

```
.transition()  
.delay(1000)  
.duration(2000)
```

- also set the `delay ()` function dynamically relative to the data,

```
.transition()  
.delay( function( d, i) {  
return i * 100;  
})  
.duration( 500)
```

- when passed an anonymous function
 - *datum bound to the current element is passed into `d`*
 - *index position of that element is passed into `i`*
- in the above code example, as D3 loops through each element
 - *delay for each element is set to $i * 100$*
 - *meaning each subsequent element will be delayed 100ms more than preceding element*
- DEMO - transitions - interactive sort

Data visualisation - D3

Drawing - add interaction - adding values and elements

- select all of the bars in our chart
 - *we can rebind the new data to those bars*
 - *and grab the new update as well*

```
var bars = svg.selectAll("rect")  
  .data(dataset);
```

- if more new elements, bars in our example, than original length
 - *use `enter()` to create references to those new elements that do not yet exist*
- with these reserved elements
 - *we can use `append()` to add those new elements to the DOM*
 - *now updates our bar chart as well*
- now made the new `rect` elements
 - *need to update all visual attributes for our `rects`*
 - *set `x`, and `y` position relative to new dataset length*
 - *set width and height based upon new `xScale` and `yScale`*
 - *calculated from new dataset length*

Data visualisation - D3

Drawing - add interaction - removing values and elements

- more DOM elements than provided data values
 - D3's **exit** selection contains references to those elements without specified data
 - **exit** selection is simply accessed using the `exit()` function
- grab the `exit` selection
- then transition exiting elements off the screen
 - for example to the right
- then finally remove it

```
bars.exit()  
  .transition()  
    .duration(500)  
    .attr("x", w)  
    .remove();
```

- `remove()` is a special transition method that awaits until transition is complete
- then deletes element from DOM forever
 - to get it back, we'd need to rebuild it again

Data visualisation - D3


Drawing - SVG scatterplot - intro

- scatterplot allows us to visualise two sets of values on two different axes
 - *one set of data against another*
- plot one set of data on x axis, and the other on the y axis
- often create dimensions from our data
 - *helps us define patterns within our dataset*
 - *eg: date against age, or age against fitness...*
- dimensions will also be represented relative to x and y axes
- create our scatterplot using SVG
 - *add our SVG to a selected element*

Image - D3 Scatterplot

Testing - D3

[Home](#) | [d3 data drawing scatter](#)

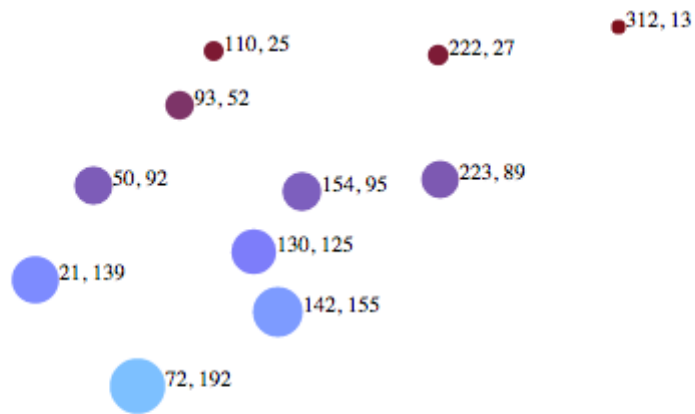

D3 - drawing a basic scatterplot

Data visualisation - D3

Drawing - SVG scatterplot - data

- data for the scatterplot is normally stored as a multi-dimensional representation
 - *comparison x and y points*
- eg: we could store this data in a multi-dimensional array

```
var dataset = [  
    [10, 22], [33, 8], [76, 39], [4, 15]  
];
```

- in such a multi-dimensional array
 - *inner array stores the comparison data points for our scatterplot*
 - *each inner array stores x and y points for scatterplot diagram*
- we can also store such data in many different structures
 - eg: JSON...

Data visualisation - D3

Drawing - SVG scatterplot - create SVG

- need to create an element for our SVG
 - *allows us to draw and output all of our required shapes*

```
d3.select("body").append("svg");
```

- appends to the body an SVG element
 - *useful to encapsulate this new DOM element within a variable*

```
var svg = d3.select("body").append("svg");
```

- variable effectively works as a reference
 - *points to the newly created SVG object*
 - *allows us to use this reference to access element in the DOM*

Data visualisation - D3

Drawing - SVG scatterplot - build scatterplot

- as with our barchart, we can set the width and height for our scatterplot,

```
//width & height  
var w = 750;  
var h = 200;
```

- we will need to create circles for use with scatterplot instead of rectangles

```
svg.selectAll('circle')  
  .data(dataset)  
  .enter()  
  .append('circle');
```

- corresponding to drawing circles
 - set cx , the x position value of the centre of the circle
 - set cy , the y position value of the centre of the circle
 - set r , the radius of the circle

Data visualisation - D3

Drawing - SVG scatterplot - adding circles

- draw circles for scatterplot

```
.attr('cx', function(d) {  
    return d[0]; //get first index value for inner array  
})  
.attr('cy', function(d) {  
    return d[1]; //get second index value for inner array  
})  
.attr('r', 5);
```

- outputs simple circle for each inner array within our supplied multi-dimensional dataset
- start to work with creating circle sizes relative to data quantities
- set a dynamic size for each circle
 - *representative of the data itself*
 - *modify the circle's area to correspond to its y value*
- as we create SVG circles, we cannot directly set the area
 - *so we need to calculate the radius r*
 - *then modify that for each circle*

Data visualisation - D3

Drawing - SVG scatterplot - calculate dynamic area

- assuming that `d[1]` is the original area value of our circles
 - *get the square root and set the radius for each circle*
- instead of setting each circle's radius as a static value
 - *now use the following*

```
.attr('r', function(d) {  
    return Math.sqrt(d[1]);  
});
```

- use the JavaScript `Math.sqrt()` function to help us with this calculation

Data visualisation - D3

Drawing - SVG scatterplot - add colour

- as with a barchart
- also set a dynamic colour relative to a circle's data

```
.attr('fill', function (d) {  
    return 'rgb(125,' + (d[1]) + ', ' + (d[1] * 2) + ')';  
});
```

Data visualisation - D3

Drawing - SVG scatterplot - add labels


```
//add labels for each circle
svg.selectAll('text')
  .data(dataset)
  .enter()
  .append('text')
  .text(function(d) {
    return d[0] + ', ' + d[1]; //set each data point on the text label
  })
  .attr('x', function(d) {
    return d[0];
  })
  .attr('y', function(d) {
    return d[1];
  })
  .attr('font-family', 'serif')
  .attr('font-size', '12px')
  .attr('fill', 'navy');
```

- start by adding text labels for our data
 - *adding new text elements where they do not already exist*
- then set the text label itself for each circle
 - *using the data values stored in each inner array*
- make the label easier to read
 - *set x and y coordinates relative to data points for each circle*
- set some styles for the labels

Image - D3 Scatterplot

Testing - D3

[Home](#) | [d3 data drawing scales](#)

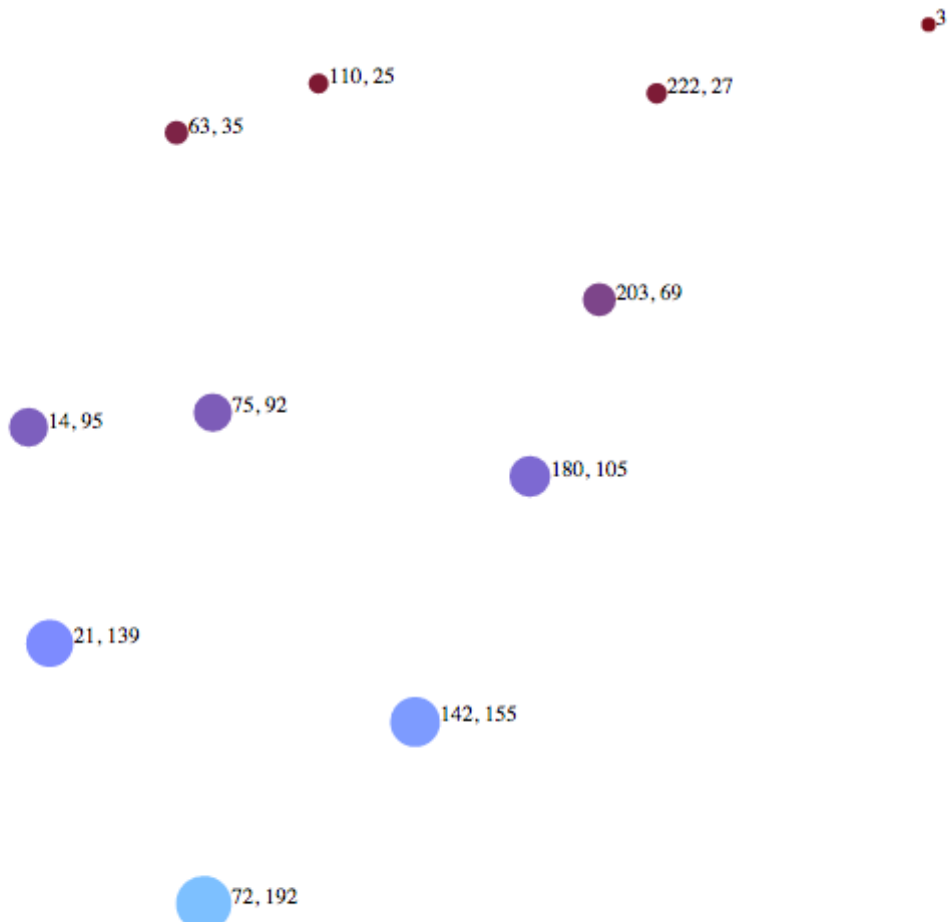

D3 - drawing a basic scatterplot 2

Data visualisation - D3

Drawing - SVG - scales

- in D3, scales are defined as follows,

"Scales are functions that map from an input domain to an output range"

Bostock, M.

- you can specify your own scale for the required dataset
 - *eg: to avoid massive data values that do not translate correctly to a visualisation*
 - *scale these values to look better within you graphic*
- to achieve this result, you simply use the following pattern.
 - *define the parameters for the scale function*
 - *call the scale function*
 - *pass a data value to the function*
 - *the scale function returns a scaled output value for rendering*
- also define and use as many scale functions as necessary for your visualisation
- important to realise that a scale has no direct relation to the visual output
 - *it is a mathematical relationship*
- need to consider scales and axes
 - *two separate, different concepts relative to visualisations*

Data visualisation - D3

Drawing - SVG - domains and ranges

- *input domain* for a scale is its possible range of input data values
 - *in effect, initial data values stored in your original dataset*
- *output range* is the possible range of output values
 - *normally use as the pixel representation of the data values*
 - *a personal consideration of the designer*
- normally set a minimum and maximum *output range* for our scaled data
- scale function then calculates the scaled output
 - *based upon original data and defined range for scaled output*
- many different types of scale available for use in D3
- three primary types
 - *quantitative*
 - *ordinal*
 - *time*
- *quantitative* scale types also include other built-in scale types
- many methods available for the scale types

Data visualisation - D3

Drawing - SVG - building a scale

- start building our scale in D3
 - use `d3.scale` with our preferred scale type

```
var scale = d3.scale.linear();
```

- to use the scale effectively, we now need to set our input domain

```
scale.domain([10, 350]);
```

- then we set the output range for the scale

```
scale.range([1, 100]);
```

- we can also chain these methods together

```
var scale = d3.scale.linear()  
    .domain([10, 350])  
    .range([1, 100]);
```

Data visualisation - D3

Drawing - SVG - adding dynamic scales

- we could pre-define values for our scale relative to a given dataset
- makes more sense to abstract these values relative to the defined dataset
- we can now use the D3 array functions to help us set these scale values
 - *eg; find highest number in array dataset*

```
d3.max(dataset, function(d) {  
    return d[0];  
});
```

- returns highest value from the supplied array
- getting minimum value in array works in the same manner
 - *with d3.min() being called instead*
- now create a scale function for x and y axes


```
var scaleX = d3.scale.linear()  
    .domain([0, d3.max(dataset, function(d) { return d[0]; })])  
    .range([0, w]); //set output range from 0 to width of svg
```

- Y axis scale modifies above code relative to provided data, d[1]
 - *range uses height instead of width*
- for a scatterplot we can use these values to set cx and cy values

Image - D3 Scatterplot

Testing - D3

[Home](#) | [d3 data drawing axes](#)

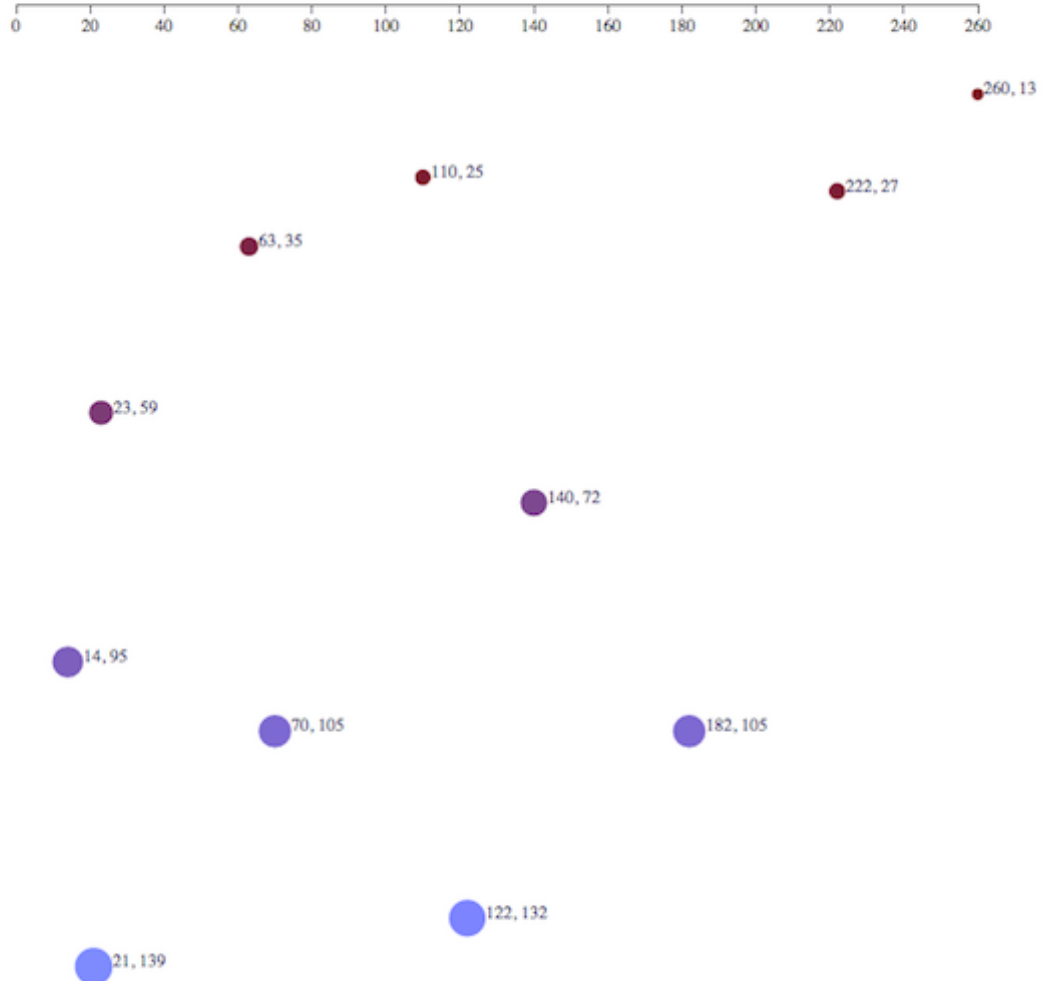

D3 - add axis

Data visualisation - D3

Drawing - SVG - adding dynamic scales

- a few data visualisation examples
- Tests 1
- Tests 2

React JavaScript Library

overview

- **React** began life as a port of a custom PHP framework called XHP
 - *developed internally at Facebook*
- XHP, as a PHP framework, was designed to render the full page for each request
- **React** developed from this concept
 - *creating a client-side implementation of loading the full page*
- **React** can, therefore, be perceived as a type of *state machine*
 - *control and manage inherent complexity of state as it changes over time*
- able to achieve this by concentrating on a narrow scope for development,
 - *maintaining and updating the DOM*
 - *responding to events*
- **React** is best perceived as a view library
 - *no definite requirements or restrictions on storage, data structure, routing...*
- allows developers freedom
 - *incorporate **React** code into a broad scope of applications and frameworks*

React JavaScript Library

why use React?

- React is often considered the V in the traditional MVC
- [React(<http://facebook.github.io/react/docs/why-react.html>) was designed to solve one problem
 - ***building large applications with data that changes over time***
- React can best be considered as addressing the core concerns
 - *simple, declarative, components*
- simple - define how your app should look at any given point in time
 - *React handles all UI changes and updates in response to data changes*
- declarative - as data changes, React effectively refreshes your app
 - *sufficiently aware to only update those parts that have changed*
- components - fundamental principle of React is building reusable components
 - *components are encapsulated in their design and concepts*
 - *they make it simple for code re-use, testing...*
 - *in particular, the separation of design and app concerns in general*
- React leverages its built-in, powerful rendering system to produce
 - *quick, responsive rendering of DOM in response to received state changes*
- uses a virtual DOM

- enables *React* to maintain and update the *DOM* without the lag of reading it as well

React JavaScript Library

state changes

- as **React** is informed of a state change, it re-runs render functions
- enables it to determine a new representation of the page in its virtual DOM
- then automatically translated into the necessary changes for the new DOM
 - *reflected in the new rendering of the view*
- may, at first glance, appear inherently slow
 - *React uses an efficient algorithm*
 - *checks and determines differences*
 - *differences between current page in the virtual DOM and the new virtual one*
- from these differences it makes the minimal set of necessary updates to the rendered DOM
- creates speed benefits and gains
 - *minimises usual reflows and DOM manipulations*
- also minimises effect of cascading updates caused by frequent DOM changes and updates

React JavaScript Library

component lifecycle

- in the lifecycle of a component
 - *its props or state might change along with any accompanying DOM representation*
- in effect, a component is a known state machine
 - *it will always return the same output for a given input*
- following this logic, React provides components with certain *lifecycle* hooks
 - *instantiation - mounting*
 - *lifetime - updating*
 - *teardown - unmounting*
- we may consider these hooks
 - *first through the instantiation of the component*
 - *then its active lifetime*
 - *finally its teardown*

React JavaScript Library

a few benefits

- one of the main benefits of this virtual approach
 - *avoidance of micro-managing any updates to the DOM*
- a developer simply informs React of any changes
 - *such as user input*
- React is able to process those passed changes and updates
- React has inherent benefit of delegating all events to a single event handler
 - *naturally gives React an associated performance boost*

React JavaScript Library

getting started - part I

- React's starter kit
 - *gives us the required React JS file, the JSX transform JS file, and many examples and demos*
- choose whether we want to use
 - *JSX, plain JavaScript, or pre-compile the former into the latter before deploying our application*

```
<!DOCTYPE html>
<html>
  <head>
    <title>Hello React!</title>
    <script src="build/react.js"></script>
    <script src="build/JSXTransformer.js"></script>
  </head>
  <body>
    <div id="example"></div>
    <script type="text/jsx">
      React.render(
        <h1>Hello React World!</h1>,
        document.getElementById('example')
      );
    </script>
  </body>
</html>
```

- uses the JSX Transformer to create plain JavaScript for rendering

React JavaScript Library

getting started - part 2

- perform offline transform using **react-tools**, available as an *npm* package

```
npm install -g react-tools
```

- using these tools, translate our React code file, `src/helloworld.js`, to plain JavaScript

```
jsx --watch src/ build/
```

- **NB:** `build/helloworld.js` autogenerated whenever we make a change in our React code
- updated HTML source file is as follows

```
<!DOCTYPE html>
<html>
  <head>
    <title>Hello React!</title>
    <!-- required react files -->
    <script src="build/react.js"></script>
    <!-- no need for JSX transformer if we use NPM package React too
    <!--<script src="build/JSXTransformer.js"></script>-->
  </head>
  <body>
    <div id="example"></div>
    <script src="build/helloworld.js"></script>
  </body>
</html>
```

React JavaScript Library

JSX - intro

- JSX stands for **JavaScript XML**
 - *follows an XML familiar syntax for developing markup within React components*
- JSX is not compulsory within React
 - *it makes components easier to read and understand*
 - *its structure is more succinct and less verbose*
- A few defining characteristics of JSX
 - *each JSX node maps to a function in JavaScript*
 - *JSX does not require a runtime library*
 - *JSX does not supplement or modify the underlying semantics of JavaScript*

React JavaScript Library

JSX - benefits

- why use JSX, in particular when it simply maps to JavaScript functions?
- many of the inherent benefits of JSX become more apparent
 - *as an application, and its code base, grows and becomes more complex*
- benefits can include
 - *a sense of familiarity - easier with experience of XML and DOM manipulation*
 - *eg: React components capture all possible representations of the DOM*
 - *JSX transforms an application's JavaScript code into semantic, meaningful markup*
 - *permits declaration of component structure and information flow using a similar syntax to HTML*
 - *permits use of pre-defined HTML5 tag names and custom components*
 - *easy to visualise code and components*
 - *considered easier to understand and debug*
 - *ease of abstraction due to JSX transpiler*
 - *abstracts process of converting markup to JavaScript*
 - *unity of concerns*
 - *no need for separation of view and templates*
 - *React encourages discrete component for each concern within an application*
 - *encapsulates the logic and markup in one definition*

React JavaScript Library

JSX - composite components

- example React component might allow us to output a HTML heading

```
var heading = React.createClass({
  render: function() {
    return (
      <div className="heading">
        <h2>Welcome</h2>
      </div>
    );
  }
});
```

- currently fixed to Welcome heading
- now update this example to work with dynamic values
- JSX considers values dynamic if they are placed between curly brackets { . . }
 - *treated as JavaScript context*

```
var heading = 'Welcome';
<h2>{heading}</h2>
```

React JavaScript Library

JSX - more dynamic values

- also call functions
 - *move some logic for a component to a standard JavaScript function*
- then call this function, plus any supplied parameters
- React can also evaluate arrays, and then output each value

```
var heading = React.createClass({
  render: function() {
    var text = ['welcome', 'home'];
    return (
      <h3>{text}</h3>
    );
  }
});

React.render(<heading />, document.getElementById('example'));
```

React JavaScript Library

JSX - conditionals

- a component's markup and its logic are inherently linked in React
- this naturally includes *conditionals*, *loops*...
- adding `if` statements directly to JSX will create invalid JavaScript

1. ternary operator

```
render: function() {  
  return <div className={  
    this.state.isComplete ? 'is-complete' : ''  
  }>...</div>  
}
```

2. variable

```
getIsComplete: function() {  
  return this.state.isComplete ? 'is-complete' : '';  
},  
render: function() {  
  var isComplete = this.getIsComplete();  
  return <div className={isComplete}>...</div>  
}
```

3. function call

```
getIsComplete: function() {  
  return this.state.isComplete ? 'is-complete' : '';  
},  
render: function() {  
  return <div className={this.getIsComplete()}>...</div>;  
}
```

- to handle React's lack of output for *null* or *false* values
 - use a boolean value and follow it with the desired output

React JavaScript Library

JSX - non-DOM attributes - part I

- in JSX, there are currently three special attribute names
 - *key*
 - *ref*
 - *dangerouslySetInnerHTML*

1. *key*

- an optional unique identifier that remains consistent throughout render passes
- informs React so it can more efficiently select when to reuse or destroy a component
- helps improve the rendering performance of the application.
- eg: if two elements already in the DOM need to switch position
 - *React is able to match the keys and move them*
 - *does not require unnecessary re-rendering of the complete DOM*

React JavaScript Library

JSX - non-DOM attributes - part 2

2. ref

- ref permits parent components to easily maintain a reference to child components
 - *available outside of the render function*
- to use ref, simply set the attribute to the desired reference name

```
render: function() {  
  return <div>  
    <input ref="myInput" ... />  
  </div>;  
}
```

- able to access this ref using the defined `this.refs.myInput`
 - *access anywhere in the component*
 - *object accessed through this ref known as a backing instance*
- **NB:** not the actual DOM
 - *a description of the component React uses to create the DOM when necessary*
- access DOM itself for this ref
 - *use `this.refs.myInput.getDOMNode()`, where myInput is name of previously defined ref*

React JavaScript Library

JSX - non-DOM attributes - part 3

3. dangerouslySetInnerHTML

- When absolutely necessary, React can set HTML content as a string using this attribute
- to correctly use this property set it as an object with key `__html`

```
render: function() {  
  var htmlString = {  
    __html: "<span>...your html string...</span>"  
  };  
  return <div dangerouslySetInnerHTML={htmlString}></div>;  
}
```

React JavaScript Library

JSX - reserved words

- JSX transforms to plain JavaScript functions
 - *means there are some reserved or special attributes*
 - *eg: we can't use `class` or `for`*
- to create a form label with the `for` attribute we can use `htmlFor` instead

```
<label htmlFor="text...">
```

- create a custom class we can use `className`

```
<div className={class...}>
```

React JavaScript Library

data flow

- data flows in one direction in React
 - *namely from **parent to child***
- helps to make components nice and simple, and predictable as well
- components take *props* from the parent, and then render
- if a *prop* has been changed, for whatever reason
 - *React will update the component tree for that change*
 - *then re-render any components that used that property*
- Internal state also exists for each component
 - *state should only be updated within the component itself*
- we can think of data flow in React
 - *in terms of *props* and *state**

React JavaScript Library

data flow - props - part I

- props can hold any data and are passed to a component for usage
- set props on a component during instantiation

```
var classics = [{ title: 'Greek'}];  
<ListClassics classics={classics}/>
```

- also use the setProps method on a given instance of a component

```
var ListClassics = React.createClass({  
  render: function() {  
    return (  
      <li className="classic">{this.props.classics}</li>  
    );  
  }  
});  
  
var classics = [{ title: 'Greek'}];  
var listClassics = React.render (  
  <ListClassics/>,  
  document.getElementById('example')  
);  
  
listClassics.setProps({ classics: classics });
```

React JavaScript Library

data flow - props with JSX

- set props using `{ }` syntax
 - *allows us to pass variables of any type via JavaScript injection*

```
<a href={'/classics/' + classic.id}>{classic.title}</a>
```

- also pass event handlers as props

```
var EditButton = React.createClass({
  render: function() {
    return (
      <a className='button edit' onClick={this.handleClick}>Edit</a>
    );
  },
  handleClick: function() {
    //handle click...
    alert('edit button clicked...');
  }
});
```

React JavaScript Library

state - intro - part I

- a component in React is able to house *state*
- *State* is inherently different from *props* because it is internal to the component
- it is particularly useful for deciding a view state on an element
 - *eg: we could use state to track options within a hidden list or menu*
 - *track the current state*
 - *change it relative to component requirements*
 - *then show options based upon this amended state*
- **NB:** considered bad practice to update state directly using `this.state`
 - *use the method `this.setState`*
- try to avoid storing computed values or components directly in *state*
- focus upon using simple data
 - *directly required for given component to function correctly*
- considered good practice to perform required calculations in the `render` function
- try to avoid duplicating *prop* data into *state*
 - *use the `props` data instead*

React JavaScript Library

state - intro - part 2

```
var EditButton = React.createClass({
  getInitialState: function() {
    return {
      editShow: true
    };
  },
  render: function() {
    if (this.state.editShow == false) {
      alert('edit button will be turned off...');
    }
    return (
      <button className="button edit" onClick={this.handleClick}>Edit</b
    );
  },
  handleClick: function() {
    //handle click...
    alert('edit button clicked');
    //set state after button click
    this.setState({ editShow: false });
  }
});
```

React JavaScript Library

state - intro - part 3

- when designing React apps, we often think about
 - **stateless children** and a **stateful parent**

A common pattern is to create several stateless components that just render data, and have a stateful component above them in the hierarchy that passes its state to its children via props.

React documentation

- need to carefully consider how to identify and implement this type of component hierarchy
 1. Stateless child components
 - *components should be passed data via props from the parent*
 - *to remain stateless they should not manipulate their state*
 - *they should send a callback to the parent informing it of a change, update etc*
 - *parent will then decide whether it should result in a state change, and a re-rendering of the DOM*
 2. Stateful parent component
 - *can exist at any level of the hierarchy*
 - *does not have to be the root component for the app*
 - *instead can exist as a child to other parents*
 - *use parent component to pass props to its children*
 - *maintain and update state for the applicable components*

React JavaScript Library

state - intro - part 4

1. props vs state

- *in React, we can often consider two types of model data*
- *includes `props` and `state`*
- *most components normally take their data from `props`*
- *allows them to render the required data*
- *as we work with users, add interactivity, and query and respond to servers*
- *we also need to consider the `state` of the application*
- *`state` is very useful and important in React*
- *also important to try and keep many of our components stateless*

2. state

- *React considers user interfaces, UIs, as simple state machines*
- *acting in various states and then rendering as required*
- *in React, we simply update a component's state*
- *then render the new corresponding UI*

React JavaScript Library

state - intro - part 5

I. How state works

- if there is a change in data in the application
 - *perhaps due to a server update or user interaction*
 - *quickly and easily inform React by calling `setState(data, callback)`*
- this method allows us to easily merge data into `this.state`
 - *re-renders the component*
- as re-rendering is finished
 - *optional `callback` is available and is called by React*
- this `callback` will often be unnecessary
 - *it's still useful to know it is available*

React JavaScript Library

state - intro - part 6

2. In state

- try to keep data in state to a minimum
 - *consider minimal possible representation of an application's state*
 - *helps build a stateful component*
- state should try to just contain minimal data
 - *data required by a component's event handlers to help trigger a UI update*
 - *if and when they are modified*
- such properties should also normally only be stored in `this.state`
- as we render the updated UI
 - *simply compute required information in the `render()` method based on this state*
 - *avoids need to keep computed values in sync in state*
 - *instead relying on React to compute them for us*

3. out of state

- in React, `this.state` should only contain minimal data
- minimum necessary to represent an application's UI state
- should contain
 - *computed value*
 - *React components*
 - *duplicated data from props*

React JavaScript Library

state - an example app - part I

- a simple app to allow us to test the concept of stateful parent and stateless child components
- resultant app outputs two parallel `div` elements
- allow a user to select one of the available categories
- then view all of the available *authors*

```
//static test data...
var AUTHORS = [
  {id:1, category: 'greek', categoryId:1, author: 'Plato'},
  {id:2, category: 'greek', categoryId:1, author: 'Aristotle'},
  {id:3, category: 'greek', categoryId:1, author: 'Aeschylus'},
  {id:4, category: 'roman', categoryId:2, author: 'Livy'},
  {id:5, category: 'greek', categoryId:1, author: 'Euripides'},
  {id:6, category: 'roman', categoryId:2, author: 'Ptolemy'},
  {id:7, category: 'greek', categoryId:1, author: 'Sophocles'},
  {id:8, category: 'roman', categoryId:2, author: 'Virgil'},
  {id:9, category: 'roman', categoryId:2, author: 'Juvenal'}
];
```

- start with some static data to help populate our app
- `categoryId` used to filter unique categories
 - *again to help get all of our authors per category*

React JavaScript Library

state - an example app - part 2

- for `stateless` child components
 - *need to output a list of filtered, unique categories*
 - *then a list of authors for each selected category*
- first child component is the `CategoryList`
 - *filters and renders our list of unique categories*
 - *`onClick` attribute is included*
 - *state is therefore passed via callback to the `stateful` parent*

React JavaScript Library

state - an example app - part 3

```
//output unique categories from passed data...
var CategoryList = React.createClass({
  render: function() {
    var category = [];
    return (
      <div id="left-titles" className="col-6">
        <ul>
          {this.props.data.map(function(item) {
            if (category.indexOf(item.category) > -1) {
            } else {
              category.push(item.category);
              return (
                <li key={item.id} onClick={this.props.onCategorySelected.bind
                  {item.category}
                </li>);
              }, this)}
            </ul>
          </div>
        );
      }
    });
```

- the component is accepting props from the parent component
 - *then informing this parent of a required change in state*
 - *change reported via a callback to the onCategorySelected method*
 - *does not change state itself*
 - *it simply handles the passed data as required for a React app*

React JavaScript Library

state - an example app - part 4

- need to consider our second `stateless` child component
 - *renders the user's chosen authors per category*
 - *user clicks on their chosen category*
 - *a list of applicable authors is output to the right side div*

```
var AuthorList = React.createClass({
  render: function() {
    return (
      <div id="right-titles" className="col-md-6 col-sm-6 col-xs-6">
        <ul>
          {this.props.authors.map(function(item) {
            return (
              <li key={item.id}>{item.author}</li>
            );
          })}
        </ul>
      </div>
    );
  }
});
```

- this component does not set any state
- simply rendering the passed props data for viewing

React JavaScript Library

state - an example app - part 5

- to handle updates to the DOM, we need to consider our `stateful` parent
- this component passes the app's data as `props` to the children
- handles the setting and updating of the `state` for app as well
- as noted in the React documentation,

State should contain data that a component's event handler may change to trigger a UI update.

- for this example app
 - *only need to store the `selectedCategoryAuthors` in `state`*
 - *enables us to update the UI for our app*

React JavaScript Library

state - an example app - part 6

```
var Container = React.createClass({
  getInitialState: function() {
    return {
      selectedCategoryAuthors: this.getCategoryAuthors(this.props.defaultCategoryId);
    };
  },
  getCategoryAuthors: function(categoryId) {
    var data = this.props.data;
    return data.filter(function(item) {
      return item.categoryId === categoryId;
    });
  },
  render: function() {
    return (
      <div className="container col-md-12 col-sm-12 col-xs-12">
        <CategoryList data={this.props.data} onCategorySelected={this.onCategorySelected}>
          <AuthorList authors={this.state.selectedCategoryAuthors} />
        </div>
      );
    },
  onCategorySelected: function(categoryId) {
    this.setState({
      selectedCategoryAuthors: this.getCategoryAuthors(categoryId)
    });
  }
});
```

React JavaScript Library

state - an example app - part 7

- our `stateful` parent component sets its initial state
 - *including passed data and app's selected category for authors*
- helps set a default state for the app
 - *we can then modify as a user selects their chosen category*
- callback for this user selected category is handled in the `onCategorySelected` method
 - *updates the app's state for the chosen `categoryId`*
 - *then leads to the app re-rendering the DOM for any changes*
- we still have computed data in the app's state
 - *as noted in the React documentation,*

this.state should only contain the minimal amount of data needed to represent your UIs state...

- we should now move our computations to the `render` method of the parent component
 - *then update state accordingly*

React JavaScript Library

state - an example app - part 8

```
var Container = React.createClass({
  getInitialState: function() {
    return {
      selectedCategoryId: this.props.defaultCategoryId
    };
  },
  render: function() {
    var data = this.props.data;
    var selectedCategoryAuthors = data.filter(function(item) {
      return item.categoryId === this.state.selectedCategoryId;
    }, this);
    return (
      <div className="container col-md-12 col-sm-12 col-xs-12">
        <CategoryList data={this.props.data} onCategorySelected={this.onCategorySelected}>
        <AuthorList authors={selectedCategoryAuthors} />
      </div>
    );
  },
  onCategorySelected: function(categoryId) {
    this.setState({selectedCategoryId: categoryId});
  }
});
```

- state is now solely storing the categoryId for our app
- can be modified and the DOM re-rendered correctly

React JavaScript Library

state - an example app - part 9

- we can then load this application
 - *passing data as props to the Container*
 - *data from JSON Authors*

```
var buildLibrary = React.render (  
  <Container data={AUTHORS} defaultCategoryId='1' />,  
  document.getElementById('library')  
);
```

- DEMO - state example

React JavaScript Library

state - minimal state - part I

- to help make our UI interactive
 - *use React's `state` to trigger changes to the underlying data model of an application*
 - *need to keep a minimal set of mutable state*
- **DRY**, or *don't repeat yourself*
 - *often cited as a good rule of thumb for this minimal set*
- need to decide upon an absolute minimal representation of the state of the application
 - *then compute everything else as required*
 - *eg: if we maintain an array of items*
 - *common practice to calculate array length as needed instead of maintaining a counter*

React JavaScript Library

state - minimal state - part 2

- as we develop an application with React
 - *start dividing our data into logical pieces*
 - *then start to consider which is state*
- for example,
 - *is it from props?*
 - *if yes, this is probably not state in React*
 - *does it update or change over time? (eg: due to API updates etc)*
 - *if yes, this is probably not state*
 - *can you compute the data based upon other state or props in a component?*
 - *if yes, it is not state*
- need to decide upon our minimal set of components that mutate, or own state
 - *React is based on the premise of one-way data flow down the hierarchy of components*
 - *can often be quite tricky to determine*
- initially, we can check the following
 - *each component that renders something based on state*
 - *determine the parent component that needs the state in the hierarchy*
 - *a common or parent component should own the state*
 - *NB: if this can't be determined*
 - *simply create a basic component to hold this state*
 - *add component at the top of the state hierarchy*

React JavaScript Library

component lifecycle - intro

- React components include a minimal lifecycle API
- provides the developer with enough without being overwhelming
 - *at least in theory*
- React provides what are known as *will* and *did* methods
 - *will* - called right before something happens
 - *did* - called right after something happens
- relative to the lifecycle, we can consider the following groupings of methods
 1. Instantiation (mounting)
 2. Lifetime (updating)
 3. Teardown (unmounting)
 4. Anti-pattern (calculated values)

React JavaScript Library

component lifecycle - method groupings - Instantiation (mounting)

- includes methods called upon instantiation for the selected component class
- eg: `getDefaultProps` or `getInitialState`
 - *use such methods to set default values for new instances*
 - *initialise a custom state of each instance...*
- also have the important `render` method
 - *builds our application's virtual DOM*
 - *the only required method for a component*
- `render` method has rules it needs to follow
 - *such as accessible data*
 - *return values*
- `render` method must also remain *pure*
 - *cannot change the state or modify the DOM output*
 - *returned result is the virtual DOM*
 - *compared against actual DOM*
 - *helps determine if changes are required for the application*

React JavaScript Library

component lifecycle - method groupings - Lifetime (updating)

- component has now been rendered to the user for viewing and interaction
- as a user interacts with the component
 - *they are changing the state of that component or application*
 - *allows us as developers to act on the relevant points in the component tree*
- State changes for the application
 - *those affecting the component*
 - *may result in update methods being called*
- we're telling the component how and when to update

React JavaScript Library

component lifecycle - method groupings - Teardown (unmounting)

- as React is finished with a component
 - *it must be unmounted from the DOM and destroyed*
- there is a single hook for this moment
 - *provides opportunity to perform necessary cleanup and teardown*
- `componentWillUnmount`
 - *removes component from component hierarchy*
 - *this method cleans up the application before component removal*
 - *undo custom work performed during component's instantiation*

React JavaScript Library

component lifecycle - method groupings - Anti-pattern (calculated values)

- React is particularly concerned with maintaining a single source of truth
- one point where props and state are derived, set...
- consider calculated values derived from props
 - *considered an anti-pattern to store these calculated values as state*
- if we needed to convert a props date to a string for rendering
 - *this is not state*
 - *it should simply be calculated at the time of render*

React JavaScript Library

Additional reading, material, and samples

- design thoughts
- event handling
- more composing components
- dom manipulation
- forms
- intro to flux
- animations
- lots of samples...

Source code - demos

D3.js

- D3 basic elements
- Drawing with SVG
- Drawing with SVG - barcharts
- Drawing with SVG - barcharts, colour, and text labels

React

- state example

References

- Chocolatey for Windows
 - *Chocolatey package manager for Windows*
- D3.js
 - *D3 - API reference*
 - *D3 - Easing*
 - *D3 - Scales*
 - *D3 - Wiki*
- Homebrew for OS X
 - *Homebrew - the missing package manager for OS X*
- Kirk, A. *Data Visualisation: A successful design process*. Packt Publishing. 2012.
- React
 - *React*
 - *React - API Reference*
 - *React - Starter Kit*
- W3 Selector API