

Comp 324/424 - Client-side Web Design

Fall Semester 2018 - Week 11

Dr Nick Hayward

HTML5, CSS, & JS - example - part 14

interaction - add a note - abstract code

- need to create a new function to abstract
 - *creation and output of a new note*
 - *manage the input field for our note app*
- moving logic from button click function to separate, abstracted function
- then call this function as needed
 - *for a button click or keyboard press*
 - *then create and render the new note*

```
//manage input field and new note output
function createNote() {
  //object for wrapper html for note
  var $note = $("

");
  //define input field
  var $note_text = $(".note-input input");
  //conditional check for input field
  if ($note_text.val() !== "") {
    //set content for note
    $note.html($note_text.val());
    //append note text to note-output
    $(".note-output").append($note);
    $note_text.val("");
  }
}


```

HTML5, CSS, & JS - example - part 15.1

interaction - add a note - travel.js

```
//overall app logic and loader...
function travelNotes() {
  "use strict";

  //manage input field and new note output
  function createNote() {
    //object for wrapper html for note
    var $note = $("

");
    //define input field
    var $note_text = $(".note-input input");
    //conditional check for input field
    if ($note_text.val() !== "") {
      //set content for note
      $note.html($note_text.val());
      //append note text to note-output
      $(".note-output").append($note);
      $note_text.val("");
    }
  }

  //handle user event for `add` button click
  $(".note-input button").on("click", function(e) {
    createNote();
  });

  //handle user event for keyboard press
  $(".note-input input").on("keypress", function(e){
    if (e.keyCode === 13) {
      createNote();
    }
  });
};
$(document).ready(travelNotes);


```

HTML5, CSS, & JS - example - part 15.2

interaction - add a note - plain JS

```
function travelNotes() {
  "use strict";

  // get a reference to `.note_output` in the DOM
  let noteOutput = document.querySelector('.note-output');
  // add note button
  let addNoteBtn = document.getElementById('add-note');
  // input field for add note
  let inputNote = document.getElementById('input-note');

  // add event listener to add note button
  addNoteBtn.addEventListener('click', () => {
    createNote(inputNote, noteOutput);
  });

  // add event listener for keypress in note input field
  inputNote.addEventListener('keypress', (e) => {
    // check key pressed by code - 13 - return
    if (e.keyCode === 13) {
      createNote(inputNote, noteOutput);
    }
  });
}

// create a note
// - input = value from input field
// - output = DOM node for output of new note
function createNote(input, output) {
  // create p node
  let p = document.createElement('p');
  // get value from input field for note
  let inputVal = input.value;
  // check input value
  if (inputVal !== '') {
    // create text node
    let noteText = document.createTextNode(inputVal);
    // append text to paragraph
    p.appendChild(noteText);
    // append new paragraph and text to existing note output
    output.appendChild(p);
    // clear input text field
    input.value = '';
  }
}
```

```
    }  
  }  
  
  // load app  
  travelNotes();
```

- DEMO 6 - travel notes - series I

HTML5, CSS, & JS - example - part 16

interaction - add a note - animate

- jQuery well-known for its simple ability to animate elements
- many built-in effects available in jQuery
 - *build our own as well*
- to `fadeIn` an element, effectively it needs to be hidden first
- we hide our newly created note
- then we can set it to `fadeIn` when ready
- many additional parameters for jQuery's `fadeIn` function
 - *customise a callback*
 - *change the speed of the animation*
 - *and so on...*
- jQuery API - `fadeIn`

HTML5, CSS, & JS - example - part 17

interaction - add a note - animate js

```
//manage input field and new note output
function createNote() {
  //object for wrapper html for note
  var $note = $("

");
  //define input field
  var $note_text = $(".note-input input");
  //conditional check for input field
  if ($note_text.val() !== "") {
    //set content for note
    $note.html($note_text.val());
    //hide new note to setup fadeIn...
    $note.hide();
    //append note text to note-output
    $(".note-output").append($note);
    //fadeIn hidden new note
    $note.fadeIn("slow");
    $note_text.val("");
  }
}


```

- DEMO 7 - travel notes - series I

HTML5, CSS, & JS - example - part 18

style and render notes

- we have some new notes in our app
- add some styling to help improve the look and feel of a note
- can set background colours, borders font styles...
- set differentiating colours for each alternate note
- allows us to try some pseudoclasses in the CSS
 - *specified paragraphs in the `note-output` section*

```
.note-output p:nth-child(even) {  
  background-color: #ccc;  
}  
.note-output p:nth-child(odd) {  
  background-color: #eee;  
}
```

- DEMO 8 - travel notes - series 1

HTML5, CSS, & JS - final thoughts

- a basic app that records simple notes
- many additional options we can add
- some basic functionality is needed to make it useful
 - *autosave - otherwise we lose our data each time we refresh the browser*
 - *edit a note*
 - *delete a note*
 - *add author information*
- additional functionality might include
 - *save persistent data to DB, name/value pairs...*
 - *organise and view collections of notes*
 - *add images and other media*
 - *local and APIs*
 - *add contextual information*
 - *again, local and APIs*
 - *structure notes, media, into collection*
 - *define related information*
 - *search, sort...*
 - *export options and sharing...*
- security, testing, design patterns

jQuery - basics - part I

intro

- jQuery offers us a number of useful tools and options for building web apps
- packaged, prepared JavaScript library
 - *a lot easier to work with, and develop for, than standard JavaScript*
- features simpler syntax and a concise set of options for manipulating the DOM
 - *often simply quicker and easier to write our apps with jQuery than JavaScript*
- jQuery is an inherently expressive approach to working with JavaScript
 - *in particular, manipulating the DOM*
- consistent approach to handling events in the DOM
- includes useful, simplified approach to adding AJAX functionality

jQuery - basics - part 2

selectors

- jQuery works with selectors using a similar concept as CSS
- we can use CSS selectors as a jQuery selector

```
$( "div" )  
$( "p" )  
$( ".note-input" )  
$( ".note-input button" )  
$( "p:nth-child(even)" )  
...
```

- jQuery may share many selectors with CSS
 - *some cases where jQuery will slightly differ*
- adds useful set of pseudoclasses and pseudoelements not in CSS

```
$( "p:parent" )
```

- use the above to find all paragraphs with children, including text
- a jQuery extension, and not part of the CSS specification

jQuery - basics - part 3

manipulate the DOM

```
<body>
  <!-- document header -->
  <header>
    <h3></h3>
    <p></p>
  </header>
  <!-- document main -->
  <main>
    <!-- note input -->
    <section class="note-input">
      <h5>add note</h5>
      <input><button></button>
    </section>
    <!-- note output -->
    <section class="note-output">
    </section>
  </main>
  <!-- document footer -->
  <footer>
    <p></p>
  </footer>
</body>
```

- benefits of using jQuery is the ease it offers for manipulating the DOM
- add elements, delete them, move them around...

jQuery - basics - part 4

add elements

- add a new element to our app
 - *simply append or prepend to a given position in the DOM*

```
//append note text to note-output  
$(".note-output").append($note);
```

- adds our new element, and content to the DOM
 - *end of the selected element in document*

```
//append note text to note-output  
$(".note-output").prepend($note);
```

- prepend to the document
 - *adds to the end of the selected element*
- additional options in jQuery, such as `prependTo ()`
- differ slightly on the target for the content
- useful to select an element, then add to another elsewhere in DOM

jQuery - basics - part 5

remove elements

- also remove elements from the DOM
- easiest option is to use the `remove()` function on a given selector

```
$("p:nth-child(even)").remove();
```

- also empty an element, remove all child elements from selected element
 - *remove all of the notes, those we added in paragraph elements*

```
$(".note-output p").empty();
```

- also temporarily remove elements from the window

```
$note.fadeOut("slow");
```

- elements are not removed from the DOM, their style is updated

```
display: none;
```

jQuery - basics - part 6

events and async

- jQuery uses a standard pattern for events and handling

```
//handle user event for `add` button click
$(".note-input button").on("click", function(e) {
  ...
});
```

- allows us to set up listeners for many user triggered events
- commonly known as **event-driven** or **asynchronous** programming
- main difference with more traditional procedural patterns, is the way we use **callbacks**
 - *allow us to set functions for later execution*
- functions are set as parameters, then executed at the appropriate, required time
- callbacks are not only appropriate for interaction or user events
- use them throughout our programming to schedule functions and execution

```
setTimeout(function() {
  ...
}, 2000);
```

- an issue with **asynchronous** programming
 - *often simply being aware of the execution order or sequence of events*

Image - HTML5, CSS, & JS - DOM recap

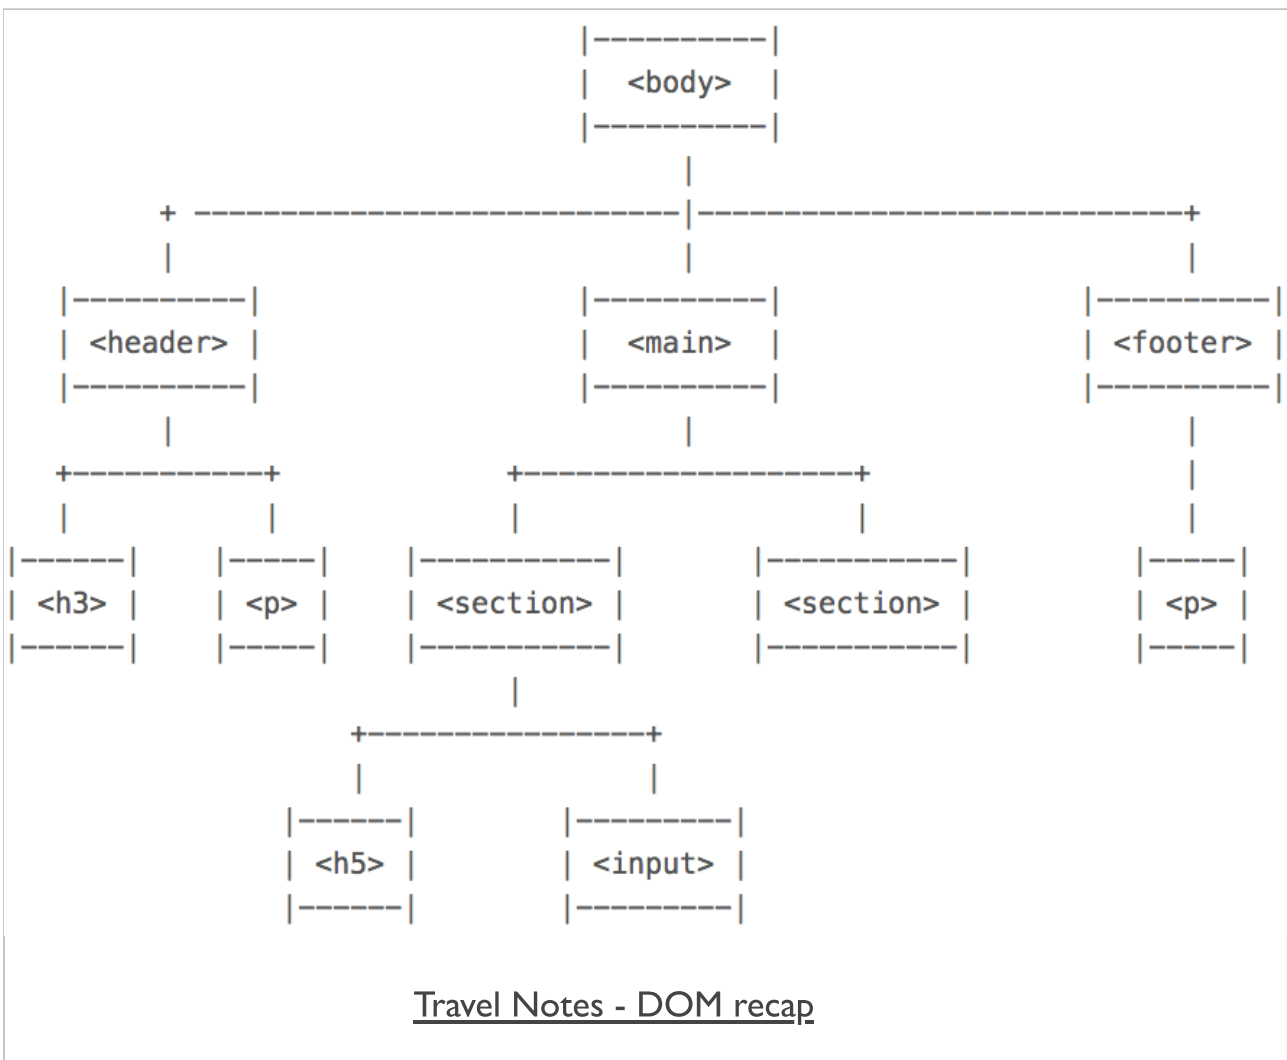


Image - Travel Notes - Series I - recap

travel notes

record notes from various cities and places visited...

add note

add

have fun in St Tropez

ride the tram in Nice

play golf in Mougins

app's copyright information, additional links...

Travel Notes - Series I - Demo 8 recap

HTML5, CSS, & JS - example - add-ons

new features and add-ons...

- delete all notes
- delete a single note
- new event handlers
- additional styling

HTML5, CSS, & JS - example - part I.I

delete option - all notes

- standard `remove()` function in jQuery

```
$("p").remove();
```

- option to **delete all** notes from `.note-output`
- add a new toolbar for note controls and options

```
<section class="note-controls">
  <button id="notes-delete">Delete all</button>
</section>
```

- then add some simple styling for this new toolbar

```
/* note controls */
.note-controls {
  margin: 10px 0 10px 0;
  padding: 2px;
  border-bottom: 1px solid #dedede;
  display: none;
}
/* simplify default button styles for note controls */
.note-controls button {
  padding: 2px;
  margin: 2px;
  border-radius: 0;
  border: 1px solid #dedede;
  cursor: pointer;
}
```

HTML5, CSS, & JS - example - part 1.2

delete option - all notes - plain js

```
// delete all notes button
let deleteAll = document.getElementById('notes-delete');

// add event listener for delete all notes...
deleteAll.addEventListener('click', () => {
  // get notes from DOM
  let notes = noteOutput.querySelectorAll('p');
  // loop through notes and remove a single note per iteration...
  for (let note of notes) {
    note.remove();
  }
});
```

HTML5, CSS, & JS - example - part 2.1

delete option - all notes

- note controls toolbar is hidden, by default in the CSS
- need some way to check its visibility as we add our notes
 - *no notes, then the toolbar is not required*

```
//check element visibility - expects single element relative to display:none  
function checkVisible(element) {  
  if (element.is(":hidden")) {  
    element.fadeIn();  
  }  
}
```

- simply checking a passed element to see whether it is hidden
 - *then fadeIn() as necessary*
- can update this method later on to check hidden and visible
- call this function as required

```
checkVisible($(".note-controls"));
```

HTML5, CSS, & JS - example - part 2.2

delete option - all notes - plain js

- use display property to check node

```
// check visibility of passed node
function checkVisible(node) {
  // check passed node's current visibility
  if (node.style.display !== 'block') {
    // show in DOM to allow fadeIn...
    node.style.display = 'block';
    // call fadeIn for node in DOM
    fadeIn(node);
  }
}
```

- & usage with a defined node

```
// define node to check...
let controls = document.getElementById('controls');
// call function
checkVisible(controls);
```

HTML5, CSS, & JS - example - part 2.3

delete option - all notes - plain js

- use `visibility` property to check node

```
// check visibility of passed node
function checkVisible(node) {
    // check passed node's current visibility
    if (node.style.visibility = 'hidden') {
        // show in DOM to allow fadeIn...
        node.style.display = 'block';
        node.style.visibility = 'visible';
        // call fadeIn for node in DOM
        fadeIn(node);
    }
}
```

HTML5, CSS, & JS - example - part 3

delete option - all notes

- add a note, the `.note-controls` toolbar is shown
 - ***delete all*** button now becomes available to our users

```
//handle deletion of all notes
$("#notes-delete").on("click", function(e) {
  var $note = $(".note-output p");
  $(this).parent().hide();
  $note.remove();
});
```

- creating a new handler for the click events on the `#notes-delete` button
- hides its own container, the notes toolbar
- then removes all of the notes, `p`, from the `.note-output` section

HTML5, CSS, & JS - example - part 4.I

JS code so far

```
//check element visibility - expects single element relative to display:none
function checkVisible(element) {
    if (element.is(":hidden")) {
        element.fadeIn();
    }
}
...
//handle deletion of all notes
$("#notes-delete").on("click", function(e) {
    var $note = $(".note-output p");
    $(this).parent().hide();
    $note.remove();
});
```

HTML5, CSS, & JS - example - part 4.2

JS code so far - plain JS

- hide parent node for controls...

```
// delete all notes button
let deleteAll = document.getElementById('notes-delete');

// add event listener for delete all notes...
deleteAll.addEventListener('click', () => {
  // hide parent controls node...
  deleteAll.parentNode.style.display = 'none';
  // get notes from DOM
  let notes = noteOutput.querySelectorAll('p');
  // loop through notes and remove a single note per iteration...
  for (let note of notes) {
    // remove single node
    note.remove();
  }
});
```

- DEMO 1 - travel notes - series 2

HTML5, CSS, & JS - example - part 5

delete option - all notes

- still making an assumption notes exist in the note-output section
- add an additional function to check element exists in the DOM or not
- use `length` property - plain JS & jQuery

```
$("#p").length
```

- new function for checking elements in the DOM - plain JS & jQuery

```
//check elements exists
function checkExist(element) {
  if (element.length) {
    return true;
  } else {
    return false;
  }
}
```

HTML5, CSS, & JS - example - part 6.I

delete option - all notes

- updated delete all notes option to include check for notes
- call `checkExist()` function in conditional statement

```
//handle deletion of all notes
$("#notes-delete").on("click", function(e) {
  //set note selector
  var $note = $(".note-output p");
  //check $note exists
  if (checkExist($note) === true) {
    //hide note-controls
    $(this).parent().hide();
    //remove all notes
    $note.remove();
  }
});
```

HTML5, CSS, & JS - example - part 6.2

delete option - all notes - plain JS

```
// add event listener for delete all notes...
deleteAll.addEventListener('click', () => {
  // get notes from DOM
  let notes = noteOutput.querySelectorAll('p');
  // check notes in DOM
  if (checkExist(notes) === true) {
    // hide parent controls node...
    deleteAll.parentNode.style.display = 'none';
    // loop through notes and remove a single note per iteration...
    for (let note of notes) {
      // remove single node
      note.remove();
    }
  }
});
```

- DEMO 2 - travel notes - series 2

Image - Travel Notes - Series 2 - demo 2

travel notes

record notes from various cities and places visited...

add note

add

Delete all

stroll along the Promenade des Anglais in Nice

lose money in Monaco

meet Picasso in Antibes

be seen in Cannes

app's copyright information, additional links...

Travel Notes - Series 2 - Demo 2

HTML5, CSS, & JS - example - part 7

delete option - per note

- consider adding a single delete option per note
- allowing a user to selectively delete their chosen note
 - *regardless of hierarchical position within the .note-output section*
- design decisions for such an option might include
 - *do we offer a selection option, such as checkboxes, to select one or more delete items*
 - *perhaps a single delete button per note*
 - *a drag and drop to delete option*
 - *there are many different ways to present and use this option*
- programmatically follow a similar pattern for deletion of the note
- three jQuery functions can help us remove elements from a document
 - *remove()*
 - *detach()*
 - *replaceWith()*

jQuery - removing elements - quick overview

- used `remove ()` function with delete all notes
 - *best used to remove elements permanently from a document*
 - *will **unbind** any attached event handlers for elements being removed*
 - *will return reference to removed elements, but not the original bound events*
- `detach ()` often used for any temporary removal requirements
 - *eg: update a lot of the DOM, detach affected elements, then insert later...*
 - *retains its event handlers, and we can add these elements later*

```
$("p").detach();
```

- then append the attached elements as required

```
var $detachP = $("p").detach();  
$detachP.appendTo("#detached");
```

- `replaceWith ()` replaces an element, or group of elements, with passed element
- event handlers for the replaced elements are unbound

```
var $replacedP = $(".note-output p").first().replaceWith("<p>replaced...</p>");
```


HTML5, CSS, & JS - example - part 8.1

delete option - per note

- simply need to delete the selected note
 - *use the same `remove()` function for single and all notes*
- add option per note to allow user to delete a required note
- add a delete button for each note
 - *add programmatically with each new note*

```
function createButton(buttonClass, buttonText) {  
  var $button = $('<button class="'+buttonClass+'" ">'+buttonText+'</button>');  
  return $button;  
}
```

- new function allows us to create simple buttons as required
 - *a specified class and button text passed as parameters*
 - *use function to build required delete button in `createNote()` function*

```
//create delete button  
var $delete_button = createButton("note-delete", "delete");
```

HTML5, CSS, & JS - example - part 8.2

delete option - per note - plain js

```
// create button element - pass class and text
function createButton(btnClass, btnTxt) {
    // create button node
    let btnNode = document.createElement('button');
    // create button text node
    let btnTextNode = document.createTextNode(btnTxt);
    // set attribute on button node
    btnNode.setAttribute('class', btnClass);
    // append text to button
    btnNode.appendChild(btnTextNode);
    // return new button node with text and attribute...
    return btnNode;
}
```

- then call as required,

```
// create delete button for note
let delButton = createButton('note-delete', 'delete');
```

HTML5, CSS, & JS - example - part 9.1

delete option - per note

- append delete option to note
 - *before adding note to the DOM in createNote function*

```
function createNote() {  
    ...  
    //set content for note  
    $note.html($note_text.val());  
    //append delete button to each note  
    $note.append($delete_button);  
    ...  
}
```

HTML5, CSS, & JS - example - part 9.2

delete option - per note - plain js

```
function createNote(input, output) {  
  // get value from input field for note  
  let inputVal = input.value;  
  
  // check input value  
  if (inputVal !== '') {  
    // create p node  
    let p = document.createElement('p');  
    // create delete button for note  
    let delButton = createButton('note-delete', 'delete');  
    // prepend button to note  
    p.prepend(delButton);  
    // create text node  
    let noteText = document.createTextNode(inputVal);  
    // append text to paragraph  
    p.appendChild(noteText);  
    // append new paragraph and text to existing note output  
    output.appendChild(p);  
    // call custom animation for fade in...  
    //fadeIn(p);  
    // clear input text field  
    input.value = '';  
  }  
  
  let controls = document.getElementById('app-controls');  
  checkVisible(controls);  
}
```

HTML5, CSS, & JS - example - part 10

delete option - per note

- with jQuery
 - *need to bind a click event to the dynamically created delete note button*
 - plain JS option simpler
- delete button is being added to the DOM dynamically
 - *need to add handler for single note deletion event to existing DOM element*
 - *add handler to parent `.note-output` and then new `button.note-delete`*

```
$(".note-output").on("click", "button.note-delete" , function() {  
    //delete parent note  
    $(this).parent().remove();  
    //set note selector  
    var $note = $(".note-output p");  
    //check for empty notes, and then remove note-controls  
    if (checkExist($note) === false) {  
        //hide note-controls  
        $(".note-controls").hide();  
    }  
});
```

- DEMO 3 - travel notes - series 2 - jQuery

Image - Travel Notes - Series 2 - demo 3

travel notes

record notes from various cities and places visited...

add note

breakfast in Antibes

lunch in Nice

dinner in Monaco

app's copyright information, additional links...

Travel Notes - Series 2 - Demo 3

HTML5, CSS, & JS - example - part II

delete option - per note

- now allow our users to delete a single note
- single note option is awkward at the moment
- simply allow a user to either mouseover or select a note to show additional options
 - *showing the available delete button*
- enable a user to select their note of choice
 - *need to bind a click event to a note*

```
//handle click event per note
$(".note-output").on("click", "p", function() {
  ...
});
```

- user selects a note
 - *no check for previous other visible delete buttons*
 - *ensure only delete button for selected note is shown*

Image - HTML5, CSS, & JS - too many delete buttons

travel notes

record notes from various cities and places visited...

add note

cannes note

nice note

monaco note

antibes note

app's copyright information, additional links...

Travel Notes - Week 6 - Too many delete buttons

HTML5, CSS, & JS - example - part 12.1

delete option - per note

- return to our earlier function, `checkVisible()`
- modify to allow better abstraction and usage
- modify to test for visibility
 - *then simply return a boolean value*

```
//check element visibility - expects single element relative to display:none
function checkVisible(element) {
  //check if element is hidden or not
  if (element.is(":hidden")) {
    return true;
  } else {
    return false;
  }
}
```

- also need to modify check for the `.note-controls` in `createNote()` function

```
...
//check visibility of note controls
if (checkVisible($(".note-controls")) === true) {
  $(".note-controls").fadeIn();
}
...
```

HTML5, CSS, & JS - example - part 12.2

delete option - per note - plain js

- note delete button

```
// add delete button for current note
// use anonymous FN instead of arrow FN
// this binds to clicked DOM node
delButton.addEventListener('click', function () {
    console.log('note delete...', this.parentNode);
    this.parentNode.remove();
});
```

- note delete button with check for notes
- no notes - hide *delete all* option

```
// add delete button for current note
// use anonymous FN instead of arrow FN
// this binds to clicked DOM node
delButton.addEventListener('click', function () {
    console.log('note delete...', this.parentNode);
    this.parentNode.remove();
    // get notes from DOM
    let notes = output.querySelectorAll('p');
    if (checkExist(notes) === false) {
        controls.style.display = 'none';
    }
});
```

- DEMO 3 - travel notes - series 2 - plain JS

HTML5, CSS, & JS - example - part 13.1

delete option - per note

- updated handler for note selection now checks for visible delete buttons

```
//handle click event per note
$(".note-output").on("click", "p", function() {
    //check if other delete buttons visible
    if (checkVisible($(".button.note-delete")) === true) {
        $(".button.note-delete").hide();
    }
    $(this).children("button.note-delete").show();
});
```

- bind handler for the user clicking on a note
- check whether other delete buttons are visible on any other notes
 - *if visible, we can simply hide these delete buttons*
 - *then show the delete option for the currently selected note*
- later abstract this function to handle other options associated with each note

HTML5, CSS, & JS - example - part 13.2

delete option - per note - plain JS

- check for current delete buttons per note
 - *hide each delete button*
 - *then, show delete button for current note...*

```
// click listener for note
p.addEventListener('click', function() {
  // get notes delete buttons from DOM
  let delBtns = output.querySelectorAll('.note-delete');
  if (checkExist(delBtns) === true) {
    for (let btn of delBtns) {
      btn.style.display = 'none';
    }
  }
  this.querySelector('.note-delete').style.display = 'inline';
});
```

- DEMO 4 - travel notes - series 2
 - *jQuery*
 - *plain JS*

HTML5, CSS, & JS - example - part 14

style note(s)

- add some additional styling to our notes
 - *start with some changes to the design of each note*
 - *then considered the overall `.note-output` section*
- remove styling for alternating notes, set uniform style per note

```
/* note paragraph output */  
.note-output p {  
  margin: 10px;  
  padding: 10px;  
  border: 1px solid #b1c4b1;  
  cursor:pointer;  
}
```

- need to add some styling for our delete button, and position it within each note

```
/* note delete button */  
.note-output p button.note-delete {  
  display: block;  
  padding: 5px;  
  margin: 5px 5px 10px 0;  
  border-radius: 0;  
  border: 1px solid #dedede;  
  cursor: pointer;  
}
```

HTML5, CSS, & JS - example - part 15

style note(s)

- add some styling for the button's hover pseudo-class
 - *acts as useful feedback to the user that the button is an active element*

```
.note-output p button.note-delete:hover {  
  background-color: #aaa;  
  color: #fff;  
}
```

- also consider adding some similar feedback to our note
 - *a sign of active as the user moves their mouse cursor over each note*

```
/* note paragraph output hover */  
.note-output p:hover {  
  border: 1px solid #1a3852;  
}
```

- DEMO 5 - travel notes - series 2
 - *jQuery*
 - *plain JS*

HTML5, CSS, & JS - example - part 16

style note(s)

- a couple of issues that still need to be fixed in the application
 - *first issue is lack of consistency in styling our buttons*
- fixed by abstracting our CSS styling for a default button
 - *specific button styles can be added later*

```
/* default button style */
button {
  padding: 2px;
  margin: 2px;
  border-radius: 0;
  border: 1px solid #dedede;
  cursor: pointer;
}
```

- removed the need for a ruleset to style the button for
 - *adding a note, delete all notes, and the single delete button per note*

HTML5, CSS, & JS - example - part 17

style note(s)

- also create a default ruleset for a button hover pseudo-class
 - *again reducing our need for repetition in the stylesheet*

```
/* default button hover style */  
button:hover {  
  background-color: #aaa;  
  color: #fff;  
}
```

- iterative development is fine
 - *continue to abstract styles, overall design, and logic as we develop an application*

HTML5, CSS, & JS - example - part 18

style note(s)

- second issue is the expected interaction with each note
 - *issue is simply that a user cannot choose to remove this option*
- should be able to toggle its view and options
- update interaction by modifying handler for click event on a note
 - **NB:** *toggle()* for events was removed in jQuery 1.9
 - *build our own*

```
//handle click event per note
$(".note-output").on("click", "p", function() {
    //check if other delete buttons visible
    if (checkVisible($(".button.note-delete")) === true) {
        //set all siblings to active=false to ensure checks are correct
        $(this).siblings().attr("active", "false");
        $(".button.note-delete").hide();
    }
    //then handle click event for current note
    if (!$ (this).attr("active") || $(this).attr("active") === "false") {
        $(this).attr("active", "true");
        $(this).children("button.note-delete").show();
    } else if ($(this).attr("active") === "true") {
        $(this).attr("active", "false");
        $(this).children("button.note-delete").hide();
    }
});
```

- DEMO 6 - travel notes - series 2

HTML5, CSS, & JS - example - part 19

a few extras to consider...

- alternative layouts
 - *grid*
 - *squares*
 - *snippet view*
 - *table*
 - *lists...*
- notifications
- snippets with expansion
- split views
 - *note snippet with contextual/media per note...*
- drag and drop delete
- filters
- sort options
- tags
- much, much more...

Image - Square notes - a bit of fun

travel notes

record notes from various cities and places visited...

add note

cannes

nice

monaco

antibes

frejus

st tropez

eze

app's copyright information, additional links...

Travel Notes - Week 6 - Squares

- DEMO - travel notes - squares

JS Objects - quick recap - part I

- important JavaScript primitive
 - *one of the most frequently used as well*
- created with curly braces,

```
var object1 = {  
  "a": "nine",  
  "b": "ten"  
};
```

- access internal variables of this object using the dot . operator

```
console.log(object1.a);
```

- update the value of an internal variable

```
object1.a = "amelia";
```

JS Objects - quick recap - part 2

- also create an empty variable, and then assign values as necessary

```
var object1 = {};
```

- an object can contain variables with values of different types
- store variables in an object with types such as strings, arrays, and even other objects
- function variables behave just like any other variables in JavaScript
 - *we can also store them in our objects as needed*

```
var $a = $("p");  
$a.hide();
```

- simply attach a function to a jQuery object

JSON - quick recap

- a JSON object is effectively a JavaScript object
 - *contained within curly braces*

```
{  
  "country": "France",  
  "city": "Marseille"  
}
```

- objects can contain multiple name/value pairs
- object stored in the form of a string
- to send a JS object
 - *create it in the application's code*
 - *then convert it to a string*
 - *finally use it as required*
- a lot of the AJAX is abstracted to JavaScript libraries

JSON - pros and cons

useful pros

- more concise, less verbose than XML and HTML
 - *potentially faster execution of data...*
- regularly used with JavaScript
 - *includes good support*
- language agnostic, interoperability
 - *can be used with many different programming languages*
- can also be called from many different domains
 - *eg: JSON-P...*

some cons

- may present security risk
 - *malicious content due to JavaScript XSS*
 - *need to verify source for JSON...*
- syntax is precise, unforgiving

JS and JSON - functions

- creating some JSON string is easy enough
- also easily create a JSON string from a JavaScript object
 - *and vice-versa*
- use the JavaScript `stringify` function

```
var jsonObject1 = JSON.stringify(object1);  
console.log(jsonObject1);
```

- similarly parse a JSON string to a JS object

```
var object2 = JSON.parse(jsonObject1);  
console.log(object2);
```


AJAX and JSON - part I

intro

- AJAX is a simple way to load data
 - *often new or updated data*
 - *into a current page without having to refresh the browser window*
- common form of data for work with AJAX is JSON
- many common usage scenarios and examples for AJAX
 - *autocomplete in forms*
 - *live filtering of search queries*
 - *real-time updates for content and data streams*
- also use AJAX to help us load data behind the scenes
 - *preparing content for our users before a specific request is received*
 - *helps to speed up page responses and data load times*
- AJAX uses an asynchronous model for processing requests
- user can continue to perform various tasks, queries, and work
 - *whilst the browser itself continues to load data*
- inherent benefit of AJAX should include
 - *a more responsive site, intuitive usage and interface experience*

AJAX and JSON - part 2

asynchronous model

- traditional synchronous model normally stops a page
 - *until it has loaded and processed a requested script*
- AJAX enables a browser to request data from the server
 - *without this synchronous pause in usage*
- AJAX's **asynchronous processing model**
 - *often known as **non-blocking***
 - *allows a page to load data and process user's interactions*
- server responds with the requested data
 - *an event will be fired by the browser*
 - *event can then call a function to process the data*
 - *often JSON, XML, or simply HTML*
- browser will use an **XMLHttpRequest** object to help handle these AJAX requests
- browser will not wait for a response

JSON and jQuery - get a file - part I

initial setup

- try some AJAX with a JSON file

```
{  
  "country": "France",  
  "city": "Marseille"  
}
```

- save this content to our docs/json/trips.json file
- run on a server, local or remote
 - browser security restrictions for JavaScript
 - local server such as XAMPP, Python's SimpleHTTPServer, Node.js...

```
python -m SimpleHTTPServer 8080
```

- initially use the `getJSON()` function to test reading this content

```
$.getJSON("docs/json/trips.json", function(trip) {  
  console.log(trip);  
});
```

- console output is expected JSON object

```
Object { country: "France", city: "Marseille" }
```

JSON and jQuery - get a file - part 2

test with site

- now use this return object to load our data as required within a site

```
//overall app logic and loader...
function loadJSON() {
    "use strict";

    $.getJSON("docs/json/trips.json", function(trip) {
        //element for trip data
        var $tripData = $("

");
        //add some content from json to element
        $tripData.html(trip.city + ", " + trip.country);
        //append content to .note-output section
        $(".note-output").append($tripData);
    });
};

$(document).ready(loadJSON);


```

- DEMO - AJAX I - AJAX - demo I

JSON and jQuery - get a file - part 3

array for trips...

Whilst the previous example is useful, for our application we obviously need to store multiple trips. So, multiple countries, multiple cities, and so on. Therefore, we need to consider working with JSON arrays. We'll update our `trips.json` file as follows to test loading cities,

```
{
  "cities": [
    {
      "name": "Marseille",
      "region": "Provence-Alpes-Côte d'Azur"
    },
    {
      "name": "Paris",
      "region": "Île-de-France"
    }
  ]
}
```

JSON and jQuery - get a file - part 4

load an array for trips...

- update JavaScript to load array and set data as required

```
//overall app logic and loader...
function loadJSON() {
    "use strict";

    $.getJSON("docs/json/trips.json", function(trips) {
        //element for trip data
        var $cityData = $("<ul>");

        //iterate over cities array - trips.cities...
        var $cities = trips.cities;
        $cities.forEach(function (item) {
            var $city = $("<li>");
            $city.html(item.name + " in the region of " + item.region);
            $cityData.append($city);
        })
        //append list to .note-output
        $(".note-output").append($cityData);
    });
};

$(document).ready(loadJSON);
```

- DEMO - AJAX 2 - AJAX - demo 2

Demos

- Travel notes app - series 1
 - *DEMO 6 - travel notes - demo 6*
 - *DEMO 7 - travel notes - demo 7*
 - *DEMO 8 - travel notes - demo 8*
- Travel notes app - series 2 - jQuery
 - *DEMO 1 - travel notes - demo 1*
 - *DEMO 2 - travel notes - demo 2*
 - *DEMO 3 - travel notes - demo 3*
 - *DEMO 4 - travel notes - demo 4*
 - *DEMO 5 - travel notes - demo 5*
 - *DEMO 6 - travel notes - demo 6*
- Travel notes app - series 2 - plain JS
 - *DEMO 3 - travel notes - series 2 - plain JS*
 - *DEMO 4 - travel notes - series 2 - plain JS*
 - *DEMO 5 - travel notes - series 2 - plain JS*
- AJAX
 - *DEMO 1 - AJAX - demo 1*
 - *DEMO 2 - AJAX - demo 2*

Resources

- jQuery
 - *jQuery*
 - *jQuery API*
 - *jQuery - .getJSON()*
 - *jQuery :parent selector*
- MDN
 - *MDN - JS Objects*
- Various
 - *Create your own AJAX loader*
- W3
 - *W3 - JS Object*
 - *W3 - JS Performance*