


How messages are sent?

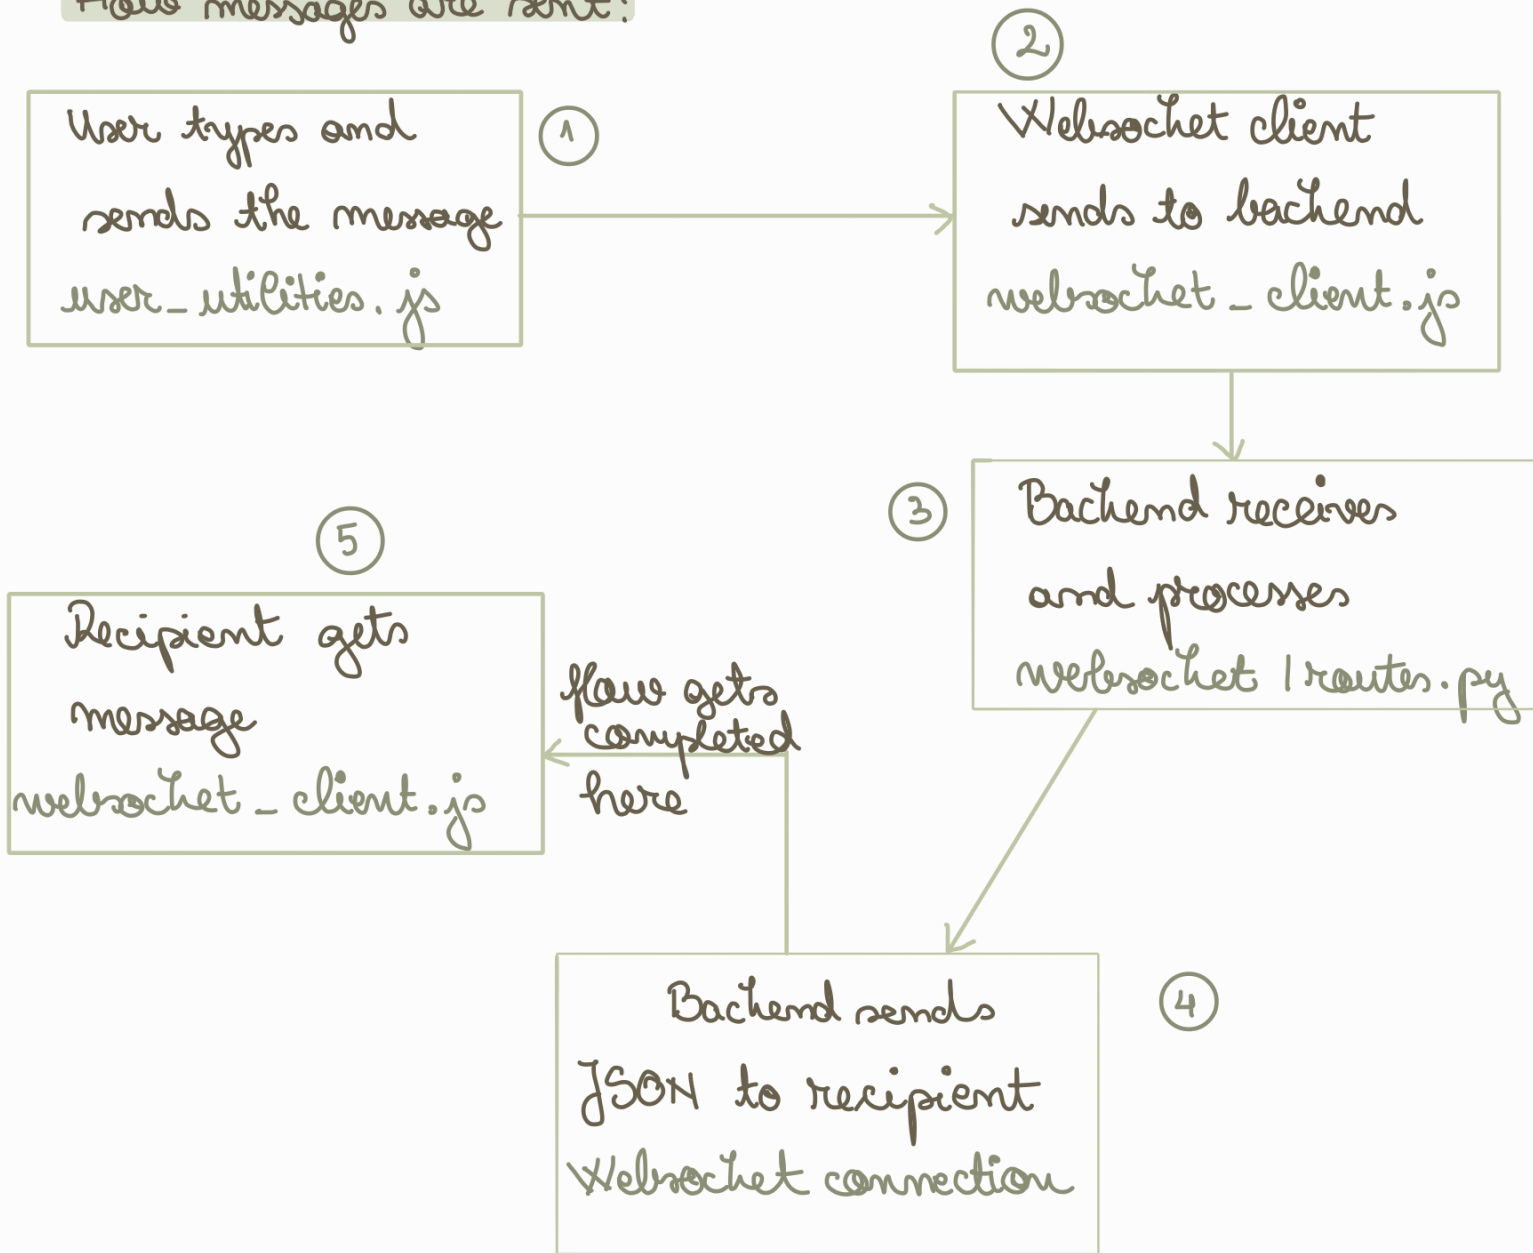

* At step ③, additional backend processes are run.

A method `handle_send_messages` will run, which has the main purpose of storing the message in Redis

How is pub-sub used?

- publishers send messages to channels
- subscribers listen to channels and receive messages

Redis usage in SageChat

① Message storage in Redis - using the `store-message` method.

- saves all messages
- organizes messages by conversation: `convos: alice: bob`
- persists even on server restart

② PubSub: decoupled architecture
The `WebSocket` handler doesn't need to know about all the other components

Various info is published:

- `user-online`
- `chat-messages`
- `typing`