

Table of Contents

Planning	I
Analysis and Design	II
Project Code: UR Folder	III
Project Code: Admin Folder	IV
Project Defense Handouts	V

Dreamweaver MX Files: Part 1 VI

Dreamweaver MX Files: Part 2 VII

Dreamweaver MX Files: Part 3 VIII

Dreamweaver MX Files: Part 4 IX

Power Point Presentation X

Project Proposal

February 18, 2004

To: Professor Smith, Senior Project Academic Advisor

From: Walter Browning

RE: Senior Project Proposal

I am presenting this proposal for my Senior Project to you for approval. During the senior project meeting earlier this semester, Dr. Briner stated that all senior projects should be an implemented solution to a real problem. This proposal will discuss, in detail, the problems I wish to solve and how I plan to solve them.

The Problem(s):

The Director of University Relations, Ms. Sarah Huxford had contacted Mr. James Whitfield (former CSU Web Master) in the Fall of '03 about reconstructing the University Relations website entirely. At that time, Mr. Whitfield was in the middle of a very large project for Career Planning and knew that I was in need of a senior project and interested in web design. So, he put me in contact with Ms. Huxford.

During the several meetings that followed, Ms. Huxford described the certain complications that she had been having within the department and we began the process of constructing possible solutions.

First, the design of the current website was based off of a general departmental template that James had created earlier. Ms. Huxford was very interested in making the University Relations website different from the current template. She showed me examples of websites from other academic institutions: Wake Forest University and College of Charleston. After a few meetings we had decided on a general design for the University Relations portal page.

The next step was to come up with possible solutions to some concerns involving University Relations.

The first problem addressed was current methods for getting a new article placed on the website. The current system involves placing a work-order to the one web-master for the entire CSU website. Normally, articles get placed on the website fairly quickly; however, when there are many work orders or significant on-going projects this process can be delayed. Since the world of news and publications strive on providing the public with fast, accurate information, one can see how this may be a problem.

Providing an automated web-based system would give the Director of University Relations the ability to input any article from any location without having to place a single work order. This would not only help University Relations, but also cut the current workload of the web-master. The last problem discussed would involve the current process for requesting services from University Relations. One of the purposes of University Relations is to cover events of CSU related activities whether on or off campus. To help stay informed of such events, University Relations has a request form that one can fill out with all the needed information: Contact Name, Phone Number, Location, Event Description, Time, etc. The problems with this system are: sometimes forms are not filled out in their entirety, many people are unaware there is a system, and some people are still under the assumption that University Relations is somehow informed of all events.

The Solution(s):*

For the portal page, Ms. Huxford and I agreed on the following design specifications:

- Top: Title Bar w/ Horizontal Sub Menu
- Three Columns:
 - One large center column w/ image and links below
 - Two small outer columns
 - Left Column
 - Top - Link to CSU in the News
 - Middle - Latest 3 CSU Press Releases pulled from a database
 - Bottom - Link to News Archive
 - Right Column
 - Top - Drop Down Menu for "Quick Links"
 - Middle - Image linking several publications
 - Bottom - Link to Press Pass System (Event coverage request form)
- Bottom: CSU mission and link to Admin Login

To automate a web-driven article entry system, Ms. Huxford and I agreed on the following design specifications:

- Database Driven Archive
- Submitted via the web
- The system should have the capabilities of:
 - Adding Articles
 - Editing Articles
 - Deleting Articles
- There should be two archives:
 - One for CSU in the News
 - One for CSU Press Releases
- Security will be based on setting security level restrictions for certain pages.
 - Users must login using valid username and password.
- Those with highest security level will be able to create and delete users.
- Anyone should be able to view all articles from both archives.

To improve the efficiency of event requests, Ms. Huxford and I agreed upon these design specifications:

- An e-mail notification will be sent to Ms. Huxford with the event information.
- The event information will be stored in the database in case the e-mail does not reach Ms. Huxford for any reason.
- The system will allow for deletion of past events.

**All solutions will be implemented using ASP (Active Server Pages) technology.*

The Resources:

The resources needed to complete this project include:

- Software:
 - Dreamweaver MX
 - Adobe Photoshop 7.0
 - Microsoft Project
 - Microsoft Visio
 - Microsoft Office 2000 Professional
- Hardware:
 - Laptop Computer
 - Desktop Computer
- Miscellaneous:
 - Dreamweaver MX Tutorial
 - ASP Tutorial

The Training/Research:

Before any programming is done, I must be familiar with the software packages I will be using. I am already familiar Microsoft Project, Visio, and Office (including Access). For my training in Dreamweaver MX, James suggested the tutorial he used at <http://www.webthang.co.uk> that teaches the basics of Dreamweaver through the development of two ASP sites. For Adobe Photoshop, James agreed on assisting with learning the basics of image editing in Photoshop. I have completed the tutorial for Dreamweaver MX and ASP and have spent several weeks familiarizing myself with Adobe Photoshop 7.0.

I hope I have provided you with the needed information for your approval in the continuation of this project.

Thank you for your time.

WB

Project Charter

Project Name: University Relations Website

Project Purposes: To provide the University Relations department at Charleston Southern University with a website will expedite the processes of Event Coverage Requests and web postings of Press Releases and External Articles.

Anticipated Completion: Within 6 months of project initiation

Budget: --

Key Participants:

Participant	Position	Primary Responsibilities
Walter Browning	Programmer Analyst	Analyzing, Designing, and Programming Project
Larry D. Smith	Academic Advisor	Provide Assistance during the Planning, Analysis, and Design
James L. Whitfield	Senior Technical Advisor and Remote Assistance	To provide training and assistance for Dreamweaver MX, Photoshop 7.0, ASP, and HTML
John Strubel	Technical Assistant	To provide technical assistance with MS-FTP, and Photoshop

Statement of Scope

"University Relations Website"

Problem Description

University Relations is interested in revamping their current website with intentions of increasing efficiency within their department. University Relations is currently plagued with the misunderstanding that their department is informed of all events that occur on or by the University's many organizations. The current methods of informing University Relations of such events are either by a hand-written request form or by phone. Under this system, there have been many instances of confusion and miscommunication. To avoid any future difficulties, the Head of University Relations, Ms. Sarah Huxford, would like to automate the current request forms via electronic submission.

One other difficulty that has hindered the efficiency of University Relations is the turn around of new Headlines to reach our website. The current process of placing news articles on the CSU website involves placing a work order through Administrative Services. This work order is placed alongside other work orders from other departments. Since the News and Publications industry thrives on how current and quickly information is made available to the public, Ms. Huxford would also like the newly designed website to include to incorporate the ability for her to post new articles on the University Website without infringing on the current security standards set forth by the Administrative Services department at CSU.

Anticipated Business Benefits

The primary business benefit to be obtained by the new University Relations website is departmental efficiency. The new website will provide the following specific benefits:

- Improve communication between University Relations and those outside of the department.
- Expedite Turn-Around Time for web-postings of articles
- Decrease the work-load of the current web-master


System Capabilities

To obtain the business benefits listed above, the website will incorporate these capabilities:


- Easy navigation
- E-mail Notification of Coverage Requests
- Current .pdf archives

Work Breakdown Structure: Planning Phase		
Phases, Activities, and Tasks	Duration in Days	Number of Resources
1.0 Project Planning Phase		
1.1 Define the Problem		
1.1.1 Meet with Users	3	3
1.1.2 Determine Scope	1	1
1.1.3 Define System Capabilities	1	2
1.1.4 Determine Benefits	1	1
1.1.5 Develop Context Diagram	3	1
1.2 Produce the Project Schedule		
1.2.1 Develop Work Breakdown Structure	2	1
1.2.2 Develop Tracking Gantt Chart	2	1
1.3 Confirm Project Feasibility		
1.3.1 Identify Intangible Costs/Benefits	1	2
1.3.2 Estimate Tangible Costs	2	2
1.3.3 Do Cost/Benefit Analysis	3	1
1.3.4 Evaluate Technical Feasibility	2	2
1.3.5 Evaluate Schedule Feasibility	2	1
1.3.6 Evaluate Reasource Feasibility	2	1
1.4 Staff the Project	1	
1.4.1 Develop a Resource Plan	1	1
1.4.2 Identify and Request Tech Staff	1	2
1.4.3 Meet with Users, Indentify Staff	1	2
1.4.4 Organize Project Team	1	1
1.5 Launch the Project		
1.5.1 Setup Project Facilities	1	3

ID	Task Name	Duration	Start	'04	M	T	W	T	F	S	S	M	T	W	T	F
1	Project Planning Phase	24 days	Tue 1/13/04													
2	Define the Problem	7 days	Tue 1/13/04													
3	Meet with Users	3 days	Tue 1/13/04													
4	Determine Scope	1 day	Wed 1/14/04													
5	Define System Capabilities	1 day	Thu 1/15/04													
6	Determine Benefits	1 day	Fri 1/16/04													
7	Develop Context Diagram	3 days	Mon 1/19/04													
8	Produce Project Schedule	4 days	Thu 1/22/04													
9	Develop Work Breakdown Structure	2 days	Thu 1/22/04													
10	Develop Pert Chart	2 days	Mon 1/26/04													
11	Confirm Project Feasibility	8 days	Wed 1/28/04													
12	Identify Intangible Costs/Benefits	1 day	Wed 1/28/04													
13	Estimate Tangible Costs	2 days	Thu 1/29/04													
14	Do Cost/Benefit Analysis	3 days	Mon 2/2/04													
15	Evaluate Technical Feasibility	2 days	Thu 2/5/04													
16	Evaluate Schedule Feasibility	2 days	Thu 2/5/04													
17	Evaluate Resource Availability	2 days	Thu 2/5/04													
18	Staff the Project	4 days	Mon 2/9/04													
19	Develop a Resource Plan	1 day	Mon 2/9/04													
20	Identify and Request Tech Staff	1 day	Tue 2/10/04													
21	Meet with Users, Identify Staff	1 day	Wed 2/11/04													
22	Organize Project Team	1 day	Thu 2/12/04													
23	Launch the Project	1 day	Fri 2/13/04													
24	Setup Project Facilities	1 day	Fri 2/13/04													

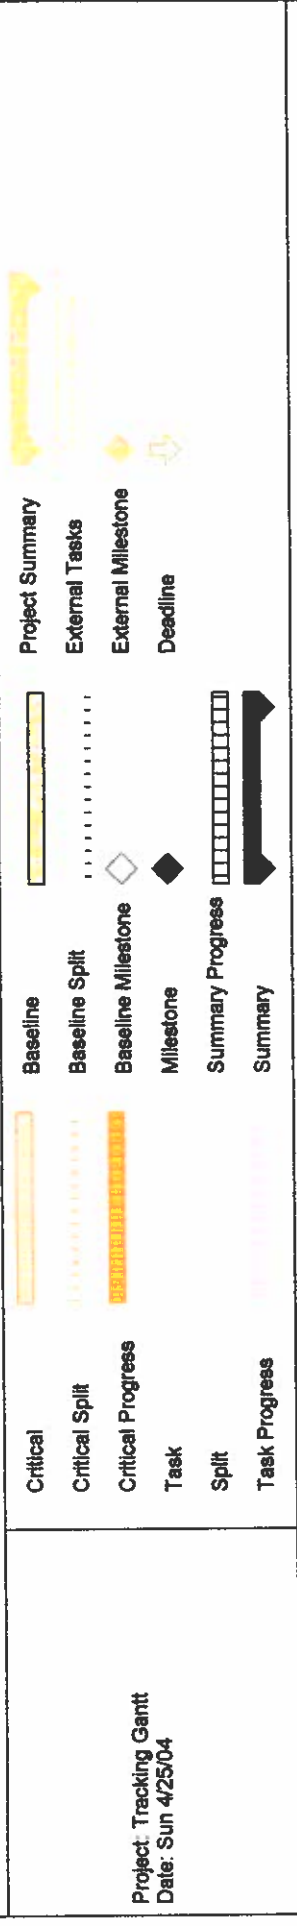

System Context Diagram

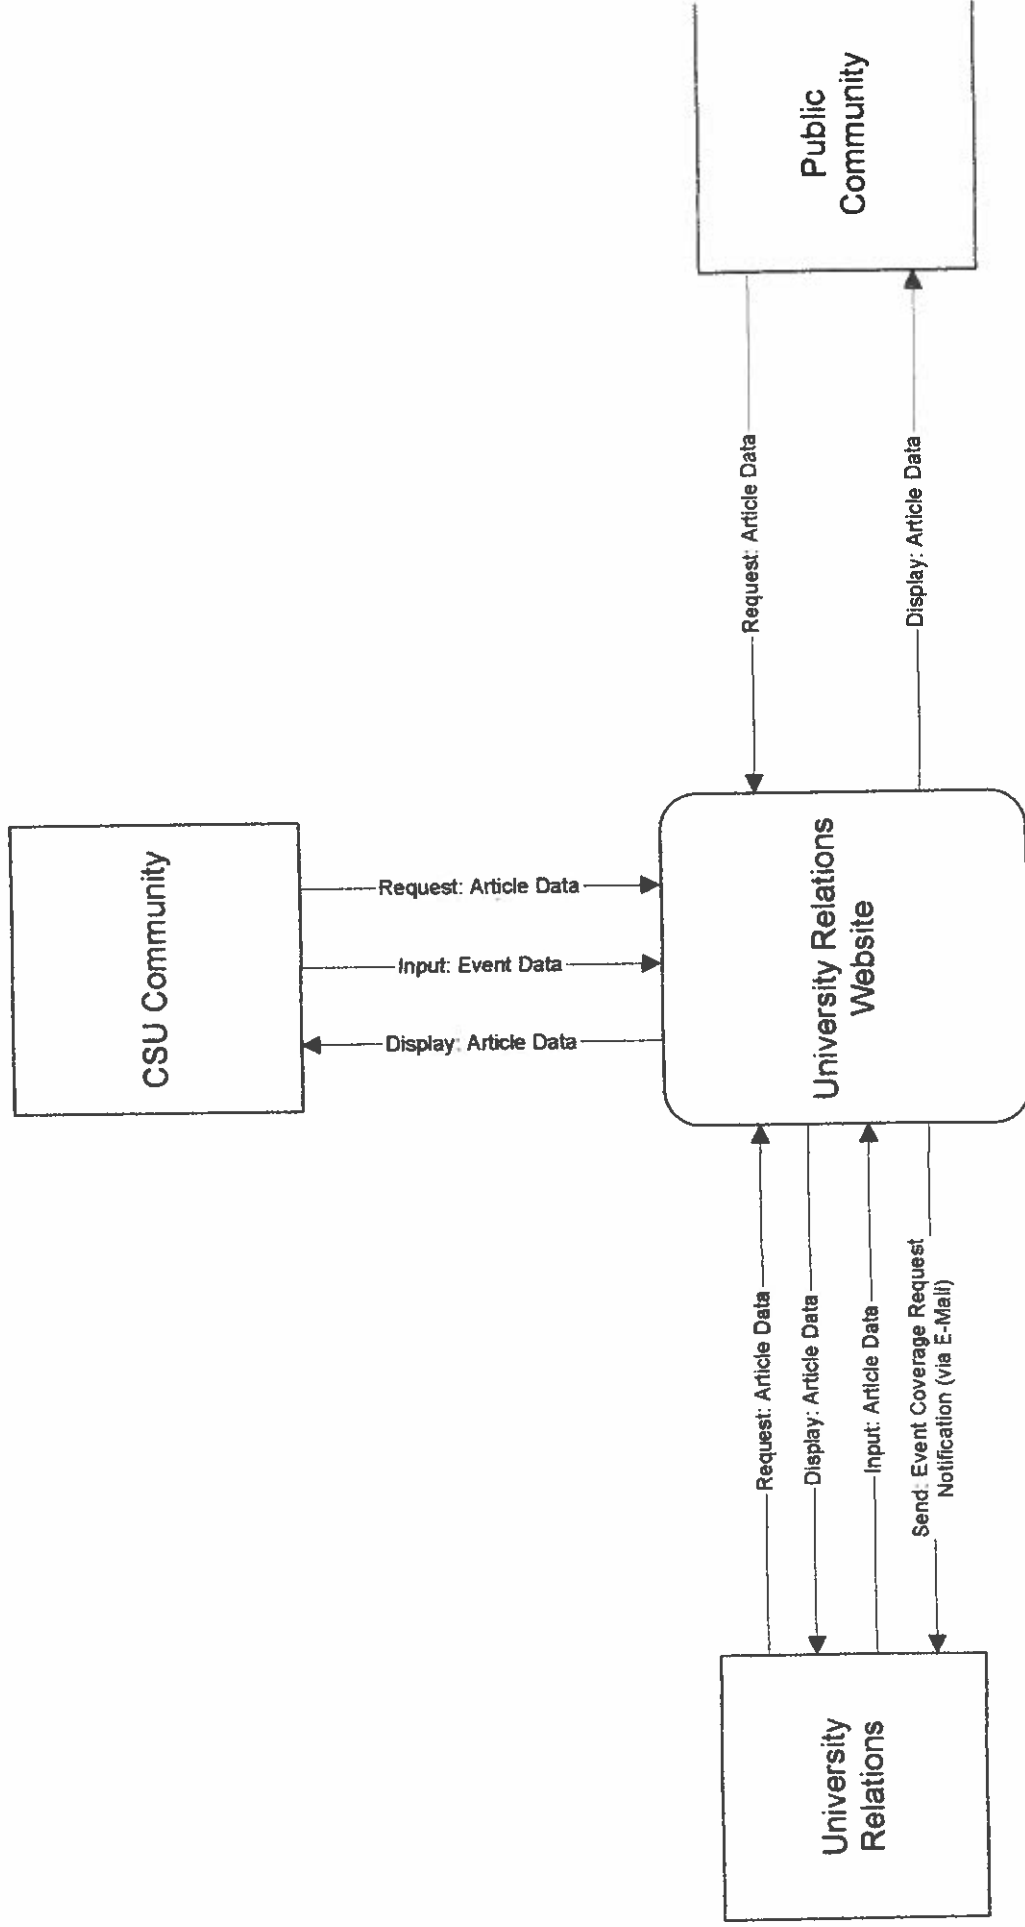

Entity Relationship Diagram

PressPass	
PK	ID
	Organization Event EventDate EventTime Location Email ContactName Phone OnCampus OffCampus Photo

ExtArticles	
PK	ID
	ExtArtDate ExtArtTitle ExtArtText Pic1 Pic2 Pic3

PressRelease	
PK	ID
	PRDate PRTitle PRText Pic1 Pic2 Pic3


Security	
PK	ID
	Username Password Security

CSUMag	
PK	ID
	Date Link


BIP	
PK	ID
	Date Link

InsideCSU	
PK	ID
	Date Link

Reflections	
PK	ID
	Date Link

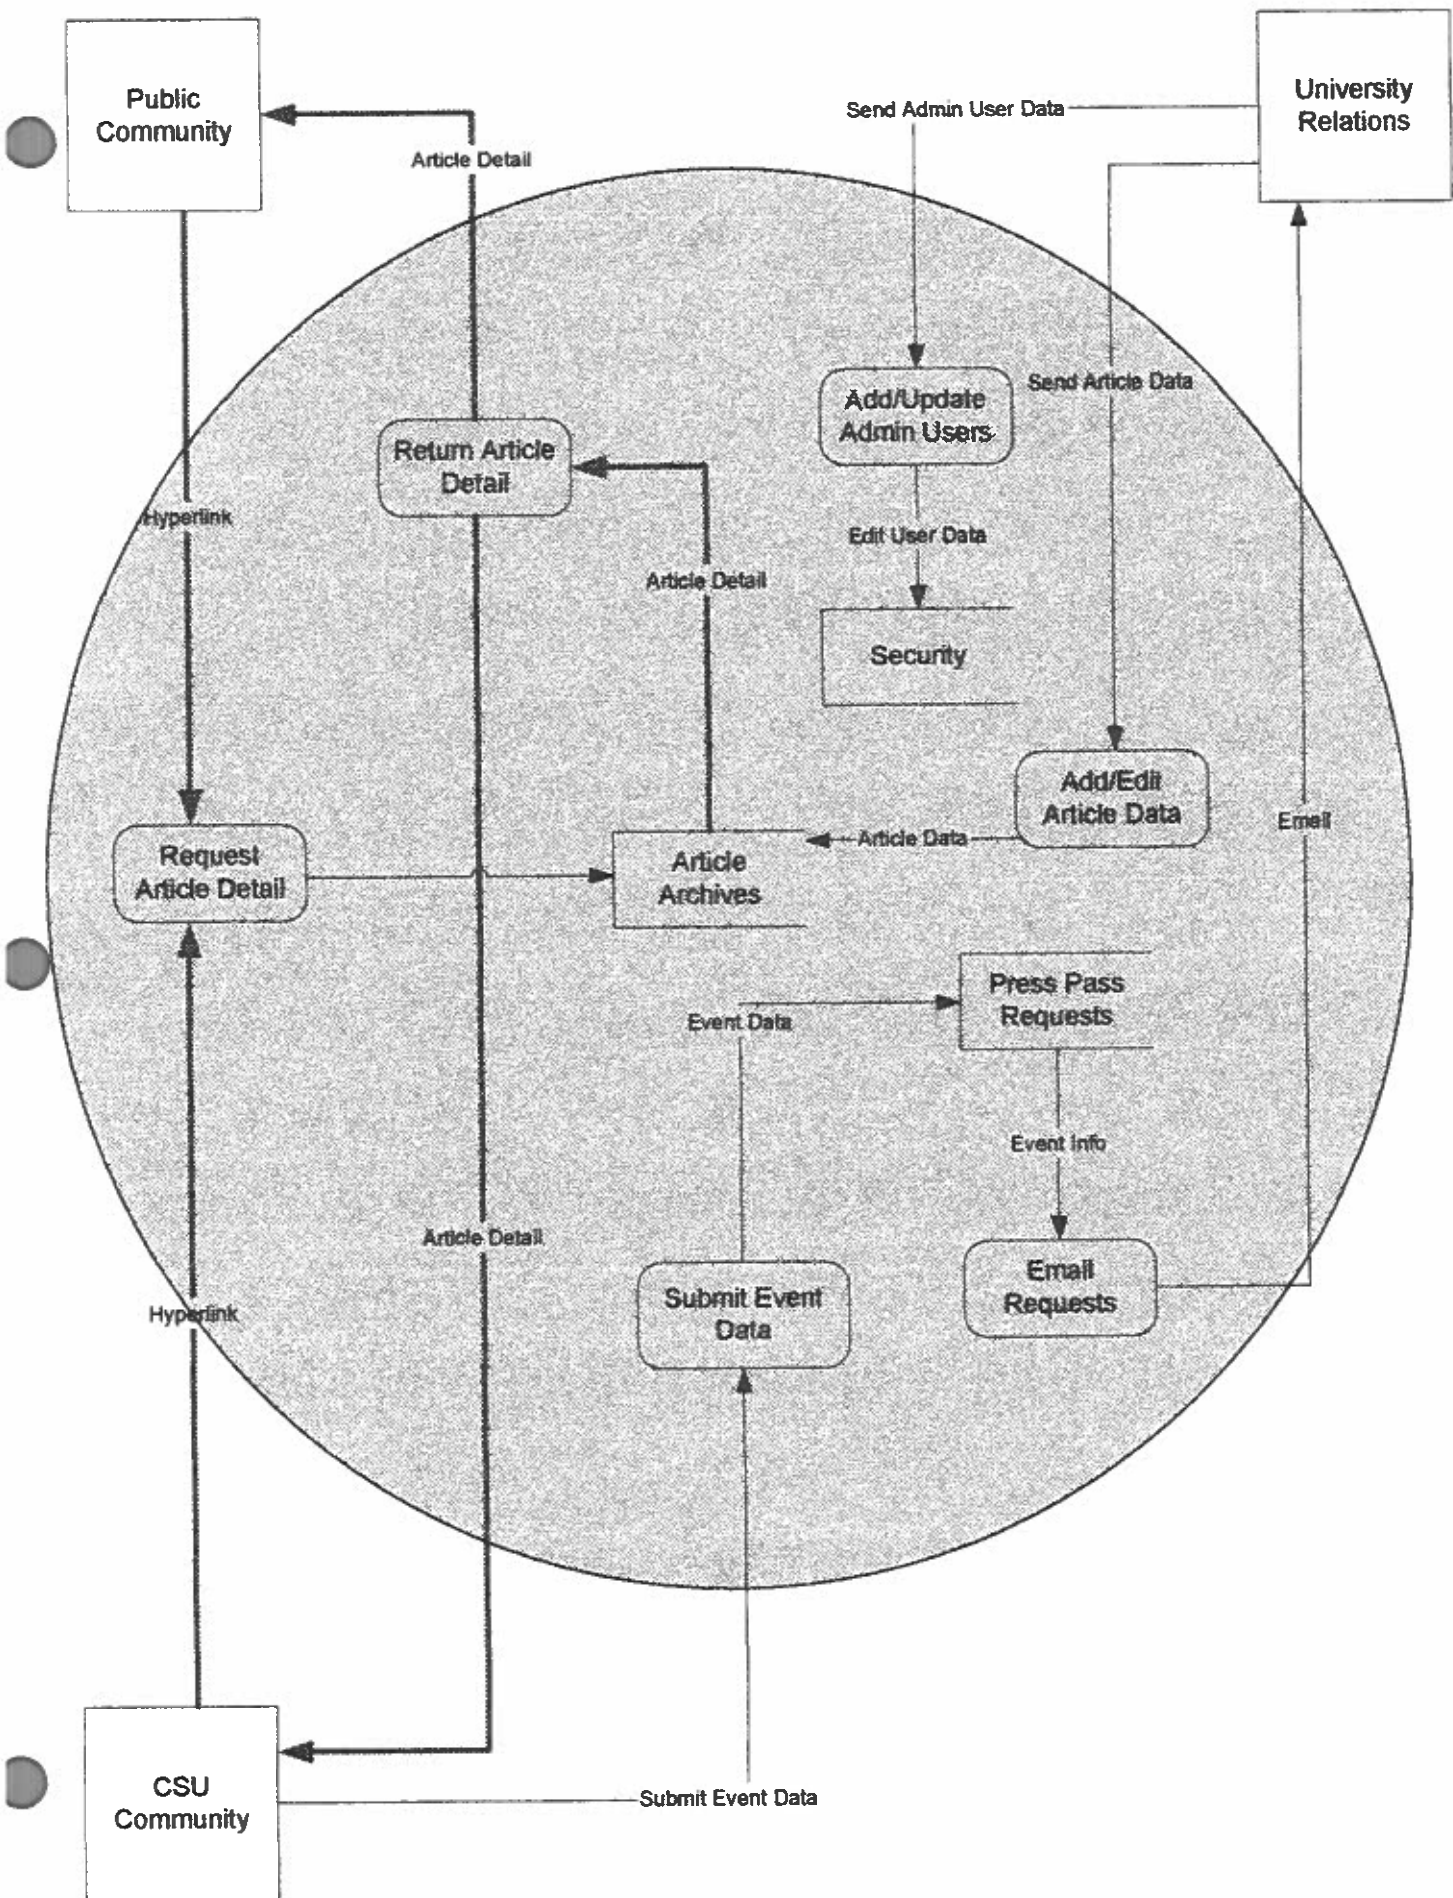

Event Coverage Request

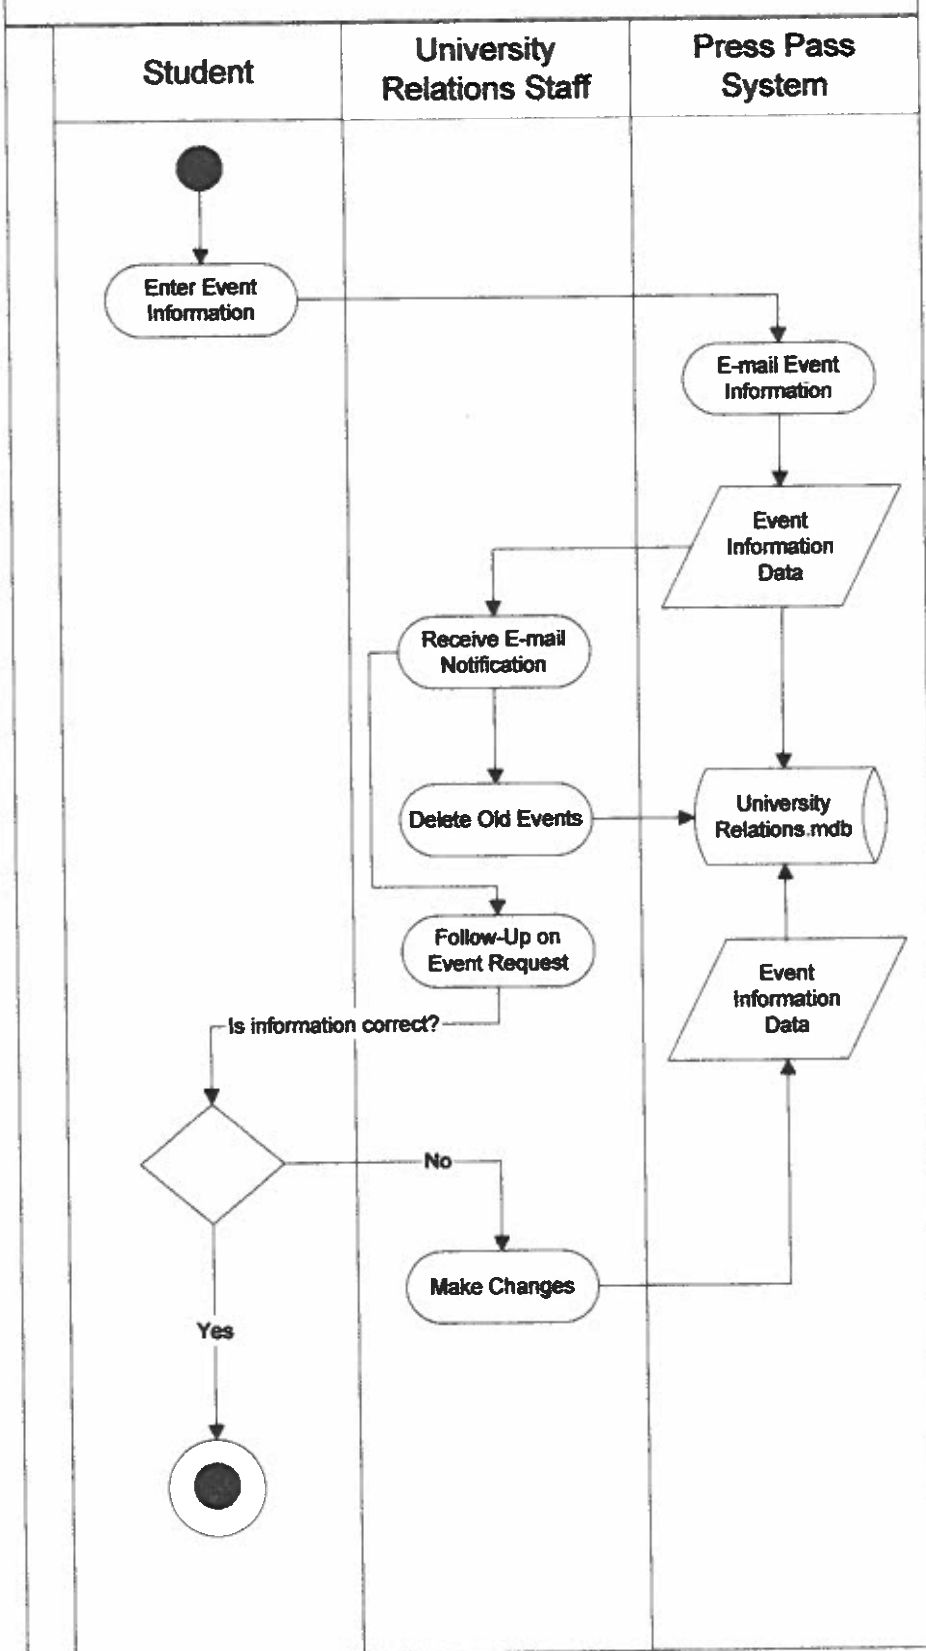

View Article Detail

CSU & Public
Community

Archival System


Request Article
Detail

Retrieve Article
Detail

University
Relations.mdb

Article
Detail

Display Article
Detail

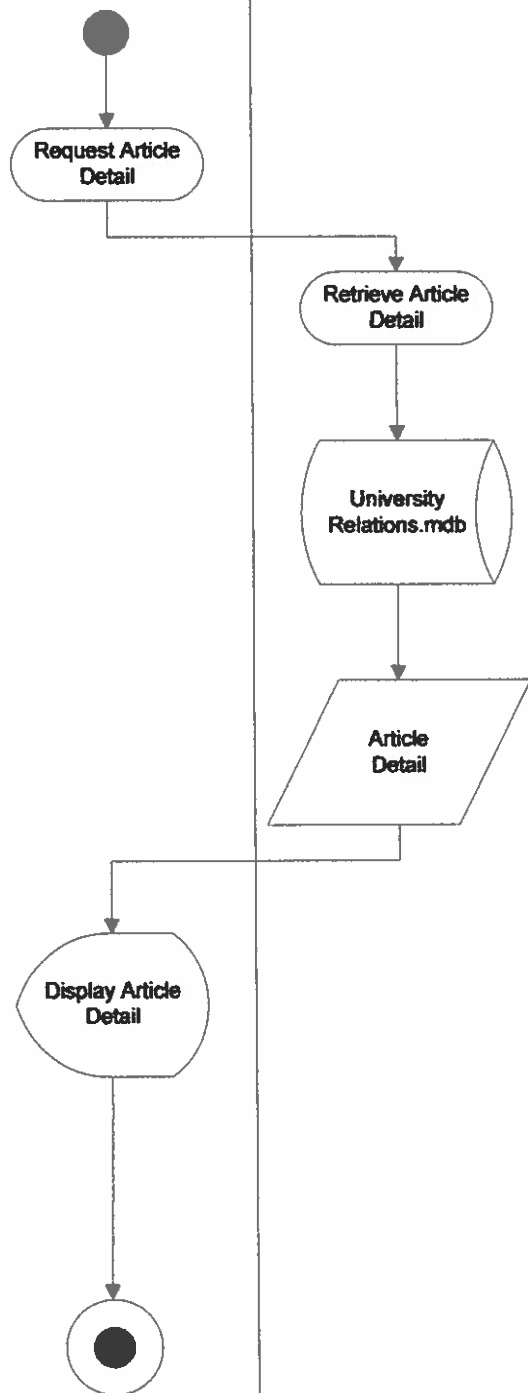

Submit Article

University
Relations

Archival System

Submit Article
Data

Article
Data

University
Relations.mdb

Admin Control
Panel



Checklist for Conducting an Interview

Before

- ☐ Establish the objective for the interview
- ☐ Determine correct user(s) to be involved
- ☐ Determine project team members to participate
- ☐ Build a list of questions and issues to be discussed
- ☐ Review related documents and materials
- ☐ Set the time and location
- ☐ Inform all participants of objective, time, and locations

During

- ☐ Dress appropriately
- ☐ Arrive on time
- ☐ Look for exception and error conditions
- ☐ Probe for details
- ☐ Take thorough notes
- ☐ Identify and document unanswered items or open questions

After

- ☐ Review notes for accuracy, completeness, and understanding
- ☐ Transfer information to appropriate models and documents
- ☐ Identify areas needing further clarification
- ☐ Send thank-you notes if appropriate

Discussion and Interview Agenda

Setting

Objective of Interview: Discuss final details and tie up loose ends.

March 24, 2004 – 4:30 PM – Phone Conference

User Participants (names and titles/positions)

- ☐ Ms. Sarah Huxford

Interview/Discussion

1. What changes need to be made to homepage?
2. Are the admin control functions user-friendly?
3. What to do with Media Relations page and Creative Services?

Follow-Up

Important decisions or answers to questions

Open items not resolved with assignments for solution

Date and time of next meeting or follow-up session

TBA

AboutCSU.asp

```
<?@LANGUAGE="VBSCRIPT" CODEPAGE="1252">
<html>
<head>
<title>About CSU</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body link="012650" vlink="999966" alink="#333333">
<table width="750" border="0" align="center" cellpadding="0" cellspacing="0">
  <tr>
    <td height="60" bgcolor="012650"> <div align="center"><a href="PubHome.asp">
</a></div></td>
  </tr>
  <tr>
    <td height="30" valign="top" bgcolor="012650"> <div align="center"></div></td>
  </tr>
  <tr>
    <td height="30" valign="top"><div align="right"><font size="2"><strong><a
href="javascript:history.go(-1)">&lt;&lt;
Back</a></strong></font><font color="999966"></font></div></td>
  </tr>
</table>
<div align="center"><br>
  <table width="590" border="1" cellspacing="0" cellpadding="5">
    <tr>
      <td height="12" bgcolor="#666666">
        <div align="center"><strong><font color="#FFFFFF" size="5" face="Times New Roman,
Times, serif">Quick
Facts About CSU</font></strong></div></td>
      </tr>
      <tr>
        <td bgcolor="eeeeee"><br>
          <blockquote>
            <p><font color="012650" size="3" face="Times New Roman, Times, serif">
<strong>Location:</strong><font face="Arial, Helvetica, sans-serif">
Charleston, SC</font><br>
<strong>Founded:</strong><font face="Arial, Helvetica, sans-serif">
1964</font><br>
<strong>Status:</strong><font face="Arial, Helvetica, sans-serif">
Private</font><br>
<strong>Mission:</strong><font face="Arial, Helvetica, sans-serif">
&quot;Promoting
academic excellence in a Christian environment.&quot;</font><br>
<strong>Team Name:</strong><font face="Arial, Helvetica, sans-serif">
Buccaneers</font><br>
<strong>Athletic Conference:</strong><font face="Arial, Helvetica,
sans-serif">Big
South Conference, NCAA Division I</font><br>
<strong>School Colors:</strong><font face="Arial, Helvetica, sans-serif">Blue
</font></strong>
and
<strong><font color="999966" face="Arial, Helvetica, sans-serif">Gold
</font></strong><br>
<strong>Undergraduate Tuition (2003-2004):</strong><font face="Arial,
Helvetica, sans-serif">$14,426</font><br>
<strong>Enrollment (2003-2004):</strong><br>
&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&-Undergraduate:</strong><font
face="Arial, Helvetica, sans-serif">2,737</font><strong><br>
```

```
<table border="0"><tr><td align="center"><div align="center"><p>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&~Graduate:</strong><font face="Arial,<br/>Helvetica,<br/>sans-serif">253</font></td><td align="right"><div align="left"><p>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&~Total:</strong><font face="Arial,<br/>Helvetica,<br/>sans-serif">2,990</font></p><p><strong>In-state/out-of-state Students:</strong><font face="Arial,<br/>Helvetica,<br/>sans-serif">79%<br/>in-state / 21% out-of-state</font></p><p><strong>Faculty (full-time):</strong><font face="Arial,<br/>Helvetica,<br/>sans-serif">98</font></p><p><strong>Academic Majors:</strong><font face="Arial,<br/>Helvetica,<br/>sans-serif">36</font></p><p><strong>Library Holdings:</strong><font face="Arial,<br/>Helvetica,<br/>sans-serif">218,000<br/>volumes</font></p><p><strong>Endowment:</strong><font face="Arial,<br/>Helvetica,<br/>sans-serif">$10 million</font></p><p><strong>Undergraduates Receiving Financial Aid:</strong><font face="Arial,<br/>Helvetica,<br/>sans-serif">95% (2003-2004)</font></p></div></td></tr></table><br/><div align="center"><p>&nbsp;&nbsp;&nbsp;&nbsp;&~</p><map name="Map"><area shape="rect" coords="4,5,92,24" href="MediaRelations.asp"><area shape="rect" coords="98,5,193,24" href="CreativeServices.asp"><area shape="rect" coords="197,6,279,25" href="ArchivedNews.asp"><area shape="rect" coords="284,6,353,25" href="Publications.asp"><area shape="rect" coords="358,6,392,24" href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations"><area shape="rect" coords="400,6,465,23" href="http://www.csuniv.edu/AboutCSU/aboutcsu.html"></map><map name="Map2"><area shape="rect" coords="3,3,379,45" href="PubHome.asp"></map></div></body></html>
```

ArchivedExtNews.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
Dim rsViewExtArt
Dim rsViewExtArt_numRows

Set rsViewExtArt = Server.CreateObject("ADODB.Recordset")
rsViewExtArt.ActiveConnection = MM_UnivRel_STRING
rsViewExtArt.Source = "SELECT * FROM ExtArticles ORDER BY ExtArtDate DESC"
rsViewExtArt.CursorType = 0
rsViewExtArt.CursorLocation = 2
rsViewExtArt.LockType = 1
rsViewExtArt.Open()

rsViewExtArt_numRows = 0
%>
<%
Dim Repeat1__numRows
Dim Repeat1__index

Repeat1__numRows = -1
Repeat1__index = 0
rsViewExtArt_numRows = rsViewExtArt_numRows + Repeat1__numRows
%>

<%
Dim MM_paramName
%>
<%
' *** Go To Record and Move To Record: create strings for maintaining URL and Form
parameters

Dim MM_keepNone
Dim MM_keepURL
Dim MM_keepForm
Dim MM_keepBoth

Dim MM_removeList
Dim MM_item
Dim MM_nextItem

' create the list of parameters which should not be maintained
MM_removeList = "&index="
If (MM_paramName <> "") Then
    MM_removeList = MM_removeList & "&" & MM_paramName & "="
End If

MM_keepURL=""
MM_keepForm=""
MM_keepBoth=""
MM_keepNone=""

' add the URL parameters to the MM_keepURL string
For Each MM_item In Request.QueryString
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepURL = MM_keepURL & MM_nextItem & Server.URLEncode(Request.QueryString
(MM_item))
    End If
Next
```

```

' add the Form variables to the MM_keepForm string
For Each MM_item In Request.Form
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepForm = MM_keepForm & MM_nextItem & Server.URLEncode(Request.Form
(MM_item))
    End If
Next

' create the Form + URL string and remove the initial '&' from each of the strings
MM_keepBoth = MM_keepURL & MM_keepForm
If (MM_keepBoth <> "") Then
    MM_keepBoth = Right(MM_keepBoth, Len(MM_keepBoth) - 1)
End If
If (MM_keepURL <> "") Then
    MM_keepURL = Right(MM_keepURL, Len(MM_keepURL) - 1)
End If
If (MM_keepForm <> "") Then
    MM_keepForm = Right(MM_keepForm, Len(MM_keepForm) - 1)
End If

' a utility function used for adding additional parameters to these strings
Function MM_joinChar(firstItem)
    If (firstItem <> "") Then
        MM_joinChar = "&"
    Else
        MM_joinChar = ""
    End If
End Function

```

```

<html>
<head>
<title>CSU Press Releases</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body link="012650" vlink="999966" alink="000000">
<div align="left">
    <table width="750" border="0" cellpadding="0" cellspacing="0" bgcolor="012650">
        <tr>
            <td width="160" rowspan="2"> <div align="center"></div></td>
            <td width="590" height="75"> <div align="left"></div></td>
        </tr>
        <tr>
            <td width="590" height="30"> <div align="left">
                <map name="Map">
                    <area shape="rect" coords="282,5,355,25" href="Publications.asp">
                    <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
                    <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
                    <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
                    <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
                    <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
                </map>
            </div></td>
        </tr>
    </table>

```

```
<table width="750" border="0" cellspacing="0" cellpadding="0">
  <tr>
    <td width="160" height="450" align="left" valign="top"><a
href="ArchivedNews.asp"></a><br>
      <br>
      <br></td>
    <td valign="top">
<div align="center"><br>
      </div>
      <table width="550" border="1" align="center" cellpadding="5"
cellspacing="0">
        <tr>
          <td height="40" bgcolor="#333333">
            <div align="left"><font color="012650" size="4"><strong><font
color="#CC0000" size="5" face="Courier New, Courier, mono">
              <font face="Arial, Helvetica, sans-serif"><font color="#FFFFFF">
CSU
                in the News</font></font></font></strong></font> </div></td>
          </tr>
          <tr>
            <td valign="top" bgcolor="#CCCCC"><font color="#000000" size="2"
face="Times New Roman, Times, serif">Please
              choose from one of the resources below for updated news from
Charleston
              Southern. <br>
              Some resources may require Adobe Acrobat Reader. You may Download
it <a href="http://www.csuniv.edu/rp500enu.exe">here</a>.</font>
            </td>
          </tr>
          <tr>
            <td valign="top" bgcolor="eeeeee">
              <%
While ((Repeat1__numRows <> 0) AND (NOT rsViewExtArt.EOF))
%>
                  &nbsp;&nbsp;&nbsp;&nbsp;<li><font color="012650" size="2"
face="Arial, Helvetica, sans-serif"><strong><A HREF="../UR/ExtArtDetail.asp?&=
MM_keepURL & MM_joinChar(MM_keepURL) & "ID=" & rsViewExtArt.Fields.Item
("ID").Value %>"><%=rsViewExtArt.Fields.Item("Title").Value)%></A></strong>
</font><font color="012650"> ~ <font size="2" face="Times New Roman, Times,
serif"><%=rsViewExtArt.Fields.Item("ExtArtDate").Value)%> </font></font>
                  <%
Repeat1__index=Repeat1__index+1
Repeat1__numRows=Repeat1__numRows-1
rsViewExtArt.MoveNext()
Wend
%><font color="000000">
                    <font color="012650">&nbsp;&nbsp;&nbsp;</font></li>
                    <br><br>
                  </td>
                </tr>
              </table>
              <p align="center"><font color="012650" size="4"><strong><font
color="#CC0000" size="5" face="Courier New, Courier, mono">
                </font></strong></font> </p>
              <p align="center"></p>
            </td>
          </tr>
        </table>
      </div>
</table>
<map name="Map2">
```

```
<area shape="rect" coords="4,11,308,54" href="MediaRelations.asp">
</map>
<map name="Map4">
  <area shape="rect" coords="12,5,145,29" href="ExpertsGuide.asp">
</map>
<map name="Map3">
  <area shape="rect" coords="13,7,144,30" href="ArchivedNews.asp">
</map>
</body>
</html>
<%
rsViewExtArt.Close()
Set rsViewExtArt = Nothing
%>
```


ArchivedNews.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
Dim rsViewPRArticle
Dim rsViewPRArticle_numRows

Set rsViewPRArticle = Server.CreateObject("ADODB.Recordset")
rsViewPRArticle.ActiveConnection = MM_UnivRel_STRING
rsViewPRArticle.Source = "SELECT * FROM PressReleases ORDER BY
PressRelDate DESC"
rsViewPRArticle.CursorType = 0
rsViewPRArticle.CursorLocation = 2
rsViewPRArticle.LockType = 1
rsViewPRArticle.Open()

rsViewPRArticle_numRows = 0
%>
<%
Dim Repeat1__numRows
Dim Repeat1__index

Repeat1__numRows = -1
Repeat1__index = 0
rsViewPRArticle_numRows = rsViewPRArticle_numRows + Repeat1__numRows
%>
<%
Dim MM_paramName
%>

<%
' *** Go To Record and Move To Record: create strings for maintaining
URL and Form parameters

Dim MM_keepNone
Dim MM_keepURL
Dim MM_keepForm
Dim MM_keepBoth

Dim MM_removeList
Dim MM_item
Dim MM_nextItem

' create the list of parameters which should not be maintained
MM_removeList = "&index="
If (MM_paramName <> "") Then
    MM_removeList = MM_removeList & "&" & MM_paramName & "="
End If

MM_keepURL=""
MM_keepForm=""
MM_keepBoth=""
MM_keepNone=""

' add the URL parameters to the MM_keepURL string
For Each MM_item In Request.QueryString
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
```

```

    MM_keepURL = MM_keepURL & MM_nextItem & Server.URLEncode
(Request.QueryString(MM_item))
End If
Next

```

```

' add the Form variables to the MM_keepForm string
For Each MM_item In Request.Form
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepForm = MM_keepForm & MM_nextItem & Server.URLEncode
(Request.Form(MM_item))
    End If
Next

```

```

' create the Form + URL string and remove the intial '&' from each of
the strings
MM_keepBoth = MM_keepURL & MM_keepForm
If (MM_keepBoth <> "") Then
    MM_keepBoth = Right(MM_keepBoth, Len(MM_keepBoth) - 1)
End If
If (MM_keepURL <> "") Then
    MM_keepURL = Right(MM_keepURL, Len(MM_keepURL) - 1)
End If
If (MM_keepForm <> "") Then
    MM_keepForm = Right(MM_keepForm, Len(MM_keepForm) - 1)
End If

```

' a utility function used for adding additional parameters to these strings

```

Function MM_joinChar(firstItem)
    If (firstItem <> "") Then
        MM_joinChar = "&"
    Else
        MM_joinChar = ""
    End If
End Function

```

```

%>
<html>
<head>
<title>CSU News Press Releases Archive</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

```

```

<body link="012650" vlink="999966" alink="000000">
<table width="750" border="0" cellpadding="0" cellspacing="0"
bgcolor="012650">
    <tr>
        <td width="160" rowspan="2"> <div align="center"></div></td>
        <td width="590" height="75"> <div align="left"></div></td>
    </tr>
    <tr>
        <td width="590" height="30"> <div align="left">
            <map name="Map3">
                <area shape="rect" coords="282,5,355,25"
href="Publications.asp">

```

```

        <area shape="rect" coords="198,4,278,24"
href="ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25"
href="CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24"
href="MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%
20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
        </map>
        <map name="MapMap">
        <area shape="rect" coords="282,5,355,25"
href="Publications.asp">
        <area shape="rect" coords="198,4,278,24"
href="ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25"
href="CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24"
href="MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%
20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
        </map>
        <map name="MapMap2">
        <area shape="rect" coords="282,5,355,25"
href="Publications.asp">
        <area shape="rect" coords="198,4,278,24"
href="ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25"
href="CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24"
href="MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%
20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
        </map>
        <map name="Map">
        <area shape="rect" coords="282,5,355,25"
href="Publications.asp">
        <area shape="rect" coords="198,4,278,24"
href="ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25"
href="CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24"
href="MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%
20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
        </map>
        </div></td>
    </tr>
</table>

```

```

<table width="750" border="0" cellpadding="0" cellspacing="0">
  <tr>
    <td width="160" height="400" align="left" valign="top"><br>
    <br>
    <br> </td>
    <td valign="top">
<div align="center"><br>
    <table width="550" border="1" cellpadding="5" cellspacing="0">
      <tr>
        <td height="40" align="left" valign="middle" bgcolor="#
333333"> <div align="left"><font color="012650" size="4"><strong><font
color="#CC0000" size="5" face="Courier New, Courier, mono"><font
color="#FFFFFF" face="Arial, Helvetica, sans-serif">CSU
        </font></font><font color="#FFFFFF" size="5"
face="Arial, Helvetica, sans-serif">Press
        Releases</font></strong></font> </div></td>
      </tr>
      <tr>
        <td align="left" valign="middle" bgcolor="#CCCCCC"><font
color="#000000" size="2" face="Times New Roman, Times, serif">Please
        choose from one of the resources below for updated news
        from Charleston
        Southern. <br>
        Some resources may require Adobe Acrobat Reader. You may
        Download
        it <a href="http://www.csuniv.edu/rp500enu.exe">here</a>.
      </font></td>
    </tr>
    <tr>
      <td align="left" valign="middle" bgcolor="eeeeee"> <br> <ul>
        <li>
While ((Repeat1__numRows <> 0) AND (NOT rsViewPRArticle.EOF))
  <li><font size="2" face="Arial, Helvetica, sans-serif">
<strong><A HREF="../UR/PressReleaseDetail.asp?<%= MM_keepURL &
MM_joinChar(MM_keepURL) & "ID=" & rsViewPRArticle.Fields.Item
("ID").Value %>"><%= (rsViewPRArticle.Fields.Item("Title").Value) %> </A>
</strong></font> <font color="012650">~ <font size="2" face="Times New
Roman, Times, serif"><%= (rsViewPRArticle.Fields.Item
("PressRelDate").Value) %></font></font></li>
        <li>
Repeat1__index=Repeat1__index+1
Repeat1__numRows=Repeat1__numRows-1
rsViewPRArticle.MoveNext()
      </li>
      </ul></td>
    </tr>
  </table>
</div></td>
</tr>
</table>
<map name="Map2">
  <area shape="rect" coords="8,11,309,55" href="MediaRelations.asp">
</map>
<map name="Map3">
  <area shape="rect" coords="13,7,149,28" href="ArchivedNews.asp">

```

```
</map>
<map name="Map4">
  <area shape="rect" coords="12,6,144,30" href="#">
</map>
</body>
</html>
<%
rsViewPRArticle.Close()
Set rsViewPRArticle = Nothing
%>
```

BIPArchive.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
Dim rsBIP
Dim rsBIP_numRows

Set rsBIP = Server.CreateObject("ADODB.Recordset")
rsBIP.ActiveConnection = MM_UnivRel_STRING
rsBIP.Source = "SELECT * FROM BIP ORDER BY Date DESC"
rsBIP.CursorType = 0
rsBIP.CursorLocation = 2
rsBIP.LockType = 1
rsBIP.Open()

rsBIP_numRows = 0
%>
<%
Dim Repeat1__numRows
Dim Repeat1__index

Repeat1__numRows = -1
Repeat1__index = 0
rsBIP_numRows = rsBIP_numRows + Repeat1__numRows
%>
<html>
<head>
<title>University Relations: Buc In Print Archive</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body link="999966" vlink="999966" alink="999966">
<div align="left">
  <table width="750" border="0" cellpadding="0" cellspacing="0" bgcolor="012650">
    <tr>
      <td width="160" rowspan="2"> <div align="center"></div></td>
      <td width="590" height="75"> <div align="left"></div></td>
    </tr>
    <tr>
      <td width="590" height="30"> <div align="left">
        <map name="Map">
          <area shape="rect" coords="282,5,355,25" href="Publications.asp">
          <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
          <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
          <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
          <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
          <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
        </map>
      </div></td>
    </tr>
  </table>
  <table width="750" border="0" cellspacing="0" cellpadding="0">
    <tr>
      <td width="160" valign="top"><a href="Publications.asp"></a>
      <br>
```

```
<a href="StyleGuide.asp"></a><br>  
<a href="PrintJobGuide.asp"></a><br>  
<a href="PressPass.asp"></a>  
</td>  
<td valign="top">  
<div align="center"><br>  
    <table width="500" border="1" cellpadding="5" cellspacing="0"  
bgcolor="eeeeee">  
        <tr>  
            <td height="50" bgcolor="#333333"> <div align="left"><strong><font  
color="#FFFFFF" size="4" face="Arial, Helvetica, sans-serif">Buc  
                In Print Archive</font></strong></div></td>  
        </tr>  
        <tr valign="middle">  
            <td height="45"><font color="#000000" size="2" face="Times New  
Roman, Times, serif">Please  
                choose from one of the resources below for updated news from  
Charleston  
                Southern. Some resources may require Adobe Acrobat Reader. You  
may Download it <a href="http://www.csuniv.edu/rp500enu.exe">here  
</a>.</font></td>  
        </tr>  
        <tr valign="middle">  
            <td height="45"> <div align="center"> <br>  
                <%  
While ((Repeat1__numRows <> 0) AND (NOT rsBIP.EOF))  
%>  
                    <font color="012650" size="3" face="Arial, Helvetica, sans-  
serif"><strong><font color="9D8E62">  
                        <a href="  
                            %=(rsBIP.Fields.Item("Link").Value)%>">  
                            %=(rsBIP.Fields.Item("Date").Value)%></a><font color="012650">  
]&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&~</strong> </font>  
                        <%  
Repeat1__index=Repeat1__index+1  
Repeat1__numRows=Repeat1__numRows-1  
rsBIP.MoveNext()  
Wend  
%>  
                            <br>  
                            <br>  
                        </div></td>  
                </tr>  
            </table>  
  
        </div></td>  
    </tr>  
</table>  
<map name="Map2">  
    <area shape="rect" coords="11,6,134,30" href="StyleGuide.asp">  
</map>  
<map name="Map3">  
    <area shape="rect" coords="12,6,152,30" href="PrintJobGuide.asp">  
</map>  
<map name="Map4">  
    <area shape="rect" coords="11,8,122,31" href="PressPass.asp">  
</map>  
</div>  
</body>  
</html>  
<%
```

```
rsBIP.Close()  
Set rsBIP = Nothing  
>
```


CreativeServices.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<html>
<head>
<title>Creative Services</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body>
<table width="750" border="0" cellpadding="0" cellspacing="0" bgcolor="012650">
  <tr>
    <td width="160" rowspan="2"> <div align="center"></div></td>
    <td width="590" height="75"> <div align="left"></div></td>
  </tr>
  <tr>
    <td width="590" height="30"> <div align="left">
      <map name="Map">
        <area shape="rect" coords="282,5,355,25" href="Publications.asp">
        <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
      </map>
    </div></td>
  </tr>
</table>
<table width="750" border="0" cellspacing="0" cellpadding="0">
  <tr>
    <td width="160" valign="top"><a href="Publications.asp"></a><br>
    <a href="StyleGuide.asp"></a><br>
    <a href="PrintJobGuide.asp"></a><br>
    <a href="PressPass.asp"></a></td>
    <td valign="top">
      <div align="center">
        <p><a href="http://www.csuniv.edu/CSUnews/CSUmagazine/Winter2003-
pages.pdf"></a></p>
      </div></td>
  </tr>
</table>
<br>
<map name="Map2">
  <area shape="rect" coords="12,6,139,30" href="Publications.asp">
</map>
<map name="Map3">
  <area shape="rect" coords="13,8,132,32" href="StyleGuide.asp">
</map>
<map name="Map4">
  <area shape="rect" coords="13,8,151,31" href="PrintJobGuide.asp">
```

```
</map>
<map name="Map5">
  <area shape="rect" coords="11,8,123,30" href="PressPass.asp">
</map>
<map name="Map6">
  <area shape="rect" coords="8,6,545,295"
href="http://www.csuniv.edu/CSUnews/CSUmagazine/Winter2003-pages.pdf">
</map>
</body>
</html>
```

CSUMagArchive.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
Dim rsCSUMag
Dim rsCSUMag_numRows

Set rsCSUMag = Server.CreateObject("ADODB.Recordset")
rsCSUMag.ActiveConnection = MM_UnivRel_STRING
rsCSUMag.Source = "SELECT * FROM CSUMag ORDER BY Date DESC"
rsCSUMag.CursorType = 0
rsCSUMag.CursorLocation = 2
rsCSUMag.LockType = 1
rsCSUMag.Open()

rsCSUMag_numRows = 0
%>
<%
Dim Repeat1__numRows
Dim Repeat1__index

Repeat1__numRows = -1
Repeat1__index = 0
rsCSUMag_numRows = rsCSUMag_numRows + Repeat1__numRows
%>
<html>
<head>
<title>University Relations: CSU Magazine Archive</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body link="999966" vlink="999966" alink="012650">
<table width="750" border="0" cellpadding="0" cellspacing="0" bgcolor="012650">
  <tr>
    <td width="160" rowspan="2"> <div align="center"></div></td>
    <td width="590" height="75"> <div align="left"></div></td>
  </tr>
  <tr>
    <td width="590" height="30"> <div align="left">
      <map name="Map">
        <area shape="rect" coords="282,5,355,25" href="Publications.asp">
        <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
      </map>
    </div></td>
  </tr>
</table>
<table width="750" border="0" cellspacing="0" cellpadding="0">
  <tr>
    <td width="160"><a href="Publications.asp"></a><br>
```

```

        <a href="StyleGuide.asp"></a><br>
        <a href="PrintJobGuide.asp"></a><br>
        <a href="PressPass.asp"></a>
    </td>
    <td valign="top">
<div align="center"><br>
        <table width="550" border="1" cellpadding="5" cellspacing="0"
bgcolor="eeeeee">
            <tr>
                <td colspan="3" bgcolor="#333333"> <div align="left"><strong><font
color="012650" size="3" face="Arial, Helvetica, sans-serif">
                    <font color="#FFFFFF" size="5">CSU Magazine Archive</font> </font>
</strong></div></td>
                </tr>
                <tr>
                    <td colspan="3" bgcolor="#CCCCCC"><font color="#000000" size="2"
face="Times New Roman, Times, serif">Please
                        choose from one of the resources below for updated news from
Charleston
                        Southern. <br>
                        Some resources may require Adobe Acrobat Reader. You may Download
                        it <a href="http://www.csuniv.edu/rp500enu.exe">here</a>.</font>
</td>
                </tr>
                <tr>
                    <td colspan="3"> <div align="left">
                        <%
While ((Repeat1__numRows <> 0) AND (NOT rsCSUMag.EOF))
%>
                            <font color="012650"><br>
                            <strong> [</strong></font> <font color="999966"><strong> <a
href="<%= (rsCSUMag.Fields.Item("Link").Value) %>">
                                <%= (rsCSUMag.Fields.Item("Date").Value) %></a> </strong></font>
<strong><font color="012650">] &nbsp;&nbsp;&nbsp;&nbsp;<br>
                                <br>
                                </font></strong>
                            <%
Repeat1__index=Repeat1__index+1
Repeat1__numRows=Repeat1__numRows-1
rsCSUMag.MoveNext()
Wend
%>
                                </div></td>
                            </tr>
                        </table>
                    </div></td>
                </tr>
            </table>
<map name="Map2">
    <area shape="rect" coords="11,6,134,30" href="StyleGuide.asp">
</map>
<map name="Map3">
    <area shape="rect" coords="12,6,152,30" href="PrintJobGuide.asp">
</map>
<map name="Map4">
    <area shape="rect" coords="11,8,122,31" href="PressPass.asp">
</map>
<map name="Map5">
    <area shape="rect" coords="11,8,138,31" href="Publications.asp">
</map>

```

```
<map name="Map6">
  <area shape="rect" coords="7,3,324,37" href="CreativeServices.asp">
</map>
</body>
</html>
<%
rsCSUMag.Close()
Set rsCSUMag = Nothing
%>
```

ExpertsGuide.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body>
<table width="750" border="0" cellpadding="0" cellspacing="0" bgcolor="012650">
  <tr>
    <td width="160" rowspan="2"> <div align="center"></div></td>
    <td width="590" height="75"> <div align="left"></div></td>
  </tr>
  <tr>
    <td width="590" height="30"> <div align="left">
      <map name="Map">
        <area shape="rect" coords="282,5,355,25" href="Publications.asp">
        <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
      </map>
    </div></td>
  </tr>
</table>
<map name="Map2">
  <area shape="rect" coords="4,11,308,54" href="MediaRelations.asp">
</map>
<br>
<table width="750" border="0" cellspacing="0" cellpadding="0">
  <tr>
    <td width="160"><a href="Publications.asp"></a><br>
    <a href="StyleGuide.asp"></a><br>
    <a href="PrintJobGuide.asp"></a><br>
    <a href="PressPass.asp"></a></td>
    <td valign="top"> <div align="center">
      <p><br>
      <font color="012650" size="4" face="Arial, Helvetica, sans-serif">
<strong>Under Construction</strong></font></p>
    </div></td>
  </tr>
</table>
<map name="Map2Map">
  <area shape="rect" coords="12,6,139,30" href="Publications.asp">
</map>
<map name="Map3">
  <area shape="rect" coords="13,8,132,32" href="StyleGuide.asp">
```

```
</map>
<map name="Map4">
  <area shape="rect" coords="13,8,151,31" href="PrintJobGuide.asp">
</map>
<map name="Map5">
  <area shape="rect" coords="11,8,123,30" href="PressPass.asp">
</map>
</body>
</html>
```

ExtArtDetail.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
Dim rsExtArtDetail__MMColParam
rsExtArtDetail__MMColParam = "1"
If (Request.QueryString("ID") <> "") Then
    rsExtArtDetail__MMColParam = Request.QueryString("ID")
End If
%>
<%
Dim rsExtArtDetail
Dim rsExtArtDetail_numRows

Set rsExtArtDetail = Server.CreateObject("ADODB.Recordset")
rsExtArtDetail.ActiveConnection = MM_UnivRel_STRING
rsExtArtDetail.Source = "SELECT * FROM ExtArticles WHERE ID = " + Replace
(rsExtArtDetail__MMColParam, "'", "'') + ""
rsExtArtDetail.CursorType = 0
rsExtArtDetail.CursorLocation = 2
rsExtArtDetail.LockType = 1
rsExtArtDetail.Open()

rsExtArtDetail_numRows = 0
%>
<html>
<head>
<title>CSU in the News: Article Detail</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body link="012650" vlink="999966" alink="#FF0000">
<div align="left">
    <table width="750" border="0" cellpadding="0" cellspacing="0" bgcolor="012650">

        <tr>
            <td width="160" rowspan="2"> <div align="center"></div></td>
            <td width="590" height="75"> <div align="left"></div></td>
        </tr>
        <tr>
            <td width="590" height="30"> <div align="left">
                <map name="Map">
                    <area shape="rect" coords="282,5,355,25" href="Publications.asp">
                    <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
                    <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
                    <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
                    <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
                    <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
                </map>
            </div></td>
        </tr>
    </table>
    <table width="750" border="0" cellspacing="0" cellpadding="0">
        <tr>
            <td width="160" valign="top"><img src="../Images/CampusNewsGIF.gif"

```


[illegible]

```

        </div></td>
    </tr>
</table>
</div>
<map name="Map2">
    <area shape="rect" coords="7,14,309,54" href="MediaRelations.asp">
</map>
<map name="Map3">
    <area shape="rect" coords="12,7,144,30" href="#">
</map>
<map name="Map4">
    <area shape="rect" coords="12,5,149,30" href="#">
</map>
<map name="Map5">
    <area shape="rect" coords="13,8,143,30" href="ExpertsGuide.asp">
</map>
</body>
</html>
<?
rsExtArtDetail.Close()
Set rsExtArtDetail = Nothing
?>

```

InsideCSUArchive.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
Dim rsInsideCSU
Dim rsInsideCSU_numRows

Set rsInsideCSU = Server.CreateObject("ADODB.Recordset")
rsInsideCSU.ActiveConnection = MM_UnivRel_STRING
rsInsideCSU.Source = "SELECT * FROM InsideCSU ORDER BY Date DESC"
rsInsideCSU.CursorType = 0
rsInsideCSU.CursorLocation = 2
rsInsideCSU.LockType = 1
rsInsideCSU.Open()

rsInsideCSU_numRows = 0
%>
<%
Dim Repeat1_numRows
Dim Repeat1_index

Repeat1_numRows = -1
Repeat1_index = 0
rsInsideCSU_numRows = rsInsideCSU_numRows + Repeat1_numRows
%>
<html>
<head>
<title>University Relations: Inside CSU Archive</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body link="999966" vlink="999966" alink="012650">
<table width="750" border="0" cellpadding="0" cellspacing="0" bgcolor="012650">
  <tr>
    <td width="160" rowspan="2"> <div align="center"></div></td>
    <td width="590" height="75"> <div align="left"></div></td>
  </tr>
  <tr>
    <td width="590" height="30"> <div align="left">
      <map name="Map">
        <area shape="rect" coords="282,5,355,25" href="Publications.asp">
        <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
      </map>
    </div></td>
  </tr>
</table>
<table width="750" border="0" cellspacing="0" cellpadding="0">
  <tr>
    <td width="160"><a href="Publications.asp"></a>
<br>
```

```

<a href="StyleGuide.asp"></a><br>
<a href="PrintJobGuide.asp"></a><br>
<a href="PressPass.asp"></a>
</td>
<td align="center">
<table width="550" border="1" cellpadding="5" cellspacing="0"
bgcolor="eeeeee">
<tr>
<td height="50" colspan="3" bgcolor="#333333">
<div align="left"><font color="#FFFFFF" size="4" face="Arial,
Helvetica, sans-serif"><strong>Inside
CSU Archive</strong></font></div></td>
</tr>
<tr>
<td colspan="3" bgcolor="#CCCCCC"><font color="#000000" size="2"
face="Times New Roman, Times, serif">Please
choose from one of the resources below for updated news from
Charleston
Southern. <br>
Some resources may require Adobe Acrobat Reader. You may Download
it <a href="http://www.csuniv.edu/rp500enu.exe">here</a>.</font>
</td>
</tr>
<tr>
<td colspan="3" bgcolor="eeeeee"> <%
While ((Repeat1__numRows <> 0) AND (NOT rsInsideCSU.EOF))
%>
<strong><font color="012650">[</font></strong> <font color="999966">
<strong>
<a href="<%= (rsInsideCSU.Fields.Item("Link").Value) %>">
<%= (rsInsideCSU.Fields.Item("Date").Value) %></a> <strong><font
color="012650"> ]&nbsp;&nbsp;&nbsp;&nbsp;</font></strong>
<%
Repeat1__index=Repeat1__index+1
Repeat1__numRows=Repeat1__numRows-1
rsInsideCSU.MoveNext()
Wend
%> </td>
</tr>
</table>
</div></td>
</tr>
</table>
<map name="Map2">
<area shape="rect" coords="11,6,134,30" href="StyleGuide.asp">
</map>
<map name="Map3">
<area shape="rect" coords="12,6,152,30" href="PrintJobGuide.asp">
</map>
<map name="Map4">
<area shape="rect" coords="11,8,122,31" href="PressPass.asp">
</map>
<map name="Map5">
<area shape="rect" coords="5,2,321,38" href="CreativeServices.asp">
</map>
</body>
</html>
<%
rsInsideCSU.Close()
Set rsInsideCSU = Nothing

```



MediaRelations.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>

<!--#include file="../Connections/UnivRel.asp" -->
<%
Dim rsMedRelPressRel
Dim rsMedRelPressRel_numRows

Set rsMedRelPressRel = Server.CreateObject("ADODB.Recordset")
rsMedRelPressRel.ActiveConnection = MM_UnivRel_STRING
rsMedRelPressRel.Source = "SELECT * FROM PressReleases ORDER BY PressRelDate DESC"
rsMedRelPressRel.CursorType = 0
rsMedRelPressRel.CursorLocation = 2
rsMedRelPressRel.LockType = 1
rsMedRelPressRel.Open()

rsMedRelPressRel_numRows = 0
%>
<%
Dim Repeat1__numRows
Dim Repeat1__index

Repeat1__numRows = -1
Repeat1__index = 0
rsMedRelPressRel_numRows = rsMedRelPressRel_numRows + Repeat1__numRows
%>
<%
Dim MM_paramName
%>
<%
' *** Go To Record and Move To Record: create strings for maintaining URL and Form
parameters

Dim MM_keepNone
Dim MM_keepURL
Dim MM_keepForm
Dim MM_keepBoth

Dim MM_removeList
Dim MM_item
Dim MM_nextItem

' create the list of parameters which should not be maintained
MM_removeList = "&index="
If (MM_paramName <> "") Then
    MM_removeList = MM_removeList & "&" & MM_paramName & "="
End If

MM_keepURL=""
MM_keepForm=""
MM_keepBoth=""
MM_keepNone=""

' add the URL parameters to the MM_keepURL string
For Each MM_item In Request.QueryString
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepURL = MM_keepURL & MM_nextItem & Server.URLEncode(Request.QueryString
(MM_item))
    End If
Next
```

```

' add the Form variables to the MM_keepForm string
For Each MM_item In Request.Form
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepForm = MM_keepForm & MM_nextItem & Server.URLEncode(Request.Form
(MM_item))
    End If
Next

' create the Form + URL string and remove the intial '&' from each of the strings
MM_keepBoth = MM_keepURL & MM_keepForm
If (MM_keepBoth <> "") Then
    MM_keepBoth = Right(MM_keepBoth, Len(MM_keepBoth) - 1)
End If
If (MM_keepURL <> "") Then
    MM_keepURL = Right(MM_keepURL, Len(MM_keepURL) - 1)
End If
If (MM_keepForm <> "") Then
    MM_keepForm = Right(MM_keepForm, Len(MM_keepForm) - 1)
End If

' a utility function used for adding additional parameters to these strings
Function MM_joinChar(firstItem)
    If (firstItem <> "") Then
        MM_joinChar = "&"
    Else
        MM_joinChar = ""
    End If
End Function
%>
<html>
<head>
<title>Media Relations</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body link="012650" vlink="999966" alink="999966">
<table width="750" border="0" cellpadding="0" cellspacing="0" bgcolor="012650">
    <tr>
        <td width="160" rowspan="2"> <div align="center"></div></td>
        <td width="590" height="75"> <div align="left"></div></td>
    </tr>
    <tr>
        <td width="590" height="30"> <div align="left">
            <map name="MapMap">
                <area shape="rect" coords="282,5,355,25" href="Publications.asp">
                <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
                <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
                <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
                <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
                <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
            </map>
            <map name="Map">
                <area shape="rect" coords="282,5,355,25" href="Publications.asp">
                <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
                <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
                <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
                <area shape="rect" coords="357,4,391,24"

```

```

href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
    <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
    </map>
    </div></td>
</tr>
</table>
<table width="750" border="0" cellpadding="0" cellspacing="0">
    <tr>
        <td width="160" valign="top"><a href="ArchivedNews.asp"></a><br>
        <br>
        <br>
        <map name="Map3">
            <area shape="rect" coords="12,5,149,30" href="ArchivedNews.asp">
        </map>
    </td>
    <td valign="top">
        <div align="center"><br>
            <table width="550" border="1" cellpadding="5" cellspacing="0">
                <tr>
                    <td height="50" align="left" valign="middle" bgcolor="#333333">
                        <div align="left"><font color="012650" size="4"><strong><font
color="#FFFFFF" size="5" face="Arial, Helvetica, sans-serif">CSU
                        Press Releases</font></strong></font> </div></td>
                    </tr>
                    <tr>
                        <td align="left" valign="middle" bgcolor="#CCCCCC"><font color="#
000000" size="2" face="Times New Roman, Times, serif">Please
                        choose from one of the resources below for updated news from
                        Charleston
                        Southern. <br>
                        Some resources may require Adobe Acrobat Reader. You may Download
                        it <a href="http://www.csuniv.edu/rp500enu.exe">here</a>.</font>
                    </td>
                </tr>
                <tr>
                    <td align="left" valign="middle" bgcolor="eeeeee"> <ul>
                        <font color="012650"><br> </MM:DECORATION></MM REPEATEDREGION>
                    </font><MM REPEATEDREGION NAME="Repeat1" SOURCE="rsViewPRArticle"><MM:DECORATION
                    OUTLINE="Repeat" OUTLINEID=1>
                        <%
While ((Repeat1__numRows <> 0) AND (NOT rsMedRelPressRel.EOF))
    %>
                        <li><font color="012650"><strong><font size="2" face="Times New
                        Roman, Times, serif"><A HREF="PressReleaseDetail.asp?<%= MM_keepURL & MM_joinChar
                        (MM_keepURL) & "ID=" & rsMedRelPressRel.Fields.Item("ID").Value %>"><%=
                        (rsMedRelPressRel.Fields.Item("Title").Value) %></A> </font>&nbsp;</strong> ~
                        </font></li>
                        <font color="012650" size="2" face="Times New Roman, Times,
                        serif">
                        &nbsp;<%= (rsMedRelPressRel.Fields.Item("PressRelDate").Value) %>
                    </font>
                        <%
Repeat1__index=Repeat1__index+1
Repeat1__numRows=Repeat1__numRows-1
rsMedRelPressRel.MoveNext()
Wend
    %>
                        </ul></td>
                    </tr>
                </tr>
            </table>
        </div>
    </td>
</tr>
</table>

```



```
        </table>
    </div></td>
</tr>
</table>
<map name="Map2">
    <area shape="rect" coords="11,6,144,29" href="ExpertsGuide.asp">
</map>
</body>
</html>
<%
rsMedRelPressRel.Close()
Set rsMedRelPressRel = Nothing
%>
```

PressPass.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
' *** Edit Operations: declare variables

Dim MM_editAction
Dim MM_abortEdit
Dim MM_editQuery
Dim MM_editCmd

Dim MM_editConnection
Dim MM_editTable
Dim MM_editRedirectUrl
Dim MM_editColumn
Dim MM_recordId

Dim MM_fieldsStr
Dim MM_columnsStr
Dim MM_fields
Dim MM_columns
Dim MM_typeArray
Dim MM_formVal
Dim MM_delim
Dim MM_altVal
Dim MM_emptyVal
Dim MM_i

MM_editAction = CStr(Request.ServerVariables("SCRIPT_NAME"))
If (Request.QueryString <> "") Then
    MM_editAction = MM_editAction & "?" & Request.QueryString
End If

' boolean to abort record edit
MM_abortEdit = false

' query string to execute
MM_editQuery = ""
%>
<%
' *** Insert Record: set variables

If (CStr(Request("MM_insert")) = "Form") Then

    MM_editConnection = MM_UnivRel_STRING
    MM_editTable = "RequestForm"
    MM_editRedirectUrl = "../UR/RequestSubmitted.asp"
    MM_fieldsStr =
"Name|value|Phone|value|Email|value|Event|value|EventDate|value|Dept|value|EventTi
me|value|Location|value|Information|value|Photo|value|ArtPR|value|OnCampus|value|O
ffCampus|value"
    MM_columnsStr =
"Name|',none,'|Phone|',none,'|Email|',none,'|Event|',none,'|EventDate|',none,'
'|Dept|',none,'|EventTime|',none,'|Location|',none,'|Information|',none,'|Phot
o|none,1,0|ArtPR|none,1,0|OnCampus|none,1,0|OffCampus|none,1,0"

    ' create the MM_fields and MM_columns arrays
    MM_fields = Split(MM_fieldsStr, "|")
    MM_columns = Split(MM_columnsStr, "|")

    ' set the form values
    For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
```

```

    MM_fields(MM_i+1) = CStr(Request.Form(MM_fields(MM_i)))
Next

' append the query string to the redirect URL
If (MM_editRedirectUrl <> "" And Request.QueryString <> "") Then
    If (InStr(1, MM_editRedirectUrl, "?", vbTextCompare) = 0 And
Request.QueryString <> "") Then
        MM_editRedirectUrl = MM_editRedirectUrl & "?" & Request.QueryString
    Else
        MM_editRedirectUrl = MM_editRedirectUrl & "&" & Request.QueryString
    End If
End If

End If
>
<
' *** Insert Record: construct a sql insert statement and execute it

Dim MM_tableValues
Dim MM_dbValues

If (CStr(Request("MM_insert")) <> "") Then

    ' create the sql insert statement
    MM_tableValues = ""
    MM_dbValues = ""
    For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
        MM_formVal = MM_fields(MM_i+1)
        MM_typeArray = Split(MM_columns(MM_i+1), ",")
        MM_delim = MM_typeArray(0)
        If (MM_delim = "none") Then MM_delim = ""
        MM_altVal = MM_typeArray(1)
        If (MM_altVal = "none") Then MM_altVal = ""
        MM_emptyVal = MM_typeArray(2)
        If (MM_emptyVal = "none") Then MM_emptyVal = ""
        If (MM_formVal = "") Then
            MM_formVal = MM_emptyVal
        Else
            If (MM_altVal <> "") Then
                MM_formVal = MM_altVal
            ElseIf (MM_delim = "'") Then ' escape quotes
                MM_formVal = "'" & Replace(MM_formVal, "'", "''") & "'"
            Else
                MM_formVal = MM_delim + MM_formVal + MM_delim
            End If
        End If
        If (MM_i <> LBound(MM_fields)) Then
            MM_tableValues = MM_tableValues & ", "
            MM_dbValues = MM_dbValues & ", "
        End If
        MM_tableValues = MM_tableValues & MM_columns(MM_i)
        MM_dbValues = MM_dbValues & MM_formVal
    Next
    MM_editQuery = "insert into " & MM_editTable & " (" & MM_tableValues & ") values (" & MM_dbValues & ")"

    If (Not MM_abortEdit) Then
        ' execute the insert
        Set MM_editCmd = Server.CreateObject("ADODB.Command")
        MM_editCmd.ActiveConnection = MM_editConnection
        MM_editCmd.CommandText = MM_editQuery
        MM_editCmd.Execute
        MM_editCmd.ActiveConnection.Close
    
```

```

Dim objCDO, strBody
Set objCDO = Server.CreateObject("CDONTS.NewMail")

strBody = "There has been a new event request by " &
cStr(Request("Name")) & vbcrLf
strBody = strBody & "Club/Dept: " & cStr(Request
("Dept")) & vbcrLf
strBody = strBody & "Event: " & cStr(Request
("Event")) & vbcrLf
strBody = strBody & "Date: " & cStr(Request
("EventDate")) & vbcrLf & "Time: " & cStr(Request("EventTime")) & vbcrLf
strBody = strBody & "Location: " & cStr(Request
("Location")) & vbcrLf
strBody = strBody & "Services Requested: " & cStr
(Request("Photo")) & " " & cStr(Request("ArtPR")) & vbcrLf
strBody = strBody & "Suggested Use: " & cStr(Request
("OnCampus")) & " " & cStr(Request("OffCampus")) & vbcrLf
strBody = strBody & "Phone Number: " & cStr(Request
("Phone")) & vbcrLf
strBody = strBody & "Email: " & cStr(Request
("Email")) & vbcrLf & "Other Information: " & cStr(Request("Information")) &
vbcrLf

objCDO.From = cStr(Request("Email"))
objCDO.To = "walterkbrowningiv@lycos.com"
objCDO.Subject = "Event Coverage Request from " &
cStr(Request("Dept"))

objCDO.Body = strBody

objCDO.Send()

Set objCDO = Nothing

If (MM_editRedirectUrl <> "") Then
    Response.Redirect(MM_editRedirectUrl)
End If
End If

End If
%>
<html>
<head>
<title>Creative Services: Press Pass Form</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body bgcolor="FFFFFF" text="012650">
<div align="left"></div>
<table width="750" border="0" cellpadding="0" cellspacing="0" bgcolor="012650">
    <tr>
        <td width="160" rowspan="2"> <div align="center"><a href="PressPass.asp"></a></div>
</td>
        <td width="295" height="75"> <div align="left"></div></td>
        <td width="105"><div align="center"></div></td>
    </tr>
    <tr>
        <td width="590" height="30" colspan="2"> <div align="left">
            <map name="MapMap">
                <area shape="rect" coords="282,5,355,25" href="Publications.asp">

```

```

        <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
    </map>
    <map name="Map">
        <area shape="rect" coords="282,5,355,25" href="Publications.asp">
        <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
    </map>
</div></td>
</tr>
</table>
<div align="left"> </div>
<div align="left"></div>
<table width="750" border="0" cellpadding="2" cellspacing="0">
    <tr>
        <td width="160" align="left" valign="top" bgcolor="ffffff">
            <p align="left"><a href="Publications.asp"></a><br>
                <a href="StyleGuide.asp"></a><br>
                <a href="PrintJobGuide.asp"></a><br>
                <a href="PressPass.asp"></a>
            </p></td>
        <td valign="top"> <div align="center">
            <p><font color="ffffff" size="5" face="Arial, Helvetica, sans-serif">
<strong><font color="#FF0000" face="Courier New, Courier, mono">E<font size="4">
VENT</font>
                C<font size="4">OVERAGE</font> A<font size="4">PPLICATION<br>
                <br>
                </font></font></strong></font><font color="012650" size="3" face="Arial,
Helvetica, sans-serif"><strong><font size="2">If
                your organization or club is hosting an event on Campus,<br>
                it may be possible for someone from University Relations<br>
                to be there and cover the activities.*<br>
                </font></strong></font> <font size="2" face="Arial, Helvetica, sans-
serif"><strong><font color="012650"><br>
                Just fill out and submit the request form below.</font></strong></font>
<font face="Georgia, Times New Roman, Times, serif"><font color="012650" size="3">
</font></font><font color="012650" size="3" face="Georgia, Times New
Roman, Times, serif"></font><font color="012650" size="3" face="Arial, Helvetica,
sans-serif">
                </font> </p>
            <form ACTION="&MM editAction%" METHOD="POST" name="Form" id="Form">
                <table width="585" border="0" cellspacing="0" cellpadding="0">
                    <tr bgcolor="eeeeee">
                        <td colspan="6"><font color="012650">&nbsp;</font></td>
                    </tr>
                    <tr bgcolor="eeeeee">
                        <td></td>
                        <td colspan="2"><strong><font color="9D8E62" face="Arial, Helvetica,

```

```

sans-serif"><em>Contact
    Information:</em></font></strong></td>
    <td width="55"></td>
    <td></td>
    <td></td>
</tr>
<tr bgcolor="eeeeee">
    <td></td>
    <td width="75"></td>
    <td width="115"></td>
    <td width="55"></td>
    <td></td>
    <td></td>
</tr>
<tr bgcolor="eeeeee">
    <td width="42"><font color="012650">&nbsp;</font></td>
    <td width="75"><strong><font color="012650" face="Arial, Helvetica,
sans-serif">Name:</font></strong></td>
    <td width="115"><font color="012650" face="Arial, Helvetica, sans-
serif">
        <input name="Name" type="text" id="Name" size="25">
        </font></td>
    <td><strong><font color="012650" face="Arial, Helvetica, sans-
serif">Phone:</font></strong></td>
    <td> <font color="012650">
        <input name="Phone" type="text" id="Phone" size="15">
        </font></td>
    <td width="40"><font color="012650">&nbsp;</font></td>
</tr>
<tr bgcolor="eeeeee">
    <td></td>
    <td width="75"><strong><font color="012650" face="Arial, Helvetica,
sans-serif">E-mail:</font></strong></td>
    <td width="115"> <font color="012650">
        <input name="Email" type="text" id="Email" size="25">
        </font></td>
    <td width="55"></td>
    <td></td>
    <td></td>
</tr>
<tr bgcolor="eeeeee">
    <td></td>
    <td colspan="2"></td>
    <td width="55">&nbsp;</td>
    <td>&nbsp;</td>
    <td>&nbsp;</td>
</tr>
<tr bgcolor="eeeeee">
    <td>&nbsp;</td>
    <td colspan="2"><strong><font color="9D8E62" face="Arial, Helvetica,
sans-serif"><em>Event
    Details:</em></font></strong></td>
    <td width="55">&nbsp;</td>
    <td>&nbsp;</td>
    <td>&nbsp;</td>
</tr>
<tr bgcolor="eeeeee">
    <td width="42"><font color="012650">&nbsp;</font></td>
    <td width="75" height="24"><strong><font color="012650" face="Arial,
Helvetica, sans-serif">Event:</font></strong></td>
    <td width="115"><font color="012650" face="Arial, Helvetica, sans-
serif">
        <input name="Event" type="text" id="Event" size="25">
        </font></td>

```

```

        <td><strong><font color="012650" face="Arial, Helvetica, sans-
serif">Date:</font></strong></td>
        <td><font color="012650" face="Arial, Helvetica, sans-serif">
        <input name="EventDate" type="text" id="EventDate" size="15">
        </font></td>
        <td width="40"><font color="012650">&nbsp;</font></td>
    </tr>
    <tr bgcolor="eeeeee">
        <td>&nbsp;</td>
        <td width="75"><strong><font color="012650" face="Arial, Helvetica,
sans-serif">Club/Dept:</font></strong></td>
        <td width="115"><font color="012650" face="Arial, Helvetica, sans-
serif">
            <input name="Dept" type="text" id="Dept" size="25">
            </font></td>
        <td height="24"><strong><font color="012650" face="Arial, Helvetica,
sans-serif">Time:</font></strong></td>
        <td><font color="012650">
            <input name="EventTime" type="text" id="EventTime" size="15">
            </font></td>
        <td>&nbsp;</td>
    </tr>
    <tr bgcolor="eeeeee">
        <td width="42"><font color="012650">&nbsp;</font></td>
        <td width="75"><strong><font color="012650" face="Arial, Helvetica,
sans-serif">Location:</font></strong></td>
        <td width="115"><font color="012650">
            <input name="Location" type="text" id="Location" size="25">
            </font></td>
        <td width="55">&nbsp;</td>
        <td width="40">&nbsp;</td>
        <td width="40"><font color="012650">&nbsp;</font></td>
    </tr>
    <tr bgcolor="eeeeee">
        <td></td>
        <td width="75"><strong><font size="2" face="Arial, Helvetica, sans-
serif">Other</font><font face="Arial, Helvetica, sans-serif">
            <font size="2">Information</font></strong></td>
        <td colspan="3" valign="bottom"><textarea name="Information"
cols="45" rows="5" id="Information"></textarea></td>
    </tr>
    <tr bgcolor="eeeeee">
        <td></td>
        <td width="75"></td>
        <td width="115"></td>
        <td width="55"></td>
        <td></td>
        <td></td>
    </tr>
    <tr bgcolor="eeeeee">
        <td>&nbsp;</td>
        <td width="75">&nbsp;</td>
        <td width="115">&nbsp;</td>
        <td width="55">&nbsp;</td>
        <td>&nbsp;</td>
        <td>&nbsp;</td>
    </tr>
    <tr bgcolor="eeeeee">
        <td>&nbsp;</td>
        <td colspan="2"><font color="9D8E62" face="Arial, Helvetica, sans-
serif"><strong><em>Services
            Requested:</em></strong></font></td>
        <td width="55">&nbsp;</td>
    </tr>

```

```

        <td>&nbsp;&nbsp;&nbsp;</td>
        <td>&nbsp;&nbsp;&nbsp;</td>
    </tr>
    <tr bgcolor="eeeeee">
        <td>&nbsp;&nbsp;&nbsp;</td>
        <td colspan="4"><input name="Photo" type="checkbox" id="Photo"
value="Photo">
            <font face="Arial, Helvetica, sans-serif"><strong>Photography
</strong></font>
            &nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<input name="ArtPR"
type="checkbox" id="ArtPR" value="ArtPR">
            <strong><font size="3" face="Arial, Helvetica, sans-serif">
Article/Press
                Release</font></strong></td>
            <td></td>
        </tr>
    <tr bgcolor="eeeeee">
        <td>&nbsp;&nbsp;&nbsp;</td>
        <td colspan="2">&nbsp;&nbsp;&nbsp;</td>
        <td width="55">&nbsp;&nbsp;&nbsp;</td>
        <td>&nbsp;&nbsp;&nbsp;</td>
        <td>&nbsp;&nbsp;&nbsp;</td>
    </tr>
    <tr bgcolor="eeeeee">
        <td>&nbsp;&nbsp;&nbsp;</td>
        <td colspan="2"><font color="9D8E62" face="Arial, Helvetica, sans-
serif"><strong><em>Suggested
            Use:</em></strong></font></td>
        <td width="55">&nbsp;&nbsp;&nbsp;</td>
        <td>&nbsp;&nbsp;&nbsp;</td>
        <td>&nbsp;&nbsp;&nbsp;</td>
    </tr>
    <tr bgcolor="eeeeee">
        <td>&nbsp;&nbsp;&nbsp;</td>
        <td colspan="4"><input name="OnCampus" type="checkbox"
id="OnCampus" value="OnCampus">
            <font size="2"><strong> <font size="3" face="Arial, Helvetica,
sans-serif">On-campus
                publications </font>(<em>CSU Magazine, Buc In Print,Cutlass, etc.
</em>)</strong></font></td>
        <td>&nbsp;&nbsp;&nbsp;</td>
    </tr>
    <tr bgcolor="eeeeee">
        <td>&nbsp;&nbsp;&nbsp;</td>
        <td colspan="4"><input name="OffCampus" type="checkbox"
id="OffCampus" value="OffCampus">
            <strong><font face="Arial, Helvetica, sans-serif">Off-campus media
                outlets</font> </strong><font size="2"><strong>(<em>Post &
                Courier, Summerville Journal-Scene, etc.)</em></strong></font>
</td>
        <td>&nbsp;&nbsp;&nbsp;</td>
    </tr>
    <tr bgcolor="eeeeee">
        <td colspan="6">&nbsp;&nbsp;&nbsp;</td>
    </tr>
    <tr bgcolor="eeeeee">
        <td colspan="6">&nbsp;&nbsp;&nbsp;</td>
    </tr>
    <tr bgcolor="eeeeee">
        <td colspan="6"><div align="center"><font color="012650"></font>
<font color="012650"></font>
            <font color="012650">
                <input type="submit" name="Submit" value="Submit" >
                <

```



```
'If (Request("Submit") <> " ") Then
```

```
'Function SendHTMLEmail(strSendTo, strSubject, strBody)
'dim objEmail
'set objEmail = Server.CreateObject("CDONTS.NewMail")
'strSendTo = "laedeesmann@yahoo.com"
'strSubject = "Event Coverage Request from " & cStr(Request("Dept"))
'strBody = "There has been a new event request by " & cStr(Request("Name")) &
"<br><br>" & "Club/Dept: " & cStr(Request("Dept")) & "<br><br>" & "Event: " & cStr
(Request("Event")) & "<br><br>" & "Date: " & cStr(Request("EventDate")) & "<br>
<br>" & "Time: " & cStr(Request("EventTime")) & "<br><br>" & "Location: " & cStr
(Request("Date")) & "<br><br>" & "Services Requested: " & cStr(Request("Photo")) &
cStr(Request("ArtPR")) & "<br><br>" & "Suggested Use: " & cStr(Request("SuggUse"))
& "<br><br>" & "Phone Number: " & cStr(Request("Phone")) & "<br><br>" & "Email: "
& cStr(Request("Email")) & "<br><br>" & "Other Information: " & cStr(Request
("Information")) & "<br><br>"
'objEmail.To = strSendTo
'objEmail.From = cStr(Request("Email"))
'objEmail.subject = strSubject
'objEmail.body = strBody
'objEmail.BodyFormat = 0
'objEmail.MailFormat = 0
'objEmail.send
'set objEmail = nothing
'End Function

'End If
```

```
</font></div></td>
</tr>
<tr bgcolor="eeeeee">
<td><font color="012650">&nbsp;</font></td>
<td width="75"><font color="012650">&nbsp;</font></td>
<td width="115"><font color="012650">&nbsp;</font></td>
<td width="55">&nbsp;</td>
<td width="40">&nbsp;</td>
<td width="40"><font color="012650">&nbsp;</font></td>
</tr>
</table>
<div align="center"><br>
~<br>
</div>
<input type="hidden" name="MM_insert" value="Form">
</form>
<p><font color="ffffff" size="3" face="Arial, Helvetica, sans-serif">
</font></p>
</div></td>
</tr>
<tr>
<td width="160" height="250" align="left" valign="top" bgcolor="ffffff"></td>
<td valign="top"><div align="justify"><font size="1" face="Verdana, Arial,
Helvetica, sans-serif"><strong><em>*The
Office of University Relations (UR) reserves the right to determine the
newsworthiness of each event/story, and to manage the distribution and
publication of each even/story. While we cannot guarantee that a full-time
staff member will always be available to cover your event, we employ
highly
capable, well-trained work-study students who may be available to take
photographs and/or write an article. In the event that no one is available
to cover your event, UR has a limited number of 35 mm cameras which can
be submitted with less than one week's notice are not guaranteed coverage
by UR.</em></strong></font></div></td>
</tr>
</table>
```

```
<div align="left"></div>
<map name="Map2">
  <area shape="rect" coords="3,2,323,38" href="CreativeServices.asp">
</map>
<map name="Map3">
  <area shape="rect" coords="12,7,137,31" href="Publications.asp">
</map>
<map name="Map4">
  <area shape="rect" coords="13,7,131,31" href="StyleGuide.asp">
</map>
<map name="Map5">
  <area shape="rect" coords="12,8,122,30" href="PressPass.asp">
</map>
<map name="Map6">
  <area shape="rect" coords="12,6,152,32" href="PrintJobGuide.asp">
</map>
</body>
</html>
```

PressReleaseDetail.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
Dim rsPressReleaseDetail_MMColParam
rsPressReleaseDetail_MMColParam = "1"
If (Request.QueryString("ID") <> "") Then
    rsPressReleaseDetail_MMColParam = Request.QueryString("ID")
End If
%>
<%
Dim rsPressReleaseDetail
Dim rsPressReleaseDetail_numRows

Set rsPressReleaseDetail = Server.CreateObject("ADODB.Recordset")
rsPressReleaseDetail.ActiveConnection = MM_UnivRel_STRING
rsPressReleaseDetail.Source = "SELECT * FROM PressReleases WHERE ID = " + Replace
(rsPressReleaseDetail_MMColParam, "'", "''") + ""
rsPressReleaseDetail.CursorType = 0
rsPressReleaseDetail.CursorLocation = 2
rsPressReleaseDetail.LockType = 1
rsPressReleaseDetail.Open()

rsPressReleaseDetail_numRows = 0
%>
<html>
<head>
<title>Campus News Press Release</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body text="012650" link="012650" vlink="012650" alink="999966">
<div align="left">
<table width="750" border="0" cellpadding="0" cellspacing="0" bgcolor="012650">
<tr>
<td width="160" rowspan="2"> <div align="center"></div></td>
<td width="590" height="75"> <div align="left"></div></td>
</tr>
<tr>
<td width="590" height="30"> <div align="left">
<map name="MapMap">
<area shape="rect" coords="282,5,355,25" href="Publications.asp">
<area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
<area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
<area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
<area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
<area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
</map>
<map name="Map">
<area shape="rect" coords="282,5,355,25" href="Publications.asp">
<area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
<area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
<area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
<area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">

```

[illegible]

```

PicShow1 = rsPressReleaseDetail.Fields.Item
("Pic3").Value
IF PicShow <>" THEN%>
    ">
    <%ELSE%>
        
    <%End If%>
</font></div>

</td>
</tr>
</table>
</td>
</tr>
</table>
</div>
<map name="Map2">
    <area shape="rect" coords="8,15,307,54" href="MediaRelations.asp">
</map>
<map name="Map3">
    <area shape="rect" coords="11,7,148,30" href="ArchivedExtNews.asp">
</map>
</body>
</html>
<%
rsPressReleaseDetail.Close()
Set rsPressReleaseDetail = Nothing
%>

```

PrintJobGuide.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<html>
<head>
<title>Print Job Guide</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body>
<table width="750" border="0" cellpadding="0" cellspacing="0" bgcolor="012650">
  <tr>
    <td width="160" rowspan="2"> <div align="center"></div></td>
    <td width="590" height="75"> <div align="left"></div></td>
  </tr>
  <tr>
    <td width="590" height="30"> <div align="left">
      <map name="Map">
        <area shape="rect" coords="282,5,355,25" href="Publications.asp">
        <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
      </map>
    </div></td>
  </tr>
</table>
<br>
<table width="750" border="0" cellspacing="0" cellpadding="0">
  <tr>
    <td width="160"><a href="Publications.asp"></a><br>
    <a href="StyleGuide.asp"></a><br>
    <br>
    <a href="PressPass.asp"></a></td>
    <td><div align="center"><font color="012650" size="5" face="Arial, Helvetica,
sans-serif"><strong><font size="6">Under
      Construction </font>...</strong></font></div></td>
  </tr>
</table>
<br>
<map name="Map2">
  <area shape="rect" coords="2,1,324,39" href="CreativeServices.asp">
</map>
<map name="Map3">
  <area shape="rect" coords="11,8,133,33" href="StyleGuide.asp">
</map>
<map name="Map4">
  <area shape="rect" coords="12,7,123,31" href="PressPass.asp">
</map>
<map name="Map5">
```

```
    <area shape="rect" coords="12,7,139,30" href="Publications.asp">
</map>
</body>
</html>
```

PubHome.asp

```
<%@LANGUAGE="VBSCRIPT"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
Dim rsHomeReleases
Dim rsHomeReleases_numRows

Set rsHomeReleases = Server.CreateObject("ADODB.Recordset")
rsHomeReleases.ActiveConnection = MM_UnivRel_STRING
rsHomeReleases.Source = "SELECT * FROM PressReleases ORDER BY PressRelDate DESC"
rsHomeReleases.CursorType = 0
rsHomeReleases.CursorLocation = 2
rsHomeReleases.LockType = 1
rsHomeReleases.Open()

rsHomeReleases_numRows = 0
%>
<%
Dim Repeat1__numRows
Dim Repeat1__index

Repeat1__numRows = 3
Repeat1__index = 0
rsHomeReleases_numRows = rsHomeReleases_numRows + Repeat1__numRows
%>
<%
Dim MM_paramName
%>

<%
' *** Go To Record and Move To Record: create strings for maintaining URL and Form
parameters

Dim MM_keepNone
Dim MM_keepURL
Dim MM_keepForm
Dim MM_keepBoth

Dim MM_removeList
Dim MM_item
Dim MM_nextItem

' create the list of parameters which should not be maintained
MM_removeList = "&index="
If (MM_paramName <> "") Then
    MM_removeList = MM_removeList & "&" & MM_paramName & "="
End If

MM_keepURL=""
MM_keepForm=""
MM_keepBoth=""
MM_keepNone=""

' add the URL parameters to the MM keepURL string
For Each MM_item In Request.QueryString
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepURL = MM_keepURL & MM_nextItem & Server.URLEncode(Request.QueryString
(MM_item))
    End If
Next
```



```

' add the Form variables to the MM_keepForm string
For Each MM_item In Request.Form
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepForm = MM_keepForm & MM_nextItem & Server.URLEncode(Request.Form
(MM_item))
    End If
Next

' create the Form + URL string and remove the intial '&' from each of the strings
MM_keepBoth = MM_keepURL & MM_keepForm
If (MM_keepBoth <> "") Then
    MM_keepBoth = Right(MM_keepBoth, Len(MM_keepBoth) - 1)
End If
If (MM_keepURL <> "") Then
    MM_keepURL = Right(MM_keepURL, Len(MM_keepURL) - 1)
End If
If (MM_keepForm <> "") Then
    MM_keepForm = Right(MM_keepForm, Len(MM_keepForm) - 1)
End If

' a utility function used for adding additional parameters to these strings
Function MM_joinChar(firstItem)
    If (firstItem <> "") Then
        MM_joinChar = "&"
    Else
        MM_joinChar = ""
    End If
End Function
*>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN">
<html>
<head>
<title>University Relations</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
<script language="JavaScript" type="text/JavaScript">
<!--

function MM_jumpMenu(targ,selObj,restore){ //v3.0
    eval(targ+".location='"+selObj.options[selObj.selectedIndex].value+"'");
    if (restore) selObj.selectedIndex=0;
}
//-->
</script>
</head>

<body bgcolor="ffffff" text="012650" link="012650">
<div align="center">
    <table width="750" height="90" border="0" cellpadding="0" cellspacing="0"
id="UnRelTitleBar">
        <tr>
            <td width="175" bgcolor="012650"> <div align="center"></div></td>
            <td width="400" height="60" align="center" valign="middle" bgcolor="012650">
                <div align="center"></div></td>
            <td width="175" valign="top" bgcolor="012650"> <div align="right"><font
color="ffffff" size="1" face="Arial, Helvetica, sans-serif"><strong>
                </strong></font></div>
                <div align="center"></div></td>
        </tr>
        <tr>
            <td height="30" colspan="3" bgcolor="012650">
                <div align="center"></div></td>
</tr>
<tr bgcolor="012650">
  <td bgcolor="ffffff"><font color="ffffff">&nbsp;</font></td>
  <td bgcolor="ffffff"><font color="ffffff">&nbsp;</font></td>
  <td valign="top" bgcolor="ffffff"><div align="right"><font color="ffffff"
size="1" face="Arial, Helvetica, sans-serif"><strong><a
href="../Admin/AdminLogin.asp"><font color="012650">Admin
Login</font></a></strong></font></div></td>
</tr>
</table>
<div align="right"> </div>
<table width="750" height="290" border="0" cellpadding="0" cellspacing="0">
  <tr>
    <td colspan="3" align="center" valign="bottom" bgcolor="012650"></td>
    <td width="400" rowspan="2" align="center" valign="middle" bgcolor="012650">
      <div align="center">
      </div>
      <div align="center"></div>
      <div align="center"></div></td>
    <td width="175" colspan="3" align="center" valign="bottom" bgcolor="012650">
      <div align="center"><font color="ffffff"> </font>
        <form name="form1" method="post" action="">
          <font color="ffffff">
            <select name="QuickMenu" onChange="MM_jumpMenu('parent',this,0)">
              <option selected>Quick Links...</option>
              <option>-----</option>
              <option value="../UR/AboutCSU.asp">Quick Facts: CSU</option>
              <option value="MediaRelations.asp">Media Relations</option>
              <option value="ArchivedNews.asp">Campus News</option>
              <option value="Publications.asp">Publications</option>
              <option value="ArchivedNews.asp">Story Archives</option>
              <option value="StyleGuide.asp">Style Guide</option>
            </select>
          </font>
        </form>
      </div></td>
  </tr>
  <tr>
    <td width="3" height="200" align="center" valign="top" bgcolor="012650">
</td>
    <td width="169" height="200" align="left" valign="top" bgcolor="ffffff">
      <ul>
        <li>
          <strong><A HREF="../UR/PressReleaseDetail.asp?&#62;= MM_keepURL &
MM_joinChar(MM_keepURL) & "ID=" & rsHomeReleases.Fields.Item("ID").Value &#62;"><font
size="2" face="Times New Roman, Times, serif">&#62;= (rsHomeReleases.Fields.Item
("Title").Value) &#62;</font></A><font face="Times New Roman, Times, serif"><br>
</font></strong><font color="012650" size="2" face="Times New Roman,
Times, serif">&#62;= (rsHomeReleases.Fields.Item("PressRelDate").Value) &#62;</font> <br>
</font>
          <li>
            Repeat1_index=Repeat1_index+1
            Repeat1_numRows=Repeat1_numRows-1
            rsHomeReleases.MoveNext()
          </li>
        </ul>
      </td>
    <td width="3" height="200" align="center" valign="top" bgcolor="012650">

```

```

</td>
<td width="3" height="200" bgcolor="012650"> <p> </p></td>
<td width="169" height="200" align="center" valign="bottom"
bgcolor="012650"><div align="center" valign = "top"></div>
<font size="1"><br></font>
<div align="center"></div></td>
<td width="3" height="200" bgcolor="012650"> </td>
</tr>
<tr>
<td height="40" colspan="3" align="center" valign="middle" bgcolor="012650">
<div align="center"><a href="ArchivedNews.asp"></a></div></td>
<td width="400" align="center" valign="middle" bgcolor="012650">&nbsp;</td>
<td height="40" colspan="3" align="center" valign="middle" bgcolor="012650">
<div align="center"><a href="PressPass.asp">
</a></div></td>
</tr>
</table>
<br>
<font color="ffffff" size="1"><strong><font color="012650" face="Arial,
Helvetica, sans-serif">Charleston
Southern University</font></strong></font><font color="012650" size="2"
face="Arial, Helvetica, sans-serif">
</font><font color="012650" size="2"><em><font size="1"><br>
<font face="Arial, Helvetica, sans-serif">&quot;Promoting Academic Excellence
in a Christian Environment&quot;</font></em></font></div>
<map name="Map">
<area shape="rect" coords="282,5,355,25" href="Publications.asp">
<area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
<area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
<area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
<area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
<area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
</map>
<map name="Map2">
<area shape="rect" coords="4,5,169,45" href="ArchivedExtNews.asp">
</map>
<map name="Map3">
<area shape="rect" coords="5,119,75,184" href="ArchivedExtNews.asp">
<area shape="rect" coords="83,83,160,185" href="InsideCSUArchive.asp">
<area shape="rect" coords="93,5,156,77" href="CSUMagArchive.asp">
<area shape="rect" coords="5,4,75,116" href="BIPArchive.asp">
</map>
<map name="Map4">
<area shape="rect" coords="7,2,163,32" href="ArchivedExtNews.asp">
</map>
<map name="Map5">
<area shape="rect" coords="5,4,164,32" href="PressPass.asp">
</map>
</body>
</html>
<?
rsHomeReleases.Close()
Set rsHomeReleases = Nothing
?>

```

Publications.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<html>
<head>
<title>Creative Services</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body link="999966" vlink="999966" alink="999966">
<table width="750" border="0" cellpadding="0" cellspacing="0" bgcolor="012650">
  <tr>
    <td width="160" rowspan="2"> <div align="center"></div></td>
    <td width="590" height="75"> <div align="left"></div></td>
  </tr>
  <tr>
    <td width="590" height="30"> <div align="left">
      <map name="Map">
        <area shape="rect" coords="282,5,355,25" href="Publications.asp">
        <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24" href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
        <area shape="rect" coords="398,5,463,24" href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
      </map>
    </div></td>
  </tr>
</table>
<table width="750" border="0" cellspacing="0" cellpadding="0">
  <tr>
    <td width="160" valign="top"><a href="Publications.asp"></a>
    <br>
    <a href="StyleGuide.asp"></a><br>
    <a href="PrintJobGuide.asp"></a><br>
    <a href="PressPass.asp"></a>
  </td>
  <td align="center"><br>
    <table width="580" border="1" cellpadding="5" cellspacing="0">
      <tr bgcolor="eeeeee">
        <td height="50" colspan="5" bgcolor="#333333"><font color="ffffff" size="5" face="Arial, Helvetica, sans-serif"><strong>CSU Publications</strong></font></td>
      </tr>
      <tr bgcolor="#CCCCCC">
        <td colspan="5"><font color="#000000" size="2" face="Times New Roman, Times, serif">Please choose from one of the resources below for updated news from Charleston Southern. <br>
        Some resources may require Adobe Acrobat Reader. You may Download it <a href="http://www.csuniv.edu/rp500enu.exe">here</a>.</font>
      </td>
    </table>
  </td>
</tr>
</table>
```

```

        </tr>
        <tr bgcolor="eeeeee">
            <td colspan="1"> <div align="center"><br>
                <br>
            </div>
            <div align="center"><strong><font color="012650" face="Arial,
Helvetica, sans-serif">Buc
                In Print <br>
                <br>
                
                <map name="Map5Map">
                    <area shape="rect" coords="4,2,47,14"
href="../../UR/BIPArchive.asp">
                </map>
                </font></strong></div></td>
            <td width="135">
                <div align="center"><br>
                <br>
            </div>
            <div align="center"><strong><font color="012650" face="Arial,
Helvetica, sans-serif">Reflections<br>
                <br>
                </font></strong>
                <map name="Map6Map">
                    <area shape="rect" coords="4,1,48,14"
href="../../UR/ReflectionsArchive.asp">
                </map>
                <strong><font color="012650" face="Arial, Helvetica, sans-serif">
                </font></strong></div>
            <div align="center"></div></td>
            <td width="135">
                <div align="center"></div>
                <div align="center"><strong><font color="012650" face="Arial,
Helvetica, sans-serif"><br>
                    Inside CSU<br>
                    <br>
                    </font></strong>
                    <map name="Map7Map">
                        <area shape="rect" coords="4,3,48,14"
href="../../UR/InsideCSUArchive.asp">
                    </map>
                    <strong><font color="012650" face="Arial, Helvetica, sans-serif">
                    </font></strong></div>
                <div align="center"></div></td>
            <td width="135">
                <div align="center"><br>
                <br>
                <font color="012650" face="Arial, Helvetica, sans-serif"><strong>
CSU
                Magazine</strong><br>
                <br>
                </font></strong>
                <map name="Map8Map">
                    <area shape="rect" coords="3,2,50,14"
href="../../UR/CSUMagArchive.asp">
                </map>

```

```

                <strong><font color="012650" face="Arial, Helvetica, sans-serif">
                </font></strong></div>
                <div align="center"></div></td>
            </tr>
        </table>
    </div></td>
</tr>
</table>
<map name="Map2">
    <area shape="rect" coords="11,6,134,30" href="StyleGuide.asp">
</map>
<map name="Map3">
    <area shape="rect" coords="12,6,152,30" href="PrintJobGuide.asp">
</map>
<map name="Map4">
    <area shape="rect" coords="11,8,122,31" href="PressPass.asp">
</map>
<map name="Map5">
    <area shape="rect" coords="4,2,47,14" href="../../UR/BIPArchive.asp">
</map>
<map name="Map6">
    <area shape="rect" coords="4,1,48,14" href="../../UR/ReflectionsArchive.asp">
</map>
<map name="Map7">
    <area shape="rect" coords="4,3,48,14" href="../../UR/InsideCSUArchive.asp">
</map>
<map name="Map8">
    <area shape="rect" coords="3,2,50,14" href="../../UR/CSUMagArchive.asp">
</map>
</body>
</html>

```

ReflectionsArchive.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
Dim rsReflections
Dim rsReflections_numRows

Set rsReflections = Server.CreateObject("ADODB.Recordset")
rsReflections.ActiveConnection = MM_UnivRel_STRING
rsReflections.Source = "SELECT * FROM Reflections ORDER BY Date DESC"
rsReflections.CursorType = 0
rsReflections.CursorLocation = 2
rsReflections.LockType = 1
rsReflections.Open()

rsReflections_numRows = 0
%>
<%
Dim Repeat1_numRows
Dim Repeat1_index

Repeat1_numRows = -1
Repeat1_index = 0
rsReflections_numRows = rsReflections_numRows + Repeat1_numRows
%>
<html>
<head>
<title>University Relations: Publications Archive</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body link="999966" vlink="999966" alink="012650">
<table width="750" border="0" cellpadding="0" cellspacing="0" bgcolor="012650">
  <tr>
    <td width="160" rowspan="2"> <div align="center"></div></td>
    <td width="590" height="75"> <div align="left"></div></td>
  </tr>
  <tr>
    <td width="590" height="30"> <div align="left">
      <map name="Map">
        <area shape="rect" coords="282,5,355,25" href="Publications.asp">
        <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
      </map>
    </div></td>
  </tr>
</table>
<table width="750" border="0" cellspacing="0" cellpadding="0">
  <tr>
    <td width="160" valign="top"><a href="Publications.asp"></a>
<br>
    <a href="StyleGuide.asp"></a><br>
    <a href="PrintJobGuide.asp"></a><br>
    <a href="PressPass.asp"></a>
</td>
<td valign="top">
<div align="center"><br>
    <table width="525" border="1" cellpadding="5" cellspacing="0"
bgcolor="eeeeee">
        <tr>
            <td bgcolor="#333333"> <div align="left"><strong><font color="ffffff"
size="5" face="Arial, Helvetica, sans-serif">Reflections
                Archive</font></strong></div></td>
        </tr>
        <tr>
            <td bgcolor="#CCCCCC"><font color="#000000" size="2" face="Times New
Roman, Times, serif">Please
                choose from one of the resources below for updated news from
                Charleston
                Southern. <br>
                Some resources may require Adobe Acrobat Reader. You may Download
                it <a href="http://www.csuniv.edu/rp500enu.exe">here</a>.</font>
        </td>
    </tr>
    <tr>
        <td> <div align="center"><br>
            <%
While ((Repeat1__numRows <> 0) AND (NOT rsReflections.EOF))
%>
                <font color="999966" size="3" face="Arial, Helvetica, sans-serif">
<strong><font color="012650">[</font>
                    <a href="<%= rsReflections.Fields.Item("Link").Value %>"><%=
(rsReflections.Fields.Item("Date").Value)%></a> <font color="012650"> ]</font>
&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&~</strong></font>
                <%
Repeat1__index=Repeat1__index+1
Repeat1__numRows=Repeat1__numRows-1
rsReflections.MoveNext()
Wend
%>
                <br>
                <br>
            </div></td>
        </tr>
    </table>
</div></td>
</tr>
</table>
<map name="Map2">
    <area shape="rect" coords="11,6,134,30" href="StyleGuide.asp">
</map>
<map name="Map3">
    <area shape="rect" coords="12,6,152,30" href="PrintJobGuide.asp">
</map>
<map name="Map4">
    <area shape="rect" coords="11,8,122,31" href="PressPass.asp">
</map>
</body>
</html>
<%
rsReflections.Close()
Set rsReflections = Nothing
```




StyleGuide.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<html>
<head>
<title>Style Guide</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body>
<table width="750" border="0" cellpadding="0" cellspacing="0" bgcolor="012650">
  <tr>
    <td width="160" rowspan="2"> <div align="center"></div></td>
    <td width="590" height="75"> <div align="left"></div></td>
  </tr>
  <tr>
    <td width="590" height="30"> <div align="left">
      <map name="Map">
        <area shape="rect" coords="282,5,355,25" href="Publications.asp">
        <area shape="rect" coords="198,4,278,24" href="ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25" href="CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24" href="MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
      </map>
    </div></td>
  </tr>
</table>
<br>
<table width="750" border="0" cellspacing="0" cellpadding="0">
  <tr>
    <td width="160"><a href="Publications.asp"></a><br>
    <br>
    <a href="PrintJobGuide.asp"></a><br>
    <a href="PressPass.asp"></a>
  </td>
  <td align="center" valign="middle"><font color="012650" size="5" face="Arial,
Helvetica, sans-serif"><strong><font size="6">Under
Construction </font>...</strong></font></td>
  </tr>
</table>
<map name="Map2">
  <area shape="rect" coords="13,9,152,31" href="PrintJobGuide.asp">
</map>
<map name="Map3">
  <area shape="rect" coords="13,8,121,30" href="PressPass.asp">
</map>
<map name="Map4">
  <area shape="rect" coords="13,7,136,30" href="Publications.asp">
</map>
</body>
```

</html>

AccessDenied.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<html>
<head>
<title>Access Denied</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
<meta http-equiv="refresh" content="5;URL=AdminLogin.asp">
</head>

<body link="012650">
<div align="center"></div>
<table width="750" height="90" border="0" align="center" cellpadding="0"
cellspacing="0" bgcolor="012650" id="UnRelTitleBar">
  <tr>
    <td height="60" align="center" bgcolor="012650"> <div align="center"></div>
      <div align="center"></div>
      <div align="right"></div></td>
    </tr>
    <tr>
      <td align="center" bgcolor="012650"> <div align="center">
        <map name="Map">
          <area shape="rect" coords="282,5,355,25" href="../../../UR/Publications.asp">
          <area shape="rect" coords="198,4,278,24" href="../../../UR/ArchivedNews.asp">
          <area shape="rect" coords="101,5,192,25"
href="../../../UR/CreativeServices.asp">
          <area shape="rect" coords="6,4,95,24" href="../../../UR/MediaRelations.asp">
          <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
          <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
        </map>
      </div></td>
    </tr>
  </table>
<div align="center"></div>
<div align="center"><br>
  <font color="012650" size="4"><strong>ACCESS DENIED</strong></font><font
color="012650"><br>
  <br>
  <strong><font size="3">You do not have permission to view this page.<br>
  You will be redirected to login screen...</font></strong><br>
  <br>
  <strong>If you are not redirected in the next 5 seconds,<br>
  then click the link below...</strong><br>
  <br>
  <strong><font size="2">&lt;&lt; <a href="AdminLogin.asp">Back to Login</a>
</font></strong><br>
  </font> </div>
<map name="Map2">
  <area shape="rect" coords="3,3,378,44" href="../../../UR/PubHome.asp">
</map>
</body>
</html>
```

AddArticle.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
' *** Restrict Access To Page: Grant or deny access to this page
MM_authorizedUsers="3,2,1"
MM_authFailedURL="AdminLogin.asp"
MM_grantAccess=false
If Session("MM_Username") <> "" Then
    If (false Or CStr(Session("MM_UserAuthorization"))="") Or _
        (InStr(1,MM_authorizedUsers,Session("MM_UserAuthorization"))>=1) Then
        MM_grantAccess = true
    End If
End If
If Not MM_grantAccess Then
    MM_qsChar = "?"
    If (InStr(1,MM_authFailedURL,"?") >= 1) Then MM_qsChar = "&"
    MM_referrer = Request.ServerVariables("URL")
    if (Len(Request.QueryString()) > 0) Then MM_referrer = MM_referrer & "?" &
Request.QueryString()
    MM_authFailedURL = MM_authFailedURL & MM_qsChar & "accessdenied=" &
Server.URLEncode(MM_referrer)
    Response.Redirect(MM_authFailedURL)
End If
%>
<%
' *** Edit Operations: declare variables

Dim MM_editAction
Dim MM_abortEdit
Dim MM_editQuery
Dim MM_editCmd

Dim MM_editConnection
Dim MM_editTable
Dim MM_editRedirectUrl
Dim MM_editColumn
Dim MM_recordId

Dim MM_fieldsStr
Dim MM_columnsStr
Dim MM_fields
Dim MM_columns
Dim MM_typeArray
Dim MM_formVal
Dim MM_delim
Dim MM_altVal
Dim MM_emptyVal
Dim MM_i

MM_editAction = CStr(Request.ServerVariables("SCRIPT_NAME"))
If (Request.QueryString <> "") Then
    MM_editAction = MM_editAction & "?" & Request.QueryString
End If

' boolean to abort record edit
MM_abortEdit = false

' query string to execute
MM_editQuery = ""
%>
<%
```

```
' *** Insert Record: set variables
```

```
If (CStr(Request("MM_insert")) = "add_article_form") Then
```

```
    MM_editConnection = MM_UnivRel_STRING
    MM_editTable = "PressReleases"
    MM_editRedirectUrl = "ViewPRArticles.asp"
    MM_fieldsStr = "Title|value|PressRelDate|value|ArticleText|value|Pic1|value|Pic2|value|Pic3|value"
    MM_columnsStr = "Title|',none,''|PressRelDate|',none,NULL|ArticleText|',none,''|Pic1|',none,''|Pic2|',none,''|Pic3|',none,''"
```

```
    ' create the MM_fields and MM_columns arrays
```

```
    MM_fields = Split(MM_fieldsStr, "|")
    MM_columns = Split(MM_columnsStr, "|")
```

```
    ' set the form values
```

```
    For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
        MM_fields(MM_i+1) = CStr(Request.Form(MM_fields(MM_i)))
    Next
```

```
    ' append the query string to the redirect URL
```

```
    If (MM_editRedirectUrl <> "" And Request.QueryString <> "") Then
        If (InStr(1, MM_editRedirectUrl, "?", vbTextCompare) = 0 And Request.QueryString <> "") Then
            MM_editRedirectUrl = MM_editRedirectUrl & "?" & Request.QueryString
        Else
            MM_editRedirectUrl = MM_editRedirectUrl & "&" & Request.QueryString
        End If
    End If
```

```
End If
```

```
>>
<<
```

```
' *** Insert Record: construct a sql insert statement and execute it
```

```
Dim MM_tableValues
```

```
Dim MM_dbValues
```

```
If (CStr(Request("MM_insert")) <> "") Then
```

```
    ' create the sql insert statement
```

```
    MM_tableValues = ""
```

```
    MM_dbValues = ""
```

```
    For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
```

```
        MM_formVal = MM_fields(MM_i+1)
```

```
        MM_typeArray = Split(MM_columns(MM_i+1), ",")
```

```
        MM_delim = MM_typeArray(0)
```

```
        If (MM_delim = "none") Then MM_delim = ""
```

```
        MM_altVal = MM_typeArray(1)
```

```
        If (MM_altVal = "none") Then MM_altVal = ""
```

```
        MM_emptyVal = MM_typeArray(2)
```

```
        If (MM_emptyVal = "none") Then MM_emptyVal = ""
```

```
        If (MM_formVal = "") Then
```

```
            MM_formVal = MM_emptyVal
```

```
        Else
```

```
            If (MM_altVal <> "") Then
```

```
                MM_formVal = MM_altVal
```

```
            ElseIf (MM_delim = "'") Then ' escape quotes
```

```
                MM_formVal = "'" & Replace(MM_formVal, "'", "'") & "'"
```

```
            Else
```

```
                MM_formVal = MM_delim + MM_formVal + MM_delim
```

```
            End If
```

```

End If
If (MM_i <> LBound(MM_fields)) Then
    MM_tableValues = MM_tableValues & ","
    MM_dbValues = MM_dbValues & ","
End If
MM_tableValues = MM_tableValues & MM_columns(MM_i)
MM_dbValues = MM_dbValues & MM_formVal
Next
MM_editQuery = "insert into " & MM_editTable & " (" & MM_tableValues & ") values
(" & MM_dbValues & ")"

If (Not MM_abortEdit) Then
    ' execute the insert
    Set MM_editCmd = Server.CreateObject("ADODB.Command")
    MM_editCmd.ActiveConnection = MM_editConnection
    MM_editCmd.CommandText = MM_editQuery
    MM_editCmd.Execute
    MM_editCmd.ActiveConnection.Close

    If (MM_editRedirectUrl <> "") Then
        Response.Redirect(MM_editRedirectUrl)
    End If
End If

End If
%>
<html>
<head>
<title>Add Article</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body>
<div align="center">
    <table width="750" height="90" border="0" align="center" cellpadding="0"
    cellspacing="0" bgcolor="012650" id="UnRelTitleBar">
        <tr>
            <td width="175" bgcolor="012650"> <div align="center"></div></td>
            <td width="400" height="60" align="center" valign="middle" bgcolor="012650">
                <div align="center"></div></td>
            <td width="175" valign="top" bgcolor="012650"> <div align="right"></div>
        </td>
        </tr>
        <tr>
            <td colspan="3" bgcolor="012650"> <div align="center">
                <map name="Map">
                    <area shape="rect" coords="282,5,355,25"
                    href="../../UR/Publications.asp">
                    <area shape="rect" coords="198,4,278,24"
                    href="../../UR/ArchivedNews.asp">
                    <area shape="rect" coords="101,5,192,25"
                    href="../../UR/CreativeServices.asp">
                    <area shape="rect" coords="6,4,95,24" href="../../UR/MediaRelations.asp">
                    <area shape="rect" coords="357,4,391,24"
                    href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
                    <area shape="rect" coords="398,5,463,24"
                    href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
                </map>
            </div></td>
        </tr>
    </table>

```

```
<br>
<form ACTION="#=MM_editAction#" METHOD="POST" name="add_article_form"
id="add_article_form">
  <table width="750" border="0" cellpadding="0" cellspacing="0"
bgcolor="eeeeee">
    <tr>
      <td colspan="6">&nbsp;</td>
    </tr>
    <tr>
      <td colspan="6"> <div align="center"><font color="012650" size="3"
face="Arial, Helvetica, sans-serif"><strong>Add
Article</strong></font></div></td>
    </tr>
    <tr>
      <td colspan="6">&nbsp;</td>
    </tr>
    <tr>
      <td colspan="6"> <div align="center">
        <hr width="94%">
      </div></td>
    </tr>
    <tr>
      <td>&nbsp;</td>
      <td colspan="3">&nbsp;</td>
      <td>&nbsp;</td>
    </tr>
    <tr>
      <td width="90"><strong><font color="012650" face="Arial, Helvetica, sans-
serif">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&Title:</font></strong></td>
      <td colspan="3"><div align="left">
        <input name="Title" type="text" id="Title8" size="45">
      </div>
      <div align="left"></div></td>
      <td width="276"><strong><font color="012650" face="Arial, Helvetica, sans-
serif">Date:&nbsp;</font></strong><strong>
        <input name="PressRelDate" type="text" id="PressRelDate10" size="15">
      </strong></td>
    </tr>
    <tr>
      <td><strong><font color="012650" face="Arial, Helvetica, sans-serif">
&nbsp;</font></strong>
      </td>
      <td>&nbsp;</td>
      <td>&nbsp;</td>
      <td>&nbsp;</td>
      <td><div align="left"><strong></strong><font color="012650" size="2"
face="Arial, Helvetica, sans-serif"><strong><font color="012650" face="Arial,
Helvetica, sans-serif">&nbsp;</font></strong><strong><font color="012650"
face="Arial, Helvetica, sans-serif">&nbsp;</font></strong><strong><font
color="012650" face="Arial, Helvetica, sans-serif">&nbsp;</font></strong><strong>
<font color="012650" face="Arial, Helvetica, sans-serif">&nbsp;</font></strong>
<strong><font color="012650" face="Arial, Helvetica, sans-serif">&nbsp;</font>
</strong>Ex:<strong><font color="012650" face="Arial, Helvetica, sans-serif">
&nbsp;</font></strong>
      <em>mm/dd/yyyy</em></font></div></td>
      <td>&nbsp;</td>
    </tr>
    <tr valign="top">
      <td align="left"> <div align="left">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&
<strong><font color="012650" face="Arial, Helvetica, sans-serif">Article:
      </font></strong></div></td>
      <td colspan="3" align="left"><strong><font color="012650" face="Arial,
Helvetica, sans-serif">
        <textarea name="ArticleText" cols="50" rows="5" id="textarea10">

```



```
</textarea>
    </font></strong></td>
    <td colspan="2" align="left">&nbsp;&nbsp;&nbsp;</td>
</tr>
<tr>
    <td colspan="6" align="center">&nbsp;&nbsp;&nbsp;</td>
</tr>
<tr>
    <td align="center"> <div align="left"></div>
        <div align="left"><strong><font size="3" face="Arial, Helvetica, sans-
serif"><font color="012650">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&Pic
1: </font></strong> <font color="012650"> </font></div></td>
    <td width="161" align="center"><div align="left">
        <input name="Pic1" type="text" id="Pic1" size="22">
    </div></td>
    <td width="62" align="center"><div align="left"><font color="012650">
<strong><font size="3" face="Arial, Helvetica, sans-serif">Pic
2:</font></strong> </font><font color="012650"> </font></div></td>
    <td width="161" align="center"><div align="left"><font color="012650">
    <input name="Pic2" type="text" id="Pic2" size="22">
    </font></div></td>
    <td colspan="2" align="center"><div align="left"><font color="012650">
    </font><font color="012650"><strong><font size="3" face="Arial,
Helvetica, sans-serif">Pic
3:</font></strong></font>
    <input name="Pic3" type="text" id="Pic3" size="22">
    </div></td>
</tr>
<tr>
    <td colspan="6" align="center">&nbsp;&nbsp;&nbsp;</td>
</tr>
<tr>
    <td colspan="6" align="center"> <hr width="94%"></td>
</tr>
<tr>
    <td colspan="6" align="center">&nbsp;&nbsp;&nbsp;</td>
</tr>
<tr bgcolor="eeeeee">
    <td colspan="6" align="center"> <input name="SubmitArticle" type="submit"
id="SubmitArticle8" value="Submit"></td>
</tr>
<tr bgcolor="eeeeee">
    <td colspan="6" align="center">&nbsp;&nbsp;&nbsp;</td>
</tr>
<tr bgcolor="eeeeee">
    <td colspan="6" align="center"> <div align="center"> </div></td>
</tr>
</table>
<input type="hidden" name="MM_insert" value="add_article_form">
</form>
</div>
<map name="Map2">
    <area shape="rect" coords="3,4,378,44" href="../../UR/PubHome.asp">
</map>
</body>
</html>
```

AddExtArticle.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
' *** Edit Operations: declare variables

Dim MM_editAction
Dim MM_abortEdit
Dim MM_editQuery
Dim MM_editCmd

Dim MM_editConnection
Dim MM_editTable
Dim MM_editRedirectUrl
Dim MM_editColumn
Dim MM_recordId

Dim MM_fieldsStr
Dim MM_columnsStr
Dim MM_fields
Dim MM_columns
Dim MM_typeArray
Dim MM_formVal
Dim MM_delim
Dim MM_altVal
Dim MM_emptyVal
Dim MM_i

MM_editAction = CStr(Request.ServerVariables("SCRIPT_NAME"))
If (Request.QueryString <> "") Then
    MM_editAction = MM_editAction & "?" & Request.QueryString
End If

' boolean to abort record edit
MM_abortEdit = false

' query string to execute
MM_editQuery = ""
%>
<%
' *** Insert Record: set variables

If (CStr(Request("MM_insert")) = "form1") Then

    MM_editConnection = MM_UnivRel_STRING
    MM_editTable = "ExtArticles"
    MM_editRedirectUrl = "AdminControl3.asp"
    MM_fieldsStr = "Title|value|PressRelDate|value|ArticleText|value|Pic1|value|Pic2|value|Pic3|value"
    MM_columnsStr =
"Title|',none,''|ExtArtDate|',none,NULL|ArticleText|',none,''|Pic1|',none,''|Pic2|',none,''|Pic3|',none,'"
    ' create the MM_fields and MM_columns arrays
    MM_fields = Split(MM_fieldsStr, "|")
    MM_columns = Split(MM_columnsStr, "|")

    ' set the form values
    For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
        MM_fields(MM_i+1) = CStr(Request.Form(MM_fields(MM_i)))
    Next
```

```

' append the query string to the redirect URL
If (MM_editRedirectUrl <> "" And Request.QueryString <> "") Then
    If (InStr(1, MM_editRedirectUrl, "?", vbTextCompare) = 0 And
Request.QueryString <> "") Then
        MM_editRedirectUrl = MM_editRedirectUrl & "?" & Request.QueryString
    Else
        MM_editRedirectUrl = MM_editRedirectUrl & "&" & Request.QueryString
    End If
End If

End If
%>
<%
' *** Insert Record: construct a sql insert statement and execute it

Dim MM_tableValues
Dim MM_dbValues

If (CStr(Request("MM_insert")) <> "") Then

    ' create the sql insert statement
    MM_tableValues = ""
    MM_dbValues = ""
    For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
        MM_formVal = MM_fields(MM_i+1)
        MM_typeArray = Split(MM_columns(MM_i+1),",")
        MM_delim = MM_typeArray(0)
        If (MM_delim = "none") Then MM_delim = ""
        MM_altVal = MM_typeArray(1)
        If (MM_altVal = "none") Then MM_altVal = ""
        MM_emptyVal = MM_typeArray(2)
        If (MM_emptyVal = "none") Then MM_emptyVal = ""
        If (MM_formVal = "") Then
            MM_formVal = MM_emptyVal
        Else
            If (MM_altVal <> "") Then
                MM_formVal = MM_altVal
            ElseIf (MM_delim = "'") Then ' escape quotes
                MM_formVal = "'" & Replace(MM_formVal,"'","''") & "'"
            Else
                MM_formVal = MM_delim + MM_formVal + MM_delim
            End If
        End If
    End If
    If (MM_i <> LBound(MM_fields)) Then
        MM_tableValues = MM_tableValues & ","
        MM_dbValues = MM_dbValues & ","
    End If
    MM_tableValues = MM_tableValues & MM_columns(MM_i)
    MM_dbValues = MM_dbValues & MM_formVal
Next
MM_editQuery = "insert into " & MM_editTable & " (" & MM_tableValues & ") values
(" & MM_dbValues & ")"

If (Not MM_abortEdit) Then
    ' execute the insert
    Set MM_editCmd = Server.CreateObject("ADODB.Command")
    MM_editCmd.ActiveConnection = MM_editConnection
    MM_editCmd.CommandText = MM_editQuery
    MM_editCmd.Execute
    MM_editCmd.ActiveConnection.Close

    If (MM_editRedirectUrl <> "") Then
        Response.Redirect(MM_editRedirectUrl)
    End If

```

End If

End If

```
&>
<html>
<head>
<title>Add Article</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body>
<div align="center">
  <table width="750" height="90" border="0" align="center" cellpadding="0"
    cellspacing="0" bgcolor="012650" id="UnRelTitleBar">
    <tr>
      <td width="175" bgcolor="012650"> <div align="center"></div></td>
      <td width="400" height="60" align="center" valign="middle" bgcolor="012650">
        <div align="center"></div></td>
      <td width="175" valign="top" bgcolor="012650"> <div align="right"></div>
</td>
    </tr>
    <tr>
      <td colspan="3" bgcolor="012650"> <div align="center">
        <map name="Map">
          <area shape="rect" coords="282,5,355,25"
href="../UR/Publications.asp">
          <area shape="rect" coords="198,4,278,24"
href="../UR/ArchivedNews.asp">
          <area shape="rect" coords="101,5,192,25"
href="../UR/CreativeServices.asp">
          <area shape="rect" coords="6,4,95,24" href="../UR/MediaRelations.asp">
          <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
          <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
        </map>
      </div></td>
    </tr>
  </table>
  <br>
  <form name="form1" method="POST" action="<%=MM editAction%>">
    <table width="750" border="0" cellpadding="0" cellspacing="0"
bgcolor="eeeeee">
      <tr>
        <td colspan="6">&nbsp;</td>
      </tr>
      <tr>
        <td colspan="6"> <div align="center"><font color="012650" size="3"
face="Arial, Helvetica, sans-serif"><strong>Add
Article</strong></font></div></td>
      </tr>
      <tr>
        <td colspan="6">&nbsp;</td>
      </tr>
      <tr>
        <td colspan="6"> <div align="center">
          <hr width="94%">
        </div></td>
      </tr>
      <tr>
        <td colspan="6">&nbsp;</td>
      </tr>
    </table>
  </form>
</body>
</html>
```

```

        <td colspan="3">&nbsp;</td>
        <td>&nbsp;</td>
    </tr>
    <tr>
        <td width="90"><strong><font color="012650" face="Arial, Helvetica, sans-
        serif">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</font></strong></td>
        <td colspan="3"><div align="left">
            <input name="Title" type="text" id="Title8" size="45">
        </div>
        <div align="left"></div></td>
        <td width="276"><strong><font color="012650" face="Arial, Helvetica, sans-
        serif">Date:&nbsp;</font></strong><strong>
            <input name="PressRelDate" type="text" id="PressRelDate10" size="15">
        </strong></td>
    </tr>
    <tr>
        <td><strong><font color="012650" face="Arial, Helvetica, sans-serif">
&nbsp;</font></strong>
        </td>
        <td>&nbsp;</td>
        <td>&nbsp;</td>
        <td>&nbsp;</td>
        <td><div align="left"><strong></strong><font color="012650" size="2"
        face="Arial, Helvetica, sans-serif"><strong><font color="012650" face="Arial,
        Helvetica, sans-serif">&nbsp;</font></strong><strong><font color="012650"
        face="Arial, Helvetica, sans-serif">&nbsp;</font></strong><strong><font
        color="012650" face="Arial, Helvetica, sans-serif">&nbsp;</font></strong><strong>
        <font color="012650" face="Arial, Helvetica, sans-serif">&nbsp;</font></strong>
        <strong><font color="012650" face="Arial, Helvetica, sans-serif">&nbsp;</font>
        </strong>Ex:<strong><font color="012650" face="Arial, Helvetica, sans-serif">
&nbsp;</font></strong>
            <em>mm/dd/yyyy</em></font></div></td>
        <td>&nbsp;</td>
    </tr>
    <tr valign="top">
        <td align="left"><div align="left">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&
<strong><font color="012650" face="Arial, Helvetica, sans-serif">Article:
        </font></strong></div></td>
        <td colspan="3" align="left"><strong><font color="012650" face="Arial,
        Helvetica, sans-serif">
            <textarea name="ArticleText" cols="50" rows="5" id="textareal0">
        </textarea>
        </font></strong></td>
        <td colspan="2" align="left">&nbsp;</td>
    </tr>
    <tr>
        <td colspan="6" align="center">&nbsp;</td>
    </tr>
    <tr>
        <td align="center"><div align="left"></div>
        <div align="left"><strong><font size="3" face="Arial, Helvetica, sans-
        serif"><font color="012650">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&Pic
        1: </font></font></strong><font color="012650"></font></div></td>
        <td width="161" align="center"><div align="left">
            <input name="Pic1" type="text" id="Pic1" size="22">
        </div></td>
        <td width="62" align="center"><div align="left"><font color="012650">
<strong><font size="3" face="Arial, Helvetica, sans-serif">Pic
        2:</font></strong></font><font color="012650"></font></div></td>
        <td width="161" align="center"><div align="left"><font color="012650">
            <input name="Pic2" type="text" id="Pic2" size="22">
        </font></div></td>
        <td colspan="2" align="center"><div align="left"><font color="012650">
        </font><font color="012650"><strong><font size="3" face="Arial,

```

```

Helvetica, sans-serif">Pic
    3:</font></strong></font>
    <input name="Pic3" type="text" id="Pic3" size="22">
  </div></td>
</tr>
<tr>
  <td colspan="6" align="center">&nbsp;</td>
</tr>
<tr>
  <td colspan="6" align="center"> <hr width="94%"></td>
</tr>
<tr>
  <td colspan="6" align="center">&nbsp;</td>
</tr>
<tr bgcolor="eeeeee">
  <td colspan="6" align="center"><input name="SubmitArticle" type="submit"
id="SubmitArticle8" value="Submit"></td>
</tr>
<tr bgcolor="eeeeee">
  <td colspan="6" align="center">&nbsp;</td>
</tr>
<tr bgcolor="eeeeee">
  <td colspan="6" align="center"> <div align="center"> </div></td>
</tr>
</table>
  <input type="hidden" name="MM_insert" value="form1">
</form>
</div>
<map name="Map2">
  <area shape="rect" coords="2,4,378,45" href="../../UR/PubHome.asp">
</map>
</body>
</html>

```

AddUser.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
' *** Edit Operations: declare variables

Dim MM_editAction
Dim MM_abortEdit
Dim MM_editQuery
Dim MM_editCmd

Dim MM_editConnection
Dim MM_editTable
Dim MM_editRedirectUrl
Dim MM_editColumn
Dim MM_recordId

Dim MM_fieldsStr
Dim MM_columnsStr
Dim MM_fields
Dim MM_columns
Dim MM_typeArray
Dim MM_formVal
Dim MM_delim
Dim MM_altVal
Dim MM_emptyVal
Dim MM_i

MM_editAction = CStr(Request.ServerVariables("SCRIPT_NAME"))
If (Request.QueryString <> "") Then
    MM_editAction = MM_editAction & "?" & Request.QueryString
End If

' boolean to abort record edit
MM_abortEdit = false

' query string to execute
MM_editQuery = ""
%>
<%
' *** Insert Record: set variables

If (CStr(Request("MM_insert")) = "add_user_form") Then

    MM_editConnection = MM_UnivRel_STRING
    MM_editTable = "Users"
    MM_editRedirectUrl = "ViewUsers.asp"
    MM_fieldsStr = "Username|value|Password|value|Security|value"
    MM_columnsStr = "Username|',none,''|Password|',none,''|Security|',none,'"

    ' create the MM_fields and MM_columns arrays
    MM_fields = Split(MM_fieldsStr, "|")
    MM_columns = Split(MM_columnsStr, "|")

    ' set the form values
    For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
        MM_fields(MM_i+1) = CStr(Request.Form(MM_fields(MM_i)))
    Next

    ' append the query string to the redirect URL
    If (MM_editRedirectUrl <> "" And Request.QueryString <> "") Then
        If (InStr(1, MM_editRedirectUrl, "?", vbTextCompare) = 0 And
```

```

Request.QueryString <> "") Then
    MM_editRedirectUrl = MM_editRedirectUrl & "?" & Request.QueryString
Else
    MM_editRedirectUrl = MM_editRedirectUrl & "&" & Request.QueryString
End If
End If

End If
%>
<%
' *** Insert Record: construct a sql insert statement and execute it

Dim MM_tableValues
Dim MM_dbValues

If (CStr(Request("MM_insert")) <> "") Then

    ' create the sql insert statement
    MM_tableValues = ""
    MM_dbValues = ""
    For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
        MM_formVal = MM_fields(MM_i+1)
        MM_typeArray = Split(MM_columns(MM_i+1), ",")
        MM_delim = MM_typeArray(0)
        If (MM_delim = "none") Then MM_delim = ""
        MM_altVal = MM_typeArray(1)
        If (MM_altVal = "none") Then MM_altVal = ""
        MM_emptyVal = MM_typeArray(2)
        If (MM_emptyVal = "none") Then MM_emptyVal = ""
        If (MM_formVal = "") Then
            MM_formVal = MM_emptyVal
        Else
            If (MM_altVal <> "") Then
                MM_formVal = MM_altVal
            ElseIf (MM_delim = "'") Then ' escape quotes
                MM_formVal = "'" & Replace(MM_formVal, "'", "'") & "'"
            Else
                MM_formVal = MM_delim + MM_formVal + MM_delim
            End If
        End If
        If (MM_i <> LBound(MM_fields)) Then
            MM_tableValues = MM_tableValues & ","
            MM_dbValues = MM_dbValues & ","
        End If
        MM_tableValues = MM_tableValues & MM_columns(MM_i)
        MM_dbValues = MM_dbValues & MM_formVal
    Next
    MM_editQuery = "insert into " & MM_editTable & " (" & MM_tableValues & ") values"
    (" & MM_dbValues & ")"

    If (Not MM_abortEdit) Then
        ' execute the insert
        Set MM_editCmd = Server.CreateObject("ADODB.Command")
        MM_editCmd.ActiveConnection = MM_editConnection
        MM_editCmd.CommandText = MM_editQuery
        MM_editCmd.Execute
        MM_editCmd.ActiveConnection.Close

        If (MM_editRedirectUrl <> "") Then
            Response.Redirect(MM_editRedirectUrl)
        End If
    End If

End If

```



```

face="Arial, Helvetica, sans-serif"><strong>Add
    User</strong></font></div></td>
</tr>
<tr>
    <td colspan="3"> <div align="center">
        <hr width="92%">
    </div></td>
</tr>
<tr>
    <td width="15">&nbsp;</td>
    <td width="100"><strong><font color="012650" face="Arial, Helvetica, sans-
serif">Username:</font></strong></td>
    <td> <input name="Username" type="text" id="Username" size="25"></td>
</tr>
<tr>
    <td width="15">&nbsp;</td>
    <td width="100">&nbsp;</td>
    <td>&nbsp;</td>
</tr>
<tr>
    <td width="15">&nbsp;</td>
    <td width="100"><strong><font color="012650" face="Arial, Helvetica, sans-
serif">Password:</font></strong></td>
    <td> <input name="Password" type="text" id="Password" size="25"></td>
</tr>
<tr>
    <td align="left" valign="top">&nbsp;</td>
    <td align="left" valign="top">&nbsp;</td>
    <td>&nbsp;</td>
</tr>
<tr>
    <td width="15" align="left" valign="top">&nbsp;</td>
    <td width="100" align="left" valign="top"><font color="012650" size="3"
face="Arial, Helvetica, sans-serif"><strong>Security:</strong></font></td>
    <td> <input name="Security" type="text" id="Security" size="5"> <strong>
<font color="012650" size="3">(1-3)</font></strong></td>
</tr>
<tr>
    <td colspan="3" align="center"> <hr width="92%"></td>
</tr>
<tr>
    <td colspan="3" align="center"> <input name="SubmitUser" type="submit"
id="SubmitUser" value="Submit">
    </td>
</tr>
<tr bgcolor="eeeeee">
    <td colspan="3" align="center">&nbsp;</td>
</tr>
<tr bgcolor="eeeeee">
    <td colspan="3" align="center"> <div align="center"> </div></td>
</tr>
</table>
<input type="hidden" name="MM_insert" value="add_user_form">
</form>
<div align="center">
    <map name="Map2">
        <area shape="rect" coords="2,3,378,43" href="../../UR/PubHome.asp">
    </map>
    <strong></strong></div>
</body>
</html>
<%
rsAddUser.Close()
Set rsAddUser = Nothing

```


AdminControl1.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<%
' *** Restrict Access To Page: Grant or deny access to this page
MM_authorizedUsers="3,2,1"
MM_authFailedURL="AccessDenied.asp"
MM_grantAccess=false
If Session("MM_Username") <> "" Then
    If (false Or CStr(Session("MM_UserAuthorization"))="") Or _
        (InStr(1,MM_authorizedUsers,Session("MM_UserAuthorization"))>=1) Then
        MM_grantAccess = true
    End If
End If
If Not MM_grantAccess Then
    MM_qsChar = "?"
    If (InStr(1,MM_authFailedURL,"?") >= 1) Then MM_qsChar = "&"
    MM_referrer = Request.ServerVariables("URL")
    if (Len(Request.QueryString()) > 0) Then MM_referrer = MM_referrer & "?" &
Request.QueryString()
    MM_authFailedURL = MM_authFailedURL & MM_qsChar & "accessdenied=" &
Server.URLEncode(MM_referrer)
    Response.Redirect(MM_authFailedURL)
End If
%>
<html>
<head>
<title>Workstudy Control Panel</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body link="012650">
<div align="center">
    <table width="750" height="90" border="0" align="center" cellpadding="0"
cellspacing="0" bgcolor="012650" id="UnRelTitleBar">
        <tr bgcolor="012650">
            <td height="60"> <div align="center"></div>
                <div align="center"></div>
                <div align="right"></div></td>
            </tr>
            <tr bgcolor="012650">
                <td> <div align="center"></div>
                    <div align="center">
                        <map name="Map">
                            <area shape="rect" coords="282,5,355,25"
href="../UR/Publications.asp">
                            <area shape="rect" coords="198,4,278,24"
href="../UR/ArchivedNews.asp">
                            <area shape="rect" coords="101,5,192,25"
href="../UR/CreativeServices.asp">
                            <area shape="rect" coords="6,4,95,24" href="../UR/MediaRelations.asp">
                            <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
                            <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
                        </map>
                    </div></td>
            </tr>
        </table>
<br>
<table width="750" border="0" cellspacing="0" cellpadding="0">
```

```
<tr>
    <td valign="top"> <div align="center">
        <table width="500" border="0" cellspacing="0" cellpadding="0">
            <tr>
                <td><div align="center"><font color="012650" size="3" face="Times
New Roman, Times, serif"><strong><font size="4">Workstudy
Control Panel</font> </strong></font></div></td>
            </tr>
            <tr>
                <td><hr width="75%" size="2"></td>
            </tr>
            <tr>
                <td>&nbsp;</td>
            </tr>
            <tr>
                <td> <div align="center"><strong><font color="012650">Campus News:
</font>
                    </strong><font color="012650"><em>CSU Press Releases</em></font>
                    <hr width="35%">
                </div></td>
            </tr>
            <tr>
                <td><div align="center"><font color="012650" size="3" face="Times
New Roman, Times, serif"><strong><a href="AddArticle.asp">Add
Article</a> | <a href="ViewPRArticles2.asp">Update Article</a>
</strong></font></div></td>
            </tr>
            <tr>
                <td>&nbsp;</td>
            </tr>
            <tr>
                <td> <div align="center"><strong><font color="012650">CSU in the
News:</font></strong> <font color="012650"><em>External Articles
</em></font>
                    <hr width="35%">
                </div></td>
            </tr>
            <tr>
                <td> <div align="center"><font color="012650" size="3" face="Times
New Roman, Times, serif"><strong><a href="AddExtArticle.asp">Add
Article</a> | <a href="ViewExtArticles2.asp">Update Article</a>
</strong></font></div></td>
            </tr>
        </table>
        <p>&nbsp;</p>
        <p><font color="012650" size="3" face="Times New Roman, Times, serif">
</font></p>
        <p><font color="012650" size="3" face="Times New Roman, Times, serif">
<strong>
            </strong></font><br>
        </p>
    </div></td>
</tr>
</table>
<br>
</div>
<map name="Map2">
    <area shape="rect" coords="2,2,379,42" href="../UR/PubHome.asp">
</map>
</body>
</html>
```

AdminControl2.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<%
' *** Restrict Access To Page: Grant or deny access to this page
MM_authorizedUsers="3,2"
MM_authFailedURL="AdminControl1.asp"
MM_grantAccess=false
If Session("MM_Username") <> "" Then
    If (false Or CStr(Session("MM_UserAuthorization"))="") Or _
        (InStr(1,MM_authorizedUsers,Session("MM_UserAuthorization"))>=1) Then
        MM_grantAccess = true
    End If
End If
If Not MM_grantAccess Then
    MM_qsChar = "?"
    If (InStr(1,MM_authFailedURL,"?") >= 1) Then MM_qsChar = "&"
    MM_referrer = Request.ServerVariables("URL")
    If (Len(Request.QueryString()) > 0) Then MM_referrer = MM_referrer & "?" &
Request.QueryString()
    MM_authFailedURL = MM_authFailedURL & MM_qsChar & "accessdenied=" &
Server.URLEncode(MM_referrer)
    Response.Redirect(MM_authFailedURL)
End If
%>
<html>
<head>
<title>Staff Control Panel</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body link="012650">
<div align="center">
    <table width="750" height="90" border="0" align="center" cellpadding="0"
cellspacing="0" bgcolor="012650" id="UnRelTitleBar">
        <tr bgcolor="012650">
            <td height="60"> <div align="center"></div>
                <div align="center"></div>
                <div align="right"></div></td>
            </tr>
            <tr bgcolor="012650">
                <td> <div align="center"></div>
                    <div align="center">
                        <map name="Map">
                            <area shape="rect" coords="282,5,355,25"
href="../../../UR/Publications.asp">
                            <area shape="rect" coords="198,4,278,24"
href="../../../UR/ArchivedNews.asp">
                            <area shape="rect" coords="101,5,192,25"
href="../../../UR/CreativeServices.asp">
                            <area shape="rect" coords="6,4,95,24" href="../../../UR/MediaRelations.asp">
                            <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
                            <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
                        </map>
                    </div></td>
            </tr>
        </table>
<br>
<table width="750" border="0" cellspacing="0" cellpadding="0">
```

```
<tr>
  <td valign="top"> <div align="center">
    <table width="500" border="0" cellspacing="0" cellpadding="0">
      <tr>
        <td><div align="center"><font color="012650" size="3" face="Times
New Roman, Times, serif"><strong><font size="4">Staff
Control Panel</font> </strong></font></div></td>
      </tr>
      <tr>
        <td><hr width="75%" size="2"></td>
      </tr>
      <tr>
        <td>&nbsp;</td>
      </tr>
      <tr>
        <td><div align="center"><strong><font color="012650">Campus News:
</font>
          </strong><font color="012650"><em>CSU Press Releases</em></font>
          <hr width="35%">
        </div></td>
      </tr>
      <tr>
        <td><div align="center"><font color="012650" size="3" face="Times
New Roman, Times, serif"><strong><a href="AddArticle.asp">Add
Article </a>| <a href="ViewPRArticles.asp">Update Article</a>
| <a href="ViewPRArticles.asp">Delete Article</a></strong>
</font></div></td>
      </tr>
      <tr>
        <td>&nbsp;</td>
      </tr>
      <tr>
        <td><div align="center"><strong><font color="012650">CSU in the
News:</font></strong> <font color="012650"><em>External Articles
</em></font>
          <hr width="35%">
        </div></td>
      </tr>
      <tr>
        <td> <div align="center"><font color="012650" size="3" face="Times
New Roman, Times, serif"><strong><a href="AddExtArticle.asp">Add
Article </a>| <a href="ViewExtArticles.asp">Update Article</a>
| <a href="ViewExtArticles.asp">Delete Article</a></strong>
</font></div></td>
      </tr>
    </table>
    <p>&nbsp;</p>
    <p><font color="012650" size="3" face="Times New Roman, Times, serif">
</font></p>
    <p><font color="012650" size="3" face="Times New Roman, Times, serif">
<strong>
      </strong></font><br>
    </p>
    </div></td>
  </tr>
</table>
<br>
</div>
<map name="Map2">
  <area shape="rect" coords="2,2,380,45" href="../../UR/PubHome.asp">
</map>
</body>
</html>
```

AdminControl3.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<%
' *** Restrict Access To Page: Grant or deny access to this page
MM_authorizedUsers="3"
MM_authFailedURL="AdminControl2.asp"
MM_grantAccess=false
If Session("MM_Username") <> "" Then
    If (false Or CStr(Session("MM_UserAuthorization"))="") Or
        (InStr(1,MM_authorizedUsers,Session("MM_UserAuthorization"))>=1) Then
        MM_grantAccess = true
    End If
End If
If Not MM_grantAccess Then
    MM_qsChar = "?"
    If (InStr(1,MM_authFailedURL,"?") >= 1) Then MM_qsChar = "&"
    MM_referrer = Request.ServerVariables("URL")
    if (Len(Request.QueryString()) > 0) Then MM_referrer = MM_referrer & "?" &
Request.QueryString()
    MM_authFailedURL = MM_authFailedURL & MM_qsChar & "accessdenied=" &
Server.URLEncode(MM_referrer)
    Response.Redirect(MM_authFailedURL)
End If
%>
<html>
<head>
<title>Administrator Control Panel</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body link="012650">
<div align="center">
    <table width="750" height="90" border="0" align="center" cellpadding="0"
cellspacing="0" bgcolor="012650" id="UnRelTitleBar">
        <tr bgcolor="012650">
            <td height="60"> <div align="center"></div>
                <div align="center"><a href="../UR/PubHome.asp"></a></div>
                <div align="right"></div></td>
            </tr>
            <tr bgcolor="012650">
                <td> <div align="center"></div>
                    <div align="center">
                        <map name="Map">
                            <area shape="rect" coords="282,5,355,25"
href="../UR/Publications.asp">
                            <area shape="rect" coords="198,4,278,24"
href="../UR/ArchivedNews.asp">
                            <area shape="rect" coords="101,5,192,25"
href="../UR/CreativeServices.asp">
                            <area shape="rect" coords="6,4,95,24" href="../UR/MediaRelations.asp">
                            <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
                            <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
                        </map>
                    </div></td>
            </tr>
        </table>
<br>
```



```

<table width="750" border="0" cellspacing="0" cellpadding="0">
  <tr>
    <td valign="top"> <div align="center">
      <table width="500" border="0" cellspacing="0" cellpadding="0">
        <tr>
          <td><div align="center"><font color="012650" size="3" face="Times
New Roman, Times, serif"><strong><font size="4">Administrator
Control Panel</font> </strong></font></div></td>
        </tr>
        <tr>
          <td><hr width="75%" size="2"></td>
        </tr>
        <tr>
          <td>&nbsp;</td>
        </tr>
        <tr>
          <td><div align="center"><strong><font color="012650">Campus News:
</font>
          </strong><font color="012650"><em>CSU Press Releases</em></font>
          <hr width="35%">
          </div></td>
        </tr>
        <tr>
          <td><div align="center"><font color="012650" size="3" face="Times
New Roman, Times, serif"><strong><a href="AddArticle.asp">Add
Article</a> | <a href="ViewPRArticles.asp">Update Article</a>
| <a href="ViewPRArticles.asp">Delete Article</a></strong>
</font></div></td>
          <td>&nbsp;</td>
        </tr>
        <tr>
          <td><div align="center"><strong><font color="012650">CSU in the
News:</font></strong> <font color="012650"><em>External Articles
</em></font>
          <hr width="35%">
          </div></td>
          <td><div align="center"><font color="012650" size="3" face="Times
New Roman, Times, serif"><strong><a href="AddExtArticle.asp">Add
Article</a> | <a href="ViewExtArticles.asp">Update Article</a>
| <a href="ViewExtArticles.asp">Delete Article</a></strong>
</font></div></td>
        </tr>
        <tr>
          <td>&nbsp;</td>
        </tr>
        <tr>
          <td><div align="center"><strong><font color="012650">Admin Users
</font></strong>
          <hr width="35%">
          </div></td>
          <td><div align="center"><font color="012650" size="3" face="Times
New Roman, Times, serif"><strong><a href="AddUser.asp">Add
User</a> | <a href="ViewUsers.asp">Update User</a> | <a
href="ViewUsers.asp">Delete
User</a></strong></font></div></td>
        </tr>
        <tr>
          <td>&nbsp;</td>
        </tr>
      </table>
    </td>
  </tr>

```

```

        </tr>
        <tr>
            <td><div align="center"><font color="012650"><strong>Press Pass
                Controls</strong></font>
                <hr width="35%">
            </div></td>
        </tr>
        <tr>
            <td><div align="center"><strong><font color="012650"><a
href="ViewRequests.asp">View
                Requests</a> | <a href="DeleteOldReq.asp">Delete Old Requests
</a></font></strong></div></td>
        </tr>
    </table>
    <p>&nbsp;</p>
    <p><font color="012650" size="3" face="Times New Roman, Times, serif">
</font></p>
    <p><font color="012650" size="3" face="Times New Roman, Times, serif">
<strong>
        </strong></font><br>
    </p>
    </div></td>
</tr>
</table>
<br>
</div>
<map name="Map2">
    <area shape="rect" coords="3,2,378,44" href="../../UR/PubHome.asp">
</map>
</body>
</html>

```

AdminLogin.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
' *** Validate request to log in to this site.
MM_LoginAction = Request.ServerVariables("URL")
If Request.QueryString<>"" Then MM_LoginAction = MM_LoginAction + "?" +
Request.QueryString
MM_valUsername=CStr(Request.Form("username"))
If MM_valUsername <> "" Then
    MM_fldUserAuthorization="Security"
    MM_redirectLoginSuccess="AdminControl3.asp"
    MM_redirectLoginFailed="LoginFailure.asp"
    MM_flag="ADODB.Recordset"
    set MM_rsUser = Server.CreateObject(MM_flag)
    MM_rsUser.ActiveConnection = MM_UnivRel_STRING
    MM_rsUser.Source = "SELECT Username, Password"
    If MM_fldUserAuthorization <> "" Then MM_rsUser.Source = MM_rsUser.Source & ","
    & MM_fldUserAuthorization
    MM_rsUser.Source = MM_rsUser.Source & " FROM Users WHERE Username='" & Replace
(MM_valUsername,"'", "'") & "' AND Password='" & Replace(Request.Form
("password"),"'", "'") & "'"
    MM_rsUser.CursorType = 0
    MM_rsUser.CursorLocation = 2
    MM_rsUser.LockType = 3
    MM_rsUser.Open
    If Not MM_rsUser.EOF Or Not MM_rsUser.BOF Then
        ' username and password match - this is a valid user
        Session("MM_Username") = MM_valUsername
        If (MM_fldUserAuthorization <> "") Then
            Session("MM_UserAuthorization") = CStr(MM_rsUser.Fields.Item
(MM_fldUserAuthorization).Value)
        Else
            Session("MM_UserAuthorization") = ""
        End If
        if CStr(Request.QueryString("accessdenied")) <> "" And false Then
            MM_redirectLoginSuccess = Request.QueryString("accessdenied")
        End If
        MM_rsUser.Close
        Response.Redirect(MM_redirectLoginSuccess)
    End If
    MM_rsUser.Close
    Response.Redirect(MM_redirectLoginFailed)
End If
%>
<html>
<head>
<title>Admin Login</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body>
<div align="center">
    <table width="750" height="90" border="0" align="center" cellpadding="0"
cellspacing="0" bgcolor="012650" id="UnRelTitleBar">
        <tr bgcolor="012650">
            <td height="60"> <div align="center"></div>
                <div align="center"></div>
                <div align="right"></div></td>
            </tr>
        <tr bgcolor="012650">
```

```

        <td> <div align="center"></div>
        <div align="center">
        <map name="Map">
        <area shape="rect" coords="282,5,355,25"
href="../../../UR/Publications.asp">
        <area shape="rect" coords="198,4,278,24"
href="../../../UR/ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25"
href="../../../UR/CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24" href="../../../UR/MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
        </map>
        </div></td>
    </tr>
</table>
<p><font color="012650" face="Arial, Helvetica, sans-serif"><strong><br>
Administration Login </strong></font></p>
<form name="form1" method="POST" action="<%=MM_LoginAction%>"
<table width="285" border="0" cellpadding="0" cellspacing="0">
    <tr>
        <td width="85"><strong><font color="012650" size="3">Username:</font>
</strong></td>
        <td><div align="center">
            <input name="username" type="text" id="username" size="24">
        </div></td>
    </tr>
    <tr>
        <td width="85"><strong><font color="012650" size="3">Password:</font>
</strong></td>
        <td><div align="center">
            <input name="password" type="password" id="password" size="24.">
        </div></td>
    </tr>
    <tr>
        <td colspan="2">&nbsp;</td>
    </tr>
    <tr>
        <td colspan="2"><div align="center">
            <input type="submit" name="Submit" value="Log In">
        </div></td>
    </tr>
</table>
</form>
<p>&nbsp;</p>
</div>

<map name="Map2">
    <area shape="rect" coords="3,3,379,44" href="../../../UR/PubHome.asp">
</map>
</body>
</html>

```

DeleteExtArticle.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
' *** Edit Operations: declare variables

Dim MM_editAction
Dim MM_abortEdit
Dim MM_editQuery
Dim MM_editCmd

Dim MM_editConnection
Dim MM_editTable
Dim MM_editRedirectUrl
Dim MM_editColumn
Dim MM_recordId

Dim MM_fieldsStr
Dim MM_columnsStr
Dim MM_fields
Dim MM_columns
Dim MM_typeArray
Dim MM_formVal
Dim MM_delim
Dim MM_altVal
Dim MM_emptyVal
Dim MM_i

MM_editAction = CStr(Request.ServerVariables("SCRIPT_NAME"))
If (Request.QueryString <> "") Then
    MM_editAction = MM_editAction & "?" & Request.QueryString
End If

' boolean to abort record edit
MM_abortEdit = false

' query string to execute
MM_editQuery = ""
%>
<%
' *** Delete Record: declare variables

if (CStr(Request("MM_delete")) = "form1" And CStr(Request("MM_recordId")) <> "")
Then

    MM_editConnection = MM_UnivRel_STRING
    MM_editTable = "ExtArticles"
    MM_editColumn = "ID"
    MM_recordId = "" + Request.Form("MM_recordId") + ""
    MM_editRedirectUrl = "ViewPRArticles.asp"

    ' append the query string to the redirect URL
    If (MM_editRedirectUrl <> "" And Request.QueryString <> "") Then
        If (InStr(1, MM_editRedirectUrl, "?", vbTextCompare) = 0 And
Request.QueryString <> "") Then
            MM_editRedirectUrl = MM_editRedirectUrl & "?" & Request.QueryString
        Else
            MM_editRedirectUrl = MM_editRedirectUrl & "&" & Request.QueryString
        End If
    End If

End If
```

```

%>
<%
' *** Delete Record: construct a sql delete statement and execute it

If (CStr(Request("MM_delete")) <> "" And CStr(Request("MM_recordId")) <> "") Then

    ' create the sql delete statement
    MM_editQuery = "delete from " & MM_editTable & " where " & MM_editColumn & " = " & MM_recordId

    If (Not MM_abortEdit) Then
        ' execute the delete
        Set MM_editCmd = Server.CreateObject("ADODB.Command")
        MM_editCmd.ActiveConnection = MM_editConnection
        MM_editCmd.CommandText = MM_editQuery
        MM_editCmd.Execute
        MM_editCmd.ActiveConnection.Close

        If (MM_editRedirectUrl <> "") Then
            Response.Redirect(MM_editRedirectUrl)
        End If
    End If

End If
%>
<%
Dim rsViewExtArt_MMColParam
rsViewExtArt_MMColParam = "1"
If (Request.QueryString("ID") <> "") Then
    rsViewExtArt_MMColParam = Request.QueryString("ID")
End If
%>
<%
' *** Restrict Access To Page: Grant or deny access to this page
MM_authorizedUsers="3,2"
MM_authFailedURL="AdminLogin.asp"
MM_grantAccess=false
If Session("MM_Username") <> "" Then
    If (false Or CStr(Session("MM_UserAuthorization"))="") Or _
        (InStr(1,MM_authorizedUsers,Session("MM_UserAuthorization"))>=1) Then
        MM_grantAccess = true
    End If
End If
If Not MM_grantAccess Then
    MM_qsChar = "?"
    If (InStr(1,MM_authFailedURL,"?") >= 1) Then MM_qsChar = "&"
    MM_referrer = Request.ServerVariables("URL")
    if (Len(Request.QueryString()) > 0) Then MM_referrer = MM_referrer & "?" & Request.QueryString()
    MM_authFailedURL = MM_authFailedURL & MM_qsChar & "accessdenied=" & Server.URLEncode(MM_referrer)
    Response.Redirect(MM_authFailedURL)
End If
%>
<%
Dim rsViewExtArt
Dim rsViewExtArt_numRows

Set rsViewExtArt = Server.CreateObject("ADODB.Recordset")
rsViewExtArt.ActiveConnection = MM_UnivRel_STRING
rsViewExtArt.Source = "SELECT * FROM ExtArticles WHERE ID IN(" + Replace(rsViewExtArt_MMColParam, "'", "'') + ")"
rsViewExtArt.CursorType = 0

```

```

rsViewExtArt.CursorLocation = 2
rsViewExtArt.LockType = 1
rsViewExtArt.Open()

rsViewExtArt_numRows = 0
%>
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body>
<div align="center"></div>
<table width="750" height="90" border="0" align="center" cellpadding="0"
cellspacing="0" bgcolor="012650" id="UnRelTitleBar">
  <tr bgcolor="012650">
    <td height="60"> <div align="center"></div>
      <div align="center"></div>
      <div align="right"></div></td>
    </tr>
    <tr bgcolor="012650">
      <td> <div align="center"></div>
        <div align="center">
          <map name="Map">
            <area shape="rect" coords="282,5,355,25" href="../../../UR/Publications.asp">
            <area shape="rect" coords="198,4,278,24" href="../../../UR/ArchivedNews.asp">
            <area shape="rect" coords="101,5,192,25"
href="../../../UR/CreativeServices.asp">
            <area shape="rect" coords="6,4,95,24" href="../../../UR/MediaRelations.asp">
            <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
            <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
          </map>
        </div></td>
      </tr>
    </table>
    <div align="center"></div>
    <div align="center"><br>
      <strong><font color="012650" size="4">Delete Article Now</font></strong><br>
      <form name="form1" method="POST" action="%MM editAction%">
        <table width="300" border="0" cellspacing="0" cellpadding="0">
          <tr bgcolor="eeeeee">
            <td colspan="2">&nbsp;</td>
            <td colspan="2">&nbsp;</td>
          </tr>
          <tr bgcolor="eeeeee">
            <td width="25">&nbsp;</td>
            <td width="55"><font color="012650"><strong>ID:</strong></font></td>
            <td><strong><font color="012650" size="2"><%=rsViewExtArt.Fields.Item
("ID").Value>%></font></strong></td>
            <td width="25">&nbsp;</td>
          </tr>
          <tr bgcolor="eeeeee">
            <td width="25">&nbsp;</td>
            <td width="55"><font color="012650"><strong>Title:</strong></font></td>
            <td><strong><font color="012650" size="2"><%=rsViewExtArt.Fields.Item
("Title").Value>%></font></strong></td>
            <td width="25">&nbsp;</td>
          </tr>
        </table>
      </div>
    </div>
  </tr>
</table>

```


DeleteOldReq.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
' *** Restrict Access To Page: Grant or deny access to this page
MM_authorizedUsers="3"
MM_authFailedURL="AccessDenied.asp"
MM_grantAccess=false
If Session("MM_Username") <> "" Then
    If (false Or CStr(Session("MM_UserAuthorization"))="") Or _
        (InStr(1,MM_authorizedUsers,Session("MM_UserAuthorization"))>=1) Then
        MM_grantAccess = true
    End If
End If
If Not MM_grantAccess Then
    MM_qsChar = "?"
    If (InStr(1,MM_authFailedURL,"?") >= 1) Then MM_qsChar = "&"
    MM_referrer = Request.ServerVariables("URL")
    if (Len(Request.QueryString()) > 0) Then MM_referrer = MM_referrer & "?" &
Request.QueryString()
    MM_authFailedURL = MM_authFailedURL & MM_qsChar & "accessdenied=" &
Server.URLEncode(MM_referrer)
    Response.Redirect(MM_authFailedURL)
End If
%>

<%
Dim rsViewAllRequests
Dim rsViewAllRequests_numRows

Set rsViewAllRequests = Server.CreateObject("ADODB.Recordset")
rsViewAllRequests.ActiveConnection = MM_UnivRel_STRING
rsViewAllRequests.Source = "SELECT * FROM RequestForm ORDER BY RequestID DESC"
rsViewAllRequests.CursorType = 0
rsViewAllRequests.CursorLocation = 2
rsViewAllRequests.LockType = 1
rsViewAllRequests.Open()

rsViewAllRequests_numRows = 0
%>
<%
Dim Repeat1__numRows
Dim Repeat1__index

Repeat1__numRows = -1
Repeat1__index = 0
rsViewAllRequests_numRows = rsViewAllRequests_numRows + Repeat1__numRows
%>
<html>
<head>
<title>Delete Old Requests</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body>
<div align="center">
    <table width="750" height="90" border="0" align="center" cellpadding="0"
cellspacing="0" bgcolor="012650" id="UnRelTitleBar">
        <tr bgcolor="012650">
            <td height="60"> <div align="center"></div>
                <div align="center"><a href="../UR/PubHome.asp"></a></div>
    <div align="right"></div></td>
</tr>
<tr bgcolor="012650">
    <td> <div align="center"></div>
        <div align="center">
            <map name="Map">
                <area shape="rect" coords="282,5,355,25"
href="../../UR/Publications.asp">
                <area shape="rect" coords="198,4,278,24"
href="../../UR/ArchivedNews.asp">
                <area shape="rect" coords="101,5,192,25"
href="../../UR/CreativeServices.asp">
                <area shape="rect" coords="6,4,95,24" href="../../UR/MediaRelations.asp">
                <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
                <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
            </map>
        </div></td>
</tr>
</table>
<br>
<strong><font color="012650" size="5">Delete Old Event Requests</font></strong>
<br>
<form name="formSelect" method="post" action="ReqDeleted.asp">
    <table width="500" border="0" cellspacing="0" cellpadding="0">
        <tr valign="middle" bgcolor="eeeeee">
            <td height="25" colspan="2"> <div align="center"></div></td>
        </tr>
        <%
While ((Repeat1__numRows <> 0) AND (NOT rsViewAllRequests.EOF))
%>
            <tr valign="middle" bgcolor="eeeeee">
                <td width="50" align="center" valign="middle" bgcolor="eeeeee">
                    <div align="center">
                        <input name="del" type="checkbox" value="<%=rsViewAllRequests
("RequestID")%>">
                    </div></td>
                <td><strong><font color="012650" size="3" face="Times New Roman, Times,
serif"><%= (rsViewAllRequests.Fields.Item("EventDate").Value)%> | <%=
(rsViewAllRequests.Fields.Item("EventTime").Value)%><br>
                <%= (rsViewAllRequests.Fields.Item("Event").Value)%> | <%=
(rsViewAllRequests.Fields.Item("Location").Value)%></font></strong></td>
            </tr>
            <tr valign="middle" bgcolor="eeeeee">
                <td height="15" colspan="2"></td>
            </tr>
            <%
Repeat1__index=Repeat1__index+1
Repeat1__numRows=Repeat1__numRows-1
rsViewAllRequests.MoveNext()
Wend
%>
            <tr valign="middle" bgcolor="eeeeee">
                <td height="60" colspan="2" bgcolor="eeeeee"> <div align="center">
                    <input type="submit" value="Delete Requests">
                </div></td>
            </tr>
        </table>

</form>

```

```
</div>
<map name="Map2">
  <area shape="rect" coords="3,3,379,43" href="../UR/PubHome.asp">
</map>
</body>
</html>
<?
rsViewAllRequests.Close()
Set rsViewAllRequests = Nothing
?>
```

DeletePRArticle.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
' *** Restrict Access To Page: Grant or deny access to this page
MM_authorizedUsers="3,2"
MM_authFailedURL="ViewPRArticles2.asp"
MM_grantAccess=false
If Session("MM_Username") <> "" Then
    If (false Or CStr(Session("MM_UserAuthorization"))="") Or _
        (InStr(1,MM_authorizedUsers,Session("MM_UserAuthorization"))>=1) Then
        MM_grantAccess = true
    End If
End If
If Not MM_grantAccess Then
    MM_qsChar = "?"
    If (InStr(1,MM_authFailedURL,"?") >= 1) Then MM_qsChar = "&"
    MM_referrer = Request.ServerVariables("URL")
    if (Len(Request.QueryString()) > 0) Then MM_referrer = MM_referrer & "?" &
Request.QueryString()
    MM_authFailedURL = MM_authFailedURL & MM_qsChar & "accessdenied=" &
Server.URLEncode(MM_referrer)
    Response.Redirect(MM_authFailedURL)
End If
%>
<%
' *** Edit Operations: declare variables

Dim MM_editAction
Dim MM_abortEdit
Dim MM_editQuery
Dim MM_editCmd

Dim MM_editConnection
Dim MM_editTable
Dim MM_editRedirectUrl
Dim MM_editColumn
Dim MM_recordId

Dim MM_fieldsStr
Dim MM_columnsStr
Dim MM_fields
Dim MM_columns
Dim MM_typeArray
Dim MM_formVal
Dim MM_delim
Dim MM_altVal
Dim MM_emptyVal
Dim MM_i

MM_editAction = CStr(Request.ServerVariables("SCRIPT_NAME"))
If (Request.QueryString <> "") Then
    MM_editAction = MM_editAction & "?" & Request.QueryString
End If

' boolean to abort record edit
MM_abortEdit = false

' query string to execute
MM_editQuery = ""
%>
<%
```

```

' *** Delete Record: declare variables

if (CStr(Request("MM_delete")) = "form1" And CStr(Request("MM_recordId")) <> "")
Then

    MM_editConnection = MM_UnivRel_STRING
    MM_editTable = "PressReleases"
    MM_editColumn = "ID"
    MM_recordId = "" + Request.Form("MM_recordId") + ""
    MM_editRedirectUrl = "ViewPRArticles.asp"

    ' append the query string to the redirect URL
    If (MM_editRedirectUrl <> "" And Request.QueryString <> "") Then
        If (InStr(1, MM_editRedirectUrl, "?", vbTextCompare) = 0 And
Request.QueryString <> "") Then
            MM_editRedirectUrl = MM_editRedirectUrl & "?" & Request.QueryString
        Else
            MM_editRedirectUrl = MM_editRedirectUrl & "&" & Request.QueryString
        End If
    End If

End If

' *** Delete Record: construct a sql delete statement and execute it

If (CStr(Request("MM_delete")) <> "" And CStr(Request("MM_recordId")) <> "") Then

    ' create the sql delete statement
    MM_editQuery = "delete from " & MM_editTable & " where " & MM_editColumn & " = "
    & MM_recordId

    If (Not MM_abortEdit) Then
        ' execute the delete
        Set MM_editCmd = Server.CreateObject("ADODB.Command")
        MM_editCmd.ActiveConnection = MM_editConnection
        MM_editCmd.CommandText = MM_editQuery
        MM_editCmd.Execute
        MM_editCmd.ActiveConnection.Close

        If (MM_editRedirectUrl <> "") Then
            Response.Redirect(MM_editRedirectUrl)
        End If
    End If

End If

Dim rsViewArticle_MMColParam
rsViewArticle_MMColParam = "1"
If (Request.QueryString("ID") <> "") Then
    rsViewArticle_MMColParam = Request.QueryString("ID")
End If

Dim rsViewArticle
Dim rsViewArticle_numRows

Set rsViewArticle = Server.CreateObject("ADODB.Recordset")
rsViewArticle.ActiveConnection = MM_UnivRel_STRING
rsViewArticle.Source = "SELECT * FROM PressReleases WHERE ID IN(" + Replace
(rsViewArticle_MMColParam, "'", "'') + ")"
rsViewArticle.CursorType = 0
rsViewArticle.CursorLocation = 2

```

```
rsViewArticle.LockType = 1
rsViewArticle.Open()
```

```
rsViewArticle_numRows = 0
```

```
%>
```

```
<html>
```

```
<head>
```

```
<title>Delete Article</title>
```

```
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
```

```
</head>
```

```
<body>
```

```
<div align="center">
```

```
<table width="750" height="90" border="0" align="center" cellpadding="0"
cellspacing="0" bgcolor="012650" id="UnRelTitleBar">
```

```
<tr bgcolor="012650">
```

```
<td height="60"> <div align="center"></div>
```

```
<div align="center"></div>
```

```
<div align="right"></div></td>
```

```
</tr>
```

```
<tr bgcolor="012650">
```

```
<td> <div align="center"></div>
```

```
<div align="center">
```

```
<map name="Map">
```

```
<area shape="rect" coords="282,5,355,25"
```

```
href="../../../UR/Publications.asp">
```

```
<area shape="rect" coords="198,4,278,24"
```

```
href="../../../UR/ArchivedNews.asp">
```

```
<area shape="rect" coords="101,5,192,25"
```

```
href="../../../UR/CreativeServices.asp">
```

```
<area shape="rect" coords="6,4,95,24" href="../../../UR/MediaRelations.asp">
```

```
<area shape="rect" coords="357,4,391,24"
```

```
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
```

```
<area shape="rect" coords="398,5,463,24"
```

```
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
```

```
</map>
```

```
</div></td>
```

```
</tr>
```

```
</table>
```

```
<br>
```

```
<strong><font color="012650" size="4">Delete Article Now <br>
```

```
</font></strong>
```

```
<form name="form1" method="POST" action="<%=MM editAction%>">
```

```
<table width="300" border="0" cellspacing="0" cellpadding="0">
```

```
<tr bgcolor="eeeeee">
```

```
<td colspan="2"> </td>
```

```
<td colspan="2"> </td>
```

```
</tr>
```

```
<tr bgcolor="eeeeee">
```

```
<td width="25"> </td>
```

```
<td width="55"><font color="012650"><strong>ID:</strong></font></td>
```

```
<td><strong><font color="012650" size="2"><%=rsViewArticle.Fields.Item
("ID").Value%></font></strong></td>
```

```
<td width="25"> </td>
```

```
</tr>
```

```
<tr bgcolor="eeeeee">
```

```
<td width="25"> </td>
```

```
<td width="55"><font color="012650"><strong>Title:</strong></font></td>
```

```
<td><strong><font color="012650" size="2"><%=rsViewArticle.Fields.Item
("Title").Value%></font></strong></td>
```

```
<td width="25"> </td>
```

```
</tr>
```

```
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| </td>  <font color="012650"><strong>Date:</strong></font></td>  <strong><font color="012650" size="2"><%=rsViewArticle.Fields.Item ("PressRelDate").Value %></font></strong></td>  </td> </tr> |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | | </td>  <font color="012650"><strong>Text:</strong></font></td>  <strong> <textarea name="textarea" cols="24" rows="5"><%= (rsViewArticle.Fields.Item("ArticleText").Value) %></textarea> </strong></td>  </td> </tr> |  |  |  |  |  |  |  |  |  |  |  |  | | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | | </td>  </td> </tr> |  |  |  |  |  |  |  |  | | --- | --- | --- | --- | --- | --- | --- | --- | | <div align="center"> <input type="submit" name="Submit" value="Delete"> </div></td> </tr> |  |  |  |  | | --- | --- | --- | --- | | </td>  </td> </tr> </table> <input type="hidden" name="MM_delete" value="form1"> <input type="hidden" name="MM_recordId" value="<%= rsViewArticle.Fields.Item ("ID").Value %>"> </form> <strong><font color="012650" size="4"> </font></strong></div> <map name="Map2"> <area shape="rect" coords="2,4,379,43" href=" ../UR/PubHome.asp"> </map> </body> </html> <% rsViewArticle.Close() Set rsViewArticle = Nothing %> | | | | | | | | | | | | | | | | | | | |

```

DeleteUser.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="../Connections/UnivRel.asp" -->
<%
' *** Edit Operations: declare variables

Dim MM_editAction
Dim MM_abortEdit
Dim MM_editQuery
Dim MM_editCmd

Dim MM_editConnection
Dim MM_editTable
Dim MM_editRedirectUrl
Dim MM_editColumn
Dim MM_recordId

Dim MM_fieldsStr
Dim MM_columnsStr
Dim MM_fields
Dim MM_columns
Dim MM_typeArray
Dim MM_formVal
Dim MM_delim
Dim MM_altVal
Dim MM_emptyVal
Dim MM_i

MM_editAction = CStr(Request.ServerVariables("SCRIPT_NAME"))
If (Request.QueryString <> "") Then
    MM_editAction = MM_editAction & "?" & Request.QueryString
End If

' boolean to abort record edit
MM_abortEdit = false

' query string to execute
MM_editQuery = ""
%>
<%
' *** Delete Record: declare variables

if (CStr(Request("MM_delete")) = "form1" And CStr(Request("MM_recordId")) <> "")
Then

    MM_editConnection = MM_UnivRel_STRING
    MM_editTable = "Users"
    MM_editColumn = "ID"
    MM_recordId = "" + Request.Form("MM_recordId") + ""
    MM_editRedirectUrl = "ViewUsers.asp"

    ' append the query string to the redirect URL
    If (MM_editRedirectUrl <> "" And Request.QueryString <> "") Then
        If (InStr(1, MM_editRedirectUrl, "?", vbTextCompare) = 0 And
Request.QueryString <> "") Then
            MM_editRedirectUrl = MM_editRedirectUrl & "?" & Request.QueryString
        Else
            MM_editRedirectUrl = MM_editRedirectUrl & "&" & Request.QueryString
        End If
    End If

End If
```



```

%>
<%
' *** Delete Record: construct a sql delete statement and execute it

If (CStr(Request("MM_delete")) <> "" And CStr(Request("MM_recordId")) <> "") Then

    ' create the sql delete statement
    MM_editQuery = "delete from " & MM_editTable & " where " & MM_editColumn & " = " & MM_recordId

    If (Not MM_abortEdit) Then
        ' execute the delete
        Set MM_editCmd = Server.CreateObject("ADODB.Command")
        MM_editCmd.ActiveConnection = MM_editConnection
        MM_editCmd.CommandText = MM_editQuery
        MM_editCmd.Execute
        MM_editCmd.ActiveConnection.Close

        If (MM_editRedirectUrl <> "") Then
            Response.Redirect(MM_editRedirectUrl)
        End If
    End If

End If

%>
<%
Dim rsViewUser_MMColParam
rsViewUser_MMColParam = "1"
If (Request.QueryString("ID") <> "") Then
    rsViewUser_MMColParam = Request.QueryString("ID")
End If

%>
<%
Dim rsViewUser
Dim rsViewUser_numRows

Set rsViewUser = Server.CreateObject("ADODB.Recordset")
rsViewUser.ActiveConnection = MM_UnivRel_STRING
rsViewUser.Source = "SELECT * FROM Users WHERE ID IN (" & Replace
(rsViewUser_MMColParam, "'", "''") & ")"
rsViewUser.CursorType = 0
rsViewUser.CursorLocation = 2
rsViewUser.LockType = 1
rsViewUser.Open()

rsViewUser_numRows = 0
%>
<html>
<head>
<title>Delete User</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>

<body>
<div align="center">
    <table width="750" height="90" border="0" align="center" cellpadding="0"
    cellspacing="0" bgcolor="012650" id="UnRelTitleBar">
        <tr bgcolor="012650">
            <td height="60"> <div align="center"></div>
            <div align="center"></div>
            <div align="right"></div></td>
        </tr>
        <tr bgcolor="012650">

```

```

        <td> <div align="center"></div>
        <div align="center">
        <map name="Map">
        <area shape="rect" coords="282,5,355,25"
href="../../../UR/Publications.asp">
        <area shape="rect" coords="198,4,278,24"
href="../../../UR/ArchivedNews.asp">
        <area shape="rect" coords="101,5,192,25"
href="../../../UR/CreativeServices.asp">
        <area shape="rect" coords="6,4,95,24" href="../../../UR/MediaRelations.asp">
        <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
        <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
        </map>
        </div></td>
    </tr>
</table>
<br>
<strong><font color="012650" size="4">Delete this User Now<br>
<br>
</font></strong>
<form name="form1" method="POST" action="<%=MM_editAction%>">
    <table width="250" border="0" cellspacing="0" cellpadding="0">
        <tr bgcolor="eeeeee">
            <td width="30">&nbsp;</td>
            <td>&nbsp;</td>
            <td>&nbsp;</td>
        </tr>
        <tr bgcolor="eeeeee">
            <td width="30">&nbsp;</td>
            <td width="85"><strong><font color="012650" size="3">ID:</font></strong>
</td>
            <td><strong><font color="012650" size="2">&nbsp;<%=rsViewUser.Fields.Item
("ID").Value%></font></strong></td>
        </tr>
        <tr bgcolor="eeeeee">
            <td width="30">&nbsp;</td>
            <td width="100"><strong><font color="012650" size="3">Username:</font>
</strong></td>
            <td><strong><font color="012650" size="2">&nbsp;<%=rsViewUser.Fields.Item
("Username").Value%></font></strong></td>
        </tr>
        <tr bgcolor="eeeeee">
            <td width="30">&nbsp;</td>
            <td width="100"><strong><font color="012650" size="3">Password:</font>
</strong></td>
            <td><strong><font color="012650" size="2">&nbsp;<%=rsViewUser.Fields.Item
("Password").Value%></font></strong></td>
        </tr>
        <tr bgcolor="eeeeee">
            <td width="30">&nbsp;</td>
            <td width="100"><strong><font color="012650" size="3">Security:</font>
</strong></td>
            <td><strong><font color="012650" size="2">&nbsp;<%=rsViewUser.Fields.Item
("Security").Value%></font></strong></td>
        </tr>
        <tr bgcolor="eeeeee">
            <td colspan="3">&nbsp;</td>
        </tr>
        <tr bgcolor="eeeeee">
            <td colspan="3"><div align="center">
                <input type="submit" name="Submit" value="Delete">
            </div>
        </tr>
    </table>
</form>

```

```

        </div></td>
    </tr>
    <tr bgcolor="eeeeee">
        <td colspan="3">&nbsp;</td>
    </tr>
</table>
<input type="hidden" name="MM_delete" value="form1">
<input type="hidden" name="MM_recordId" value="<%= rsViewUser.Fields.Item
("ID").Value %>">
</form>
<strong><font color="012650" size="4"> </font></strong><br>
<br>
<br>
<br>
</div>
<map name="Map2">
    <area shape="rect" coords="3,2,380,44" href="../../UR/PubHome.asp">
</map>
</body>
</html>
<%
rsViewUser.Close()
Set rsViewUser = Nothing
%>

```

LoginFailure.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<html>
<head>
<title>Login Failure</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
<meta http-equiv="refresh" content="5;URL=AdminLogin.asp">
</head>

<body link="012650">
<table width="750" height="90" border="0" align="center" cellpadding="0"
cellspacing="0" bgcolor="012650" id="UnRelTitleBar">
  <tr bgcolor="012650">
    <td height="60"> <div align="center"></div>
      <div align="center"></div>
      <div align="right"></div></td>
    </tr>
    <tr bgcolor="012650">
      <td> <div align="center"></div>
        <div align="center">
          <map name="Map">
            <area shape="rect" coords="282,5,355,25" href="../UR/Publications.asp">
            <area shape="rect" coords="198,4,278,24" href="../UR/ArchivedNews.asp">
            <area shape="rect" coords="101,5,192,25"
href="../UR/CreativeServices.asp">
            <area shape="rect" coords="6,4,95,24" href="../UR/MediaRelations.asp">
            <area shape="rect" coords="357,4,391,24"
href="http://www.csuniv.edu/Directory/staff.asp?dept=University%20Relations">
            <area shape="rect" coords="398,5,463,24"
href="http://www.csuniv.edu/AboutCSU/aboutcsu.html">
          </map>
        </div></td>
    </tr>
  </table>
<div align="center"><br>
  <strong><font color="012650" size="3" face="Arial, Helvetica, sans-serif">LOG IN
HAS FAILED</font></strong></div>
<div align="center">
  <p><font color="012650" size="2"><strong><font face="Arial, Helvetica, sans-
serif">You
  have entered the wrong username of password.<br>
  <br>
  If you are not automatically returned to the log in page withing 5 seconds<br>
  please click on the link below.</font></strong></font><font color="012650"
size="2" face="Arial, Helvetica, sans-serif"><strong><br>
  </strong></font><font color="012650" size="2"><strong><br>
  <font size="3"><font size="1" face="Arial, Helvetica, sans-serif">&lt;&lt;<a
href="AdminLogin.asp">Back
  to Login Page</a></font><a href="AdminLogin.asp"><br>
  </a><br>
  </font></strong></font></p>
</div>
<map name="Map2">
  <area shape="rect" coords="3,5,379,44" href="../UR/PubHome.asp">
</map>
</body>
</html>
```