

COIN 496 SENIOR PORTFOLIO

**Josiah Vergonio
February 25, 2010**

Coding Introductory Page

COINS 315, project 5

The grade I received on this project was a 99. I used C++ to create this program. It was initially compiled in Visual Studio 2005. However, for this portfolio, I downloaded and used Dev-C++ because I was having problems with Visual Studio 2005. To run this program, simply go to <http://www.bloodshed.net/devcpp.html> to download the compiler. Then, go to File -> New -> Source File and simply cut and paste the code from the CD into the screen. To compile and run press F9. This project was on the binary search tree.

COINS 333, homework 9, problems 1A and 1B

The grade I received on this coding homework was a 47 out of 50. We had to write patterns in Perl. Basically, we learned a concept called pattern matching which can be a class by itself. Pattern matching is the idea of using some strings (a pattern) to compare with (against) another string. Either, it matches or it doesn't. If it does match, then how did it match? In other words what part matched which? It is used most often in parsing various things such as pulling out a SID from a line or to separate parts of a sentence.

The way I compiled this Perl program was to download Strawberry from <http://strawberryperl.com>. Then, open command prompt and type in perl c:\xxxx.txt, where xxxx is the location of the Perl file.

COINS 333, homework 8

The grade I received on this coding assignment was a 45 out of 50. We had to write code that scans an array of months and replaces the month with the number of days in that month (all done in Perl also). I used two functions to accomplish this task.

COINS 334, class project

Our project in User Interface class was divided into 4 parts. We had to improve and implement an existing User Interface that is interacted with regularly. I chose to improve a website so I used HTML for my coding language. HTML does not really need to be compiled. So the best way to "run" it would be cut and paste what I have into Visual Studio 2005 and use your web browser to open it.

```

//Name: Josiah Vergonio
//Program Name: Project 5
//Creation Date: 11/17/08
//Last Modified: 11/25/08
//COIN Course: COIN 315 Data Structures
//Grade Received: 99
//Comments regarding design: In this project, we had to practice with binary search trees. ✓
    I had to implement a remove,
//clear, operator=, copy constructor, copy, and various traverseInOrder methods. We had to ✓
    complete a binary search tree
//that we working working on earlier that did not have those methods.

//Instructor's comments on this project:
//"Issues deleting the root when less than 2 children (your remove never changes root)."
```

```

#include <iostream>
using namespace std;

template <typename ItemType>
class BST { //unbalanced binary search tree, no duplicates allowed, templated
public:
    BST() {root=0;} //empty tree
    //declare AND implement copy constructor and overloaded=

    //overloaded assignment operator:
    const BST& operator=(const BST &src)
    {
        if (this != &src)
        {
            clear(root);
            copy(root,src.root);
        }
        return *this;
    }

    //copy constructor:
    BST(const BST &src)
    {
        copy(root,src.root); //copy the source's root
    }

    ~BST() { if (root) clear(root); }

    bool empty() const {return (root==0);} //return true iff no nodes

    bool insert (ItemType val) { //insert val into a correct spot, return false if duplicate ✓
        or out of memory
        if (empty()) {
            root=new Node(val);
            return (root != 0); //return true if root is not NULL, NULL if no memory
        }
        return insert(val, root);
    }

    bool search (ItemType val) const { //return true iff val found in tree
        return search(val, root);
    }

    bool remove (ItemType val) { //remove val, return true iff val found in tree
        //might have search code in it but will need a trailer ptr or look ahead, might need ✓
        2 Node pointer parameters in the private
        //for trailer method
        if (!search(val) || empty()) //if value is not found in the tree OR the tree is empty ✓
            return false
    }
};

```

```

    {
        return false;
    }
    else
    {
        return remove(val, root, 0); //2 parameter recursive function to be able to use "look
        ahead method"
    }
}

//print values in order separated by spaces
void traverseInOrderPrint() const {traverseInOrderPrint(root);}

//adjust the following such that it takes a function pointer as a parameter
//The parameter to the function pointer parameter is ItemType
void traverseInOrder(void visit(ItemType val)) const {traverseInOrder(root, visit);}

private:
struct Node { //constructor provided for simplicity of insert
    Node (ItemType d) : data(d), lChild(0), rChild(0) {}
    ItemType data;
    Node *lChild, *rChild;
};
Node * root;
//code for copy constructor to help reuse of code:
void copy (Node * &cpy, Node *src)
{
    if (src == NULL) //base case
        cpy = NULL; //if source points at NULL, then copy will also point at NULL
    else
    {
        cpy = new Node(src->data); //create a new node with src's data
        copy(cpy->lChild, src->lChild);
        copy(cpy->rChild, src->rChild);
    }
}
//below are recursive helpers for public methods with the same name

bool remove(ItemType val, Node *cur, Node *parent) //trailer is exactly cur's parent!
{
    if (cur->data == val)
    {
        //see if it has 1 or 2 or no kids

        //No Children:
        if (!cur->lChild && !cur->rChild)
        { //if cur does not have a left or right child, delete cur and return true
            //need an if statement to figure out if cur is left or right child of parent:
            if (cur == parent->lChild)
            {
                delete cur;
                parent->lChild = NULL;
                return true;
            }
            else /*if (cur == parent->rChild)*/
            {
                delete cur;
                parent->rChild = NULL;
                return true;
            }
        }

        //1 Child:
        //if parent's rChild:
        if (parent != NULL && parent->rChild == cur)
        {

```

```

    if (cur->lChild && !cur->rChild) //only has a left Child
    {
        parent->rChild=cur->lChild;
        delete cur;
        return true;
    }
    else if (!cur->lChild && cur->rChild) //only has a right Child
    {
        parent->rChild=cur->rChild;
        delete cur;
        return true;
    }
}

//if parent's lChild:
else if (parent != NULL && parent->lChild == cur )
{
    if (cur->lChild && !cur->rChild) //only has a left Child
    {
        parent->lChild=cur->lChild;
        delete cur;
        return true;
    }
    else if (!cur->lChild && cur->rChild) //only has a right Child
    {
        parent->lChild=cur->rChild;
        delete cur;
        return true;
    }
}

//2 Children:
//go left once, then keep going right, swap out rightmost value of left subtree
with root:

if (cur->lChild && cur->rChild) //if cur has a left and right child, hence 2
children
{
    Node *swapWithThis=cur; //this will keep track of what we're going to swap
with later
    parent=cur;
    cur=cur->lChild; //go left once
    if (!cur->rChild) { //handles special case
        parent->lChild=cur->lChild;
        swapWithThis->data=cur->data; //swap data
        //update trailer's pointer somehow
        delete cur; //delete cur
        return true;
    }
    else
    {
        while (cur->rChild != 0)
        {
            //update trailer in here
            parent=cur;
            cur=cur->rChild; //keep going right while cur is not null
        }
        swapWithThis->data=cur->data; //swap data
        //update trailer's pointer somehow
        parent->rChild=cur->lChild;
        delete cur; //delete cur
        return true;
    }
}

```

```

    if (val < cur->data) return remove(val, cur->lChild, cur);
    else return remove(val, cur->rChild, cur);
}

bool insert (ItemType val, Node *cur) {
    if (cur->data==val) return false; //if the val is already in there, return false b/c no
    duplicate data
    if (val < cur->data) { //go left
        if (cur->lChild) return insert(val, cur->lChild); //no left so insert here
        cur->lChild=new Node(val);
        return (cur->lChild != 0);
    }
    else {
        if (cur->rChild) return insert(val, cur->rChild); //no right so insert here
        cur->rChild=new Node(val);
        return (cur->rChild != 0);
    }
}

bool search (ItemType val, Node *cur) const {
    if (cur==0) return false; //if val not found (b/c cur is NULL, hence it
    traversed entire tree)
    //then return false
    if (cur->data == val) return true;
    if (val < cur->data) return search(val, cur->lChild); //val smaller so we go left
    else return search(val, cur->rChild);
}

void traverseInOrderPrint(Node *cur) const
{
    if (cur != 0) //base case
    {
        traverseInOrderPrint(cur->lChild); //print left
        cout << cur->data << " "; //print cur's data
        traverseInOrderPrint(cur->rChild); //print right
    }
}

void traverseInOrder(Node *cur, void visit(ItemType val)) const
{
    if (cur != 0) //base case
    {
        traverseInOrder(cur->lChild); //print left
        visit(cur->data);
        traverseInOrder(cur->rChild); //print right
    }
}

void clear(Node * cur)
{
    //postorder traversal will delete all nodes (Left, Right, Self)
    if (cur !=0) //base case, as long as cur is not NULL
    {
        clear(cur->lChild); //delete left subtree
        clear(cur->rChild); //delete right subtree
        delete cur;
    }
}


int main()
{
    //your test code would go here
    BST<int> tree;
    BST<int> tree2;
    tree.insert(4); //insert various values into the tree
    tree.insert(23);
    tree.insert(0);
    tree.insert(-55);
}

```

```
tree.insert(-100);
tree.insert(99);
tree.insert(1000);
tree.insert(50);
tree.insert(39);
tree.insert(46);
tree.insert(-5000);
//COPY CONSTRUCTOR TESTS:
tree2=tree;
cout<<"Tree 1's tree: "<<endl;
tree2.traverseInOrderPrint();
cout<<endl;
cout<<"Tree 2's tree: "<<endl;
tree.traverseInOrderPrint();
cout<<endl;
//lines 255-264 tests to make sure that the copy constructor is working properly,
different values are removed from each
//tree then printed out again to make sure the trees are correct:
tree.remove(-55);
tree2.remove(1000);
cout<<"Tree2's tree, shouldn't have a 1000: " <<endl;
tree2.traverseInOrderPrint();
cout<<endl;
cout<<"Tree1's tree, shouldn't have a -55: " <<endl;
tree.traverseInOrderPrint();
cout<<endl;

//TESTS REMOVE:
//tests 0 children removal:
tree.remove(-5000);
cout<<"Shouldn't have -5000: " <<endl;
tree.traverseInOrderPrint();
cout<<endl;
//test 1 child removal:
tree.remove(0);
cout<<"Shouldn't have 0: " <<endl;
tree.traverseInOrderPrint();
cout<<endl;
//test 2 children removal:
tree.remove(4);
cout<<"Shouldn't have a 4: " <<endl;
tree.traverseInOrderPrint();
cout<<endl;
system("PAUSE");
return 0;
}
```


Screen Shot for COIN 315, Project 5 (Binary Search Trees)

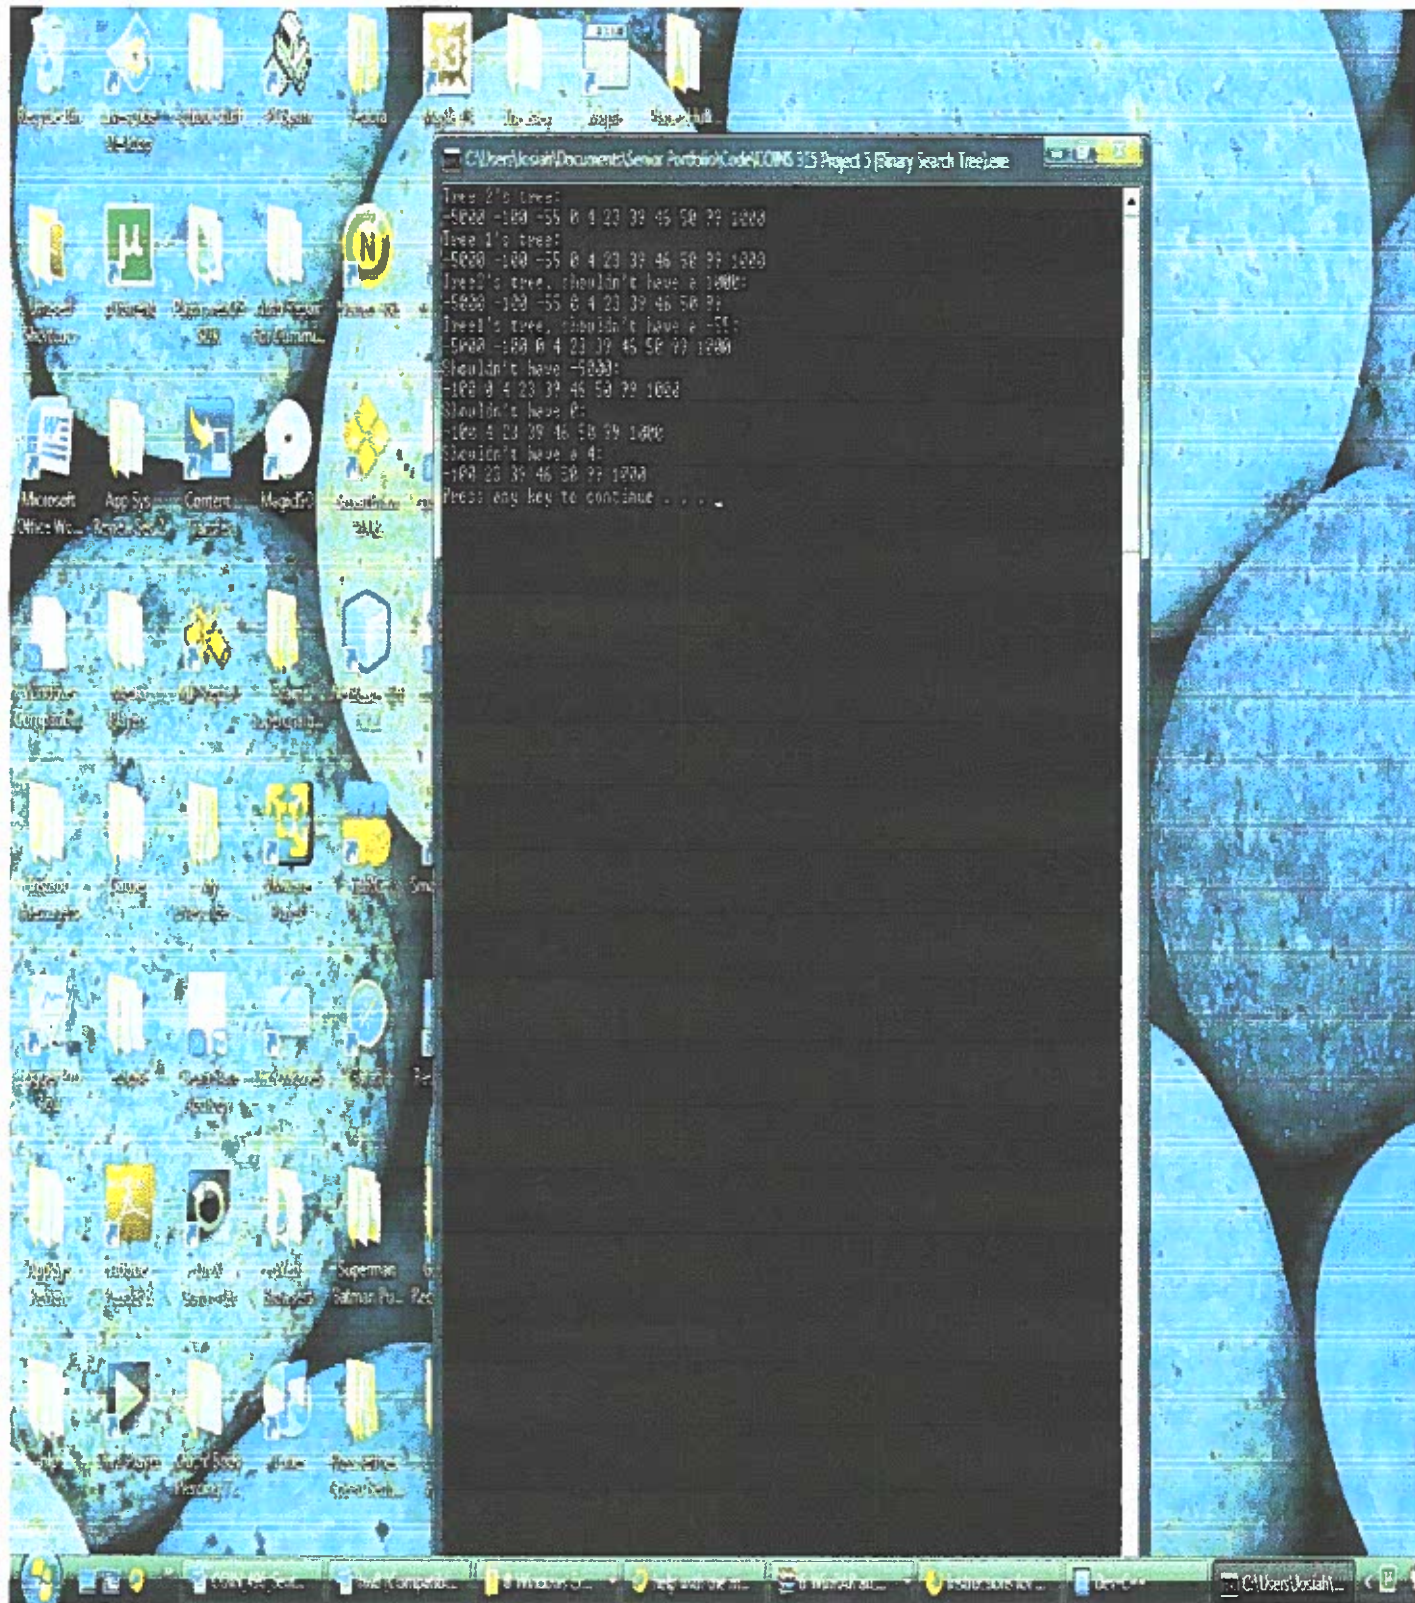

COINS 333 Homework 9 Problems 1A,1B

```
#Student Name: Josiah Vergonio
#Program Name: Problem 1A and 1B in Homework 9
#Creation Date: April 17, 2008
#Last Modified Date: April 21, 2008
#COIN Course: COIN 333 Applied Systems
#Grade Received: 47 out of 50
#Comments regarding design: In this design, I had to work with pattern matching
#in Perl.
```

```
#For 1A, I had to write patterns that matched the following things:
```

```
#       Date Time stamps of the form : year/month/day/hour/min/sec
#where year must be 4 digits; month, day, hour, and min could be 1 or
#2 digit, and sec is allowed (but not required) to be floating point with
#one or more digits before the decimal point. Write the shortest correct
#pattern you can. You may assume that range checks on the different parts
#will be done later (so \d instead of worrying about which numbers are OK).
```

```
#For 1B, I had to write patterns that matched the following things:
```

```
#       Subset of MIPS including only the mnemonics: add, addi, sub,
#lw, and sw. Remember there are many ways of using some of these
#instructions. Note that patterns can contain variables. This means
#that you could create string variables as sub-patterns then combine
#them. This would allow you to reuse your own code and make patterns
#more readable.
```

```
#Instructor's comments:
```

```
#1a) "-1, your pattern requires a decimal point"
#1b) "-2, your spacing isn't enforced in all situations, why the extra ()?
#why does regPattern not include sp, fp, gp, ra? loadStore pattern restricts
#to only offsets from sp/fp. But we have used others. Also, it doesn't accept
#a label."
```

```
#Problem 1A (Homework 9)
```

```
#a)       Date Time stamps of the form : year/month/day/hour/min/sec
#where year must be 4 digits (use the {4}); month, day, hour, and min
#could be 1 or 2 digit (use {m,n}), and sec is allowed (but not required)
#(use "?") to be floating point with one or more digits before the
#decimal point. Write the shortest correct pattern you can. You may
#assume that range checks on the different parts will be done later
#(so \d instead of worrying about which numbers are OK).
```

```
$str="2009/02/12/30/00/334324324.098709870897"; #tests the year/month/day/hour/min
1/2 digit part out
```

```
if($str =~ m!\d{4}/(\d{1,2}/){4}(\d+\.\d+)?$!)
{
    print "Yes\n";
}
else
{
    print "No\n";
}
```

```
#Problem 1B (Homework 9)
```

```
#b)       Subset of MIPS including only the mnemonics: add, addi, sub, lw, and sw.
# Remember there are many ways of using some of these instructions. Note that
#patterns
#can contain variables. This means that you could create string variables as
#sub-patterns
```


COINS 333 Homework 9 Problems 1A,1B

#then combine them. This would allow you to reuse your own code and make patterns more readable.

```
$str2='addi $t0, $a0, 16';
```

```
$loadStorePattn='(\s+)(\${a0}|\${a1}|\${a2}|\${s[0-7]}|\${t[0-9]}|\${v0}|\${v1}|\${fp}|\${ra})(\s+),(\s+)\d*(\${fp}|\${sp})\)(\s*)'; #all registers + frame pointer + return address + optional offset from fp or sp
$regPattn='(\s*)(\${a0}|\${a1}|\${a2}|\${s[0-7]}|\${t[0-9]}|\${v0}|\${v1}|\${zero})(\s*)'; #all registers + $zero register
$imm='(\s+)\d+'; #for constants
$add="add$regPattn,$regPattn,$regPattn";
$addi="addi$regPattn,$regPattn,$imm";
$sub="sub$regPattn,$regPattn,$regPattn";
$sw="sw$loadStorePattn";
$lw="lw$loadStorePattn";
if ($str2 =~ m/^(($add|$addi|$sub|$sw|$lw)$/){
    print "Yes\n";
}
else
{
    print "No\n";
}
```

Screen Shot COINS 333, homework 9, problems 1A,1B

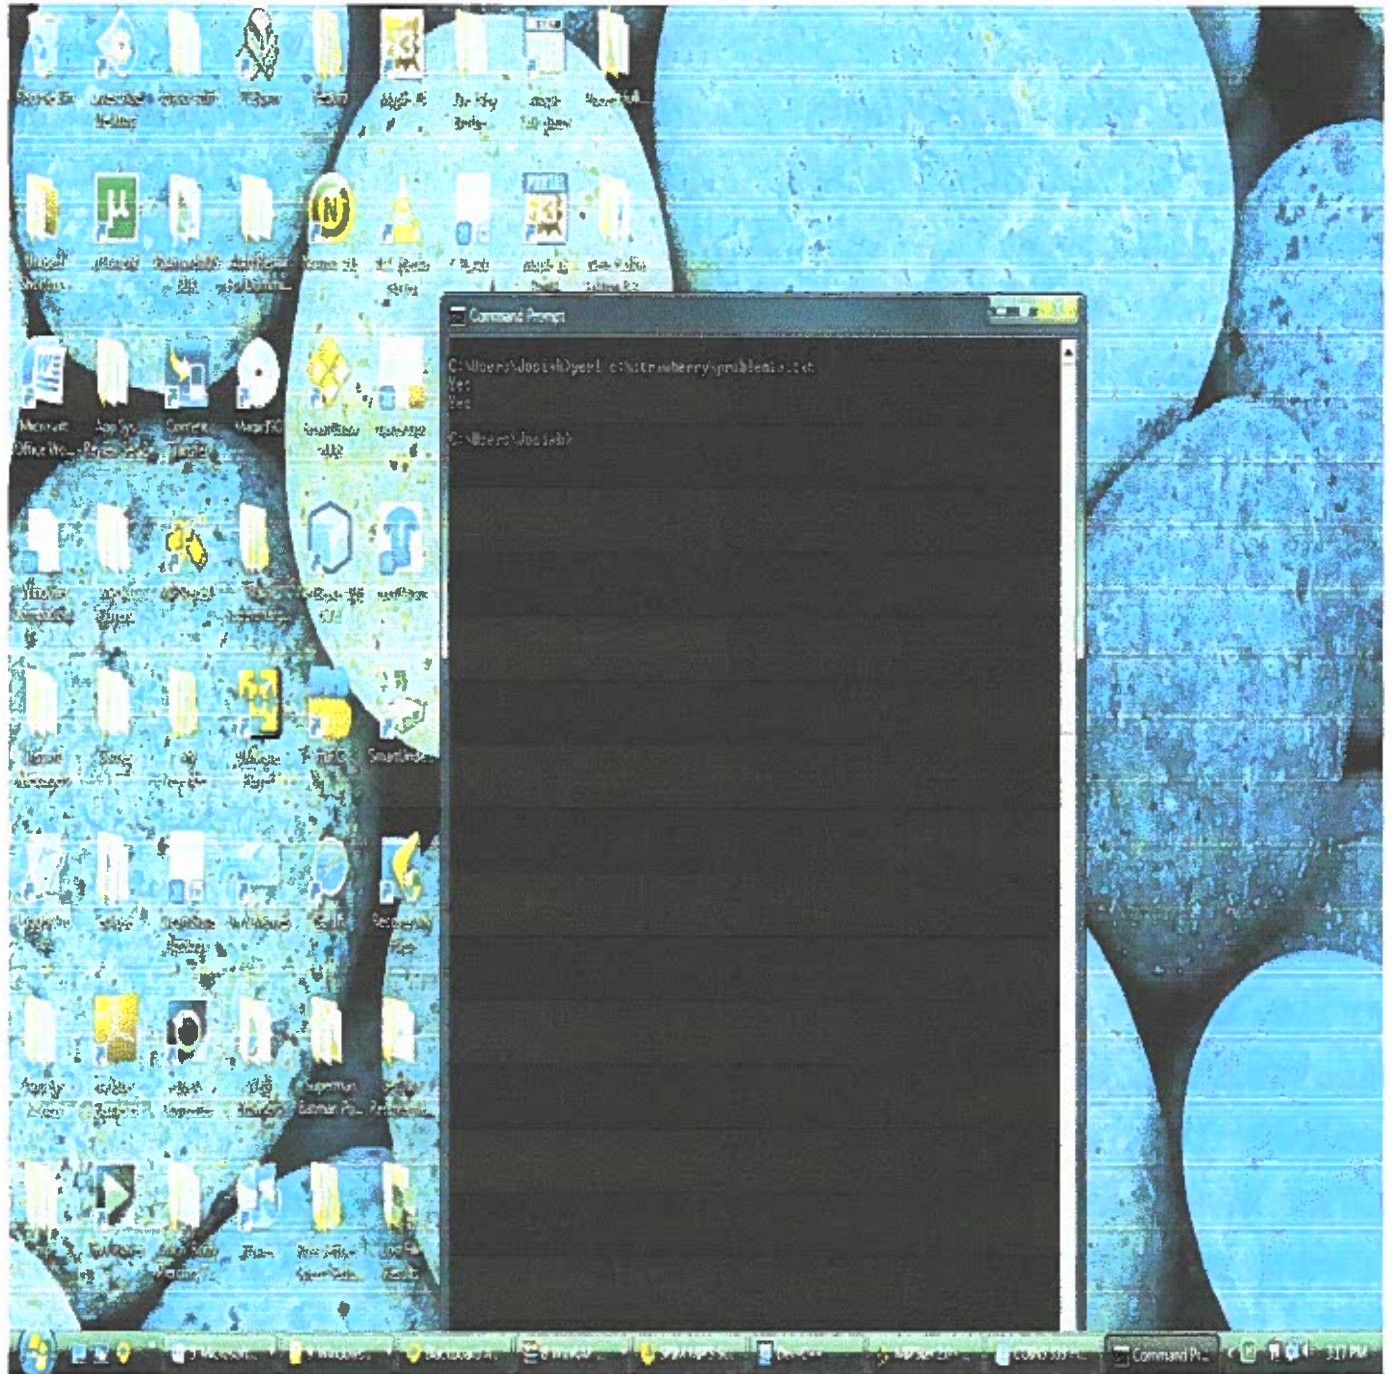

COINS 334 Class Project (Front Page)

```
<!--
  Student Name: Josiah Vergonio
  Program Name: Front Page
  Creation Date: April 1, 2009
  Last Modified Date: April 15, 2009
  COIN Course: COIN 334 User Interface
  Grade Received: 90
  Comments regarding design: This is our final project in COIN 334. It was
divided into four phases.
  The User Interface Design project will consist of improving and implementing
an exiting User Interface
  that we interact with regularly. I chose to improve Sprint's website because
they had a poor interface.
  This is the contact page. The website that Sprint made failed to follow the
8 golden rules of user interface.
  Their website is located here: http://now.sprint.com/widget/
-->
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml" >
<head>
  <title>Front Page</title>
</head>
<body style="text-align: left">
  <br />
  <strong>Welcome To The Sprint Wireless Modem Page!<br />
  <br />
</strong><a
href="http://nextelonline.nextel.com/NASApp/onlinestore/en/Action/DisplayPhones?filt
erString=Data_Cards_Phone_Char">
  Purchase a Wireless Modem</a>
  <br />
  <a href="http://now.sprint.com/widget/">Visit the Promotional Flash Site</a>
  <br />
  <a href="http://www.clickclaims.com/eccoveragemaps/index.asp">View the
Coverage</a><br />
  <a href=modemPlan.htm>View Plan</a><span style="text-decoration: underline">
  <br />
  <a
href="http://nextelonline.nextel.com/NASApp/onlinestore/en/Action/DisplaySiteMapPhon
es?audience=INDIVIDUAL&language=EN">View all Data Cards</a> </span><br />
  <br />
  <br />
  <br />
  <br />
  <br />
</body>
</html>
```



Welcome To The Sprint Wireless Modem Page!

- [Purchase a Wireless Modem](#)
- [Visit the Promotional Flash Site](#)
- [View the Coverage](#)
- [View Plan](#)
- [View all Data Cards](#)

COINS 333 Homework 8 Problem 1

```
#Student Name: Josiah Vergonio
#Program Name: Homework 8, problem 1
#Creation Date: April 10, 2008
#Last Modified Date: April 14, 2008
#COIN Course: COIN 333 Applied Systems
#Grade Received: 45 out of 50
#Comments regarding design: In this homework assignment, I had to write code that
scans
#an array of months and replaces the month with the number of days in that month
(ignoreing
#the leap year). For example, january should become 31.
#Each element in the array will be exactly 1 word, one of the 12 months
#in any combination of upper or lower case, and in any order.

#When my instructor graded this, he said:
#Months[$i] = $daysOfMonth{Months[$i]} is simpler than a splice.
```

```
@months=qw (January February MARCH April May June July August SepTembEr OctoBer
November DeCeMbEr);
%daysOfMonth=(
```

```
    january=>31,
    february=>28,
    march=>31,
    april=>30,
    may=>31,
    june=>30,
    july=>31,
    august=>30,
    september=>31,
    october=>30,
    november=>31,
    december=>30,
```

```
);
```

```
#These two functions do the work, first it changes items in @months to lower case
then
#it looks up that month inside the associative array %daysOfMonth and changes
@months
```

```
changeToLowercase();
changeToNumber();
print "@months\n";
```


```
sub changeToLowercase
```

```
{
    for ($i=0; $i<@months; $i++)
    {
        #put month in lower case
        $months[$i]=lc $months[$i];
    }
}
```

```
sub changeToNumber
```

```
{
    for ($i=0; $i<@months; $i++)
    {
        #change months to corresponding num of days using associative array
        splice @months, $i, 1, $daysOfMonth{$months[$i]};
    }
}
```

Screen Shot for COIN 333 Homework 8, problem 1

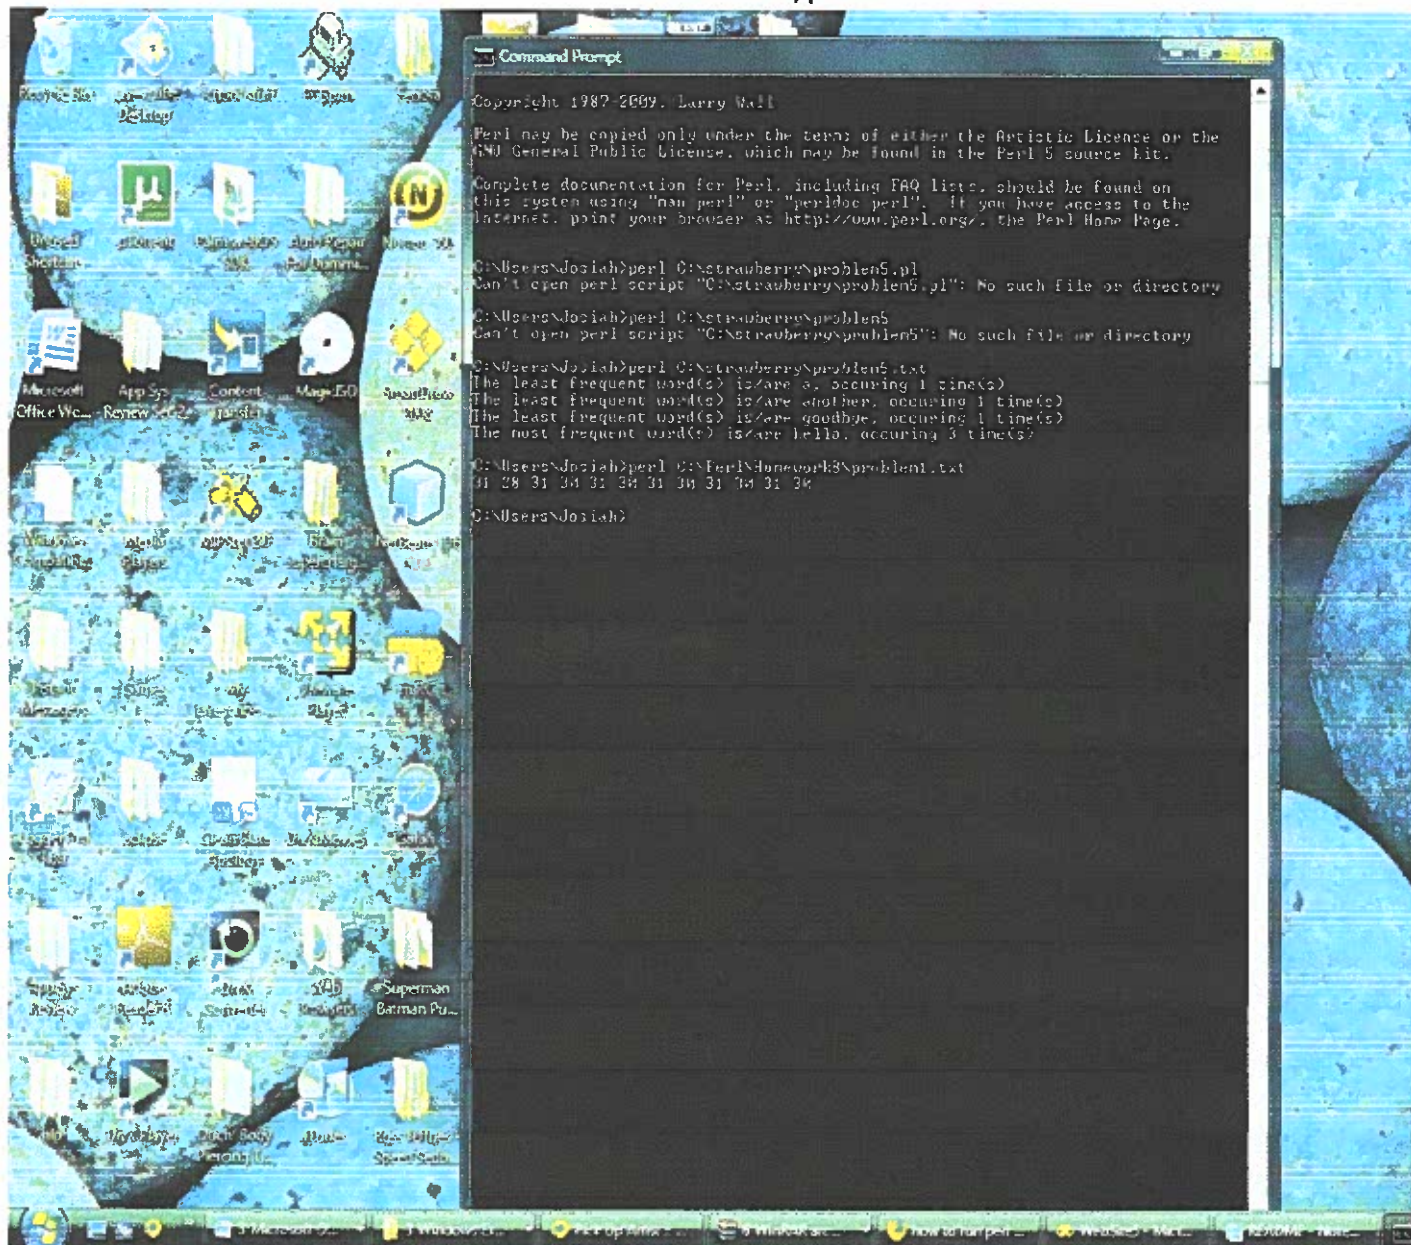

Ethics Paper Introductory Page

COINS 431: Solving the Video Game Controversy (Grade: 97)

COINS 334: The Lucrative Business of Universal Design (Grade: 98)

COINS 325: CSU's Internet Code of Conduct (Grade: 95)

Josiah Vergonio

Dr. Underwood

COINS 431

September 8, 2009

Solving the Video Game Violence Controversy

Violence in videogames is a very controversial topic. Some say there is a link; others say there is no link between violence and videogames. Currently, some things are being done about it in America. A rating system was implemented and some bills were even looked at dealing with this issue.

The ESRB (Entertainment Software Rating Board) has created a rating system for videogames. There are two parts to the rating system-the rating symbol and the content descriptor. The rating symbol will suggest what age group should be playing the game. The content descriptor gives the reason why it received that rating and also special things to consider before playing the game. According to the Media Awareness Network, “to take full advantage of the ESRB rating system, it’s important to check both the rating symbol (on the front of the game box) and the content descriptors (on the back of the game box)” (“Understanding the Rating System”).

In the courts, government officials have tried to pass bills to regulate violent video games-but, “so far all such efforts have failed” (Schiesel). The reason why all the bills have failed is because they violate 1st amendment rights. The latest bill, Violence in Video Games Rating Enforcement Act, hasn’t been passed by the courts. This “bill would require ID checks for purchases of games rated M (mature) or AO (adult only)” (Triplett). Also, it requires,

“vidgame retailers to post ratings system explanations in the store” (Triplett). Stores that violate either of these would have a \$5,000 fine. Unlike the previous bills, this does not infringe upon the 1st amendment rights.

Finally, video game retailers who are members of the EMA (Entertainment Merchants Association) have voluntarily agreed not to sell or rent videogames rated M or higher to anyone under the age of 17. Even if they are not members of the EMA, most retailers have made a commitment to parents to also voluntarily enforce the mature and adults only rating on games.

So, the question is what should be done about the violence in videogames? This is a hard question to answer. Many people have opposing answers to this. I would recommend to raise the price on a videogames rated M or higher so that teenagers will be more reluctant to buy them. In the state of Pennsylvania, a “representative drops the idea that a 5% tax should be placed on violent video games” (Piekarski). This would be a good idea and should also apply to online retailers such as EBay and Amazon. Even if the Violence in Video Games Rating Enforcement Act is passed, it will still be pretty easy for someone older to buy a game for someone underage. In my opinion, ultimately, it is the parents’ responsibility to regulate what games their children play when the child is still young and to teach them the difference between fantasy and reality. They know their child better than anybody else and can sense whether or not a video game will have an effect on them.

Another thing I would recommend is having the option to turn off the blood, gore, and adult language in a violent videogame. Many games already have this feature in the options menu. Before playing the game, the parent should visit the options menu to see if this option is available. The game will still be violent, but at least not as gory.

Another good idea is to “not buy a game until you [the parents] have thoroughly evaluated the game’s impact on your child, regardless of how badly they want it” (“What Should Be Done about Video Game Violence?”). Again, the parents should know their child’s personalities. They would know if the child has a really good imagination, is sensitive, or if they have any mental problems. If any of these apply, they should really reconsider getting them a game if it may have an impact on the child.

If the parents are not really sure about what is in the game, “ask for a demo” (“What Should Be Done about Video Game Violence?”). Then, play the demo and see what it contains. If it is too violent for your child, then don’t buy the actual copy and throw the demo away. When playing the demo, pay attention to the gore and the language. If no demo is available, read the description since “many of these game packages are quite graphic and describe with some luring, promotional detail what the game has in store” (“What Should Be Done about Video Game Violence?”).

Before buying a game, “make sure there is a 100% exchange or refund available should a violent or a sexually oriented game sneak by you” (“What Should Be Done about Video Game Violence?”). This is a smart thing to do. If it was initially thought that the game would be okay, but something violent or sexual was realized then having the ability to receive a refund is a good thing.

It is also a good idea to go outside for some family time and have your children participate in local sports events to get them away from videogames. Not only is playing a videogame for multiple hours straight unhealthy for any age group, but physical activity is healthy. Doing things as a family also promotes a feeling of bonding together.

The parents should also talk with the parents of their child's peers. They should try and find out what their child's friends play. If they play any violent videogames, then the parent should only allow their child to meet up with friends for outdoor activities.

Besides the parents' responsibilities, another good idea is to give videogame developers incentives for creating games that have no violence. In Texas, a bill has already been passed to accomplish this strategy. Over there, "game companies are eligible for up to \$250,000 in grants" as long as they allow the state to pick and choose which game projects are allowed to finish ("Texas Game Development Incentives Come with Political Strings Attached"). This is a really good idea because it creates a win-win situation for the state and the game developers. If this same idea is transferred to video game retailers as well, then the parents will have an easier time protecting their kids from videogame violence since they will not have to worry about what their neighbors' play either.

Actually, the idea about giving developers grants could be modified a little. The government should regulate where the games will be sold and not the content-so the 1st amendment is not violated. Videogames rated M or higher should be sold in adult entertainment stores. These stores are the ones that do sell violent videogames and require an ID to enter. With all these precautions in place, it is now really up to the household to decide what games to play on the TV. The government did its part by providing incentives to developers to choose where the game will be sold. The game developers are happy since their still making money and do not have to worry about content control. The parents also have an easier time since all they have to do is go to a child-friendly game store to purchase games there.

Works Cited

"Entertainment Ratings and Awareness Month." June 2009. ERLAM. 08 Sept

2009. <<http://www.erlam.org/>>.

Piekarski. "The Violent Game Tax and What it Could Mean for PA Residents." BingeGamer.net.

2009. 08 Sept 2009. <<http://www.bingegamer.net/2009/the-violent-game-tax-and-what-it-could-mean-for-pa-residents/>>.

Schiesel, Seth. "Court Blocks Laws on Video Game Violence." The New York Times. 21 Aug.

2007. 08 Sept 2009.

<http://www.nytimes.com/2007/08/21/arts/television/21vide.html?_r=2&pagewanted=1>.

"Texas Game Development Incentives Come with Political Strings Attached." 11 June 2007.

GamePolitics.com. 08 Sept 2009.

<<http://www.gamepolitics.com/2007/06/11/texas-game-development-incentives-come-political-strings-attached>>.

Triplett, William. "Bill Targets Teen Gamers." Variety.

2009. 08 Sept 2009.

<<http://www.variety.com/article/VR1117985230.html?categoryId=1064&cs=1>>.

"Understanding the Ratings System." 2009. Media Awareness Network. 08 Sept 2009.

<http://www.mediaawareness.ca/english/parents/video_games/ratings_videogames.cfm>.

"What Should Be Done About Video Game Violence?" 2009. Ohio University. 08 Sept 2009.

<<http://oak.cats.ohiou.edu/~ad182899/whattodo.htm>>.

Josiah Vergonio

The Lucrative Business of Universal Design

Companies should adapt to people with disabilities only if they can afford it or they wish to make a smart investment. Otherwise, they should resort to other methods. Universal Design is the concept of creating products that can cater to everybody regardless of physical disabilities, age, weight, height, etc. However, some argue that this can be costly.

One could also argue that creating software to specifically cater to those with disabilities will scrutinize those people. According to Wendy Bailey of the Adaptive Technology Resource Centre in the University of Toronto, “The cost prohibitive products and devices designed for people with disabilities usually have an institutional appearance that stigmatizes the individual, and confirms the ‘otherness’ of disability.” That is such a limiting perspective because it stems primarily from the social awkwardness of having a disability, rather than costs and accessibility issues. Regardless of how one is looked upon, as long as they are able to utilize an interface then that person can walk away content.

One method of possibly cutting costs while still being able to cater to those with disabilities is for a company to train their current employees to be able to help those with disabilities. According to the U.S. Department of Justice, “an agency with an inaccessible website may also meet its legal obligations by providing an alternative accessible way for citizens to use programs or services, such as a staffed telephone line”. This will prevent the company from spending money on new software and other universally designed tools. However, training costs plus the costs of additional employees may be a factor. Therefore, warranting this idea depends on how intense the training required is and how much they are willing to pay for it. If, from a company’s perspective, very little training is required and a few extra employees are

worth it, then this is a plausible strategy. Otherwise, they may need to decrease spending in one department to afford Universal Design. Or, as in a state or local government's point of view, they could ask for monetary support from the federal government to help implement Universal Design. It was a smart decision to require state and local governments to cater to those with disabilities "if the government entities receive Federal funding" (U.S. Department of Justice). The downside of this is that it may increase taxes. However, in the long term, making that first step to catering to everybody may very well be beneficial to a company or government entity.

So, why should private companies keep Universal Design in mind? The short answer is that this idea of catering to everybody can be profitable in the near future; therefore, it is a smart investment to start implementing Universal Design now. Also, this creates a win/win situation because the company gains a profit and those with disabilities can utilize a product to the fullest extent possible. According to Edward Steinfeld, Professor of Architecture at the University of New York, over the last several years a growing interest in Universal Design has happened because of "an increase in the number of survivors of disability, increasing life spans, increasing purchasing power among the population with disabilities, and products/environments that were not designed with old people in mind". He said that "the purchasing power of people with disabilities is significant, it is estimated that 36 million disabled people in the U.S. spend 40 billion dollars on special products. As they become integrated into general community life, hold jobs and earn more money, they are beginning to exert influence on design of mass marketed products". So, even if a private company is on a tight budget, it may be beneficial to them to start utilizing Universal Design strategies in their products.

In conclusion, Universal Design should be implemented because more than likely everybody wins. The initial cost might be outweighed by the future income.

Josiah Vergonio

September 3, 2007

CSU's Internet Code of Conduct

The CSU internet guidelines provide rules that students must abide by when using the internet that the school provides. In my opinion, all twelve rules are required in some form. But, for the sake of argument, not all twelve rules are absolutely necessary. Guideline #2, "I will not send e-mail or attachments that are offensive or threatening", has some holes in it. How does a person really know that an e-mail is offensive to someone else if the e-mail doesn't offend him at all? People have different perspectives on what is offensive and what isn't. University of Sydney's internet code of conduct is more legit. It states that the user must assume full responsibility for the content of all his material that can be accessed by other Internet users or be otherwise distributed after being accessed through the Internet. This means that the sender of an e-mail, even if it doesn't offend him in the least, must still be responsible for the information he sends that can be accessed by others.

A person's right to privacy is violated by American University of Beirut's internet guidelines. In their guidelines, the user must understand that his computer activity will be monitored by authorized individuals for purposes of maintaining system performance and security. I can understand why this is necessary in today's day and age. But, the Fourth Amendment is supposed to protect people from unreasonable searches. When a new university accepts a student, it should do a background check and everything necessary to filter out the criminals and terrorists. But, on the other hand, monitoring a person's computer activity is necessary in some ways because a person can change and want to do something illegal. The fourth amendment needs to be updated for this day and age. This is a tough call. On one hand, the right to privacy is being violated. But, on the other hand, protection is being harmed by not monitoring everything on the internet that a person does. CSU's internet guidelines don't even

mention the user being monitored for what they do online, but it is something that one can assume is happening in the background.

Rule#5, "I will not copy software or any other media for which I have not paid", is probably the most violated rule on the internet. This is very similar to the University of Queensland's copyright rules, where the user must not copy copyrighted material. People are constantly downloading music, movies, and other media illegally. It is also very difficult to track down who downloaded the software. The purpose of this rule is that it helps prevent the producers of services from losing money. Music artists are losing money because people simply download their songs online. Microsoft is losing money because of pirated versions of Windows. But, in my opinion, Bill Gates and music celebrities are still living quite comfortably despite the "loss" that they are experiencing. There will always still be those who are willing to pay for the goods and services that these producers provide us. There are millions of people in the world to make money off of, and not everyone is fortunate enough to have internet access in their homes. So, in my opinion, this rule is not necessary at all. The only time this rule should be necessary is if it is affecting a producer's income to the point where the business becomes bankrupt. And, before that even happens, I'm sure many people who were illegally downloading will start paying for the service just to keep their favorite producer active and producing more stuff in the future.

Guideline#1, "I will always use a computer in ways that show consideration and respect for others and are in keeping with CSU's mission" is very similar to the University of Queensland's "Official representation of the University" guideline. This guideline is not necessary in my opinion. Just because a student goes to a certain school does not mean that the student shares the same view as the university. And, this guideline, in a way prevents the right to free speech. How are students supposed to become critical thinkers after they graduate, if there are rules which limit a student's views?

The University of Queensland has this policy that states that only authorized accounts have the ability to access the internet. I can understand why this is important since the school is the one paying

for the internet services. This policy is very similar to CSU's need of a log-in and a password in order to access the internet. The internet is a very nice service that helps people find information on almost anything imaginable. The school is paying for this convenience and should not let just anybody have access to this right. The students at CSU are paying the school to have this privilege. If a non-student had access to the internet, this person would take up bandwidth that could be used to research an assignment.

Overall, I think that the code of conduct for CSU and other universities are required for safe internet usage. It also prevents students from doing anything illegal so the school and the student won't get in trouble by the law. Without the internet code of conduct, a lot of computers in the libraries would probably have viruses/spyware by now. These things would slow down the performance of the computers and make the convenience less usable.

Sources:

<http://www.uq.edu.au/hupp/index.html?page=25322>

http://www.aub.edu.lb/info/code_aub.html

<http://www.usyd.edu.au/su/uwis/policy/code-contentprov.html>

<http://www.charlestonsouthern.edu/adminservices/conduct.asp>

Presentations Introductory Page

COINS 431: Bit Locker (Grade: 95)

COINS 431: eCryptfs (Grade: 95)

COINS 496 01: Senior project 1st presentation (Grade: N/A)

BitLocker: Windows 7 vs. Windows Vista



JOSIAH VERGONIO
ADVANCED OPERATING SYSTEMS

What is BitLocker?

- A full disk encryption feature included in Ultimate and Enterprise editions of Microsoft's Windows Vista and Windows 7, as well as Windows Server 2008 and Windows Server 2008 R2
- It is designed to protect data by providing encryption for entire volumes
- It uses AES encryption algorithm in CBC mode with a 128 bit key ^[1]