

Katherine Rodreick
COIN 496 Senior Portfolio
April 9, 2010

PROGRAM

CLASS: COIN 315

GRADE: 90/100

LANGUAGE: C++

COMMENTS:

```
/*  
STUDENT NAME: Katherine Rodreich  
PROGRAM NAME: Ordered MultiList  
CREATION DATE: September 20, 2009  
LAST MODIFIED DATE: September 20, 2009  
COIN COURSE: COIN 315  
GRADE RECEIVED: 90/100  
COMMENTS REGARDING DESIGN:
```

```
*/
```

```
class OrderedMultiList {  
public:  
    //Constructors/destructors, no copy constructor/= required  
    OrderedMultiList(); //creates an empty list  
    ~OrderedMultiList(); //destructor as needed  
  
    //accessors  
    bool empty() const; //returns true iff (if and only if) list is empty  
    int uniqueSize() const; //returns the number of distinct items in the list  
    int size() const; //returns the total number of items in the list  
    //If 1, 10, 3, 10, 10, and 10 are inserted into an OrderedMultiList oml then //oml.  
    //uniqueSize() would return 3 and oml.size() would return 6.  
    bool find(int val) const; //returns true iff the list contains val  
    int count(int val) const; //returns number of times val is in the list  
    void print() const; //prints out the content of the list in order, see below  
  
    //mutators  
    bool insert(int val); //inserts item val into the list (in order),  
    //returns true iff val was able to fit in list  
    bool insert(int val, int count); //inserts item val count number of times  
    //returns false if count less than 1 or if val would not fit  
    //returns true if val was able to fit, note that if 1 val fits, they will all fit  
    bool remove(int val); //removes 1 instance of val from list  
    //returns true iff val was in list  
    int removeAll(int val); //removes all instances of val from list  
    //returns number of items removed, which could be 0  
private:  
    //Put node definition here, you may add any private methods you want,  
    //but there isn't the same situation as in Project 1 so don't try to use the same  
    //private helpers.  
  
    int total;  
  
    struct Node{  
        int data;  
        int count;  
        Node *next;  
    };  
    Node *head, *last;
```

```
};
```

```
/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: September 20, 2009
LAST MODIFIED DATE: September 20, 2009
COIN COURSE: COIN 315
GRADE RECEIVED: 90/100
COMMENTS REGARDING DESIGN:

*/

#include <iostream>
#include "OrderedMultiList.h"

using namespace std;

//Constructors/destructors
//creates an empty list
OrderedMultiList::OrderedMultiList(){
    total = 0;
    head = NULL; //creates empty list
    last = NULL;
}

OrderedMultiList::~OrderedMultiList(){
    Node * current = head;

    while( current ){
        current = current->next;
        delete head;
        head = current;
    }

    last = NULL;

    total = 0;
}

//accessors
bool OrderedMultiList::empty() const{
    if(head == NULL) //checks to see if the list is empty
        return true; //returns true if the list is empty
    else
        return false; //returns false if it isn't
}

int OrderedMultiList::uniqueSize() const{
    return total; //returns the total elements in the list
}

int OrderedMultiList::size() const{
    int sizeTotal=0;
    Node *current = head;

    for (int i=0; i < total; i++){
        sizeTotal += current->count; //adds up the total amount all of elements in the list
        current = current->next;
    }

    return sizeTotal; //returns the total amount of all elements in the list
}

bool OrderedMultiList::find(int val) const{
    Node *current;

    current = head;
```

```

    while(current != NULL && current->data != val){
        current = current->next;
    }
    if(current != 0)
        return true;
    else
        return false;
}

int OrderedMultiList::count (int val) const{
    Node *current = head;
    bool found = false;

    while(current != NULL && !found){
        if(current->data == val)
            found = true;
        else
            current = current->next;
    }
    if(current == NULL)
        return 0;

    return current->count;
}

void OrderedMultiList::print() const{
    Node *current = head;

    while(current != NULL ){
        cout << current->count <<" " << current->data <<endl; //prints the list
        current = current->next;
    }
}

//mutators
bool OrderedMultiList::insert(int val){
    return insert(val, 1);
}

bool OrderedMultiList::insert(int val, int count){
    Node * current=head, *last=NULL; //sets current to the beginning of the list
    Node *trail; //tails the current node
    Node *newGuy; //creates new nodes

    bool found = false;

    newGuy = new Node;
    newGuy->data = val;
    newGuy->next = NULL;

    if(head == NULL){ //creates a newGuy if head is equal to NULL
        head = newGuy;
        last = newGuy;
        newGuy->count = 1;
        total++;
        return true;
    }
    else{
        while(current!= NULL && !found) //searches for the list to see if the value is in
        it
            if(current->data >= val){ //if it finds it then it breaks out of loops
                found = true;
            }
    }
}

```

```

        else //if it isn't found then the loop continues until the end of the list
        {
            trail = current; //follows the current node
            current = current->next;
        }

        if(current == head){ //if the node is equal to head then it adds a new spot to ✓
put the value to inserted
            newGuy->next = head;
            head = newGuy;

            newGuy->count = count; //sets the count
            total++;
            return true;
        }
        else if(current->data == val){ //if the value already exists this increments it
            current->count += count;
            return true;
        }
        else //if it doesn't already exist it creates a new one...and sets count
        {

            trail->next = newGuy;
            newGuy->next = current;

            if(current == NULL)
                last = newGuy;

            newGuy->count = count;

            total++;
        }
    }
    return true;
}

bool OrderedMultiList::remove(int val){
    if(head == NULL)
        return false;

    Node * current = head;
    bool found = false;

    while(current != NULL && !found) //searches for value to be removed
        if(current->data == val)
            found = true;
        else{
            last = current;
            current = current->next;
        }

    if(current == NULL) //if it is equal to null it returns false
        return false;
    if(current->count == 1) //if it already exists and there is only one..it gets removed ✓
completely
        return (removeAll(val)>0);

    current->count--; //decrements the count

    return true;
}

int OrderedMultiList::removeAll(int val){
    Node *current;
    Node *trail;
    bool found;
    int oldCount; //place holder for the deleted val's count

```

```

if(head == NULL) //if head is null there is nothing to be removed b/c its empty
    return 0;
else{
    current = head;
    found = false;

    while(current != NULL && !found) //searches for value in list
        if(current->data >= val) //if it is found then it kicks out of the loop
            found = true;
        else{ //if it isn't then it searches until it is found
            trail = current;
            current = current->next;
        }

    if(current == NULL) //if the current was set to NULL then it returns 0
        return 0;
    else{
        if(current->data == val){ //if the data is in the list then it removes it.
            if(head == current){ //checks to see if the value is being pointed at ✓
                by both head and current
                head = head->next; //resets the head's pointer.

                if(head == NULL)
                    last = NULL;
                oldCount = current->count; //sets the oldCount to the current
                //value's count to return how many was ✓
                deleted

                delete current; //deletes the node
            }
            else{ //if it isn't it goes through and resets the pointers and ✓
                deletes the current counter
                trail->next = current->next;

                if(current == last)
                    last = trail;
                oldCount = current->count;
                delete current;
            }
            total--;
        }
    }
    return oldCount; //returns the amount of values deleted
}
}

```

```
/*
STUDENT NAME: Katherine Rodreich
PROGRAM NAME: Ordered MultiList
CREATION DATE: September 20, 2009
LAST MODIFIED DATE: September 20, 2009
COIN COURSE: COIN 315
GRADE RECEIVED: 90/100
COMMENTS REGARDING DESIGN:

*/

#include <iostream>
#include "OrderedMultiList.h"
using namespace std;

void main() {
    OrderedMultiList oml;
    cout << oml.empty() << " empty" << endl;

    cout << endl;

    cout << oml.insert(5) << " insert 1 5" << endl;
    cout << oml.insert(3,5) << " insert 5 3s" << endl;
    cout << oml.insert(2,4) << " insert 4 2s" << endl;
    cout << oml.insert(1,6) << " insert 6 1s" << endl;
    cout << oml.insert(5,19999) << " insert 19999 5s" << endl;
    cout << oml.insert(5) << " insert 1 5" << endl;

    cout << endl;

    cout << oml.uniqueSize() << " total unique elements in list" << endl;
    cout << oml.size() << " total amount of all elements in list" << endl;

    cout << endl;

    cout << oml.count(5) << " total amount of 5s in list" << endl;
    cout << oml.count(6) << " total amount of 6s in list" << endl;

    cout << endl;
    oml.print();
    cout << endl;

    cout << oml.remove(3) << " remove 3" << endl;
    cout << oml.remove(2) << " remove 2" << endl;
    cout << oml.removeAll(5) << " remove all 5" << endl;
    cout << oml.removeAll(3) << " remove all 3" << endl;

    cout << endl;
    oml.print();
    cout << endl;

    cout << oml.uniqueSize() << " total unique elements in list" << endl;
    cout << oml.size() << " total amount of all elements in list" << endl;
    cout << endl;

    cout << oml.find(6) << " 6 testing to see if find works, should return false" << endl;
    cout << oml.find(2) << " 2 testing to see if find works, should return true" << endl;

    cout << endl;

    cout << oml.empty() << " Empty?" << endl;

    cout << endl;

    cout << oml.removeAll(1) << endl;
```



```
cout << oml.removeAll(2) << endl;
```

```
cout << endl;
```

```
cout << oml.empty() << endl;
```

```
}
```

1315P
rojec
eredh
ce File
Files
eredh
email

```
C:\Windows\system32\cmd.exe
1 empty
1 insert 1 5
1 insert 5 3s
1 insert 4 2s
1 insert 6 1s
1 insert 19999 5s
1 insert 1 5
4 total unique elements in list
20016 total amount of all elements in list
20001 total amount of 5s in list
0 total amount of 6s in list
6 1
4 2
5 3
20001 5
1 remove 3
1 remove 2
20001 remove all 5
4 remove all 3
```

head = current;

PROGRAM

CLASS: COIN 325

GRADE: 105/100

LANGUAGE: Java

COMMENTS:

As noted when the project was turned in, it runs funny for some reason that I could never work out. A speed of 40 was supposed to be the fastest and a speed of 0 was supposed to be the slowest, but it is opposite. So a speed of 0 is the fastest.

LooneyTunesApplet

```
/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Looney Toons Applet
CREATION DATE: April 29, 2009 //Not sure exactly when, when I put this file on my
external harddrive, it changed it creation date
LAST MODIFIED DATE: April 29, 2009
COIN COURSE: COIN 325
GRADE RECEIVED: 105/100
COMMENTS REGARDING DESIGN:

*/
```

```
import java.awt.*;
import javax.swing.*;
import java.awt.event.*;
import java.applet.AudioClip;
```

```
public class LooneyTunesApplet extends JApplet
{
```

```
    //variables for the applet
    private Image image1, image2, image3, image4;
    private JTextField road1Speed;
    private JTextField road2Speed;
    private JTextField road3Speed;
    private JTextField road4Speed;
    private JLabel road1Label;
    private JLabel road2Label;
    private JLabel road3Label;
    private JLabel road4Label;
    private JButton playButton;
    private JButton stopButton;
    private AudioClip sound;
    private int delay;
```

```
    private Race road1 = new Race();
    private Race road2 = new Race();
    private Race road3 = new Race();
    private Race road4 = new Race();
```

```
    public void init()//acquires the image and sound bit for the applet
    {
        image1 = getImage(getCodeBase(), "roadrun1.gif");
        sound = getAudioClip( getDocumentBase(), "looney.wav");
    }
```

```
    }//ends init()
```

```
    public LooneyTunesApplet()
    {
        //assigns the variables values
        road1Speed = new JTextField(4);
        road1Speed.addActionListener(new Handler());
        road2Speed = new JTextField(4);
        road2Speed.addActionListener(new Handler());
        road3Speed = new JTextField(4);
        road3Speed.addActionListener(new Handler());
        road4Speed = new JTextField(4);
    }
```

```

                                LooneyTunesApplet
road4Speed.addActionListener(new Handler());

playButton = new JButton( "Play Sound" );
playButton.addActionListener( new Player());
stopButton = new JButton("Stop Sound");
stopButton.addActionListener( new Player());

```

the data

```
//creates the top part of the panel which allows for the entering of
```

```

JPanel panel1 = new JPanel();
panel1.add(new JLabel("Road Runner 1 "));
panel1.add(road1Speed);
panel1.add(new JLabel("Road Runner 2 "));
panel1.add(road2Speed);
panel1.add(new JLabel("Road Runner 3 "));
panel1.add(road3Speed);
panel1.add(new JLabel("Road Runner 4"));
panel1.add(road4Speed);
panel1.add(playButton);
panel1.add(stopButton);

```

```

//creates the "race" track
JPanel panel2 = new JPanel(new GridLayout(4, 1));
panel2.add(road1);
panel2.add(road2);
panel2.add(road3);
panel2.add(road4);

```

```

add(panel1, BorderLayout.NORTH);
add(panel2, BorderLayout.CENTER);

```

```
//LooneyTunesApplet constructor
```

```

public void stop()
{
    sound.stop();
} //ends stop()

```

```

class Handler implements ActionListener
{

```

```

    //gets the action which is supposed to be performed
    public void actionPerformed(ActionEvent e)
    {

```

to the speed

```
        //if there is something in the text fields it sets the speed
```

```
        if (e.getSource() == road1Speed)
        {

```

```
road1.setSpeed(Integer.parseInt(road1Speed.getText()));
        }

```

```
        else if (e.getSource() == road2Speed)
        {

```

```
road2.setSpeed(Integer.parseInt(road2Speed.getText()));
        }

```

```
        else if (e.getSource() == road3Speed)
        {

```

```

                                LooneyTunesApplet
                                {
road3.setSpeed(Integer.parseInt(road3Speed.getText()));
                                }
                                else if (e.getSource() == road4Speed)
                                {
road4.setSpeed(Integer.parseInt(road4Speed.getText()));
                                }
                                }//ends actionPerformed method
                                }//ends Handler Class

                                private class Player implements ActionListener
                                {
                                    //tells the applet to either start or stop the sound
                                    public void actionPerformed(ActionEvent actionEvent)
                                    {
                                        if( actionEvent.getSource() == playButton)
                                            sound.loop();
                                        else if(actionEvent.getSource() == stopButton)
                                            sound.stop();
                                    }
                                }//ends actionPerformed

                                public class Race extends JPanel implements Runnable
                                {
                                    //variables
                                    private int x = 0;
                                    private Thread thread = new Thread(this);
                                    private int sleepTime = 40;

                                    int frameNumber = -1;

                                    public Race()
                                    {
setBorder(BorderFactory.createLineBorder(Color.BLACK)); //creates the lines on the
board...
                                    thread.start();
                                    }//ends Race()

                                    public void run()
                                    {
                                        Thread.currentThread().setPriority(Thread.MIN_PRIORITY);

                                        while (true)
                                        {

                                            frameNumber++;

                                            repaint();

                                            try
                                            {
                                                Thread.sleep(sleepTime);
                                            } catch (InterruptedException ex)

```

```

                                LooneyTunesApplet
                                {
                                    ex.printStackTrace();
                                }
                                }//ends while statement
                                }//ends Run()

public void start()
{
    if (thread == null)
    {
        thread = new Thread(this);
    }
    thread.start();
}

public void stop()
{
    thread = null;
}

    public void setSpeed(int speed)
    {
        sleepTime = speed;
    }
    }//ends setSpeed()


public void paint(Graphics g)
{
    super.paint(g);
    Dimension d = getSize();
    int w;
    int h;

    w = image1.getWidth(this);
    h = image1.getHeight(this);

    if((w > 0) && (h > 0))
    {
        g.drawImage(image1, ((frameNumber*5) % (w + d.width)) - w,
                    (d.height - h)/2, this);
    }
}

    }//ends Race
} //ends LooneyTunesApplet

```

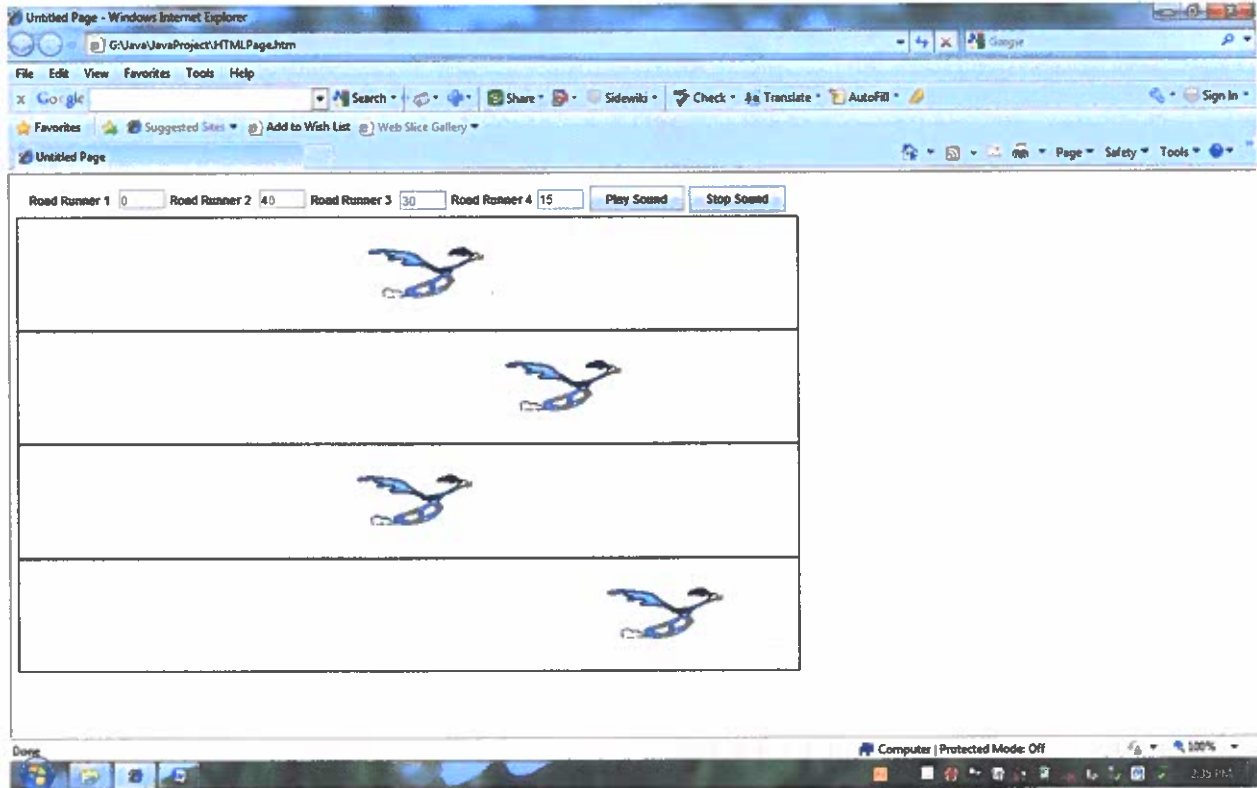

Program

Student Name: Katherine Rodreick

CLASS: COIN 332

GRADE: 100/100

LANGUAGE: HTML/VB

COMMENTS:

```
/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:
```

```
*/
```

Home Page:

```
<%@ Page Language="VB" AutoEventWireup="false" CodeFile="HomePage.aspx.vb"
Inherits="_Default" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Home Page</title>
    <link href = "StyleSheet.css" rel = "Stylesheet" type = "text/css" />

    <style type="text/css">
        .style1
        {
            font-size: xx-large;
            color: #FFFFFF;
        }
        .style2
        {
            font-size: 50pt;
            color: #FFFFFF;
            text-align: center;
        }
        .style3
        {
            font-size: xx-large;
            color: #FFFFFF;
            text-align: left;
        }
    </style>

</head>
<body>
    <form id="form1" runat="server">
        <div>

            <asp:LinkButton ID="LinkButton2" runat="server" CssClass="position"
                Height="16px" PostBackUrl="~/Register Page.aspx"
                ForeColor="White">Register</asp:LinkButton>

            &nbsp;<asp:LoginStatus ID="LoginStatus1" runat="server"
                CssClass="position"
                ForeColor="White" LogoutAction="Redirect"
                LogoutPageUrl="~/Logout.aspx" />
            &nbsp;</div>

            <h1 class="style2" style="font-family: Harrington; ">Light
                Delight&#39;s French Bakery</h1>
```

```

/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:

```

```

*/

<p class="style1" style="font-family: Harrington; text-align: left;">
    <asp:LinkButton ID="LinkButton7" runat="server" ForeColor="White"
        PostBackUrl="~/Inventory.aspx">Bakery</asp:LinkButton>
</p>
<p class="style3" style="font-family: Harrington; ">
    <asp:LinkButton ID="LinkButton5" runat="server" ForeColor="White"
        PostBackUrl="~/AboutUs.aspx">About Light Delight</asp:LinkButton>
</p>
<p class="style3" style="font-family: Harrington; ">
    <asp:LinkButton ID="LinkButton6" runat="server" ForeColor="White"
        PostBackUrl="~/StoreInfo.aspx">Store Information</asp:LinkButton>
</p>
    <asp:Image ID="Image2" runat="server" CssClass="x"
        ImageUrl="~/BLACK_AND_WHITE_TUXEDO_STRAWBERRIES_14191036_std.jpg"
/>
</form>
</body>
</html>

```


Partial Class _Default

Inherits System.Web.UI.Page

Protected Sub Page_Load(ByVal sender As Object, ByVal e As
System.EventArgs) Handles Me.Load

End Sub

End Class

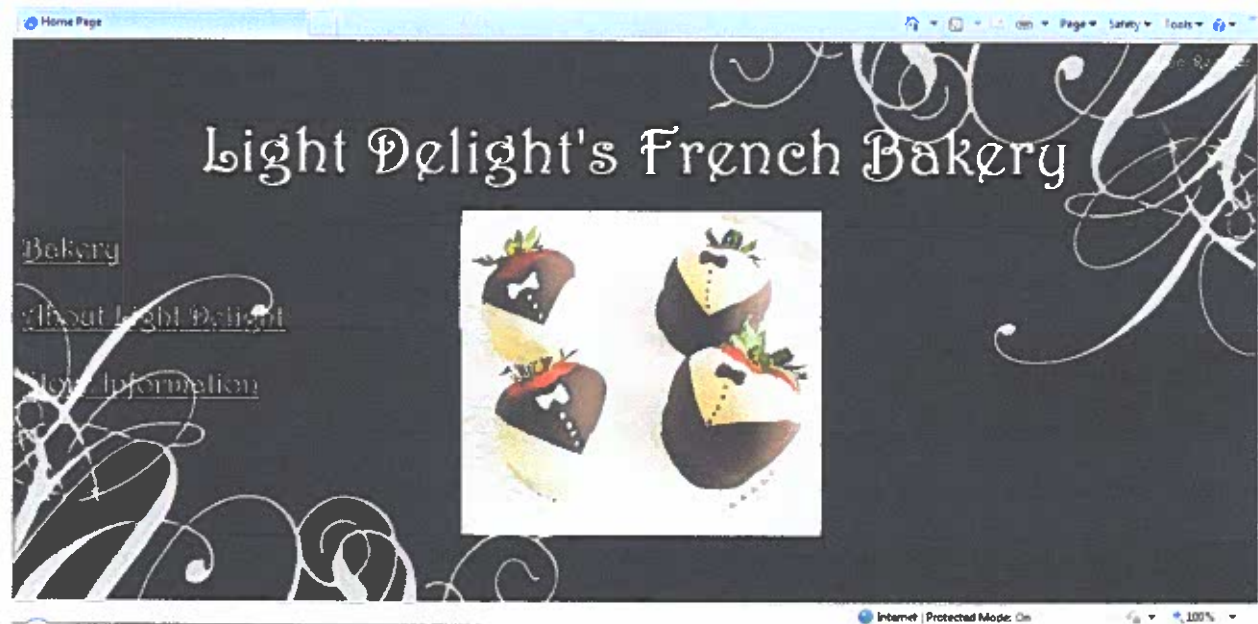

```

/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:

```

```

*/

```

Bakery Page/Inventory

```

<%@ Page Language="VB" AutoEventWireup="false" CodeFile="Inventory.aspx.vb"
Inherits="User_Inventory" StyleSheetTheme="" %>

```

```

<%@ Register assembly="System.Web.DynamicData, Version=3.5.0.0,
Culture=neutral, PublicKeyToken=31bf3856ad364e35"
namespace="System.Web.DynamicData" tagprefix="cc1" %>

```

```

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

```

```

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Bakery Page</title>
    <link href = "StyleSheet2.css" rel = "Stylesheet" type = "text/css" />

    <style type="text/css">
        .body
        {
            color: #FFFFFF;
        }
    </style>

```

```

</head>
<body bgcolor="black">
    <form id="form1" runat="server">
        <div class="body">

```

```

            <asp:LinkButton ID="LinkButton1" runat="server"
PostBackUrl="~/HomePage.aspx"
                CssClass="position" ForeColor="White" BackColor="Black"
                BorderColor="White" BorderStyle="Inset">HOME</asp:LinkButton>
            <p style="font-size: xx-large">
                <asp:LoginStatus ID="LoginStatus1" runat="server" BackColor="Black"
                BorderColor="White" BorderStyle="Inset" CssClass="position"
ForeColor="White"
                LogoutPageUrl="~/Logout.aspx" style="font-size: smaller" />
            </p>
            <p style="font-size: xx-large">
                Welcome To the Bakery Page!</p>

```

```

<h4 style="color: #CC0000">BREAKFAST PASTRIES</h4>

```

Croissant

Traditional French all butter croissant

Cinnamon Roll

A sweet pastry lined with cinnamon and walnuts then rolled and topped

/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:

*/

with sweet icing

Almond Croissant

A buttery croissant filled with sweet almond paste; topped with powdered sugar and sliced almonds.

Custard Brioche

Sweet brioche bread filled with vanilla custard and topped with granulated sugar

Raspberry Almond Croissant

A buttery croissant filled with almond paste and raspberry preserves sprinkled

with powdered sugar and sliced almonds

Chocolate Croissant

Also known as Pain au Chocolate, our traditional all butter croissant filled with rich, dark chocolate

Blueberry Twist

Twisted puff pastry baked with blueberries and finished with a striped glaze

Danish

Cream Cheese

Apple

Raspberry

<h4 style="color: #CC0000">Cake</h4>

Strawberry White Chocolate Mousse

Layers of strawberry mousse, white chocolate mousse and almond sponge cake, topped with a strawberry glaze and fresh chocolate dipped strawberries

Princess

Layers of chocolate mousse, almond sponge cake and praline crisp topped with a chocolate ganache, white and milk chocolate curls and bordered with toasted almonds

Cappuccino Mousse

Layers of cappuccino infused chocolate sponge cake with layers of chocolate mousse, topped with a coffee marble glaze and bordered with chocolate bits

Black Forest

Layers of chocolate cake with whipped cream and fresh



```
/*  
STUDENT NAME: Katherine Rodreick  
PROGRAM NAME: Ordered MultiList  
CREATION DATE: April 6, 2009  
LAST MODIFIED DATE: April 27, 2009  
COIN COURSE: COIN 332  
GRADE RECEIVED: 100/100  
COMMENTS REGARDING DESIGN:
```

```
*/
```

raspberries, topped with curled milk chocolate, whipped cream, fresh raspberries, and bordered with chocolate bits

Three LayerChocolate Mousse

Layers of white, milk, and dark chocolate mousses on a layer of chocolate cake, topped with white and milk chocolate curls and bordered with white chocolate

Mango Coconut Mousse

Layers of mango mousse, coconut mousse, and almond sponge cake topped with an apricot glaze

<h4 style="color: #CC0000">COOKIES</h4>

Chocolate Chip

Traditional chocolate chip cookie drizzled with a vanilla glaze

Palmier

An authentic French cookie - flakey, sweet and buttery

Meringue Cookie

Available in vanilla, coconut and chocolate chip

Macaroon

Moist star piped cookies made with coconut

Champagne Raspberry Cookie

Raspberry preserves sandwiched between Pallet cookies, then dipped in chocolate

Lemon Cookie

A buttery shortbread cookie with a delicious lemon glaze

Madeleine

A buttery cake-like-cookie

<h4 style="color: #CC0000">SPECIALTY DESSERTS</h4>

Crème Brûlée

A baked creamy egg custard with caramelized sugar on top

Napoleon

Layers of sweet puff pastry and vanilla egg custard topped with a fondant and chocolate. Known in French as Mille Feuilles

Vanilla Eclair

Sweet pastry filled with vanilla custard cream, and coated with chocolate and powdered sugar

Bread Pudding

A custard style bread pudding made with assorted pastries

```
/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:
```

```
*/
```

```
<br /><br />
Chocolate Bread Pudding<br />
A delicious custard style bread pudding made with assorted pastries and
chocolate
<br /><br />
Chocolate Dipped Strawberries<br />
Long stem strawberries, dipped in premium white and milk chocolate

    <br />
    <h4 style="text-align: center; font-size: x-large"> <asp:LinkButton
ID="PlaceOrder" runat="server" ForeColor="White"
    PostBackUrl="~/User/Purchase.aspx">Place
Order</asp:LinkButton></h4>
    <br />


<br />

</div>
</form>

</body>
</html>
```

```
Partial Class User_Inventory
    Inherits System.Web.UI.Page
```

```
End Class
```

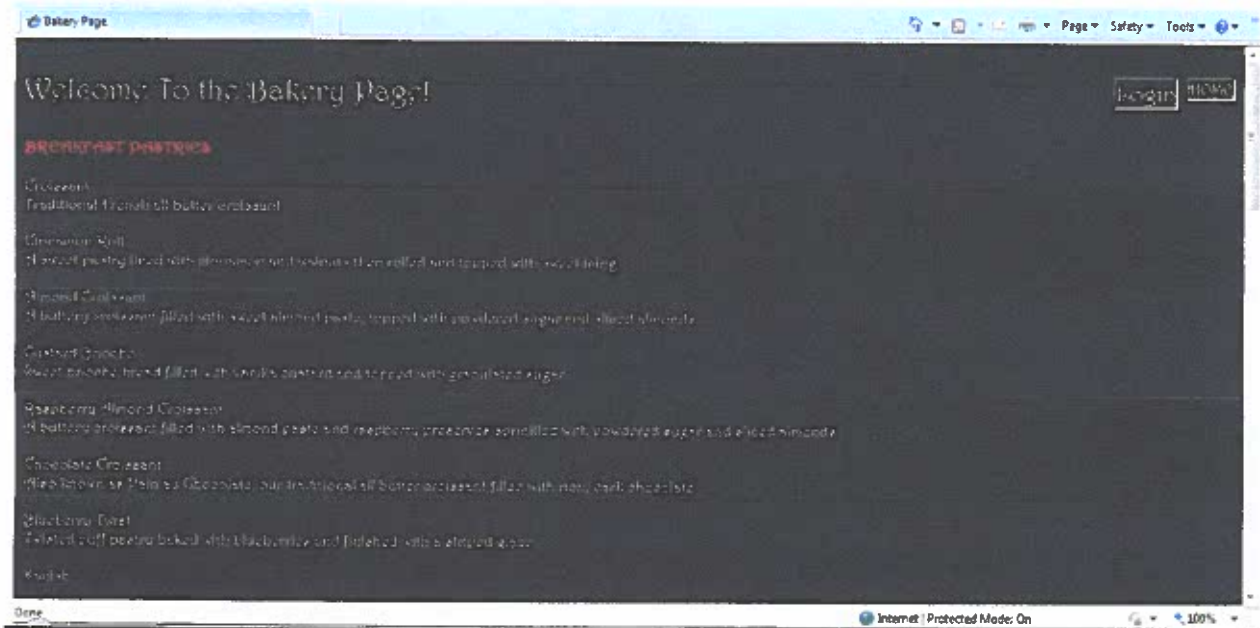


```
/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:
```

```
*/
```

Location/Store Info

```
<%@ Page Language="VB" AutoEventWireup="false" CodeFile="StoreInfo.aspx.vb"
Inherits="StoreInfo" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
```

```
<head runat="server">
```

```
    <title>Location</title>
```

```
    <link href = "StyleSheet.css" rel = "Stylesheet" type ="text/css" />
```

```
    <style type="text/css">
```

```
        .style1
```

```
        {
```

```
            font-size: large;
```

```
        }
```

```
    </style>
```

```
</head>
```

```
<body style="color: #FFFFFF">
```

```
    <form id="form1" runat="server">
```

```
        <div style="text-align: center">
```

```
            <asp:LinkButton ID="LinkButton1" runat="server" BackColor="Black"
                BorderColor="White" BorderStyle="Inset" CssClass="position"
                ForeColor="White"
```

```
               PostBackUrl="~/HomePage.aspx">HOME</asp:LinkButton>
```

```
            <span class="style1">
```

```
                <br />
```

```
                <br />
```

```
                We are located at the following cites, and we hope to expand even
                more in the
```

```
                near future. So watch out!</span><br class="style1" />
```

```
                <br />
```

```
                712 E Carolina Ave<br />
```

```
                Summerville, SC 29483<br />
```

```
                (843) 555-3999<br /><br />
```

```
                1814 E Greenville St <br />
```

```
                Charleston, SC 29406<br />
```

```
                (843) 555-0009<br />
```

```
                &nbsp;<br />
```

```
                2487 Ashley River Rd <br />
```

```
                Charleston, SC 29414<br />
```

```
                (843) 555-4475<br /><br />
```

```
            </div>
```

```
        </form>
```

```
</body>
```

```
</html>
```

```

/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:

```

```

*/

```

```

Partial Class StoreInfo
    Inherits System.Web.UI.Page

```

```

End Class

```



About Us

```

<%@ Page Language="VB" AutoEventWireup="false" CodeFile="AboutUs.aspx.vb"
Inherits="AboutUs" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>About Us</title>
    <link href = "StyleSheet.css" rel = "stylesheet" type = "text/css" />
</head>
<body>
    <form id="form1" runat="server">
        <div>
            <p style="text-align: center; font-size: medium">
                <asp:LinkButton ID="LinkButton1" runat="server" BackColor="Black"
                    BorderColor="White" BorderStyle="Inset" CssClass="position"
ForeColor="White"
                    PostBackUrl="~/HomePage.aspx">HOME</asp:LinkButton>
            </p>
            <h1 style="text-align: center; font-size: 45pt">ABOUT US</h1>

```

```

/+
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:
+ /

```

```

<p style="text-align: center; font-size: xx-large">Light Delight Café
incorporates the best elements
of Southern and French cultures. These elements are the southern
hospitality that
the South is renowned for, and the wonderfully light and delicious French
foods, pastries,
and coffees.
</p>

</div>
</form>
</body>
</html>


```

```

Partial Class AboutUs
    Inherits System.Web.UI.Page

```

```
End Class
```

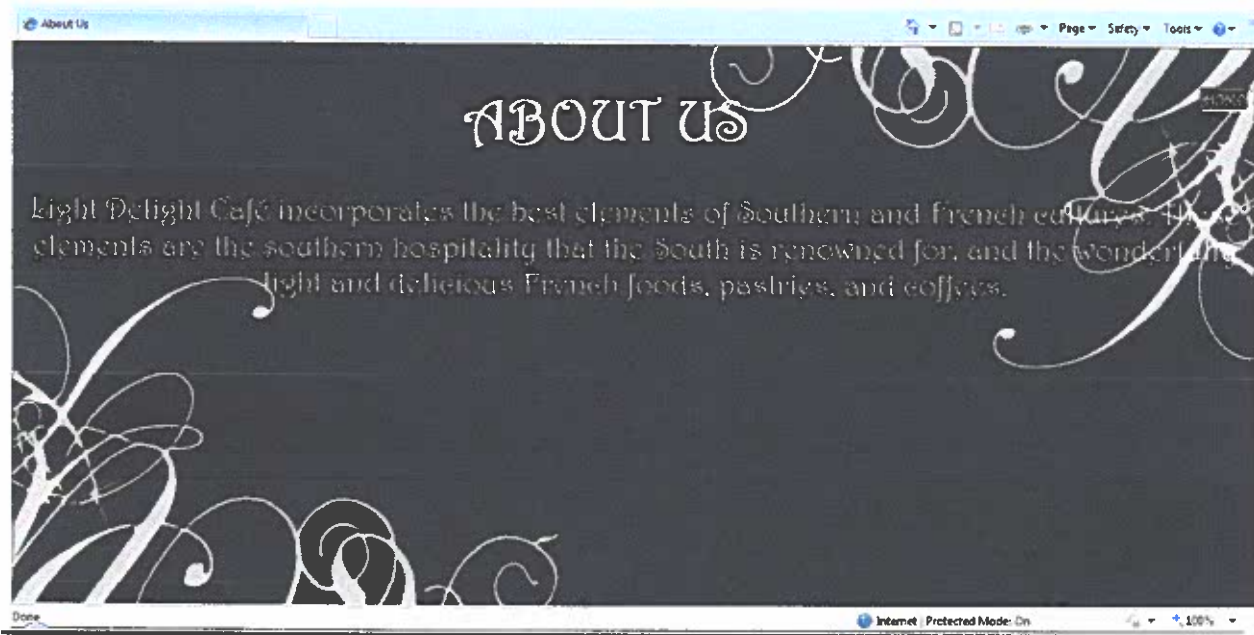

Invoice

```

<%@ Page Language="VB" AutoEventWireup="false" CodeFile="Invoice.aspx.vb"
Inherits="User_Invoice" %>

```

```

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

```

```

<html xmlns="http://www.w3.org/1999/xhtml">

```

```
/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:
```

```
*/
```

```
<head runat="server">
    <title>Invoice</title>
    <link href = "StyleSheet.css" rel = "Stylesheet" type = "text/css" />
</head>
<body>
    <form id="form1" runat="server">
        <div>

            <asp:SqlDataSource ID="SqlDataSource1" runat="server"
                ConnectionString="<%= $ ConnectionStrings:Pastry %>"
                SelectCommand="SELECT DISTINCT * FROM [Purchase_Table]">
            </asp:SqlDataSource>
            <asp:LoginStatus ID="LoginStatus1" runat="server" CssClass="position"
                LogoutPageUrl="~/Logout.aspx" LogoutAction="Redirect" />
            <asp:GridView ID="GridView1" runat="server" AllowPaging="True"
                AutoGenerateColumns="False" DataKeyNames="ID"
DataSourceID="SqlDataSource1">
                <Columns>
                    <asp:BoundField DataField="ID" HeaderText="ID"
InsertVisible="False"
                        ReadOnly="True" SortExpression="ID" />
                    <asp:CheckBoxField DataField="Croissant"
HeaderText="Croissant"
                        SortExpression="Croissant" />
                    <asp:CheckBoxField DataField="Cinnamon Roll"
HeaderText="Cinnamon Roll"
                        SortExpression="Cinnamon Roll" />
                    <asp:CheckBoxField DataField="Almond Croissant"
HeaderText="Almond Croissant"
                        SortExpression="Almond Croissant" />
                    <asp:CheckBoxField DataField="Chocolate Croissant"
                        HeaderText="Chocolate Croissant"
SortExpression="Chocolate Croissant" />
                    <asp:CheckBoxField DataField="Raspberry Almond Croissant"
                        HeaderText="Raspberry Almond Croissant"
SortExpression="Raspberry Almond Croissant" />
                    <asp:CheckBoxField DataField="Custard Biroche"
HeaderText="Custard Biroche"
                        SortExpression="Custard Biroche" />
                    <asp:CheckBoxField DataField="Blueberry Twist"
HeaderText="Blueberry Twist"
                        SortExpression="Blueberry Twist" />
                    <asp:CheckBoxField DataField="Cream Cheese Danish"
                        HeaderText="Cream Cheese Danish" SortExpression="Cream
Cheese Danish" />
                    <asp:CheckBoxField DataField="Raspberry Danish"
HeaderText="Raspberry Danish"
                        SortExpression="Raspberry Danish" />
                </Columns>
            </asp:GridView>
        </div>
    </form>
</body>
```

```
/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:
```

```
*/
```

```

    <asp:CheckBoxField DataField="Apple Danish" HeaderText="Apple
Danish"
        SortExpression="Apple Danish" />
    <asp:CheckBoxField DataField="Strawberry White Chocolate
Mousse"
        HeaderText="Strawberry White Chocolate Mousse"
        SortExpression="Strawberry White Chocolate Mousse" />
    <asp:CheckBoxField DataField="Princess Mousse"
HeaderText="Princess Mousse"
        SortExpression="Princess Mousse" />
    <asp:CheckBoxField DataField="Cappuccino Mousse"
HeaderText="Cappuccino Mousse"
        SortExpression="Cappuccino Mousse" />
    <asp:CheckBoxField DataField="Black Forest Cake"
HeaderText="Black Forest Cake"
        SortExpression="Black Forest Cake" />
    <asp:CheckBoxField DataField="Three Layer Chocolate Mousse"
        HeaderText="Three Layer Chocolate Mousse"
        SortExpression="Three Layer Chocolate Mousse" />
    <asp:CheckBoxField DataField="Mango Coconut Mousse"
HeaderText="Mango Coconut Mousse" SortExpression="Mango
Coconut Mousse" />
    <asp:CheckBoxField DataField="Chocolate Chip Cookies"
        HeaderText="Chocolate Chip Cookies"
SortExpression="Chocolate Chip Cookies" />
    <asp:CheckBoxField DataField="Madeleine Cookies"
HeaderText="Madeleine Cookies"
        SortExpression="Madeleine Cookies" />
    <asp:CheckBoxField DataField="Meringue Cookies"
HeaderText="Meringue Cookies"
        SortExpression="Meringue Cookies" />
    <asp:CheckBoxField DataField="Macaroon Cookies"
HeaderText="Macaroon Cookies"
        SortExpression="Macaroon Cookies" />
    <asp:CheckBoxField DataField="Lemon Cookies"
HeaderText="Lemon Cookies"
        SortExpression="Lemon Cookies" />
    <asp:CheckBoxField DataField="Palimer Cookies"
HeaderText="Palimer Cookies"
        SortExpression="Palimer Cookies" />
    <asp:CheckBoxField DataField="Napoleon" HeaderText="Napoleon"
        SortExpression="Napoleon" />
    <asp:CheckBoxField DataField="Creme Brulee" HeaderText="Creme
Brulee"
        SortExpression="Creme Brulee" />
    <asp:CheckBoxField DataField="Vanilla Eclair"
HeaderText="Vanilla Eclair"
        SortExpression="Vanilla Eclair" />
```

```

/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:

```

```

*/

```

```

        <asp:CheckBoxField DataField="Bread Pudding"
HeaderText="Bread Pudding"
        SortExpression="Bread Pudding" />
        <asp:CheckBoxField DataField="Chocolate Bread Pudding"
HeaderText="Chocolate Bread Pudding"
SortExpression="Chocolate Bread Pudding" />
        <asp:CheckBoxField DataField="Chocolate Dipped Strawberries"
HeaderText="Chocolate Dipped Strawberries"
SortExpression="Chocolate Dipped Strawberries" />
        <asp:TemplateField HeaderText="Price" SortExpression="Price">
            <EditItemTemplate>
                <asp:TextBox ID="TextBox1" runat="server" Text='<%#
Bind("Price") %>'></asp:TextBox>
            </EditItemTemplate>
            <ItemTemplate>
                <asp:Label ID="Label1" runat="server" Text='<%#
Bind("Price", "{0:C}") %>'></asp:Label>
            </ItemTemplate>
        </asp:TemplateField>
    </Columns>
</asp:GridView>
<br />

</div>
</form>
</body>
</html>

```

```

Partial Class User_Invoice
    Inherits System.Web.UI.Page

```

```

End Class

```

```

Purchase Page

```

```

<%@ Page Language="VB" AutoEventWireup="false" CodeFile="Purchase.aspx.vb"
Inherits="User_Purchase" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>PurchasePage</title>
    <link href = "StyleSheet.css" rel = "Stylesheet" type = "text/css" />

    <style type="text/css">
        .body
        {

```



```

/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:

```

```

*/

```

```

        color: #FFFFFF;
    }
    #form1
    {
        text-align: justify;
    }
</style>

```

```

</head>

```

```

<body>

```

```

    <form id="form1" runat="server">

```

```

        <asp:SqlDataSource ID="SqlDataSource1" runat="server"
            ConnectionString="<%= ConnectionStrings:Pastry %>"
            SelectCommand="SELECT * FROM [Purchase_Table]"
            DeleteCommand="DELETE FROM [Purchase_Table] WHERE [ID] = @ID"
            InsertCommand="INSERT INTO [Purchase_Table] ([Croissant], [Cinnamon
Roll], [Almond Croissant], [Chocolate Croissant], [Raspberry Almond
Croissant], [Custard Biroche], [Blueberry Twist], [Cream Cheese Danish],
[Raspberry Danish], [Apple Danish], [Strawberry White Chocolate Mousse],
[Princess Mousse], [Cappuccino Mousse], [Black Forest Cake], [Three Layer
Chocolate Mousse], [Mango Coconut Mousse], [Chocolate Chip Cookies],
[Madeleine Cookies], [Meringue Cookies], [Macaroon Cookies], [Lemon Cookies],
[Palmer Cookies], [Napoleon], [Creme Brulee], [Vanilla Eclair], [Bread
Pudding], [Chocolate Bread Pudding], [Chocolate Dipped Strawberries],
[Price]) VALUES (@Croissant, @Cinnamon_Roll, @Almond_Croissant,
@Chocolate_Croissant, @Raspberry_Almond_Croissant, @Custard_Biroche,
@Blueberry_Twist, @Cream_Cheese_Danish, @Raspberry_Danish, @Apple_Danish,
@Strawberry_White_Chocolate_Mousse, @Princess_Mousse, @Cappuccino_Mousse,
@Black_Forest_Cake, @Three_Layer_Chocolate_Mousse, @Mango_Coconut_Mousse,
@Chocolate_Chip_Cookies, @Madeleine_Cookies, @Meringue_Cookies,
@Macaroon_Cookies, @Lemon_Cookies, @Palmer_Cookies, @Napoleon,
@Creme_Brulee, @Vanilla_Eclair, @Bread_Pudding, @Chocolate_Bread_Pudding,
@Chocolate_Dipped_Strawberries, @Price)"

            UpdateCommand="UPDATE [Purchase_Table] SET [Croissant] = @Croissant,
[Cinnamon Roll] = @Cinnamon_Roll, [Almond Croissant] = @Almond_Croissant,
[Chocolate Croissant] = @Chocolate_Croissant, [Raspberry Almond Croissant] =
@Raspberry_Almond_Croissant, [Custard Biroche] = @Custard_Biroche, [Blueberry
Twist] = @Blueberry_Twist, [Cream Cheese Danish] = @Cream_Cheese_Danish,
[Raspberry Danish] = @Raspberry_Danish, [Apple Danish] = @Apple_Danish,
[Strawberry White Chocolate Mousse] = @Strawberry_White_Chocolate_Mousse,
[Princess Mousse] = @Princess_Mousse, [Cappuccino Mousse] =
@Cappuccino_Mousse, [Black Forest Cake] = @Black_Forest_Cake, [Three Layer
Chocolate Mousse] = @Three_Layer_Chocolate_Mousse, [Mango Coconut Mousse] =
@Mango_Coconut_Mousse, [Chocolate Chip Cookies] = @Chocolate_Chip_Cookies,
[Madeleine Cookies] = @Madeleine_Cookies, [Meringue Cookies] =

```

```
/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:
```

```
*/
```

```
@Meringue_Cookies, [Macaroon Cookies] = @Macaroon_Cookies, [Lemon Cookies] =
@Lemon_Cookies, [Palimer Cookies] = @Palimer_Cookies, [Napoleon] = @Napoleon,
[Creme Brulee] = @Creme_Brulee, [Vanilla Eclair] = @Vanilla_Eclair, [Bread
Pudding] = @Bread_Pudding, [Chocolate Bread Pudding] =
@Chocolate_Bread_Pudding, [Chocolate Dipped Strawberries] =
@Chocolate_Dipped_Strawberries, [Price] = @Price WHERE [ID] = @ID">
```

```
<DeleteParameters>
```

```
<asp:Parameter Name="ID" Type="Int32" />
```

```
</DeleteParameters>
```

```
<UpdateParameters>
```

```
<asp:Parameter Name="Croissant" Type="Boolean" />
```

```
<asp:Parameter Name="Cinnamon_Roll" Type="Boolean" />
```

```
<asp:Parameter Name="Almond_Croissant" Type="Boolean" />
```

```
<asp:Parameter Name="Chocolate_Croissant" Type="Boolean" />
```

```
<asp:Parameter Name="Raspberry_Almond_Croissant" Type="Boolean"
```

```
/>
```

```
<asp:Parameter Name="Custard_Biroche" Type="Boolean" />
```

```
<asp:Parameter Name="Blueberry_Twist" Type="Boolean" />
```

```
<asp:Parameter Name="Cream_Cheese_Danish" Type="Boolean" />
```

```
<asp:Parameter Name="Raspberry_Danish" Type="Boolean" />
```

```
<asp:Parameter Name="Apple_Danish" Type="Boolean" />
```

```
<asp:Parameter Name="Strawberry_White_Chocolate_Mousse"
```

```
Type="Boolean" />
```

```
<asp:Parameter Name="Princess_Mousse" Type="Boolean" />
```

```
<asp:Parameter Name="Cappuccino_Mousse" Type="Boolean" />
```

```
<asp:Parameter Name="Black_Forest_Cake" Type="Boolean" />
```

```
<asp:Parameter Name="Three_Layer_Chocolate_Mousse" Type="Boolean"
```

```
/>
```

```
<asp:Parameter Name="Mango_Coconut_Mousse" Type="Boolean" />
```

```
<asp:Parameter Name="Chocolate_Chip_Cookies" Type="Boolean" />
```

```
<asp:Parameter Name="Madeleine_Cookies" Type="Boolean" />
```

```
<asp:Parameter Name="Meringue_Cookies" Type="Boolean" />
```

```
<asp:Parameter Name="Macaroon_Cookies" Type="Boolean" />
```

```
<asp:Parameter Name="Lemon_Cookies" Type="Boolean" />
```

```
<asp:Parameter Name="Palimer_Cookies" Type="Boolean" />
```

```
<asp:Parameter Name="Napoleon" Type="Boolean" />
```

```
<asp:Parameter Name="Creme_Brulee" Type="Boolean" />
```

```
<asp:Parameter Name="Vanilla_Eclair" Type="Boolean" />
```

```
<asp:Parameter Name="Bread_Pudding" Type="Boolean" />
```

```
<asp:Parameter Name="Chocolate_Bread_Pudding" Type="Boolean" />
```

```
<asp:Parameter Name="Chocolate_Dipped_Strawberries"
```

```
Type="Boolean" />
```

```
<asp:Parameter Name="Price" Type="Double" />
```

```
<asp:Parameter Name="ID" Type="Int32" />
```

```
</UpdateParameters>
```

```
<InsertParameters>
```

```
<asp:Parameter Name="Croissant" Type="Boolean" />
```

```
<asp:Parameter Name="Cinnamon_Roll" Type="Boolean" />
```

```
<asp:Parameter Name="Almond_Croissant" Type="Boolean" />
```



```
/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:
```

```
*/
```

```

    <asp:Parameter Name="Chocolate_Croissant" Type="Boolean" />
    <asp:Parameter Name="Raspberry_Almond_Croissant" Type="Boolean"
/>

    <asp:Parameter Name="Custard_Biroche" Type="Boolean" />
    <asp:Parameter Name="Blueberry_Twist" Type="Boolean" />
    <asp:Parameter Name="Cream_Cheese_Danish" Type="Boolean" />
    <asp:Parameter Name="Raspberry_Danish" Type="Boolean" />
    <asp:Parameter Name="Apple_Danish" Type="Boolean" />
    <asp:Parameter Name="Strawberry_White_Chocolate_Mousse"
Type="Boolean" />
    <asp:Parameter Name="Princess_Mousse" Type="Boolean" />
    <asp:Parameter Name="Cappuccino_Mousse" Type="Boolean" />
    <asp:Parameter Name="Black_Forest_Cake" Type="Boolean" />
    <asp:Parameter Name="Three_Layer_Chocolate_Mousse" Type="Boolean"
/>

    <asp:Parameter Name="Mango_Coconut_Mousse" Type="Boolean" />
    <asp:Parameter Name="Chocolate_Chip_Cookies" Type="Boolean" />
    <asp:Parameter Name="Madeleine_Cookies" Type="Boolean" />
    <asp:Parameter Name="Meringue_Cookies" Type="Boolean" />
    <asp:Parameter Name="Macaroon_Cookies" Type="Boolean" />
    <asp:Parameter Name="Lemon_Cookies" Type="Boolean" />
    <asp:Parameter Name="Palimer_Cookies" Type="Boolean" />
    <asp:Parameter Name="Napoleon" Type="Boolean" />
    <asp:Parameter Name="Creme_Brulee" Type="Boolean" />
    <asp:Parameter Name="Vanilla_Eclair" Type="Boolean" />
    <asp:Parameter Name="Bread_Pudding" Type="Boolean" />
    <asp:Parameter Name="Chocolate_Bread_Pudding" Type="Boolean" />
    <asp:Parameter Name="Chocolate_Dipped_Strawberries"
Type="Boolean" />
    <asp:Parameter Name="Price" Type="Double" />
    </InsertParameters>
</asp:SqlDataSource>
<asp:LoginStatus ID="LoginStatus1" runat="server" CssClass="position"
    ForeColor="White" Height="19px" LogoutAction="Redirect"
    LogoutPageUrl="~/Logout.aspx" />
<br />
<asp:CheckBox ID="Croissant" runat="server" ForeColor="White"
    Text="Croissant $12.99 for Half-Dozen" Group="food" />
<br />
<asp:CheckBox ID="CinnamonRoll" runat="server" ForeColor="White"
    Text="Cinnamon Roll $12.99 for Half-Dozen" Group="food" />
<br />
<asp:CheckBox ID="AlmondCroissant" runat="server" ForeColor="White"
    Text="Almond Croissant $12.99 for Half-Dozen" Group="food" />
<br />
<asp:CheckBox ID="RaspberryAlmond" runat="server" ForeColor="White"
    Text="Raspberry Almond Croissant $12.99 for Half-Dozen" Group="food"
/>

<br />
```

/*

STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:

*/

```
<asp:CheckBox ID="CustardBiroche" runat="server" ForeColor="White"
    Text="Custard Biroche $13.99 for Half-Dozen" Group="food" />
<br />
<asp:CheckBox ID="BlueBerryTwist" runat="server" ForeColor="White"
    Text="Blueberry Twist $12.99 for Half-Dozen" Group="food" />
<br />
<asp:CheckBox ID="RaspberryDanish" runat="server" ForeColor="White"
    Text="Raspberry Danish $12.99 for Half-Dozen" Group="food" />
<br />
<asp:CheckBox ID="CreamCheese" runat="server" ForeColor="White"
    Text="Cream Cheese Danish $12.99 for Half-Dozen" Group="food" />
<br />
<asp:CheckBox ID="AppleDanish" runat="server" ForeColor="White"
    Text="Apple Danish $12.99 for Half-Dozen" Group="food" />
<br />
<asp:CheckBox ID="StrawberryMousse" runat="server" ForeColor="White"
    Text="Strawberry White Chocolate Mousse $25" Group="food" />
<br />
<asp:CheckBox ID="Princess" runat="server" ForeColor="White"
    Text="Princess Mousse $25" Group="food" />
<br />
<asp:CheckBox ID="CappuccinoMousse" runat="server" ForeColor="White"
    Text="Cappuccino Mousse $30" Group="food" />
<br />
<asp:CheckBox ID="BlackForest" runat="server" ForeColor="White"
    Text="Black Forest Cake $30" Group="food" />
<br />
<asp:CheckBox ID="ThreeLayer" runat="server" ForeColor="White"
    Text="Three Layer Chocolate Mousse $30" Group="food" />
<br />
<asp:CheckBox ID="MangoCoconut" runat="server" ForeColor="White"
    Text="Mango Coconut Mousse $30" Group="food" />
<br />
<asp:CheckBox ID="ChocolateChip" runat="server" ForeColor="White"
    Text="Chocolate Chip Cookies $12.99 for Half-Dozen" Group="food" />
<br />
<asp:CheckBox ID="Palimer" runat="server" ForeColor="White"
    Text="Palmier Cookies $12.99 for Half-Dozen" Group="food" />
<br />
<asp:CheckBox ID="Meringue" runat="server" ForeColor="White"
    Text="Merigune Cookies $12.99 for Half-Dozen" Group="food" />
<br />
<asp:CheckBox ID="Macaroon" runat="server" ForeColor="White"
    Text="Macaroon $12.99 for Half-Dozen" Group="food" />
<br />
<asp:CheckBox ID="LemonCookie" runat="server" ForeColor="White"
    Text="Lemon Cookie $12.99 for Half-Dozen" Group="food" />
<br />
<asp:CheckBox ID="Madeleine" runat="server" ForeColor="White"
```

```

/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:

*/

        Text="Madeleine Cookie  $12.99 for Half-Dozen" Group="food" />
    <br />
    <asp:CheckBox ID="Creme" runat="server" BackColor="Black"
ForeColor="White"
        Text="Creme Brulee $15" Group="food" />
    <br />
    <asp:CheckBox ID="Napoleon" runat="server" BackColor="Black"
ForeColor="White"
        Text="Napoleon $15" Group="food" />
    <br />
    <asp:CheckBox ID="VanillaEclair" runat="server" BackColor="Black"
        ForeColor="White" Text="Vanilla Eclair $15 for Half-Dozen"
Group="food" />
    <br />
    <asp:CheckBox ID="BreadPudding" runat="server" BackColor="Black"
        ForeColor="White" Text="Bread Pudding $20" Group="food" />
    <br />
    <asp:CheckBox ID="ChocolateStrawberries" runat="server" BackColor="Black"
        ForeColor="White" Text="Chocolate Dipped Strawberries  $15.99 for
Dozen"
        ToolTip="food" />
    <br />
    <br />
    <asp:Button ID="Button1" runat="server" BorderStyle="Inset"
Text="Purchase" />
    <br />
    <br />
    </form>
</body>

</html>

```

```

Imports System
Imports System.Data
Imports System.Data.Sql
Imports System.Data.SqlClient
Partial Class User_Purchase
    Inherits System.Web.UI.Page

    Protected Sub Button1_Click(ByVal sender As Object, ByVal e As
System.EventArgs) Handles Button1.Click
        Dim price As Double = 0.0
        If (Croissant.Checked) Then
            price += 12.99
            SqlDataSource1.InsertParameters("Croissant").DefaultValue =
"True"
        End If
    End Sub

```

```
/*  
STUDENT NAME: Katherine Rodreick  
PROGRAM NAME: Ordered MultiList  
CREATION DATE: April 6, 2009  
LAST MODIFIED DATE: April 27, 2009  
COIN COURSE: COIN 332  
GRADE RECEIVED: 100/100  
COMMENTS REGARDING DESIGN:
```

```
*/
```

```
    If (CinnamonRoll.Checked) Then  
        price += 12.99  
        SqlDataSource1.InsertParameters("Cinnamon_Roll").DefaultValue =  
"True"  
    End If  
    If (AlmondCroissant.Checked) Then  
        price += 12.99  
        SqlDataSource1.InsertParameters("Almond_Croissant").DefaultValue  
= "True"  
    End If  
    If (RaspberryAlmond.Checked) Then  
        price += 12.99  
  
SqlDataSource1.InsertParameters("Raspberry_Almond_Croissant").DefaultValue =  
"True"  
    End If  
    If (CustardBiroche.Checked) Then  
        price += 12.99  
        SqlDataSource1.InsertParameters("Custard_Biroche").DefaultValue =  
"True"  
    End If  
    If (BlueBerryTwist.Checked) Then  
        price += 12.99  
        SqlDataSource1.InsertParameters("Blueberry_Twist").DefaultValue =  
"True"  
    End If  
    If (RaspberryDanish.Checked) Then  
        price += 12.99  
        SqlDataSource1.InsertParameters("Raspberry_Danish").DefaultValue  
= "True"  
    End If  
    If (CreamCheese.Checked) Then  
        price += 12.99  
  
SqlDataSource1.InsertParameters("Cream_Cheese_Danish").DefaultValue = "True"  
    End If  
    If (AppleDanish.Checked) Then  
        price += 12.99  
        SqlDataSource1.InsertParameters("Apple_Danish").DefaultValue =  
"True"  
    End If  
    If (StrawberryMousse.Checked) Then  
        price += 25  
  
SqlDataSource1.InsertParameters("Strawberry_White_Chocolate_Mousse").DefaultV  
alue = "True"  
    End If  
    If (Princess.Checked) Then  
        price += 25
```

```

/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:

*/

        SqlDataSource1.InsertParameters("Princess_Mousse").DefaultValue =
"True"
        End If
        If (CappuccinoMousse.Checked) Then
            price += 30
            SqlDataSource1.InsertParameters("Cappuccino_Mousse").DefaultValue
= "True"
        End If
        If (BlackForest.Checked) Then
            price += 30
            SqlDataSource1.InsertParameters("Black_Forest_Cake").DefaultValue
= "True"
        End If
        If (ThreeLayer.Checked) Then
            price += 30

SqlDataSource1.InsertParameters("Three_Layer_Chocolate_Mousse").DefaultValue
= "True"
        End If
        If (MangoCoconut.Checked) Then
            price += 30

SqlDataSource1.InsertParameters("Mango_Coconut_Mousse").DefaultValue = "True"
        End If
        If (ChocolateChip.Checked) Then
            price += 12.99

SqlDataSource1.InsertParameters("Chocolate_Chip_Cookies").DefaultValue =
"True"
        End If
        If (Palimer.Checked) Then
            price += 12.99
            SqlDataSource1.InsertParameters("Palimer_Cookies").DefaultValue =
"True"
        End If
        If (Meringue.Checked) Then
            price += 12.99
            SqlDataSource1.InsertParameters("Meringue_Cookies").DefaultValue
= "True"
        End If
        If (Macaroon.Checked) Then
            price += 12.99
            SqlDataSource1.InsertParameters("Macaroon_Cookies").DefaultValue
= "True"
        End If
        If (LemonCookie.Checked) Then
            price += 12.99
            SqlDataSource1.InsertParameters("Lemon_Cookies").DefaultValue =
"True"

```

```

/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:

*/

    End If
    If (Madeleine.Checked) Then
        price += 12.99
        SqlDataSource1.InsertParameters("Madeleine_Cookies").DefaultValue
= "True"
    End If
    If (Creme.Checked) Then
        price += 15
        SqlDataSource1.InsertParameters("Creme_Brulee").DefaultValue =
"True"
    End If
    If (Napoleon.Checked) Then
        price += 15
        SqlDataSource1.InsertParameters("Napoleon").DefaultValue = "True"
    End If
    If (VanillaEclair.Checked) Then
        price += 15
        SqlDataSource1.InsertParameters("Vanilla_Eclair").DefaultValue =
"True"
    End If
    If (BreadPudding.Checked) Then
        price += 20
        SqlDataSource1.InsertParameters("Bread_Pudding").DefaultValue =
"True"
    End If
    If (ChocolateStrawberries.Checked) Then
        price += 15.99

SqlDataSource1.InsertParameters("Chocolate_Dipped_Strawberries").DefaultValue
= "True"
    End If
    SqlDataSource1.InsertParameters("Price").DefaultValue = price
    SqlDataSource1.Insert()
    Response.Redirect("Invoice.aspx")
End Sub
End Class

```

Style Sheet-User:

```

.position
{ float:right;
    margin-left: 8px;
    margin-top: 0px;
    font-family: Harrington;
}
.position2
{
    float: inherit;

```

```
/*
STUDENT NAME: Katherine Rodreick
PROGRAM NAME: Ordered MultiList
CREATION DATE: April 6, 2009
LAST MODIFIED DATE: April 27, 2009
COIN COURSE: COIN 332
GRADE RECEIVED: 100/100
COMMENTS REGARDING DESIGN:
```

```
*/
```

```
}
```

```
body
```

```
{
    background-image: url("wallpaper.png");
    background-repeat: no-repeat;
    background-attachment: fixed;
    background-position: center;
```

```
}
```

```
.x
```

```
{
    position: absolute;
    left: 30%;
    top: 40%;
    z-index: -1;
}
```

Style Sheet-Main Site:

```
.position
{ float: right;
    margin-left: 8px;
    margin-top: 0px;
    font-size: medium;
}
```

```
.position2
```

```
{
    float: right;
```

```
}
```

```
body
```

```
{
    background-image: url('wallpaper.png');
    background-repeat: no-repeat;
    background-attachment: fixed;
    background-position: center;
    font-family: Harrington;
    color: #FFFFFF;
    text-align: center;
```

```
}
```

```
.x
```

```
{
    position: absolute;
    left: 36%;
    top: 30%;
```

```
/*  
STUDENT NAME: Katherine Rodreick  
PROGRAM NAME: Ordered MultiList  
CREATION DATE: April 6, 2009  
LAST MODIFIED DATE: April 27, 2009  
COIN COURSE: COIN 332  
GRADE RECEIVED: 100/100  
COMMENTS REGARDING DESIGN:
```

```
*/
```

```
z-index:-1;  
}
```

Style Sheet 2-Main Site:

```
.position  
{ float:right;  
  margin-left: 8px;  
  margin-top: 0px;  
}
```

```
.position2  
{  
  float: right;  
}
```

```
body  
{  
  font-family: Harrington;  
}
```

```
.x  
{  
position:absolute;  
left:35%;  
top:35%;  
z-index:1;  
}
```

```
.y  
{  
position: absolute;  
left:60%;  
top:55%;  
z-index:2;  
}
```


PROGRAM

CLASS: COIN 333

GRADE:

LANGUAGE:

COMMENTS:

I have not taken this class yet due to the fact that it was not offered Spring of 2010. I will take this class Spring of 2011 because of the rearrangement of course offerings for the fall.

ETHICS PAPER

CLASS: 315

GRADE: 88/100

Katherine Rodreick

COIN 315

28 January 2010

Ethics: Discrimination in University Admissions

In today society individuals follow an expected educational path: pre-school, elementary school, high school, and college. Sometimes this does not pan out as well as parents want or expects it to. Some students decide that the college path is for them and pursue other avenues. Then there are some students who apply to a college/university and are rejected. Even though this student has met all the academic requirements and can even be outstanding in their high school achievements, they are turned away because of something many universities try to deny: Discrimination. Discrimination can be anything from not taking a student because of their skin color, gender, religion, or nationality. There are many other forms of discrimination, but these are the most obvious.

While searching through multiple universities admission requirement it was easy to compile a list of the most common ones. Admission requirements for recent graduated high school students are all fairly uniform. Many universities require at least four years/units of English. Another requirement which was also pretty uniform throughout most universities is the three to four years/units of math. Though there was a bit of difference when it came to science requirements. One university required three units of a science, while another required at least two laboratory sciences. Also there is the foreign language requirement which differs from university to university. Some universities group it together with the Social Studies/Humanities requirement and some universities require at least two years. Which is the same for Social Studies, University of Georgia requires at least three years of Social Studies at a College Preparatory level. At

California State University there is a Visual and Performance Arts and College Preparatory requirement, this was not a normal requirement for most of the universities that were researched. Another factor that all universities have in common as long as you are under the age of 22 or still not considered an "Adult Student" is the SAT/ACT requirements. Some schools will total the scores together, while others only require one or the other. Another score/grade they look at is high school Grade Point Average (GPA). At Washington State University they require a personal statement to be submitted along with transcripts and the application. Also the most obvious a student must have a high school diploma or the equivalent G.E.D. For transfer students some universities require at least two years of full-time coursework before transferring in. Also some universities require a minimum GPA of at least a 2.0 on a 4.0 scale. Another is not exactly a requirement but it is asked on an application. This factor is a person's race, gender, nationality, and religious affiliations.

The sad fact of life is that no matter what, at some point in life an individual will experience some form of discrimination, no matter what your race, gender, or religious affiliations are. Yet it is even worse when a person faces discrimination at one of the most important times in life, acceptance into a university. In 1995 Shannon Faulkner sued The Citadel because of its all-male admissions policy. In 1996 "The Supreme Court on Wednesday ruled that all-male, state-supported colleges and universities such as the Virginia Military Institute cannot exclude women (Rocky Mountain News)." Because of this Supreme Court ruling the lawsuit against The Citadel was dropped when they were ordered to open their doors to women. In 2003 the U.S. Supreme Court ruled "that race can be used in university admission decisions. But the narrowly divided court also seemed to put limits on how much of a factor race can play in giving minority students an advantage in the admissions process (NPR)." This gives universities the

ability to turn away an applicant who meets all the requirements in favor of a person of a different race.

There are many factors which are used to judge whether a person is eligible for acceptance into a university or not. Yet how many of these so called factors are ethically right? Should a person be admitted because of their race, gender, sexual orientation, nationality, or any other such factors? As a Christian I have to say no. According to the Bible there is only one race, that of the human race. In Genesis 1:26-28 it is said that:

Then God said, "Let us make man in our image, in our likeness, and let them rule over the fish of the sea and the birds of the air, over the livestock, over all the earth, ^[a] and over all the creatures that move along the ground."

²⁷ So God created man in his own image,
in the image of God he created him;
male and female he created them.

²⁸ God blessed them and said to them, "Be fruitful and increase in number; fill the earth and subdue it. Rule over the fish of the sea and the birds of the air and over every living creature that moves on the ground."

It is this passage that shows that discrimination is wrong. I think that admissions into a university should be earned. A person should not be looked over because of their race, gender, sexual orientation, or whatever. A person should be admitted based on their academic background. If a minority student who did not do to well in high school wishes to be admitted he should be required to write an essay or something which proves to the committee why he should be there. The same could be said for any of the applicants. This idea of having to meet a minority quota or whether or not a woman should be allowed into an all-male school is ridiculous. In Romans 2:11

it is said that God does not show favoritism, so why should we as humans favor one color, one gender, one sexual orientation over another.

There are many ways to discriminate against another human being. Shamefully it is in human nature to fall victim to these ideas that there needs to be these divides. Instead of basing admissions on statistics and having quotas met, universities need to be reminded that EVERYONE is entitled to being treated fairly and equally. Even if the universities do not abide by the Christian viewpoint that there is only one race.

Jesus teaches in Matthew 25 that whatever we do to the least of His brothers, we do to Him. If we treat a person with contempt, we are mistreating a person created in God's image; we are hurting somebody whom God loves and for whom Jesus died.

(gotQuestions.org).

The only factors that should matter in whether or not a student is accepted should be strictly academic. There should be no separation; everyone should be given an equal opportunity at achieving their goals in life.

WORKS CITED

"Discrimination in University Admissions Documented as a Nationwide Problem ." *Center for Equal Opportunity*. 21 02 2001. CEO, Web. 28 Jan 2010.
<<http://www.ceousa.org/content/view/474/119/>>.

"High Court Outlaws All-Male Academies Virginia Military Institute Told It Must Admit Women. (News/National/International)." *Rocky Mountain News*. Denver, CO: 1996.
Web. <<http://www.encyclopedia.com/doc/1G1-67781003.html>>.

"Split Rulling on Affirmative Action." *NPR*. 23 06 2003. NPR, Web. 28 Jan 2010.
<<http://www.npr.org/news/specials/michigan/index.html>>.

"What does the Bible say about racism, prejudice, and discrimination?." *gotQuestions.org*. Got Questions Ministries, Web. 28 Jan 2010. <<http://www.gotquestions.org/racism-bible.html>>.

Zondervan NIV Study Bible. Fully rev. ed. Kenneth L. Barker, gen. ed.
Grand Rapids, MI: Zondervan, 2002. Print

ETHICS PAPER

CLASS: COIN 325

GRADE: 100/100

ETHICS PAPER

CLASS: COIN 332

GRADE: 100/100

Katherine Rodreick

Dr. Lin

COINS 332

30 March 2009

Ethics Paper

Internet hacking is becoming one of the most problematic aspects of the net. Nowadays you can no longer tell if the page you are logging onto is legit or not. Due to this many people are falling prey to these internet criminals. According to the website TechsNewsWorld.com criminals like to "start small -- learn a few tidbits about a certain individual -- then work up to accessing much more sensitive information, up to and including an entire bank's computer system." In order to start small these crooks steal information such as people's logon information to websites such as Myspace, Facebook, Twitter, MSN, Yahoo, and other websites that can be used to find other sensitive information.

The people who create these "Trojans" and other computer viruses are computer nerds gone corrupt. Many people do it for fun because they get some perverse pleasure from proving that they can outsmart the authorities and other highly paid programmers. They create bugs that can infiltrate your system and record ordinary sessions on the computer in great detail. Some of the hackers will store the information that is stole in remote servers which are referred to as "treasure troves of information". One group of researchers from Prevx found one of these "troves" which had stolen information from over 160,000 computers and even after the appropriate authorities had been contacted it took awhile for it to be shut down "the site was sucking up data from 5,000 newly infected computers each day." The ethical laws of computer

programmers forbid any decent programmer from hacking and creating viruses allowing others to access sensitive data from people.

According to the IEEE Code of Ethics one of the ethical laws for a programmer is that they are “to improve the understanding of technology, its appropriate application, and potential consequences” another one is that “to avoid injuring others, their property, reputation, or employment by false or malicious action.” These codes are put in place to attempt to dissuade computer programmers from doing exactly what these bad computer nerds are doing. Which obviously they do not pay any attention to because every day they are still creating multiple programs which can cause severe damage to several people personal lives. One example of this is one man who opened an account with a bank was ill informed that his personal information had been stolen. Millions of people daily are having their identity stolen and over half of them have no clue that they were hacked because of how these hackers work.

Computer hacking is not only a crime when it comes to the law but it is also unethical. There are many standards that should have to go unsaid but it is clear that they are still not followed even if they were written down and memorized by everyone. These criminals do not care if what they do harm people and they know that they can get away with it almost over half the time.

WORKS CITED

Institute of Electrical and Electronics Engineers (IEEE). IEEE Code of Ethic. February 2006.
March 6, 2009. <http://www.ieee.org/web/aboutus/ethics/code.html>

Robertson, Jordan. Open Sesame: Inside a Data Thief's Treasure Trove. March 21, 2009.
March 30, 2009. <http://www.technewsworld.com/story/Open-Sesame-Inside-a-Data-Thiefs-Treasure-Trove-66556.html>

PRESENTATIONS

CLASS: COIN 315

GRADE: 20/20

ANAGRAM MAKER

Katherine Rodreick

COIN 315: Data Structures

Ideas

- ▣ Read data in as a block, instead of reading it in line by line...
- ▣ Make a dictionary of words for the anagram maker to use
- ▣ Run an initial letter count on all words
- ▣ Save the counts in a data structure
- ▣ Count the letters in the input
- ▣ Search dictionary, if there are any words that have the same letter counts as the input, copy them into a new "dictionary"

Data Structures

- ▣ 2D array
 - Could be useful when it comes to storing the information from the letter count
- ▣ Vector
 - Allows for the dictionary to be added too dynamically instead of having a set limit.
- ▣ C++ Strings
 - Allow for the entire string to be read in...faster than going character by character if read in as a c-string, assuming all words are valid.

Speed

- ▣ Sorting will allow for it to not have to waste time later on searching through unnecessary words
- ▣ 2D Array allows for me to store information –may not be a great idea, but we'll see
- ▣ Vector allows for information to be added dynamically, good for space...but need to figure away to store information more than one-dimension
- ▣ I believe that most of these important elements will allow for a sufficient increase of speed since most of this will be done in the constructor.

PRESENTATIONS


CLASS: COIN 332

GRADE: N/A

Term project: commercial website

By Katherine Rodreick


April 27, 2009

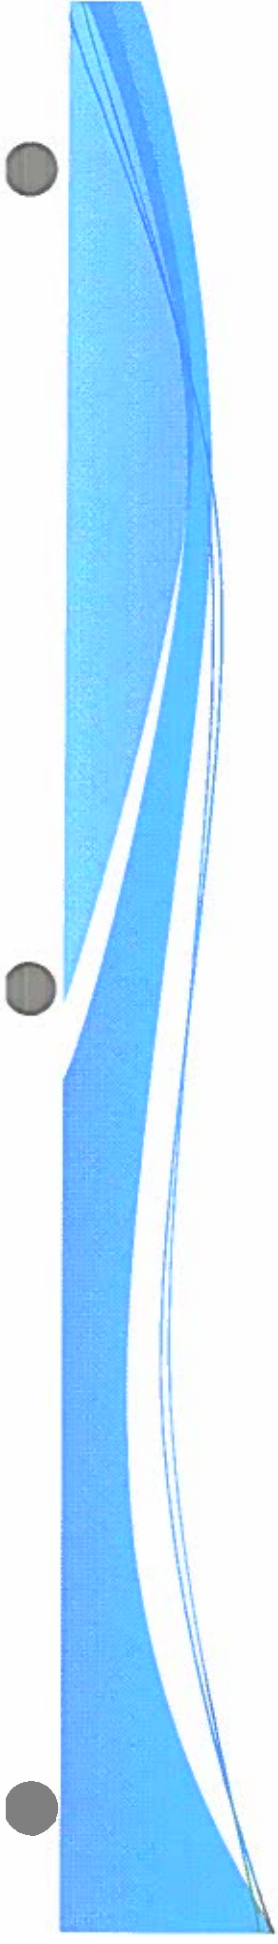


Features of my website

- A homepage
- A login feature
- A login page
- A register page
- A logout feature
- A logout page
- An inventory page
- A purchase page
- An invoice page
- An About Us page
- A locations Page


How my pages are related

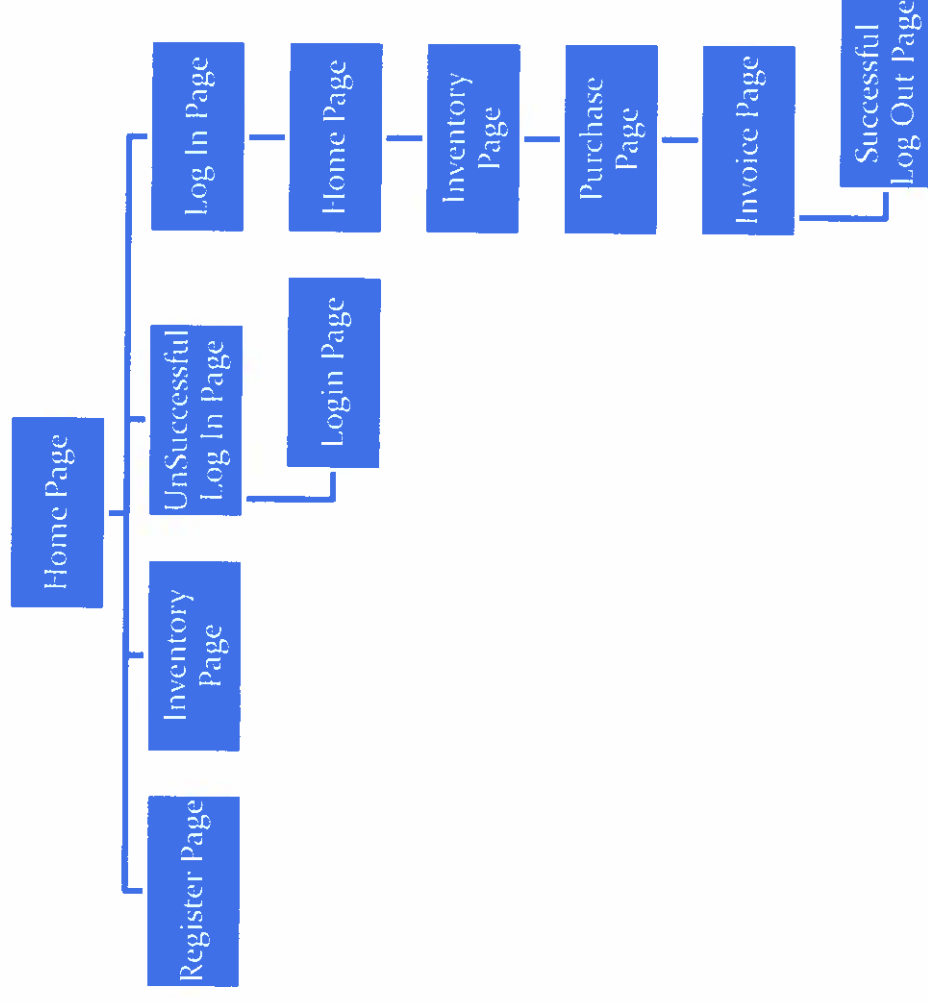

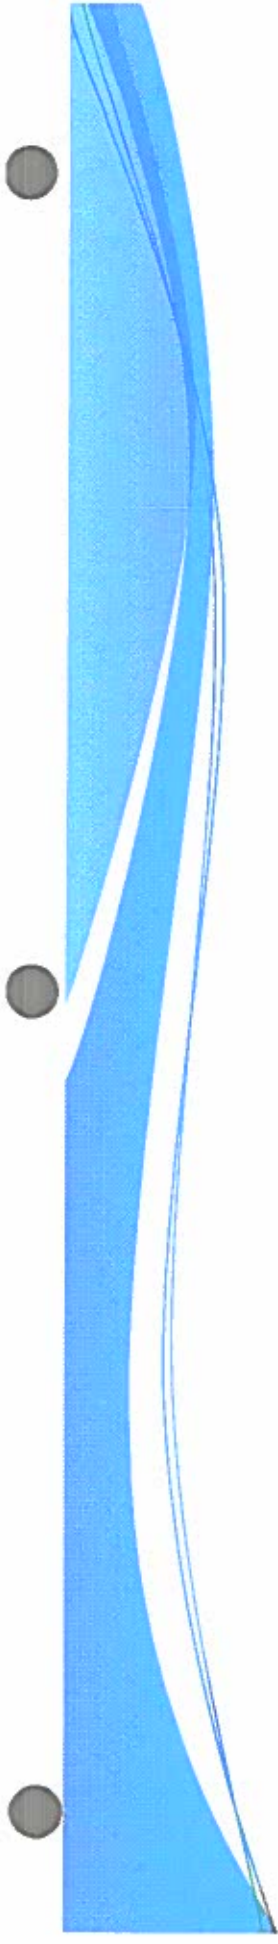

History of my store

- The site is designed for a business that I created back in my senior year of high school
- It was created for the purpose of having a fine French bakery located in the lowcountry.

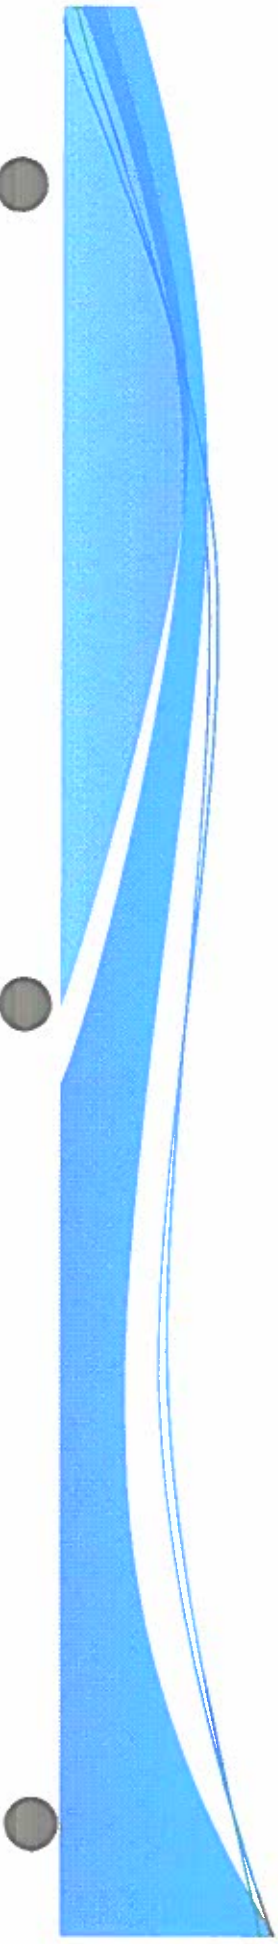

References

- For the menu list I “borrowed” a menu from the following french bakery
- <http://www.champagnebakery.com/>