


Tmain.aspx

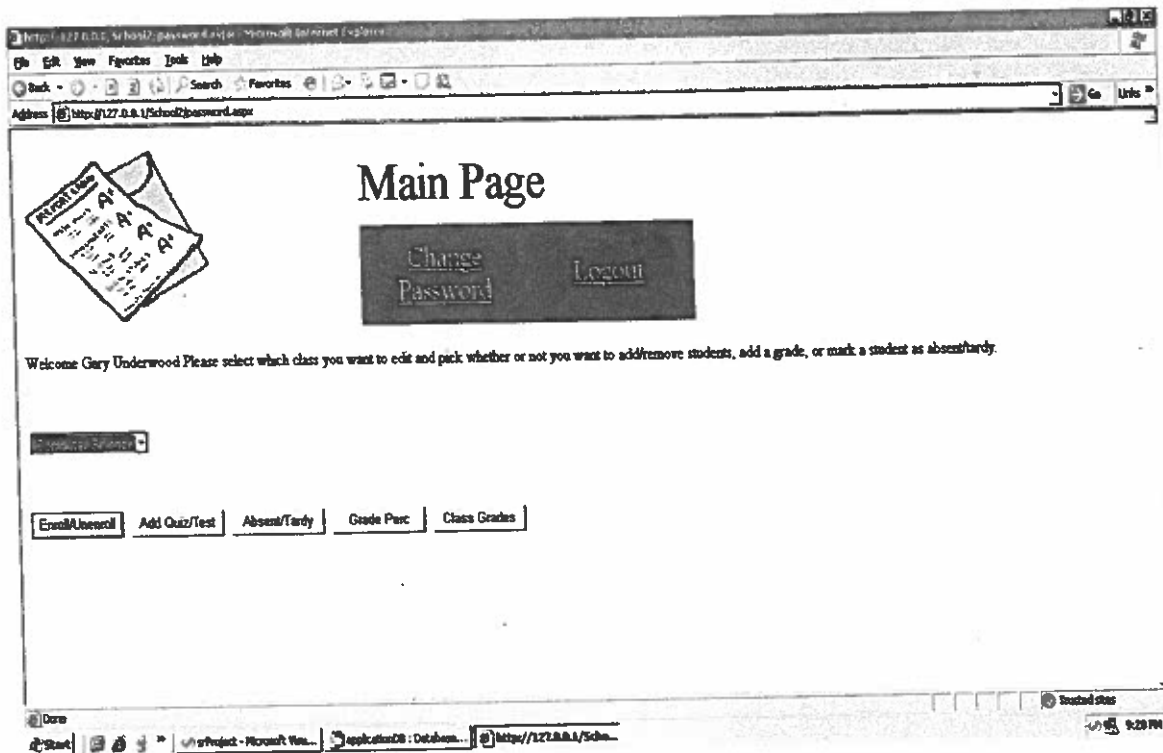

```

1 <%@ Page Language="JScript" Debug="true" %>
2
3 <%@ Import Namespace="System" %>
4 <%@ Import Namespace="System.Data" %>
5 <%@ Import Namespace="System.Data.OleDb" %>
6
7 <%@ Register TagPrefix="Header" TagName="ImageHeader" Src="userHeader.ascx" %>
8 <%@ Register TagPrefix="Vars" TagName="VarsHeader" Src="vars.ascx" %>
9 <%@ Register TagPrefix="Funcs" TagName="FuncsCommon" Src="funcs.ascx" %>
10
11 <html>
12     <head>
13         <script language = "JScript" runat = "server">
14             /*
15                 Page Name:
16                     tmain.aspx
17
18                 Description:
19                     Validate teacher using database.
20                     Set session key for continued access for teacher.
21
22                 JScript Variables:
23                     resultMessage      : var : string that tells administrator whether it
24 added or not.
25                     li                 : var : object used for both lists to get the value
26 selected
27                     dataBaseConnection : var : object used to get connection to data
28 base
29                     queryString       : var : SQL string used to get classes teacher
30 teaches
31                     dataBaseCommand   : var : object used to execute the queryStrings
32 with the current connection
33                     dataReader        : var : object used to read the data from the
34 database
35
36                 ASP Variables:
37                     addRmvBtn          : Button          : click to set Session[vars.classID]
38 and transfer to addRmvStudentPage
39                     QTBtn             : Button          : click to set Session[vars.classID]
40 and transfer to quizTestPage
41                     ATBtn            : Button          : click to set Session[vars.classID]
42 and transfer to absentTardyPage
43                     GPBtn            : Button          : click to set Session[vars.classID]
44 and transfer to QTPercPage
45                     CGBtn            : Button          : click to set Session[vars.classID]
46 and transfer to classGradePage
47                     lstClass          : DropDownList    : shows classes that teacher teaches
48
49                 Session Variables:
50                     Session[vars.classID] : keeps track of the current student's id
51 being viewed
52                     Session[vars.useridField] : used in sql statement to get the
53 classes that teacher teaches
54
55                 Functions:
56                     Funcs:
57                         getNAME: uses the session user id and user table to get the
58 current user's name.
59                     Local:
60                         addRmvButton_Click: used when addRmvBtn is clicked. sets Session
61 [vars.classID] and transfer to addRmvStudentPage
62                         quizTestButton_Click: used when QTBtn is clicked. set Session
63 [vars.classID] and transfer to quizTestPage
64                         absentTardyButton_Click: used when ATBtn is clicked. set Session
65 [vars.classID] and transfer to absentTardyPage

```

```
49         GPButton_Click: used when GPBtn is clicked. set Session[vars.
classID] and transfer to QTPercPage
50         CGBtn_Click: used when CGBtn is clicked. set Session[vars.
classID] and transfer to classGradePage
51         displayClasses: uses the session user id in an sql statement to
get all the classes the teacher teaches and bind their
52         ids to the lstClass listBox.
53         Page_Load: executes everytime the page is loaded and checks to
see if there is a Session, if not it
54         transfers to the login page. In this page on the first
time in it will only call displayClasses
55         to display the classes that the current teacher
teaches.
56         Language: JScript, ASP
57
58     */
59     </script>
60
61     <Vars:VarsHeader id = "vars" runat = "server"> </Vars:VarsHeader>
62     <Funcs:FuncsCommon id = "funcs" runat = "server"> </Funcs:FuncsCommon>
63     </head>
64
65     <body>
66     <script language = "JScript" runat = "server">
67
68         var resultMessage : String = "";
69
70         function addRmvButton_Click( sender : Object, events : EventArgs)
71         {
72             for (var li in lstClass.Items)
73             {
74                 if ( li.Selected )
75                 {
76                     Session[vars.classID] = li.Value;
77                     Server.Transfer( vars.addRmvStudentPage );
78                 }
79             }
80         }
81
82         function quizTestButton_Click( sender : Object, events : EventArgs)
83         {
84             for (var li in lstClass.Items)
85             {
86                 if ( li.Selected )
87                 {
88                     Session[vars.classID] = li.Value;
89                     Server.Transfer( vars.quizTestPage );
90                 }
91             }
92         }
93
94         function absentTardyButton_Click( sender : Object, events : EventArgs)
95         {
96             for (var li in lstClass.Items)
97             {
98                 if ( li.Selected )
99                 {
100                     Session[vars.classID] = li.Value;
101                     Server.Transfer( vars.absentTardyPage );
102                 }
103             }
104         }
105
106         function GPButton_Click( sender : Object, events : EventArgs)
107         {
108             for (var li in lstClass.Items)
```

```
109         {
110             if ( li.Selected )
111             {
112                 Session[vars.classID] = li.Value;
113                 Server.Transfer( vars.QTPercPage );
114             }
115         }
116     }
117
118     function CGButton_Click( sender : Object, events : EventArgs)
119     {
120         for (var li in lstClass.Items)
121         {
122             if ( li.Selected )
123             {
124                 Session[vars.classID] = li.Value;
125                 Server.Transfer( vars.classGradePage );
126             }
127         }
128     }
129
130     function displayClasses()
131     {
132         var dataBaseConnection: OleDbConnection = new
133         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) )
134
135         var queryString : System.String =
136         "SELECT Class.ClassID, Class.CourseID AS Class_CourseID, Class.TeacherID,
137         Course.CourseID AS Course_CourseID, "
138         + "Course.CourseName AS className, Course.divisionID AS Course_divisionID
139         , Division.divisionID AS Division_divisionID, "
140         + "Division.DivisionName FROM Division INNER JOIN (Course INNER JOIN
141         Class ON Course.CourseID = Class.CourseID) "
142         + "ON Division.divisionID = Course.divisionID WHERE ((Class.TeacherID) =
143         " + Session[vars.useridField] + "));";
144
145         dataBaseConnection.Open();
146
147         var dataBaseCommand : OleDbCommand =
148         new OleDbCommand( queryString, dataBaseConnection );
149
150         var dataReader = dataBaseCommand.ExecuteReader();
151
152         lstClass.DataSource = dataReader;
153         lstClass.DataBind();
154         dataReader.Close()
155         dataBaseCommand.Connection.Close()
156         dataBaseConnection.Close();
157     }
158
159     function Page_Load( sender : Object, events : EventArgs )
160     {
161         if ( Session == null || Session[vars.usertype] == undefined )
162             Server.Transfer (vars.loginPage);
163
164         if( !IsPostBack )
165             displayClasses()
166     }
167
168     } // end Page_Load
169
170 </script>
171
172 <form runat = "server">
```

```
169     <Header:ImageHeader id = "head" PageName = "Main Page" runat = "server"> </Header:ImageHeader>
170
171     <br /><p> Welcome
172     <% =funcs.getNAME(Session[vars.useridField], vars.userTable ) %>
173
174     Please select which class you want to edit and pick whether or not you want
175     to add/remove students,
176     add a grade, or mark a student as absent/tardy.</p> <br />
177
178     <table>
179         <tr>
180             <td style="width: 106px; height: 53px;" align="left">
181                 <asp:DropDownList runat="server" ID="lstClass" DataTextField=
182                 "className" DataValueField="ClassID" width="130px"/>
183             </td>
184         </tr>
185     </table>
186
187     <table>
188         <tr>
189             <td style="width: 106px; height: 53px;" align="left">
190                 <asp:button id="addRmvBtn" text="Enroll/Unenroll" OnClick=
191                 "addRmvButton_Click" runat="server" width="100px" align="center"></asp:button>
192             </td>
193             <td style="width: 106px; height: 53px;" align="left">
194                 <asp:button id="QTBtn" text="Add Quiz/Test" OnClick=
195                 "quizTestButton_Click" runat="server" width="100px" align="center"></asp:button>
196             </td>
197             <td style="width: 106px; height: 53px;" align="left">
198                 <asp:button id="ATBtn" text="Absent/Tardy" OnClick=
199                 "absentTardyButton_Click" runat="server" width="100px" align="center"></asp:
200                 button>
201             </td>
202             <td style="width: 106px; height: 53px;" align="left">
203                 <asp:button id="GPBtn" text="Grade Perc" OnClick="GPButton_Click"
204                 runat="server" width="100px" align="center"></asp:button>
205             </td>
206             <td style="width: 106px; height: 53px;" align="left">
207                 <asp:button id="CGBtn" text="Class Grades" OnClick=
208                 "CGButton_Click" runat="server" width="100px" align="center"></asp:button>
209             </td>
210         </tr>
211     </table>
212 </form>
213 </body>
214 </html>
```

AddRmvStud.aspx

Enroll Student

Main

Lookup the student you want to add by putting their name in the lookup text box and clicking the lookup button. Then to add that student highlight their name in the box on the left and click add. To remove a student highlight their name in the box on the left and click remove. When finished click main to go back to the teacher main page

Potential Students To Add	Students Enrolled
Add >> Remove << Highlight to add Last Name Lookup	Highlight to remove

Done

Start | sProject - Microsoft Vis... | application08 : Database... | http://127.0.0.1/Scho... | 9:38 PM

```

1 <%@ Page Language="JScript" Debug="true" %>
2
3 <%@ Register TagPrefix="Funcs" TagName="FuncsCommon" Src="funcs.ascx" %>
4 <%@ Register TagPrefix="Vars" TagName="VarsHeader" Src="vars.ascx" %>
5 <%@ Register TagPrefix="Header" TagName="ImageHeader" Src="main.ascx" %>
6
7 <%@ Import Namespace="System.Data.OleDb" %>
8 <%@ Import Namespace="System.Data" %>
9 <%@ Import Namespace="System" %>
10
11 <HTML>
12 <HEAD>
13 <script language="JScript" runat="server">
14 /*
15     Page Name:
16         addRmvStud.aspx
17
18     Description:
19         Allows teacher to add/remove student from the class.
20
21     Language: JScript
22     JScript Variables:
23         resultMessage : var : string that tells administrator wether it
24         added or not.
25         searchName : var : string that hold the last name put in the
26         text box
27         li : var : object used for both lists to get the value
28         selected
29         dataBaseConnection : var : oboect used to get connection to data
30         base
31         queryString1 : var : SQL string used to get students with same
32         last name as LN
33         queryString : var : SQL string used to get students currently
34         enrolled in current class
35         dataBaseCommand : var : object used to execute the queryStrings
36         with the current connection
37         dataReader : var : object used to read the data from the
38         database
39
40     ASP Variables:
41         LN : TextBox : students last name to lookup
42         lookupBtn : Button : lookup students with the same last
43         name in LN.Text
44         addBtn : Button : add a student to a class
45         rmvBtn : Button : to remove a student from a class
46         lstNames : ListBox : shows potential students to be added
47         lstEnrolled : ListBox : shows students already enrolled in
48         the class
49
50     Session Variables:
51         Session[vars.EnrollID] : gets the students classEnrollmentID so it
52         can be added to the classGrade table
53         Session[vars.classid] : keeps track of the current class being
54         edited
55
56     Functions:
57         Funcs:
58         enrollStudent: takes the student id, class id, and
59         classEnrollmentTable to enroll a student
60         in the current class.
61         getEnrollID: takes the student id, class id, and
62         classEnrollmentTable to get the enrollment id
63         of the student just enrolled and set Session[vars.
64         EnrollID] to that value.
65         addClassGradeEnrollID: takes the enrollment id and the

```

```

classGradeTable to put the students enrollment id
51         in the classGradeTable so that the student
's grade averages for this particular class
52         can be stored.
53         getNAME: takes the student id and the user table to get the name
of the student either enrolled or unenrolled.
54         unEnrollStudent: takes the student id, class id, and
classEnrollmentTable to unenroll a student
55         from the current class.
56         rmvClassGradeEnrollID: takes the enrollment id and the
classGradeTable to remove the students enrollment id
57         from the classGradeTable.
58     Local:
59         lookup: takes LN.Text value and looks up any student with the
same last name as that value and binds their student
60         ids to lstNames.
61         lookupButton_Click: used when the lookup button is clicked to
call the displayBoxes function
62         addButton_Click: used when the add button is clicked to execute
enrollStudent, getEnrollID, and addClassGradeEnrollID
63         rmvButton_Click: used when the remove button is clicked to
execute unEnrollStudent, getEnrollID, and rmvClassGradeEnrollID
64         getStudentsEnrolled: uses the Session class id in an SQL
statement to retrieve all the students
65         enrolled in the class and bind their student
ids to a list box in order to mark
66         a student absent or tardy.
67         displayBoxes: calls getStudentsEnrolled and then will call lookup
if the LN.Text value has a value in it and is not blank.
68         Page_Load: executes everytime the page is loaded and checks to
see if there is a Session, if not it
69         transfers to the login page. In this page on the first
time in it will only call displayBoxes
70         to display current students enrolled if any.
71
72     Database: Microsoft Access via SQL, applicationDB.mdb (defined via Web
.config file)
73     Tables used:
74         userTable, ClassEnrollment, isStudent
75
76     */
77
78     var resultMessage : String = "";
79
80     </script>
81
82     <Vars:VarsHeader id="vars" runat="server"></Vars:VarsHeader>
83     <Funcs:FuncsCommon id="funcs" runat="server"></Funcs:FuncsCommon>
84     </HEAD>
85     <body>
86     <script language="JScript" runat="server">
87
88         function addButton_Click( sender : Object, events : EventArgs)
89         {
90             for (var li in lstNames.Items)
91             {
92                 if (li.Selected)
93                 {
94                     if(funcs.enrollStudent(li.Value, Session[vars.classID], vars.
classEnrollmentTable))
95                     {
96                         Session[vars.EnrollID] = funcs.getEnrollID(li.Value,
Session[vars.classID], vars.classEnrollmentTable);
97                         if(funcs.addClassGradeEnrollID(Session[vars.EnrollID],
vars.classGradeTable))
98                     {

```

```

99         resultMessage += funcs.getNAME(li.Value, vars.
userTable) + " Student ID: " + li.Value +
        " enrolled." + "<br>"
100     }
101 }
102 }
103 }
104 }
105 displayBoxes();
106 }
107
108 function rmvButton_Click( sender : Object, events : EventArgs)
109 {
110     for (var li in lstEnrolled.Items)
111     {
112         if (li.Selected)
113         {
114             Session[vars.EnrollID] = funcs.getEnrollID(li.Value, Session
[vars.classID], vars.classEnrollmentTable);
115             if(funcs.unEnrollStudent(li.Value, Session[vars.classID],
vars.classEnrollmentTable))
116             {
117                 if(funcs.rmvClassGradeEnrollID(Session[vars.EnrollID],
vars.classGradeTable))
118                 {
119                     resultMessage += funcs.getNAME(li.Value, vars.
userTable) + " Student ID: " + li.Value +
                        " unenrolled." + "<br>"
120                 }
121             }
122         }
123     }
124 }
125 displayBoxes();
126 }
127
128 function lookup( searchName )
129 {
130     var dataBaseConnection: OleDbConnection = new
131     OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString"
) );
132
133     var queryString1 : System.String = "SELECT userTable.UserID,
userTable.FirstName + ' ' + userTable.MiddleName"
134     + " + ' ' + userTable.LastName AS FullName, isStudent.UserID AS
isStudent_UserID FROM userTable INNER JOIN "
135     + "isStudent ON userTable.UserID = isStudent.UserID WHERE ((
(userTable.LastName)=' " + searchName +
136     "') AND NOT EXISTS ( SELECT ClassEnrollment.StudentID FROM
ClassEnrollment "
137     + "WHERE ClassEnrollment.StudentID = userTable.UserID AND
ClassEnrollment.ClassID=" + Session[vars.classID] + "));";
138
139     dataBaseConnection.Open();
140
141     var dataBaseCommand : OleDbCommand =
142     new OleDbCommand( queryString1, dataBaseConnection );
143
144     var dataReader = dataBaseCommand.ExecuteReader();
145
146     lstNames.DataSource = dataReader;
147     lstNames.DataBind();
148     dataReader.Close()
149     dataBaseCommand.Connection.Close()
150     dataBaseConnection.Close();
151 }
152
153 function lookupButton_Click( sender : Object, events : EventArgs)

```

```

154     {
155         displayBoxes();
156     }
157
158     function getStudentsEnrolled()
159     {
160         var dataBaseConnection: OleDbConnection = new
161             OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) ) ✓
162     ;
163
164     var queryString : System.String = "SELECT userTable.UserID, userTable.  ✓
165     FirstName + ' ' + userTable.MiddleName "
166     + "+ ' ' + userTable.LastName AS FullName, ClassEnrollment.StudentID,  ✓
167     ClassEnrollment.ClassID FROM userTable INNER JOIN "
168     + "ClassEnrollment ON userTable.UserID = ClassEnrollment.StudentID WHERE  ✓
169     ((ClassEnrollment.ClassID)="
170     + Session[vars.classID] + "));";
171
172     dataBaseConnection.Open();
173
174     var dataBaseCommand : OleDbCommand =
175     new OleDbCommand( queryString, dataBaseConnection );
176
177     var dataReader = dataBaseCommand.ExecuteReader();
178
179     lstEnrolled.DataSource = dataReader;
180     lstEnrolled.DataBind();
181     dataReader.Close()
182     dataBaseCommand.Connection.Close()
183     dataBaseConnection.Close();
184
185     }
186
187     function displayBoxes()
188     {
189         getStudentsEnrolled();
190         if (LN.Text != "")
191             lookup(LN.Text);
192     }
193
194     function Page_Load( sender : Object, events : EventArgs )
195     {
196         if ( Session == null || Session[vars.usertype] == undefined )
197             Server.Transfer (vars.loginPage);
198
199         if ( !IsPostBack )
200             displayBoxes() ✓
201
202     } // end Page_Load
203
204     </script>
205     <form id="Form1" runat="server">
206         <Header:ImageHeader id="head" PageName="Enroll Student" runat="server"></Header:ImageHeader> ✓
207         <p>Lookup the student you want to add by putting their name in the lookup ✓
208         text box and clicking
209         the lookup button. Then to add that student highlight their name in  ✓
210         the box on the left and click
211         add. To remove a student highlight their name in the box on the left  ✓
212         and click remove. When finished
213         click main to go back to the teacher main page</p>
214         <br>
215         <table>
216         <tr>
217             <td style="width: 106px; height: 52px;">
218                 Potential Students To Add


```

```

211         </td>
212         <td style="width: 101px; height: 52px;"></td>
213         <td style="width: 109px; height: 52px;">
214             Students Enrolled
215         </td>
216     </tr>
217     <tr>
218         <td style="width: 106px; height: 53px;" align="left">
219             <asp:ListBox runat="server" ID="lstNames" SelectionMode="Multiple"
220             " DataTextField="FullName" DataValueField="UserID" width="130px"/>
221         </td>
222         <td style="width: 101px; height: 53px;" align="center">
223             <asp:button id="addBtn" text="Add >>" OnClick=
224             "addButton_Click" runat="server" width="100px" align="center"></asp:button>
225             <br>
226             <asp:button id="rmvBtn" text="Remove <<" OnClick=
227             "rmvButton_Click" runat="server" width="100px" align="center"></asp:button>
228         </td>
229     </tr>
230     <tr>
231         <td style="width: 106px; height: 62px;" align="center">
232             Highlight to add
233         </td>
234         <td style="width: 101px; height: 62px;" align="center"></td>
235         <td style="width: 109px; height: 62px;" align="center">
236             Highlight to remove
237         </td>
238     </tr>
239     <tr>
240         <td style="width: 106px; height: 37px;">
241             <% =vars.lnLabel %>
242         </td>
243         <td style="width: 101px; height: 37px;">
244             <asp:TextBox id="LN" runat="server" Width="100px" Height="28px">
245         </asp:TextBox>
246         </td>
247         <td style="width: 101px; height: 37px;">
248             <asp:button id="lookupBtn" text="Lookup" OnClick=
249             "lookupButton_Click" runat="server" width="100px" align="center"></asp:button>
250         </td>
251     </tr>
252 </table>
253 <p>
254     <%
255     Response.Write( "<b>" + resultMessage + "</b>" );
256     %>
257 </p>
258 </form>
259 </body>
260 </HTML>

```

QuizTestPage.aspx

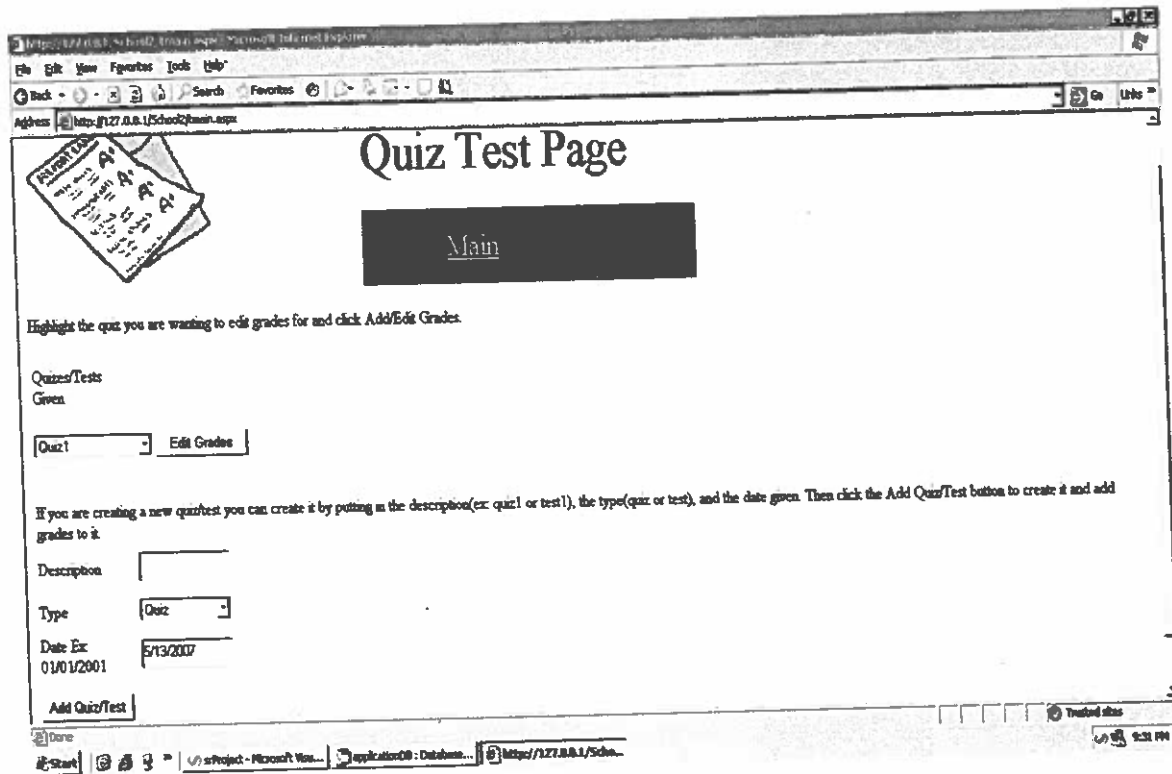

http://127.0.0.1:5543/QuizTestPage.aspx Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Search Favorites Home

Address http://127.0.0.1:5543/QuizTestPage.aspx

Quiz Test Page

[Main](#)

Highlight the quiz you are wanting to edit grades for and click Add/Edit Grades.

Quizzes/Tests Given

Quiz1 Edit Grades

If you are creating a new quiz/test you can create it by putting in the description(ex: quiz1 or test1), the type(quiz or test), and the date given. Then click the Add Quiz/Test button to create it and add grades to it.

Description

Type Quiz

Date Ex 01/01/2001 5/13/2007

Add Quiz/Test

Done

Start Project - Microsoft Visio... application: Database... http://127.0.0.1:5543/...

2:31 PM

```
<%@ Page Language="JScript" Debug="true" %>
```

```
<%@ Register TagPrefix="Funcs" TagName="FuncsCommon" Src="funcs.ascx" %>
```

```
<%@ Register TagPrefix="Vars" TagName="VarsHeader" Src="vars.ascx" %>
```

```
<%@ Register TagPrefix="Header" TagName="ImageHeader" Src="main.ascx" %>
```

```
<%@ Import Namespace="System.Data.OleDb" %>
```

```
<%@ Import Namespace="System.Data" %>
```

```
<%@ Import Namespace="System" %>
```

```
<HTML>
```

```
<HEAD>
```

```
<script language="JScript" runat="server">
```

```
/*
```

```
Page Name:  
quizTestPage.aspx
```

```
Description:  
Allows teachers to add and edit quizzes, tests, and hw for their class.
```

```
Language: JScript
```

```
JScript Variables:
```

```
resultMessage : var : string that tells teacher whether it added or  
not.  
li : var : object used for the list to get the value  
selected  
current : var : string that contains the current date  
dataBaseConnection : var : object used to get connection to data base  
queryString : var : SQL string used to get the quizzes, tests, and  
hws for the class  
queryString1 : var : SQL string used to get the types of assignments  
dataBaseCommand : var : object used to execute the queryStrings with  
the current connection  
dataReader : var : object used to read the data from the database
```

```
ASP Variables:
```

```
editGrade : Button : click to edit grades for an assignment  
already made  
addQTBtn : Button : click to add an assignment for the  
current class  
DESC : TextBox : input for the name of the assignment  
DATEID : TextBox : input for date the assignment is due/  
given  
HW : TextBox : input for how the HW will weigh on the  
final grade  
lstQuizTest : DropDownList : shows assignments already given in  
class  
lstType : DropDownList : shows the types of assignments to  
choose from
```

```
Session Variables:
```

```
Session[vars.classID] : keeps track of the current classID being  
edited  
Session[vars.quizTestId] : keeps track of the current assignment being  
edited
```

```
Functions:
```

```
Funcs:
```

```
createQuizTest: takes DESC.Text, the type value, DATEID.Text, Session  
[vars.classID], vars.quizTestTable  
and inserts those values into quizTestTable as a new  
record  
getQTID: takes DESC.Text, Session[vars.classID], vars.quizTestTable  
and returns the quizTest id of the
```

```

        assignment just created and sets the Session[vars.
quizTestID] to the value returned.
        initializeGrade: takes Session[vars.quizTestID], Session[vars.
classID], and the type value to initialize
        all students enrolled with this assignment and go
ahead and set them up with this quiz and a default
        grade of 0.
    Local:
        addEditButton_Click: used when the edit grades button is clicked and
sets the Session[vars.quizTestID]
        to the quizTestID of the selected assignment
from the lstQuizTest and transfers the user to the addEditGradePage.

        addQTButton_Click: used when the Add Quiz/Test button is clicked.
Calls the funcs functions above and sets the Session[vars.quizTestID]
        to the quizTestID of the created assignment and
transfers the user to the addEditGradePage.
        getQuizesTests: uses the Session class id in an SQL statement to
retrieve all the assignments created
        for this class already.
        getTypes: uses an SQL statement to retrieve all the types of
assignments
        from the type table.
        Page_Load: executes everytime the page is loaded and checks to see if
there is a Session, if not it
        transfers to the login page. In this page it gets the
current date for the DATE
        text box using the Date object. Then it calls
getQuizesTest to get all the assignments created
        for this class already.

        Database: Microsoft Access via SQL, applicationDB.mdb (defined via Web.
config file)
        Tables used:
            classGradeScaleTable
*/

var resultMessage : String = "";

</script>

<Vars:VarsHeader id="vars" runat="server"></Vars:VarsHeader>
<Funcs:FuncsCommon id="funcs" runat="server"></Funcs:FuncsCommon>
</HEAD>
<body>
<script language="JScript" runat="server">

function addEditButton_Click( sender : Object, events : EventArgs)
{
    for (var li in lstQuizTest.Items)
    {
        if (li.Selected)
        {
            Session[vars.quizTestID] = li.Value;
            Server.Transfer( vars.addEditGradePage );
        }
    }
}

function addQTButton_Click( sender : Object, events : EventArgs)
{
    for (var li in lstType.Items)
    {
        if (li.Selected)
        {
            if(funcs.createQuizTest(DESC.Text, li.Value, DATEID.Text, Session

```

```

[vars.classID], vars.quizTestTable))
    {
        Session[vars.quizTestID] = funcs.getQTID(DESC.Text, Session
[vars.classID], vars.quizTestTable);

        if(funcs.initializeGrade(Session[vars.quizTestID], Session
[vars.classID], li.Value))
        {

            getQuizesTests();
            Server.Transfer( vars.addEditGradePage );
        }
        else
        {
            resultMessage += "Error in creating quiz/test/HW";
        }
    }
    else
    {
        getQuizesTests();
        resultMessage += "Quiz already created with current name and
date";
    }
}
}

function getQuizesTests()
{
    var dataBaseConnection: OleDbConnection = new
    OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ));

    var queryString : System.String = "SELECT QuizTestTable.QuizTestID,
QuizTestTable.Description AS quizTestName, "
    + "QuizTestTable.ClassID FROM QuizTestTable WHERE (((QuizTestTable.ClassID)="
    + Session[vars.classID] + "))";

    dataBaseConnection.Open();

    var dataBaseCommand : OleDbCommand =
    new OleDbCommand( queryString, dataBaseConnection );

    var dataReader = dataBaseCommand.ExecuteReader();

    lstQuizTest.DataSource = dataReader;
    lstQuizTest.DataBind();
    dataReader.Close()
    dataBaseCommand.Connection.Close()
    dataBaseConnection.Close();
    getTypes()
}

function getTypes()
{
    var dataBaseConnection: OleDbConnection = new
    OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ));

    var queryString1 : System.String = "SELECT QuizTestType.Type AS Type FROM
QuizTestType";

    dataBaseConnection.Open();

```

```

var dataBaseCommand : OleDbCommand =
new OleDbCommand( queryString1, dataBaseConnection );

var dataReader = dataBaseCommand.ExecuteReader();

lstType.DataSource = dataReader;
lstType.DataBind();
dataReader.Close()
dataBaseCommand.Connection.Close()
dataBaseConnection.Close();
}

function Page_Load( sender : Object, events : EventArgs )
{
    if ( Session == null || Session[vars.usertype] == undefined )
        Server.Transfer (vars.loginPage);

    if ( !IsPostBack )
    {
        var current = new Date();
        DATEID.Text = current.getFullYear() + "-" + current.getMonth() + "-" +
current.getDate();
        getQuizesTests()
    }

} // end Page_Load

</script>
<form id="Form1" runat="server">
    <Header:ImageHeader id="head" PageName="Quiz Test Page" runat="server"></
Header:ImageHeader>
    <p>Highlight the quiz you are wanting to edit grades for and click Add/Edit
Grades. </p>
    <table>
    <tr>
        <td style="width: 106px; height: 52px;">
            Quizes/Tests Given
        </td>
        <td style="width: 101px; height: 52px;"></td>
    </tr>
    <tr>
        <td style="width: 106px; height: 53px;" align="left">
            <asp:DropDownList runat="server" ID="lstQuizTest" DataTextField=
"quizTestName" DataValueField="QuizTestID" width="130px"/>
        </td>
        <td style="width: 101px; height: 53px;" align="center">
            <asp:button id="editGrade" text="Edit Grades" OnClick=
"addEditButton_Click" runat="server" width="100px" align="center"></asp:button>
        </td>
    </tr>
    </table>
    <br />
    <table>
    <tr>
        <td>
            If you are creating a new quiz/test you can create it by putting in
the description(ex: quiz1 or
            test1), the type(quiz or test), and the date given. Then click the
Add Quiz/Test button
            to create it and add grades to it.
        </td>
    </tr>
    </table>
    <table>
    <tr>

```

```

        <td style="width: 106px; height: 37px;">
            <% =vars.descriptionLabel %>
        </td>
        <td style="width: 101px; height: 37px;">
            <asp:TextBox id="DESC" runat="server" Width="100px" Height="28px"></
asp:TextBox>
        </td>
    </tr>
    <tr>
        <td style="width: 106px; height: 37px;">
            <% =vars.typeLabel %>
        </td>
        <td style="width: 101px; height: 37px;">
            <asp:DropDownList runat="server" ID="lstType" DataTextField="Type"
DataValueField="Type" width="100px"/>
        </td>
    </tr>
    <tr>
        <td style="width: 120px; height: 37px;">
            <% =vars.dateLabel %> Ex: 2001-1-1
            yyyy-mm-dd
        </td>
        <td style="width: 101px; height: 37px;">
            <asp:TextBox id="DATEID" runat="server" Width="100px" Height="28px">
</asp:TextBox>
        </td>
    </tr>
    <tr>
        <td style="width: 101px; height: 53px;" align="center">
            <asp:button id="addQTBtn" text="Add Quiz/Test" OnClick=
"addQTButton_Click" runat="server" width="100px" align="center"></asp:button>
        </td>
    </tr>
</table>
<p>
    <%
    Response.Write( "<b>" + resultMessage + "</b>" );
    %>
</p>
</form>
</body>
</HTML>

```

AbsentTardy.aspx

http://127.0.0.1:5000/School2/absent.aspx - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Search Favorites Home

Address http://127.0.0.1:5000/School2/absent.aspx



Enroll Student

Main

Highlight the student you are wanting to mark as absent or tardy. Make sure you put the date the student is counted absent/tardy in the text box below. Then click the absent or the tardy button to mark them as one or the other.

Enrolled Students

	Absent
	Tardy

Date Ex: 01/01/2001

5/13/2007

Done

Start

Project - Microsoft Vis...

application08 : Database...

http://127.0.0.1:5000/School2/absent.aspx

Trusted sites

9:33 PM

```

1 <%@ Page Language="JScript" Debug="true" %>
2
3 <%@ Register TagPrefix="Funcs" TagName="FuncsCommon" Src="funcs.ascx" %>
4 <%@ Register TagPrefix="Vars" TagName="VarsHeader" Src="vars.ascx" %>
5 <%@ Register TagPrefix="Header" TagName="ImageHeader" Src="main.ascx" %>
6
7 <%@ Import Namespace="System.Data.OleDb" %>
8 <%@ Import Namespace="System.Data" %>
9 <%@ Import Namespace="System" %>
10
11 <HTML>
12     <HEAD>
13         <script language="JScript" runat="server">
14             /*
15                 Page Name:
16                     absentTardy.aspx
17
18                 Description:
19                     Mark a student as absent or tardy in a class.
20
21                 Language: JScript
22                 JScript Variables:
23                     resultMessage : var : string that tells administrator wether it
added or not.
24
25                 ASP Variables:
26                     DATE           : TextBox           : date marked absent/tardy
27
28                     absentBtn      : Button            : clicked to mark student absent
29                     tardyBtn       : Button            : clicked to mark student tardy
30                     lstEnrolled    : listBox           : contains students enrolled in class
31
32                 Session Variables:
33                     Session[vars.classID] : used in this page to get the students
enrolled in this class.
34
35                 Functions:
36                     Funcs:
37                         absentTardyStudent: takes the student id, class id, date, and the
absent or tardy table
38                                         and marks the student absent or tardy in the
appropriate table using
39                                         all the parameters sent to the function.
40                         getName: takes a userid (in this case the student id) and the
usertable to get that person's
41                                         first and last name and return them both as one string.
42                     Local:
43                         absentButton_Click: used when the absent button is clicked to
execute absentTardyStudent function
44                                         in funcs and send the absent table that way
the student is marked as absent.
45                         tardyButton_Click: used when the tardy button is clicked to
execute absentTardyStudent function in
46                                         funcs and send the tardy table that wat the
student is marked as tardy.
47                         getStudentsEnrolled: uses the Session class id in an SQL
statement to retrieve all the students
48                                         enrolled in the class and bind their student
ids to a list box in order to mark
49                                         a student absent or tardy.
50                         Page_Load: executes everytime the page is loaded and checks to
see if there is a Session, if not it
51                                         transfers to the login page. In this page it gets the
current date for the DATE
                                         text box using the Date object. Then it calls
getStudentsEnrolled to get the students enrolled.

```

```

52
53         Database: Microsoft Access via SQL, applicationDB.mdb (defined via Web. ✓
config file)
54         Table: Absent
55         Fields: ClassEnrollmentID (key), Date
56         Table: Tardy
57         Fields: ClassEnrollmentID (key), Date
58     */
59
60     var resultMessage : String = "";
61
62     </script>
63
64     <Vars:VarsHeader id="vars" runat="server"></Vars:VarsHeader>
65     <Funcs:FuncsCommon id="funcs" runat="server"></Funcs:FuncsCommon>
66     </HEAD>
67     <body>
68     <script language="JScript" runat="server">
69
70         function absentButton_Click( sender : Object, events : EventArgs)
71         {
72             for (var li in lstEnrolled.Items)
73             {
74                 if (li.Selected)
75                 {
76                     if(funcs.absentTardyStudent(li.Value, Session[vars.classID], ✓
DATE.Text, vars.absentTable))
77                     {
78                         resultMessage += funcs.getName(li.Value, vars. ✓
userTable) + " Student ID: " + li.Value +
79                         " counted as absent on " + DATE.Text + "<br>";
80                     }
81                     else
82                     {
83                         resultMessage += funcs.getName(li.Value, vars. ✓
userTable) + " Student ID: " + li.Value +
84                         " already marked as absent on " + DATE.Text + "<br>"; ✓
85                     }
86                 }
87             }
88         }
89
90         function tardyButton_Click( sender : Object, events : EventArgs)
91         {
92             for (var li in lstEnrolled.Items)
93             {
94                 if (li.Selected)
95                 {
96                     if(funcs.absentTardyStudent(li.Value, Session[vars.classID], ✓
DATE.Text, vars.tardyTable))
97                     {
98                         resultMessage += funcs.getName(li.Value, vars. ✓
userTable) + " Student ID: " + li.Value +
99                         " counted as tardy on " + DATE.Text + "<br>";
100                     }
101                     else
102                     {
103                         resultMessage += funcs.getName(li.Value, vars. ✓
userTable) + " Student ID: " + li.Value +
104                         " already marked as tardy on " + DATE.Text + "<br>";
105                     }
106                 }
107             }
108         }

```

```

109
110     function getStudentsEnrolled()
111     {
112         var dataBaseConnection: OleDbConnection = new
113         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) ) ✓
114     ;
115         var queryString : System.String = "SELECT userTable.UserID, userTable. ✓
116         FirstName + ' ' + userTable.MiddleName "
117         + "+ ' ' + userTable.LastName AS FullName, ClassEnrollment.StudentID, ✓
118         ClassEnrollment.ClassID FROM userTable INNER JOIN "
119         + "ClassEnrollment ON userTable.UserID = ClassEnrollment.StudentID WHERE ✓
120         ((ClassEnrollment.ClassID)="
121         + Session[vars.classID] + "));";
122
123         dataBaseConnection.Open();
124
125         var dataBaseCommand : OleDbCommand =
126         new OleDbCommand( queryString, dataBaseConnection );
127
128         var dataReader = dataBaseCommand.ExecuteReader();
129
130         lstEnrolled.DataSource = dataReader;
131         lstEnrolled.DataBind();
132         dataReader.Close()
133         dataBaseCommand.Connection.Close()
134         dataBaseConnection.Close();
135     }
136
137     function Page_Load( sender : Object, events : EventArgs )
138     {
139         if ( Session == null || Session[vars.usertype] == undefined )
140             Server.Transfer (vars.loginPage);
141
142         if ( !IsPostBack )
143         {
144             var current = new Date();
145             DATE.Text = current.getFullYear() + "-" + current.getMonth() + "-" + ✓
146             current.getDate();
147             getStudentsEnrolled()
148         }
149     }
150
151     } // end Page_Load
152
153     </script>
154     <form id="Form1" runat="server">
155         <Header:ImageHeader id="head" PageName="Enroll Student" runat="server"></Header:ImageHeader>
156         <p>Highlight the student you are wanting to mark as absent or tardy. Make ✓
157         sureyou put the date
158         the student is counted absent/tardy in the text box below. Then click ✓
159         the absent
160         or the tardy button to mark them as one or the other.</p>
161
162         <table>
163         <tr>
164             <td style="width: 106px; height: 52px;">
165                 Enrolled Students
166             </td>
167             <td style="width: 101px; height: 52px;"></td>
168         </tr>
169         <tr>
170             <td style="width: 106px; height: 53px;" align="left">
171                 <asp:ListBox runat="server" ID="lstEnrolled" SelectionMode=
172                 "Multiple" DataTextField="FullName" DataValueField="UserID" width="130px"/>
173             </td>
174         </tr>
175     </table>

```

```
163         </td>
164         <td style="width: 101px; height: 53px;" align="center">
165             <asp:button id="absentBtn" text="Absent" OnClick=
"absentButton_Click" runat="server" width="100px" align="center"></asp:button>
166             <br>
167             <asp:button id="tardyBtn" text="Tardy" OnClick=
"tardyButton_Click" runat="server" width="100px" align="center"></asp:button>
168         </td>
169     </tr>
170     <tr>
171         <td style="width: 120px; height: 45px;">
172             <% =vars.dateLabel %> Ex: 2001-1-1
173             yyyy-mm-dd
174         </td>
175         <td style="width: 101px; height: 37px;">
176             <asp:TextBox id="DATE" runat="server" Width="100px" Height="28px">
></asp:TextBox>
177         </td>
178     </tr>
179 </table>
180 <p>
181     <%
182     Response.Write( "<b>" + resultMessage + "</b>" );
183     %>
184 </p>
185 </form>
186 </body>
187 </HTML>
188
```

QTPerc.aspx

http://127.0.0.1:8080/School2/main.aspx - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Search Favorites

Address http://127.0.0.1:8080/School2/main.aspx



QuizTest Perc

Main

Please enter the percentage that each type will be counted for on the student's final grades. If you want quizzes to be 30% enter 30, test to be 60% enter 60, and homework to be 10% enter 10. Make sure that the percents all add up to 100%

Current percentages are: Quizzes 33.3%, Tests 33.4%, Homework 33.3%

Quiz

Test

Homework

Done

Start | Project - Microsoft Vis... | application08 : Database... | http://127.0.0.1:8080/School2/main.aspx

9:35 PM

```

1 <%@ Page Language="JScript" Debug="true" %>
2
3 <%@ Register TagPrefix="Funcs" TagName="FuncsCommon" Src="funcs.ascx" %>
4 <%@ Register TagPrefix="Vars" TagName="VarsHeader" Src="vars.ascx" %>
5 <%@ Register TagPrefix="Header" TagName="ImageHeader" Src="main.ascx" %>
6
7 <%@ Import Namespace="System.Data.OleDb" %>
8 <%@ Import Namespace="System.Data" %>
9 <%@ Import Namespace="System" %>
10
11 <HTML>
12 <HEAD>
13 <script language="JScript" runat="server">
14 /*
15     Page Name:
16         qtPerc.aspx
17
18     Description:
19         Allows teachers to set how quizzes, tests, and homework will be counted
20         towards
21         the student's final grade.
22
23     Language: JScript
24     JScript Variables:
25         resultMessage : var : string that tells teacher whether it added
26         or not.
27         result : var : string that shows what the current
28         percentages are
29         dataBaseConnection : var : object used to get connection to data
30         base
31         queryString : var : SQL string used to get the current percents
32         dataBaseCommand : var : object used to execute the queryStrings
33         with the current connection
34         dataReader : var : object used to read the data from the
35         database
36
37     ASP Variables:
38         button : Button : click to update the percentages
39
40         QUIZ : TextBox : input for how the quizzes will weigh
41         on the final grade
42         TEST : TextBox : input for how the tests will weigh
43         on the final grade
44         HW : TextBox : input for how the HW will weigh on
45         the final grade
46
47     Session Variables:
48         Session[vars.classID] : keeps track of the current classID being
49         edited
50
51     Functions:
52     Funcs:
53         addQTperc: takes Session[vars.classID], quiz, test, hw, vars.
54         classGradeScaleTable to update the
55         current weight percentages of the class id being
56         edited in classGradeScale Table.
57         Local:
58         getCurrentPercentages: uses the Session class id in an SQL
59         statement to retrieve the current
60         weight percentages of the class that way
61         the teacher knows what his current
62         percentages are before they decide to make
63         a change.
64         Page_Load: executes everytime the page is loaded and checks to
65         see if there is a Session, if not it
66         transfers to the login page. In this page in the

```

```

50     IsPostBack we check to make sure the total
51         percentage is 100% and if so we call addQTPerc with
52     the values of the current text box percentages
53         entered.
54
55     Database: Microsoft Access via SQL, applicationDB.mdb (defined via Web
56     .config file)
57     Tables used:
58         classGradeScaleTable
59
60     */
61
62     var resultMessage : String = "";
63
64     </script>
65
66     <Vars:VarsHeader id="vars" runat="server"></Vars:VarsHeader>
67     <Funcs:FuncsCommon id="funcs" runat="server"></Funcs:FuncsCommon>
68     </HEAD>
69     <body>
70     <script language="JScript" runat="server">
71
72     function getCurrentPercentages() : String
73     {
74         var result : String = "";
75         var queryString : System.String =
76             "SELECT " +
77             vars.quizField + ", " + vars.testField + ", " + vars.HWField +
78             " FROM " +
79             vars.classGradeScaleTable +
80             " WHERE " +
81             "(" + vars.classidField + " = " + Session[vars.classID] + ")";
82
83         // establish a connection, and query the database
84         var dataBaseConnection: OleDbConnection = new
85             OleDbConnection( ConfigurationSettings.AppSettings(
86                 "ConnectionString" ) );
87
88         // return queryString;
89         dataBaseConnection.Open();
90
91         var dataBaseCommand : OleDbCommand =
92             new OleDbCommand( queryString, dataBaseConnection );
93
94         var dataReader = dataBaseCommand.ExecuteReader();
95
96         if (dataReader.Read())
97         {
98             result = "Current percentages are: Quizes " + dataReader.
99                 GetDouble(0)*100 + "%, Tests " + dataReader.GetDouble(1)*100 + "%, Homework " +
100                 dataReader.GetDouble(2)*100 + "%.";
101         }
102         // close database connection
103         dataBaseCommand.Connection.Close();
104
105         return result;
106     }
107
108     function Page_Load( sender : Object, events : EventArgs )
109     {
110         if ( Session == null || Session[vars.usertype] == undefined )
111             Server.Transfer (vars.loginPage);
112
113         if ( IsPostBack )
114         {

```


```

110         if (QUIZ.Text == "" || TEST.Text == "" || HW.Text == "")
111         {
112             resultMessage = "You must fill in all blanks.";
113             return;
114         }
115         var quiz = (parseFloat( QUIZ.Text )/100);
116         var test = (parseFloat( TEST.Text )/100);
117         var hw = (parseFloat( HW.Text )/100)
118         var weight = quiz + test + hw;
119         if( weight >= 0.99999 && weight <= 1.00000001 )
120         {
121             if (funcs.addQTPerc( Session[vars.classID], quiz, test, hw, vars.
classGradeScaleTable ))
122                 resultMessage = "Percents updated"
123             else
124                 resultMessage = "Error in updating percents"
125         }
126         else
127         {
128             resultMessage = "Grade weighting equals " + weight + ", should
equal 100."
129         }
130     }
131 } // end Page_Load
132
133
134
135 </script>
136 <form id="Form1" runat="server">
137     <Header:ImageHeader id="head" PageName="QuizTest Perc" runat="server"></
Header:ImageHeader>
138     <div style="text-align: left">
139         <p>Please enter the percentage that each type will be counted for on the
student's
140         final grades. If you want quizzes to be 30% enter 30, test to be 60%
enter 60, and
141         homework to be 10% enter 10. Make sure that the percents all add up to
100%</p>
142         <br />
143         <p><% Response.Write(getCurrentPercentages()) %></p>
144         <table>
145             <tr>
146                 <td style="width: 100px">
147                     <% =vars.quizLabel %>
148                 </td>
149                 <td style="width: 100px">
150                     <asp:TextBox id="QUIZ" runat="server" Width="158px"
Height="22px"></asp:TextBox>
151                 </td>
152             </tr>
153             <tr>
154                 <td style="width: 100px">
155                     <% =vars.testLabel %>
156                 </td>
157                 <td style="width: 100px">
158                     <asp:TextBox id="TEST" runat="server" Width="158px"
Height="22px"></asp:TextBox>
159                 </td>
160             </tr>
161             <tr>
162                 <td style="width: 100px">
163                     <% =vars.HWLabel %>
164                 </td>
165                 <td style="width: 100px">
166                     <asp:TextBox id="HW" runat="server" Width="158px" Height=
"22px"></asp:TextBox>

```

```
167         </td>
168     </tr>
169 </table>
170 </div>
171 <br>
172     <asp:button id="button" text="Update Percentage" runat="server"></asp:
:button>
173 <br>
174 <p>
175     <%
176     Response.Write( "<b>" + resultMessage + "</b>" );
177     %>
178 </p>
179 </form>
180 </body>
181 </HTML>
182
```

ClassGrade.aspx

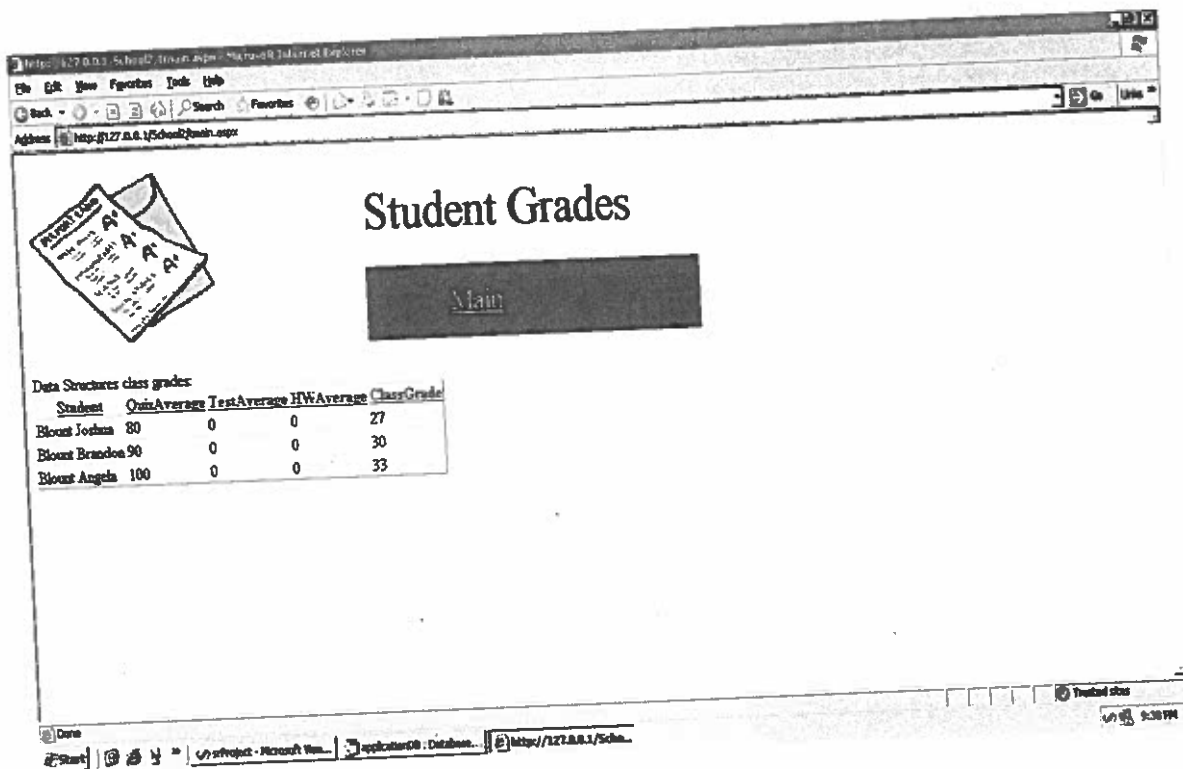

The screenshot shows a web browser window with the address bar displaying `http://127.0.0.1/School2/main.aspx`. The page content includes a graphic of a stack of papers on the left, the title "Student Grades" in the center, and a dark rectangular button labeled "Main" below the title. At the bottom left, there is a table titled "Data Structures class grades".

Student	QuizAverage	TestAverage	HWAverage	ClassGrade
Blount Joshua	80	0	0	27
Blount Brandon	90	0	0	30
Blount Angela	100	0	0	33

The browser's status bar at the bottom shows the time as 9:38 PM and the address `http://127.0.0.1/Scho...`.

```

1 <%@ Page Language="JScript" Debug="true" %>
2
3 <%@ Register TagPrefix="Funcs" TagName="FuncsCommon" Src="funcs.ascx" %>
4 <%@ Register TagPrefix="Vars" TagName="VarsHeader" Src="vars.ascx" %>
5 <%@ Register TagPrefix="Header" TagName="ImageHeader" Src="main.ascx" %>
6
7 <%@ Import Namespace="System.Data.OleDb" %>
8 <%@ Import Namespace="System.Data" %>
9 <%@ Import Namespace="System" %>
10
11 <HTML>
12   <HEAD>
13     <script language="JScript" runat="server">
14       /*
15         Page Name:
16           classGrade.aspx
17
18         Description:
19           Student info page where parents can view their child's grades.
20
21         Language: JScript
22         ASP Variables:
23           GridView1 : GridView : shows student's overall ✓
24           averages and class grade
25           AccessDataSource1 : AccessDataSource : Gets data from database to ✓
26           store in Grid
27
28         Session Variables:
29           Session[vars.classID] : used to keep track of class teachers are ✓
30           viewing grades for
31
32         Functions:
33         Funcs:
34           getStudentsEnrolled: takes the class id and gets the students ✓
35           enrolled and then calls
36           calcQAvg, calcTAvg, calcHWAvg, and calcCGAvg ✓
37           to calculate all averages
38           of the students enrolled in this class and ✓
39           store the data in the ClassGrade
40           Table.
41
42         Local:
43           Page_Load: executes everytime the page is loaded and checks to see ✓
44           if there is a Session, if not it
45           transfers to the login page. In this page it calls ✓
46           getStudentsEnrolled and uses
47           the ASP variable AccessDataSource1.SelectCommand to get ✓
48           all the student's grades in this class.
49
50         Database: Microsoft Access via SQL, applicationDB.mdb (defined via Web. ✓
51         config file)
52
53         Tables used:
54           Course, ClassGrade, ClassEnrollment, userTable
55
56       */
57     </script>
58
59     <Vars:VarsHeader id="vars" runat="server"></Vars:VarsHeader>
60     <Funcs:FuncsCommon id="funcs" runat="server"></Funcs:FuncsCommon>
61     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
62     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
63     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
64     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
65     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
66     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
67     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
68   </HEAD>


```

```

57     <body>
58     <script language="JScript" runat="server">
59
60
61         function Page_Load( sender : Object, events : EventArgs )
62         {
63             if ( Session == null || Session[vars.usertype] == undefined )
64                 Server.Transfer (vars.loginPage);
65
66             funcs.getStudentsEnrolled(Session[vars.classID]);
67
68             AccessDataSource1.SelectCommand = "SELECT userTable.LastName + ' ' +
userTable.FirstName AS Student, ClassGrade.QuizAverage, ClassGrade.TestAverage,
ClassGrade.HWAverage, ClassGrade.ClassGrade FROM ((Class INNER JOIN
ClassEnrollment ON Class.ClassID = ClassEnrollment.ClassID) INNER JOIN ClassGrade
ON ClassEnrollment.ClassEnrollmentID = ClassGrade.classEnrollmentID) INNER JOIN
userTable ON ClassEnrollment.StudentID = userTable.UserID) WHERE ((
(ClassEnrollment.ClassID) = " + Session[vars.classID] + "));
69
70             if ( !IsPostBack )
71             {
72
73             }
74         } // end Page_Load
75
76     </script>
77     <form id="Form1" runat="server">
78         <Header:ImageHeader id="head" PageName="Student Grades" runat="server"></
Header:ImageHeader>
79         <p> <% =funcs.getCourseName(Session[vars.classID]) %> class grades:
80         <asp:GridView ID="GridView1" runat="server" AllowSorting="True"
AutoGenerateColumns="False"
81             DataSourceID="AccessDataSource1">
82             <Columns>
83                 <asp:BoundField DataField="Student" HeaderText="Student" ReadOnly=
"True" SortExpression="Student" />
84                 <asp:BoundField DataField="QuizAverage" HeaderText="QuizAverage"
SortExpression="QuizAverage" />
85                 <asp:BoundField DataField="TestAverage" HeaderText="TestAverage"
SortExpression="TestAverage" />
86                 <asp:BoundField DataField="HWAverage" HeaderText="HWAverage"
SortExpression="HWAverage" />
87                 <asp:BoundField DataField="ClassGrade" HeaderText="ClassGrade"
SortExpression="ClassGrade" />
88             </Columns>
89             </asp:GridView>
90             <asp:AccessDataSource ID="AccessDataSource1" runat="server" datafile="E:\
iw3http\School2\applicationDB.mdb">
91
92             </asp:AccessDataSource>
93             </p>
94         </form>
95     </body>
96 </HTML>
97

```

Pmain.aspx

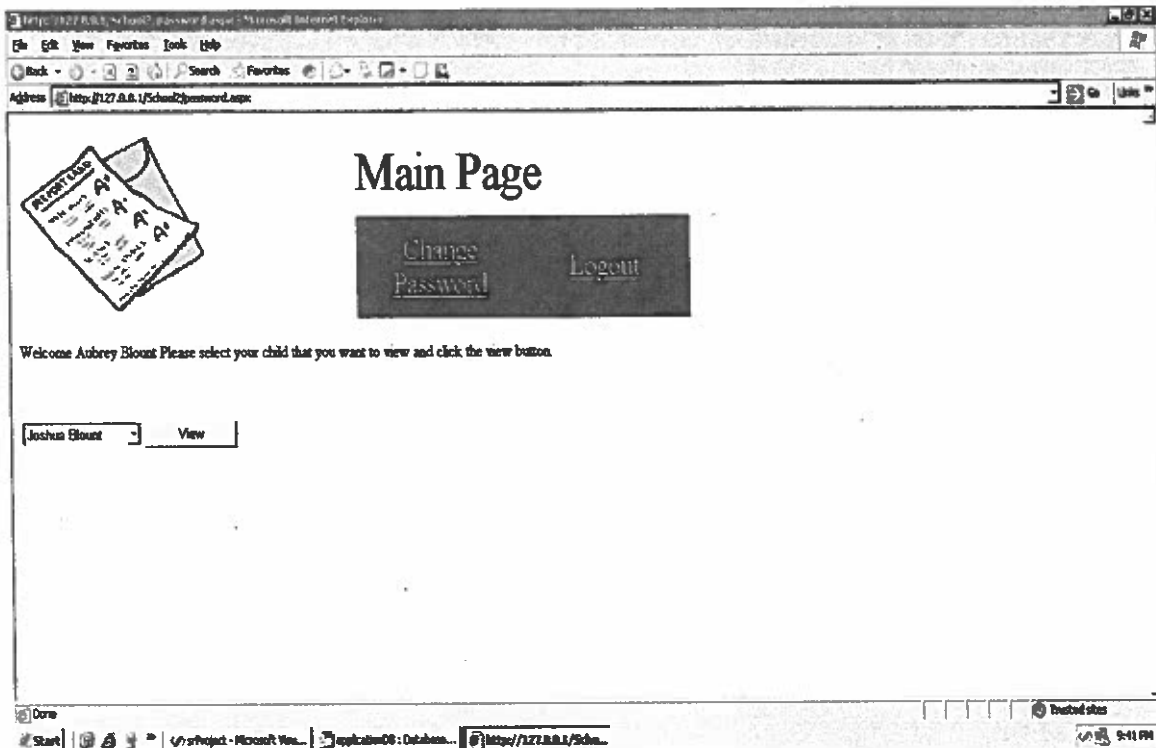

```


1 <%@ Page Language="JScript" Debug="true" %>
2
3 <%@ Import Namespace="System" %>
4 <%@ Import Namespace="System.Data" %>
5 <%@ Import Namespace="System.Data.OleDb" %>
6
7 <%@ Register TagPrefix="Header" TagName="ImageHeader" Src="userHeader.ascx" %>
8 <%@ Register TagPrefix="Vars" TagName="VarsHeader" Src="vars.ascx" %>
9 <%@ Register TagPrefix="Funcs" TagName="FuncsCommon" Src="funcs.ascx" %>
10
11 <html>
12 <head>
13 <script language = "JScript" runat = "server">
14 /*
15     Page Name:
16     pmain.aspx
17
18     Description:
19     Parent main page where parents can view their children's grades etc.
20
21     Language: JScript
22     JScript Variables:
23     resultMessage : var : string that tells administrator wether it
24 added or not.
25     li : var : object used for both lists to get the value
26     selected
27     dataBaseConnection : var : oboect used to get connection to data
28 base
29     queryString : var : SQL string used to get students that
30 parents can view
31     dataBaseCommand : var : object used to execute the queryStrings
32 with the current connection
33     dataReader : var : object used to read the data from the
34 database
35
36     ASP Variables:
37     viewBtn : Button : click to view students class grades
38
39     lstChild : DropDownList : shows students that parent is
40 allowed to view
41
42     Session Variables:
43     Session[vars.studentUID] : keeps track of the current student's id
44 being viewed
45
46     Functions:
47     Funcs:
48     getName: used to get the name of the user logging in by using the
49 session user id and
50 the user table.
51
52     Local:
53     viewButton_Click: takes the student id selected from the lstChild
54 box and sets the session[vars.studentUID]
55 to that student's id and transfers to the
56 student info page.
57     displayChild: uses the Session user id in an SQL statement to
58 retrieve all the students
59 that this particular parent is allowed to view and
60 binds their student ids to
61 the lstChild box.
62     Page_Load: executes everytime the page is loaded and checks to
63 see if there is a Session, if not it
64 transfers to the login page. In this page on the first
65 time in it will only call displayChild
66 to display the children allowed to be viewed by the
67 parents.

```

```
50
51 Database: Microsoft Access via SQL, applicationDB.mdb (defined via Web
.config file)
52 Tables used:
53 userTable, ParentStudent
54
55 */
56 </script>
57
58 <Vars:VarsHeader id = "vars" runat = "server"> </Vars:VarsHeader>
59 <Funcs:FuncsCommon id = "funcs" runat = "server"> </Funcs:FuncsCommon>
60 </head>
61
62 <body>
63 <script language = "JScript" runat = "server">
64
65 var resultMessage : String = "";
66
67 function viewButton_Click( sender : Object, events : EventArgs)
68 {
69     for (var li in lstChild.Items)
70     {
71         if ( li.Selected )
72         {
73             Session[vars.studentUID] = li.Value;
74             Server.Transfer( vars.studentInfoPage );
75         }
76     }
77 }
78
79 function displayChild()
80 {
81     var dataBaseConnection: OleDbConnection = new
82     OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) )
83
84     var queryString : System.String = "SELECT ParentStudent.StudentID, "
85     + "userTable.FirstName + ' ' + userTable.LastName AS Child "
86     + "FROM userTable INNER JOIN ParentStudent ON "
87     + "userTable.UserID = ParentStudent.StudentID WHERE (((ParentStudent.
ParentID)=" + Session[vars.useridField] + ") "
88     + "AND ((userTable.UserID)= ParentStudent.StudentID)); "
89
90     dataBaseConnection.Open();
91
92     var dataBaseCommand : OleDbCommand =
93     new OleDbCommand( queryString, dataBaseConnection );
94
95     var dataReader = dataBaseCommand.ExecuteReader();
96
97     lstChild.DataSource = dataReader;
98     lstChild.DataBind();
99     dataReader.Close()
100     dataBaseCommand.Connection.Close()
101     dataBaseConnection.Close();
102 }
103
104 function Page_Load( sender : Object, events : EventArgs )
105 {
106     if ( Session == null || Session[vars.usertype] == undefined )
107         Server.Transfer (vars.loginPage);
108
109     if( !IsPostBack )
110         displayChild()
111
112 } // end Page_Load
```

```
112
113
114     </script>
115
116     <form id="Form1" runat = "server">
117
118         <Header:ImageHeader id = "head" PageName = "Main Page" runat = "server"> </
Header:ImageHeader>
119
120         <br /><p> Welcome
121         <% =funcs.getNAME(Session[vars.useridField], vars.userTable ) %>
122
123         Please select your child that you want to view and click the view button.</
p> <br />
124
125         <table>
126             <tr>
127                 <td style="width: 106px; height: 53px;" align="left">
128                     <asp:DropDownList runat="server" ID="lstChild" DataTextField=
"Child" DataValueField="StudentID" width="130px"/>
129                 </td>
130                 <td style="width: 101px; height: 53px;" align="center">
131                     <asp:button id="viewBtn" text="View" OnClick="viewButton_Click"
runat="server" width="100px" align="center"></asp:button>
132                 </td>
133             </tr>
134         </table>
135
136
137     </form>
138 </body>
139 </html>
140
```

StudentInfo.aspx

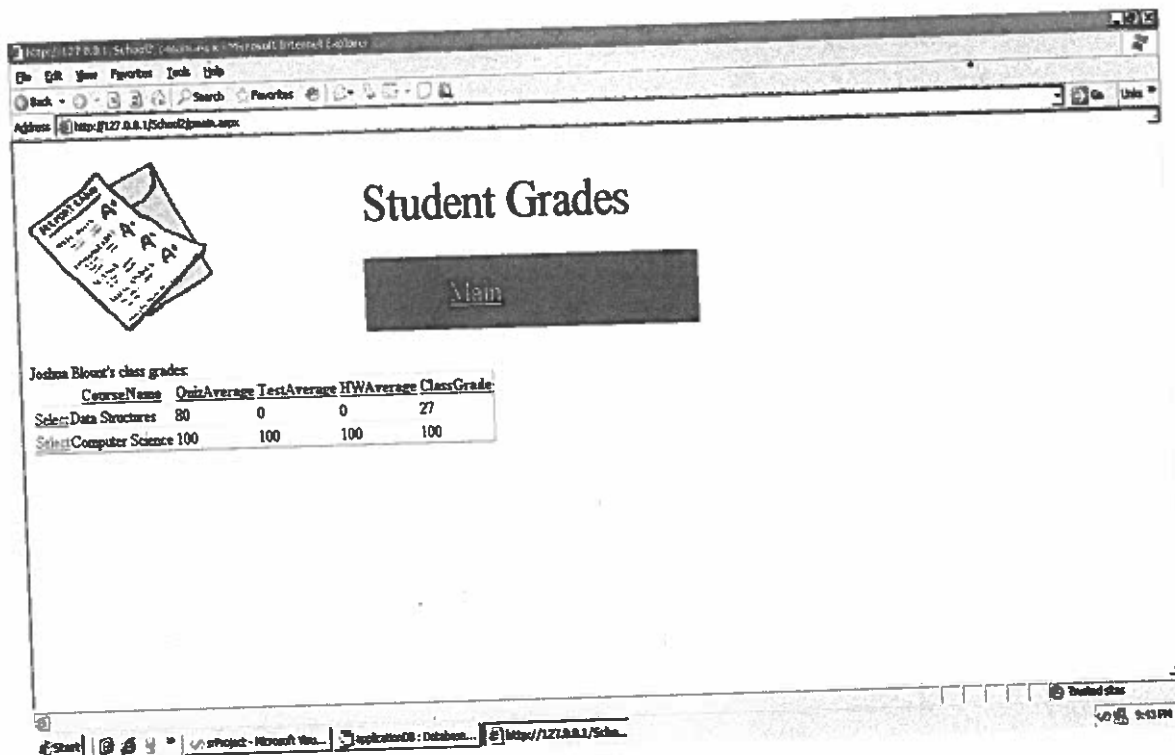

The screenshot shows a web browser window with the address bar displaying `http://127.0.0.1/School2/math.aspx`. The page content includes a graphic of a report card, a 'Main' button, and a table titled 'Joshua Bloom's class grades'.

CourseName	QuizAverage	TestAverage	HWAverage	ClassGrade
Selected: Data Structures	80	0	0	27
Selected: Computer Science	100	100	100	100


```
1 <%@ Page Language="JScript" Debug="true" %>
2
3 <%@ Register TagPrefix="Funcs" TagName="FuncsCommon" Src="funcs.ascx" %>
4 <%@ Register TagPrefix="Vars" TagName="VarsHeader" Src="vars.ascx" %>
5 <%@ Register TagPrefix="Header" TagName="ImageHeader" Src="main.ascx" %>
6
7 <%@ Import Namespace="System.Data.OleDb" %>
8 <%@ Import Namespace="System.Data" %>
9 <%@ Import Namespace="System" %>
10
11 <HTML>
12   <HEAD>
13     <script language="JScript" runat="server">
14       /*
15         Page Name:
16           studentInfo.aspx
17
18         Description:
19           Student info page where parents can view their child's grades.
20
21         Language: JScript
22         ASP Variables:
23           GridView1 : GridView : shows student's overall ✓
24           averages and class grade
25           AccessDataSource1 : AccessDataSource : Gets data from database to ✓
26           store in Grid
27
28         Session Variables:
29           Session[vars.studentUID] : used to get the student's classes and ✓
30           grades
31
32         Functions:
33           Funcs:
34             getStudentClassesEnrolled: takes the Session[vars.studentUID] and ✓
35             gets the students classes enrolled in and then calls
36             calcQAvg, calcTAvg, calcHWAvg, and ✓
37             calcCGAvg to calculate all averages
38             of the students enrolled in this class ✓
39             and store the data in the ClassGrade
40             Table.
41             getNAME: gets the name of the student using the session student id ✓
42             and the user table.
43             Local:
44             Page_Load: executes everytime the page is loaded and checks to see ✓
45             if there is a Session, if not it
46             transfers to the login page. In this page it calls ✓
47             getStudentClassesEnrolled and uses
48             the ASP variable AccessDataSource1.SelectCommand to get ✓
49             all the student's grades in all their classes
50             and store them in GridView1.
51
52         Database: Microsoft Access via SQL, applicationDB.mdb (defined via Web. ✓
53         config file)
54         Tables used:
55           Course, ClassGrade, ClassEnrollment
56
57       */
58     </script>
59
60     <Vars:VarsHeader id="vars" runat="server"></Vars:VarsHeader>
61     <Funcs:FuncsCommon id="funcs" runat="server"></Funcs:FuncsCommon>
62     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
63     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
64     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
65     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
66     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
```

```

56     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
57 </HEAD>
58 <body>
59 <script language="JScript" runat="server">
60
61     function Page_Load( sender : Object, events : EventArgs )
62     {
63         if ( Session == null || Session[vars.usertype] == undefined )
64             Server.Transfer (vars.loginPage);
65
66         funcs.getStudentClassesEnrolled(Session[vars.studentUID]);
67
68         AccessDataSource1.SelectCommand = "SELECT Course.CourseName, ClassGrade
69         .QuizAverage, ClassGrade.TestAverage, ClassGrade.HWAverage, ClassGrade.ClassGrade
        FROM ((ClassEnrollment INNER JOIN ClassGrade ON ClassEnrollment.ClassEnrollmentID
        = ClassGrade.classEnrollmentID) INNER JOIN Class ON ClassEnrollment.ClassID =
        Class.ClassID) INNER JOIN Course ON Class.CourseID = Course.CourseID) WHERE ((
        (ClassEnrollment.StudentID) = " + Session[vars.studentUID] + "));
70
71         /*if ( !IsPostBack )
72         {
73
74         } */
75     } // end Page_Load
76
77 </script>
78 <form id="Form1" runat="server">
79     <Header:ImageHeader id="head" PageName="Student Grades" runat="server"></
Header:ImageHeader>
80     <p> <% =funcs.getNAME(Session[vars.studentUID], vars.userTable ) %>'s
class grades:
81     <asp:GridView ID="GridView1" runat="server" DataSourceID=
"AccessDataSource1" AllowSorting="True" AutoGenerateColumns="False">
82         <Columns>
83             <asp:CommandField ShowSelectButton="True" />
84             <asp:BoundField DataField="CourseName" HeaderText="CourseName"
ReadOnly="True" SortExpression="CourseName" />
85             <asp:BoundField DataField="QuizAverage" HeaderText=
"QuizAverage" ReadOnly="True"
SortExpression="QuizAverage" />
86             <asp:BoundField DataField="TestAverage" HeaderText=
"TestAverage" ReadOnly="True"
SortExpression="TestAverage" />
87             <asp:BoundField DataField="HWAverage" HeaderText="HWAverage"
ReadOnly="True" SortExpression="HWAverage" />
88             <asp:BoundField DataField="ClassGrade" HeaderText="ClassGrade"
ReadOnly="True" SortExpression="ClassGrade" />
89         </Columns>
90     </asp:GridView>
91     <asp:AccessDataSource ID="AccessDataSource1" runat="server" datafile=
"E:\iw3http\School2\applicationDB.mdb" >
92     </asp:AccessDataSource>
93
94     </p>
95 </form>
96 </body>
97 </HTML>
98
99

```

Smain.aspx

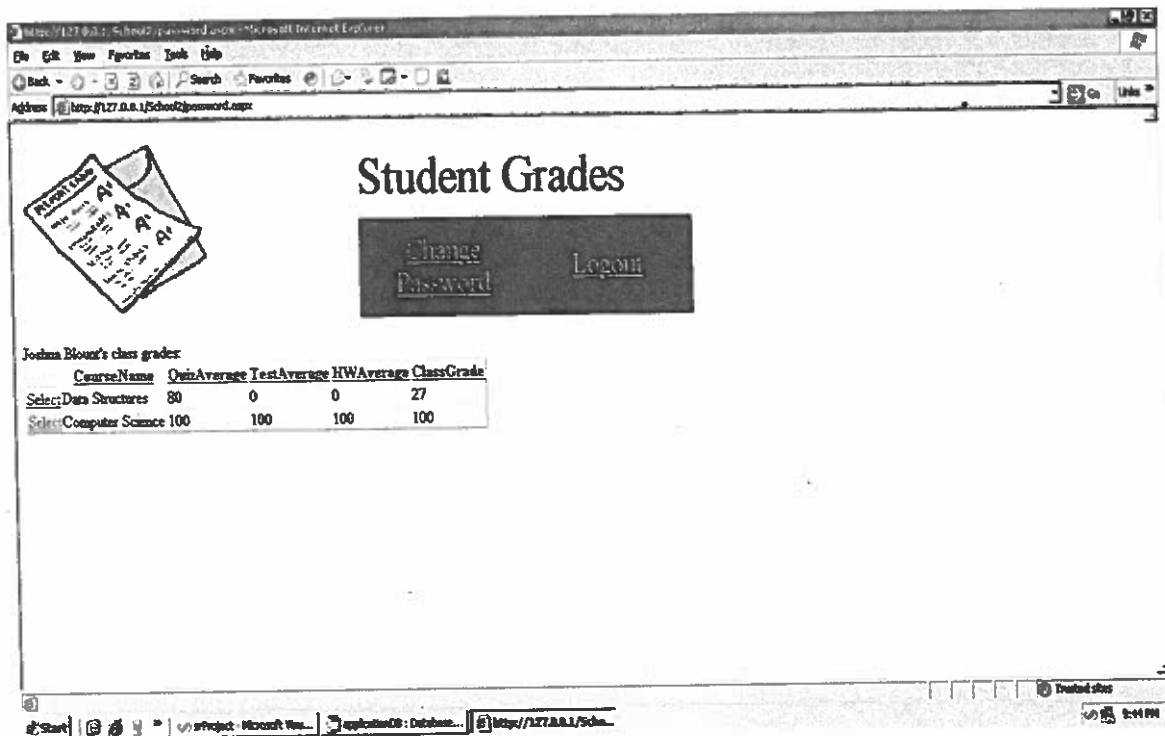

The screenshot shows a web browser window with the address bar displaying `http://127.0.0.1/School2/password.aspx`. The page content includes a navigation bar with [Change Password](#) and [Logout](#) links. Below this, a table titled "Joshua Blount's class grades" displays the following data:

CourseName	QuizAverage	TestAverage	HWAverage	ClassGrade
Select Data Structures	80	0	0	27
Select Computer Science	100	100	100	100

The taskbar at the bottom shows the Start button, several icons, and the following open applications: `Project - Microsoft Vis...`, `application08 : Database...`, and `http://127.0.0.1/Scho...`. The system clock in the bottom right corner indicates the time is 2:44 PM.

```
1 <%@ Page Language="JScript" Debug="true" %>
2
3 <%@ Import Namespace="System" %>
4
5 <%@ Register TagPrefix="Funcs" TagName="FuncsCommon" Src="funcs.ascx" %>
6 <%@ Register TagPrefix="Vars" TagName="VarsHeader" Src="vars.ascx" %>
7 <%@ Register TagPrefix="Header" TagName="ImageHeader" Src="userHeader.ascx" %>
8
9 <%@ Import Namespace="System.Data.OleDb" %>
10 <%@ Import Namespace="System.Data" %>
11 <%@ Import Namespace="System" %>
12
13 <HTML>
14   <HEAD>
15     <script language="JScript" runat="server">
16       /*
17         Page Name:
18           smain.aspx
19
20         Description:
21           Student main page where students can view their grades.
22
23         Language: JScript
24         ASP Variables:
25           GridView1 : GridView : shows student's overall
averages and class grade
26           AccessDataSource1 : AccessDataSource : Gets data from database to
store in Grid
27
28         Session Variables:
29           Session[vars.useridField] : used to get the student's classes and
grades
30
31         Functions:
32           Funcs:
33             getStudentClassesEnrolled: takes the Session[vars.useridField] and
gets the students classes enrolled in and then calls
34             calcQAvg, calcTAvg, calcHWAvg, and
calcCGAvg to calculate all averages
35             of the students enrolled in this class
and store the data in the ClassGrade
36             Table.
37             getNAME: gets the name of the student using the session user id
and the user table.
38           Local:
39             Page_Load: executes everytime the page is loaded and checks to see
if there is a Session, if not it
40             transfers to the login page. In this page it calls
getStudentClassesEnrolled and uses
41             the ASP variable AccessDataSource1.SelectCommand to get
all the student's grades in all their classes
42             and store them in GridView1.
43
44             Database: Microsoft Access via SQL, applicationDB.mdb (defined via Web
config file)
45             Tables used:
46               Course, ClassGrade, ClassEnrollment
47       */
48     </script>
49
50     <Vars:VarsHeader id="vars" runat="server"></Vars:VarsHeader>
51     <Funcs:FuncsCommon id="funcs" runat="server"></Funcs:FuncsCommon>
52     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
53     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
54     <link href="stylesheet.css" rel="stylesheet" type="text/css" />
55
```

```

56 <link href="stylesheet.css" rel="stylesheet" type="text/css" />
57 <link href="stylesheet.css" rel="stylesheet" type="text/css" />
58 <link href="stylesheet.css" rel="stylesheet" type="text/css" />
59 </HEAD>
60 <body>
61 <script language="JScript" runat="server">
62
63     function Page_Load( sender : Object, events : EventArgs )
64     {
65         if ( Session == null || Session[vars.usertype] == undefined )
66             Server.Transfer (vars.loginPage);
67
68         funcs.getStudentClassesEnrolled(Session[vars.useridField]);
69
70         AccessDataSource1.SelectCommand = "SELECT Course.CourseName, ClassGrade
.QuizAverage, ClassGrade.TestAverage, ClassGrade.HWAverage, ClassGrade.ClassGrade
FROM (((ClassEnrollment INNER JOIN ClassGrade ON ClassEnrollment.ClassEnrollmentID
= ClassGrade.classEnrollmentID) INNER JOIN Class ON ClassEnrollment.ClassID =
Class.ClassID) INNER JOIN Course ON Class.CourseID = Course.CourseID) WHERE ((
(ClassEnrollment.StudentID) = " + Session[vars.useridField] + "));

72     } // end Page_Load
73
74 </script>
75 <form id="Form1" runat="server">
76     <Header:ImageHeader id="head" PageName="Student Grades" runat="server"></
Header:ImageHeader>
77     <p> <% =funcs.getNAME(Session[vars.useridField], vars.userTable ) %>'s
class grades:
78         <asp:GridView ID="GridView1" runat="server" DataSourceID=
"AccessDataSource1" AllowSorting="True" AutoGenerateColumns="False">
79             <Columns>
80                 <asp:CommandField ShowSelectButton="True" />
81                 <asp:BoundField DataField="CourseName" HeaderText="CourseName"
ReadOnly="True" SortExpression="CourseName" />
82                 <asp:BoundField DataField="QuizAverage" HeaderText=
"QuizAverage" ReadOnly="True"
83                     SortExpression="QuizAverage" />
84                 <asp:BoundField DataField="TestAverage" HeaderText=
"TestAverage" ReadOnly="True"
85                     SortExpression="TestAverage" />
86                 <asp:BoundField DataField="HWAverage" HeaderText="HWAverage"
ReadOnly="True" SortExpression="HWAverage" />
87                 <asp:BoundField DataField="ClassGrade" HeaderText="ClassGrade"
ReadOnly="True" SortExpression="ClassGrade" />
88             </Columns>
89         </asp:GridView>
90         <asp:AccessDataSource ID="AccessDataSource1" runat="server" datafile=
"E:\iw3htp\School2\applicationDB.mdb" >
91             </asp:AccessDataSource>
92     </p>
93 </form>
94 </body>
95 </HTML>
96

```

AdminHeader.ascx

```

1 <script language = "JScript" runat = "server">
2     public var PageName : String = "Default Page";
3 </script>
4
5 <table width="60%">
6 <tr>
7     <td rowspan=2 width="50%">
8         <asp:Image id = "Image1" runat = "server" ImageUrl = "grades.gif" width="200" >
9         </asp:Image>
10    </td>
11    <td width="50%">
12        <font size=+4><% Response.Write( PageName ); %> </font>
13    </td>
14 </tr>
15 <tr bgcolor=darkblue color=white>
16     <td>
17         <table border>
18             <colgroup align="center" span="6">
19                 <tbody>
20                     <tr>
21                         <td width="25%"> <a href=chgpwd.aspx style="color: white; font-size: 20pt;
22                         font-family: Gautami;"> Change Password</a> </td>
23                         <td width="25%"> <a href=addUser.aspx style="color: white; font-size: 20pt;
24                         font-family: Gautami;"> Add User</a> </td>
25                         <td width="25%"> <a href=addDivision.aspx style="color: white; font-size:
26                         20pt; font-family: Gautami;"> Add Division</a> </td>
27                         <td width="25%"> <a href=addCourse.aspx style="color: white; font-size:
28                         20pt; font-family: Gautami;"> Add Course</a> </td>
29                         <td width="25%"> <a href=addClass.aspx style="color: white; font-size:
30                         20pt; font-family: Gautami;"> Add Class</a> </td>
31                         <td width="25%"> <a href=addRoom.aspx style="color: white; font-size: 20pt;
32                         font-family: Gautami;"> Add Room</a> </td>
33                         <td width="25%"> <a href=editInfo.aspx style="color: white; font-size:
34                         20pt; font-family: Gautami;"> Edit Info</a> </td>
35                         <td width="25%"> <a href=logout.aspx style="color: white; font-size: 20pt;
36                         font-family: Gautami;"> Logout</a> </td>
37                     </tr>
38                 </tbody>
39             </colgroup>
40         </table>
41     </td>
42 </tr>
43 </table>
44
45 <!--
46 *****
47 * (C) Copyright 1992-2004 by Deitel & Associates, Inc. and
48 * Pearson Education, Inc. All Rights Reserved.
49 *
50 * DISCLAIMER: The authors and publisher of this book have used their
51 * best efforts in preparing the book. These efforts include the
52 * development, research, and testing of the theories and programs
53 * to determine their effectiveness. The authors and publisher make
54 * no warranty of any kind, expressed or implied, with regard to these
55 * programs or to the documentation contained in these books. The authors
56 * and publisher shall not be liable in any event for incidental or
57 * consequential damages in connection with, or arising out of, the
58 * furnishing, performance, or use of these programs.
59 *****
60 -->

```

Main.ascx

```

1 <link rel="stylesheet" href="stylesheet.css" type="text/css"></link>
2
3 <script language = "JScript" runat = "server">
4     public var PageName : String = "Default Page";
5 </script>
6
7 <table width="60%">
8 <tr>
9     <td rowspan=2 width="50%">
10         <asp:Image id = "Image1" runat = "server" ImageUrl = "grades.gif" width="200" >
11         </asp:Image>
12     </td>
13     <td width="50%">
14         <font size=+4><% Response.Write( PageName ); %> </font>
15     </td>
16 </tr>
17 <tr bgcolor=darkblue color=white>
18     <td>
19         <table>
20             <colgroup align="center" span="4">
21                 <tbody>
22                     <tr>
23                         <td width="25%"> <a href=password.aspx style="color: white; font-size:
24                             20pt; font-family: Gautami;"> Main</a> </td>
25                     </tr>
26                 </tbody>
27             </table>
28         </td>
29 </tr>
30 </table>
31 <!--
32 *****
33 * (C) Copyright 1992-2004 by Deitel & Associates, Inc. and
34 * Pearson Education, Inc. All Rights Reserved.
35 *
36 * DISCLAIMER: The authors and publisher of this book have used their
37 * best efforts in preparing the book. These efforts include the
38 * development, research, and testing of the theories and programs
39 * to determine their effectiveness. The authors and publisher make
40 * no warranty of any kind, expressed or implied, with regard to these
41 * programs or to the documentation contained in these books. The authors
42 * and publisher shall not be liable in any event for incidental or
43 * consequential damages in connection with, or arising out of, the
44 * furnishing, performance, or use of these programs.
45 *****
46 -->

```

PasswdHeader.ascx

```
1 <link rel="stylesheet" href="stylesheet.css" type="text/css"></link>
2
3 <script language = "JScript" runat = "server">
4     public var PageName : String = "Default Page";
5 </script>
6
7 <table width="60%">
8 <tr>
9     <td rowspan=2 width="50%">
10         <asp:Image id = "Image1" runat = "server" ImageUrl = "grades.gif" width="200" >
11         </asp:Image>
12     </td>
13     <td width="50%">
14         <font size=+4><% Response.Write( PageName ); %> </font>
15     </td>
16 </tr>
17 <tr bgcolor=darkblue color=white>
18     <td>
19         <table>
20             <colgroup align="center" span="4">
21                 <tbody>
22                     <tr>
23                     </tr>
24                 </tbody>
25             </table>
26     </td>
27 </tr>
28 </table>
29 <br />
30 <br />
31 <!--
32 *****
33 * (C) Copyright 1992-2004 by Deitel & Associates, Inc. and *
34 * Pearson Education, Inc. All Rights Reserved. *
35 * *
36 * DISCLAIMER: The authors and publisher of this book have used their *
37 * best efforts in preparing the book. These efforts include the *
38 * development, research, and testing of the theories and programs *
39 * to determine their effectiveness. The authors and publisher make *
40 * no warranty of any kind, expressed or implied, with regard to these *
41 * programs or to the documentation contained in these books. The authors *
42 * and publisher shall not be liable in any event for incidental or *
43 * consequential damages in connection with, or arising out of, the *
44 * furnishing, performance, or use of these programs. *
45 *****
46 -->
```

UserHeader.ascx

```
1 <script language = "JScript" runat = "server">
2     public var PageName : String = "Default Page";
3 </script>
4
5 <table width="60%">
6 <tr>
7     <td rowspan=2 width="50%">
8         <asp:Image id = "Image1" runat = "server" ImageUrl = "grades.gif" width="200" >
9         </asp:Image>
10    </td>
11    <td width="50%">
12        <font size=+4><% Response.Write( PageName ); %> </font>
13    </td>
14 </tr>
15 <tr bgcolor=darkblue color=white>
16     <td>
17         <table>
18             <colgroup align="center" span="6">
19                 <tbody>
20                     <tr>
21                         <td width="25%"> <a href=chgpwd.aspx style="color: white; font-size: 20pt;
22                         font-family: Gautami;"> Change Password</a> </td>
23                         <td width="25%"> <a href=logout.aspx style="color: white; font-size: 20pt;
24                         font-family: Gautami;"> Logout</a> </td>
25                     </tr>
26                 </tbody>
27             </table>
28         </td>
29 </tr>
30 </table>
31 <!--
32 *****
33 * (C) Copyright 1992-2004 by Deitel & Associates, Inc. and
34 * Pearson Education, Inc. All Rights Reserved.
35 *
36 * DISCLAIMER: The authors and publisher of this book have used their
37 * best efforts in preparing the book. These efforts include the
38 * development, research, and testing of the theories and programs
39 * to determine their effectiveness. The authors and publisher make
40 * no warranty of any kind, expressed or implied, with regard to these
41 * programs or to the documentation contained in these books. The authors
42 * and publisher shall not be liable in any event for incidental or
43 * consequential damages in connection with, or arising out of, the
44 * furnishing, performance, or use of these programs.
45 *****
46 -->
```

Vars.ascx

```
1 <script language="JScript" runat="server">
2
3     /*
4
5         Description:
6         All variables defined here are constant, being used to reference tables
7         in the database, fields within
8         the different tables, the .aspx files.
9
10        Language: JScript
11
12    */
13
14    //Table Names
15    public var denyAccess : String = "DenyAccess";
16    public var parentCommentTable: String = "ParentComment";
17    public var studentYearTable: String = "StudentYear";
18    public var teachercommentTable : String = "Teacher Comment";
19    public var termTable : String = "Term";
20    public var yrtermTable : String = "YrTerm";
21    public var gradeLevelTable: String = "GradeLevelTable";
22    public var classTable: String = "Class";
23    public var roomTable: String = "Room";
24    public var courseTable: String = "Course";
25    public var classEnrollmentTable: String = "classEnrollment";
26    public var divisionTable: String = "Division";
27    public var absentTable: String = "Absent";
28    public var tardyTable : String = "Tardy";
29    public var gradeTable: String = "Grade";
30    public var teacherCommentTable: String = "TeacherComment";
31    public var editableTable: String = "Editable";
32    public var userTable : String = "userTable";
33    public var isPTable : String = "isParent";
34    public var isTTable : String = "isTeacher";
35    public var isATable : String = "isAdministrator";
36    public var isSTable : String = "isStudent";
37    public var PSTable : String = "ParentStudent";
38    public var quizTestTable : String = "quizTestTable";
39    public var classGradeTable : String = "ClassGrade";
40    public var classGradeScaleTable : String = "ClassGradeScale";
41    public var tabletype : String = "Table";
42
43    //User Types
44    public var usertype : String = "User";
45    public var studenttype : String = "Student";
46    public var parenttype : String = "Parent";
47    public var teachertype : String = "Teacher";
48    public var admintype : String = "Administrator";
49
50    //User id types
51    public var useridField : String = "UserID";
52    public var useridLabel : String = "User ID";
53    public var adminidField : String = "AdminID";
54    public var adminidLabel : String = "Admin ID";
55    public var teacheridField : String = "TeacherID";
56    public var teacheridLabel : String = "Teacher ID";
57    public var parentidField : String = "ParentID";
58    public var parentidLabel : String = "Parent ID";
59    public var studentidField : String = "StudentID";
60    public var studentidLabel : String = "Student ID";
61
62    //User name variables
63    public var prefixidField : String = "PrefixID";
64    public var prefixidLabel : String = "Prefix ID";
65    public var prefixField : String = "Prefix";
66    public var prefixLabel : String = "Prefix";
```

```
66     public var fnField : String = "FirstName";
67     public var fnLabel : String = "First Name";
68     public var mnField : String = "MiddleName";
69     public var mnLabel : String = "Middle Name";
70     public var lnField : String = "LastName";
71     public var lnLabel : String = "Last Name";
72     public var suffixField : String = "Suffix";
73     public var suffixLabel : String = "Suffix";
74
75     //Phone number variables
76     public var workphoneField : String = "WorkPhone";
77     public var workphoneLabel : String = "Work Phone";
78     public var cellphoneField : String = "CellPhone";
79     public var cellphoneLabel : String = "Cell Phone";
80     public var homephoneField : String = "HomePhone";
81     public var homephoneLabel : String = "Home Phone";
82     public var faxnumField : String = "FaxNum";
83     public var faxnumLabel : String = "Fax Number";
84
85     //Password variables
86     public var passwordField : String = "Passwd";
87     public var passwordLabel : String = "Password";
88     public var oldPassLabel : String = "Old Password";
89     public var newPassLabel : String = "New Password";
90     public var newPassLabel2 : String = "Retype New Pass";
91
92     //Address information
93     public var addField : String = "Address";
94     public var addLabel : String = "Address";
95     public var cityField : String = "City";
96     public var cityLabel : String = "City";
97     public var stateField : String = "State";
98     public var stateLabel : String = "State";
99     public var postalField : String = "PostalCode";
100    public var postalLabel : String = "Postal Code";
101
102
103    //E-mail address variable
104    public var eaddField : String = "EmailAddress";
105    public var eaddLabel : String = "Email Address";
106
107    //Gender and birthday variables
108    public var genderField : String = "Gender";
109    public var genderLabel : String = "Gender";
110    public var bdayField : String = "Birthdate";
111    public var bdayLabel : String = "Birthday";
112
113    //Class, course, and division variables
114    public var classidField : String = "ClassID";
115    public var classidLabel : String = "Class ID";
116    public var courseidField : String = "CourseID";
117    public var courseidLabel : String = "Course ID";
118    public var divisionidField : String = "DivisionID";
119    public var divisionidLabel : String = "Division ID";
120    public var courseNameField : String = "CourseName";
121    public var courseNameLabel : String = "Course Name";
122    public var divNameField : String = "DivisionName";
123    public var divNameLabel : String = "Division Name";
124    public var termidField : String = "TermID";
125    public var termidLabel : String = "Term ID";
126    public var rmidField : String = "rmID";
127    public var rmidLabel : String = "Room ID";
128    public var yrtermidField : String = "YearTermID";
129    public var yrtermidLabel : String = "Year/Term ID";
130    public var periodField : String = "Period";
131    public var periodLabel : String = "Period";
```

```
132     public var yrField : String = "Year";
133     public var yrLabel : String = "Year";
134
135     //Student information variables class enrollment id and grade id used to get
grade lvl
136     public var classenrollmentidField : String = "ClassEnrollmentID";
137     public var classenrollmentidLabel : String = "Class Enrollment ID";
138     public var gradelvlField : String = "GradeLevel";
139     public var gradelvlLabel : String = "Grade Level";
140     public var gradeidField : String = "GradeID";
141     public var gradeidLabel : String = "Grade ID";
142
143     //Parent and teacher comment variables
144     public var teachernoteField : String = "TeacherNote(s)";
145     public var teachernoteLabel : String = "Teacher Note(s)";
146     public var commentField : String = "ParentComment(s)";
147     public var commentLabel : String = "Parent Comment(s)";
148
149     //Quiz, test, and hw variables
150     public var quizTestIDField : String = "QuizTestID";
151     public var quizTestIDLabel : String = "QuizTestHWID";
152     public var descriptionField : String = "Description";
153     public var descriptionLabel : String = "Description";
154     public var dateField : String = "[Date]";
155     public var dateLabel : String = "Date";
156     public var typeField : String = "[Type]";
157     public var typeLabel : String = "Type";
158     public var quizField : String = "Quiz";
159     public var quizLabel : String = "Quiz";
160     public var testField : String = "Test";
161     public var testLabel : String = "Test";
162     public var HWField : String = "Homework";
163     public var HWLabel : String = "Homework";
164     public var gradeField : String = "Grade";
165     public var gradeLabel : String = "Grade";
166
167     //Variables used to keep track of student averages
168     public var quizAverageField : String = "QuizAverage";
169     public var quizAverageLabel : String = "Quiz Average";
170     public var testAverageField : String = "TestAverage";
171     public var testAverageLabel : String = "Test Average";
172     public var hwAverageField : String = "HWAverage";
173     public var hwAverageLabel : String = "HW Average";
174     public var classGradeField : String = "ClassGrade";
175     public var classGradeLabel : String = "Class Grade";
176
177     //Session variables used to keep track of information
178     public var studentUID : String = "studentid"; //used when creating a user
namely a student to keep their ID for addStudent.aspx
179     public var lastname : String = ""; //used when getting parents names to
allow access
180     public var classID : String = "classid"; //used to keep track of which class
to view
181     public var quizTestID : String = "quiztestid"; //keep track of the quiz being
edited
182     public var EnrollID : String = "enrollid"; //keep track of students
enrollment ID
183     public var editID : String = "editid"; //keep track of who/what is being
edited
184
185     //Page variables
186     public var chgpwdPage : String = "chgpwd.aspx";
187     public var loginPage : String = "password.aspx";
188     public var studentPage : String = "smain.aspx";
189     public var parentPage : String = "pmain.aspx";
190     public var teacherPage : String = "tmain.aspx";
```

```
191     public var addStudentPage : String = "addStudent.aspx";
192     public var logoutPage : String = "logout.aspx";
193     public var adminPage : String = "aMain.aspx";
194     public var studentInfoPage : String = "studentInfo.aspx";
195     public var divPage : String = "addDivision.aspx";
196     public var coursePage : String = "addCourse.aspx";
197     public var addRmvStudentPage : String = "addRmvStud.aspx";
198     public var absentTardyPage : String = "absentTardy.aspx";
199     public var quizTestPage : String = "quizTestPage.aspx";
200     public var addEditGradePage : String = "addEditGrade.aspx";
201     public var QTPercPage : String = "qtPerc.aspx";
202     public var editPage : String = "editInfo.aspx";
203     public var editUserPage : String = "editUser.aspx";
204     public var editClassPage : String = "editClass.aspx";
205     public var classGradePage : String = "classGrade.aspx";
206
207     //Fail variable used when someone messes up with login in etc...
208     public var fail : String = "fail";
209
210 </script>
```

Funcs.ascx

```

1 <%@ Import Namespace="System" %>
2 <%@ Import Namespace="System.Data" %>
3 <%@ Import Namespace="System.Data.OleDb" %>
4
5 <%@ Register TagPrefix="Vars" TagName="VarsCommon" Src="vars.ascx" %>
6
7 <Vars:VarsCommon id = "vars" runat = "server"> </Vars:VarsCommon>
8
9 <script language="JScript" runat="server">
10
11     /*
12
13         Joshua Blount
14         5/7/2007
15
16         Description:
17             Functions used to check and update the database.
18
19         Languages:  JScript, SQL
20
21         Database:  Microsoft Access via SQL, StudentDB.mdb (defined via Web.
22         config file)
23
24         Functions:
25             isValidPassword      : Checks to see if the input password is the
26             correct password      correct password
27             getPASS              : Gets the password of the current user
28             userExists           : Check to see if user exists
29             getUserID            : Get the users id
30
31             getName             : Get the name of the person
32             getLastName          : Gets the last name of a user
33             createClass          : Create a class
34             getClassID1         : Gets the class id when created to put in the
35             classGradeScale Table
36             getClassID2         : Gets the class id for the editInfo page.
37             getCourseID         : Gets the course id using the course name for
38             edit info
39             addCGSclassID       : Put the class id in the ClassGradeScale
40             table
41             createRoom          : Create the rooms
42             createUser          : Create a user
43             classExists         : Check to see if class exists
44             roomExists          : Check to see if room exists
45             chgPass            : Change the users password
46             userIsA             : Check to see what the user type is
47             getUSERTYPE         : Gets the usertype
48             addParent           : Adds a parent to the isParent Table
49             addTeacher          : Adds a teacher to the isTeacher Table
50             addStudent          : Adds a student to the isStudent Table
51             addParentStudent    : Adds a parent student relationship
52             parentStudentExists : Checks to see if the student parent
53             relationship exists
54             rmvParentStudent    : Removes a parent student relationship
55             addStudentYear      : Adds the students grade level
56             createDivision      : Creates a division (example: MATH, LANGUAGE,
57             COMPUTER)
58             divisionExists      : Check to see if division exists
59             createCourse        : Creates a course (example: Data Structure,
60             Applied Systems)
61             courseExists        : Check to see if course already exists
62             getCourseName       : Gets the course name so teacher know what
63             class grades
64
65             teacherExists       : Check to see if teacher exists
66             enrollStudent       : Adds a student to a class

```

```

57         unEnrollStudent      : Removes a student from a class
58         studentEnrolled      : Checks to see if the student is enrolled
59         getEnrollID          : Gets a students enrollment id for a class
60         addClassGradeEnrollID : Adds the class enrollment id of a student to
the class
61         grade table
62         rmvClassGradeEnrollID : Removes the class enrollment id of a student
for a
63         particular class
64         absentTardyStudent    : Marks a student as absent or tardy
65         absentTardyExists     : Checks to see if the student was already
counted
66         absent/tardy for a particular day
67         createQuizTest        : Creates an assignment for a particular class
68         getQTID               : Gets the quizTestID for a particular
assignment
69         of a particular class
70         addQTPerC             : Adds the percentages that the types of
assignments
71         will count for
72         getStudentClassesEnrolled : Gets the student's class enrollment id
and calculates
73         averages (used for parents and students)
74         getStudentsEnrolled    : Gets the students currently enrolled in a
class to start to
75         calculate their averages (used for teachers)
76         calcQAvg              : Calculates the Quiz average of students for
a particular
77         class and stores it in the ClassGrade Table
78         calcTAvg              : Calculates the Test average of students for
a particular
79         class and stores it in the ClassGrade Table
80         calcHWAvg             : Calculates the HW average of students for a
particular
81         class and stores it in the ClassGrade Table
82         calcCGAvg             : Calculates the class grade of students for a
particular
83         class and stores it in the ClassGrade Table
84     */
85
86 function isValidPassword(name : String, pass : String, table : String) : Boolean
87 {
88     var ok : Boolean = false;
89
90     if (name == "") //check to see if they left the text box blank when logging in
91         return ok;
92
93     var queryString : System.String =
94         "SELECT " +
95         vars.useridField + ", " + vars.passwordField +
96         " FROM " +
97         table +
98         " WHERE " +
99         "(" + vars.useridField + " = " + name + ")" + " AND " +
100         "(" + vars.passwordField + " = " + pass + ")";
101
102     try
103     {
104         // establish a connection, and query the database
105         var dataBaseConnection: OleDbConnection = new
OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString"
));
106
107         dataBaseConnection.Open();
108

```

```

109         var dataBaseCommand : OleDbCommand =
110             new OleDbCommand( queryString, dataBaseConnection );
111
112         var dataReader = dataBaseCommand.ExecuteReader();
113
114
115         ok = dataReader.Read();
116         if (ok)
117             Session[vars.passwordField] = dataReader.GetString(1) ; // get the
ID
118         else
119             Session[vars.passwordField] = vars.fail;
120
121         // close database connection
122         dataBaseCommand.Connection.Close();
123     }
124     catch (e)
125     {
126         Response.Write(e + " Query String in isValidPasswd: " + queryString + "
<br />");
127     }
128     return ok;
129 } // end isValidPassword
130
131 function getPASS(pass, table) : String
132 {
133
134     var result : String = " *** ERROR *** ";
135
136     var queryString : System.String =
137         "SELECT " +
138         vars.useridField + ", " + vars.passwordField +
139         " FROM " +
140         table +
141         " WHERE " +
142         "(" + vars.passwordField + " = '" + pass + "'";
143
144     try
145     {
146         // establish a connection, and query the database
147         var dataBaseConnection: OleDbConnection = new
148             OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString"
149 ) );
150
151         // return queryString;
152         dataBaseConnection.Open();
153
154         var dataBaseCommand : OleDbCommand =
155             new OleDbCommand( queryString, dataBaseConnection );
156
157         var dataReader = dataBaseCommand.ExecuteReader();
158
159         if (dataReader.Read())
160         {
161             result = dataReader.GetString ( 1 ) ; // get the ID
162             // close database connection
163             dataBaseCommand.Connection.Close();
164         }
165     }
166     catch (e)
167     {
168         Response.Write(e + " Query String in GetSSN: " + queryString + "<br />");
169     }
170     return result;
171 } // end GetPASS

```

```
172
173 function userExists(fn : String, mn : String, ln : String, suffix : String, table : String )
174 {
175     // establish a connection, and query the database
176     var dataBaseConnection: OleDbConnection = new
177         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
178
179     var queryString : System.String =
180         "SELECT " +
181             vars.useridField +
182         " FROM " +
183             table +
184         " WHERE " +
185             "(" + vars.fnField + " = '" + fn + "'" ) + " AND " +
186             "(" + vars.mnField + " = '" + mn + "'" ) + " AND " +
187             "(" + vars.lnField + " = '" + ln + "'" ) + " AND " +
188             "(" + vars.suffixField + " = '" + suffix + "'" );
189
190     dataBaseConnection.Open();
191
192     var dataBaseCommand : OleDbCommand =
193         new OleDbCommand( queryString, dataBaseConnection );
194
195     var dataReader = dataBaseCommand.ExecuteReader();
196
197     var result;
198
199     if (dataReader.Read())
200         result = dataReader.GetInt32 ( 0 ) ; // get the ID
201     else
202         result = -1;
203     dataBaseCommand.Connection.Close();
204
205     return result;
206 } // end userExists
207
208 function getUserID(uid : String, table : String)
209 {
210     var result = -1;
211     var queryString : System.String =
212         "SELECT " +
213             vars.useridField + ", " + vars.passwordField +
214         " FROM " +
215             table +
216         " WHERE " +
217             "(" + vars.useridField + " = '" + uid + "'" );
218
219     try
220     {
221         // establish a connection, and query the database
222         var dataBaseConnection: OleDbConnection = new
223             OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
224
225         dataBaseConnection.Open();
226
227         var dataBaseCommand : OleDbCommand =
228             new OleDbCommand( queryString, dataBaseConnection );
229
230         var dataReader = dataBaseCommand.ExecuteReader();
231
232         if (dataReader.Read())
233             result = dataReader.GetInt32 ( 0 ) ; // get the ID
234         else
235             result = -1;
```

```
236
237     // close database connection
238     dataBaseCommand.Connection.Close();
239 }
240 catch (e)
241 {
242     Response.Write(e + " Query String in UserId: " + queryString + "<br />");
243 }
244     return result;
245 } // end getUserID
246
247 function getName(uid, table) : String
248 {
249
250     var result : String = " *** ERROR *** ";
251
252     var queryString : System.String =
253         "SELECT " +
254             vars.useridField + ", " + vars.fnField + ", " + vars.lnField +
255             " FROM " +
256             table +
257             " WHERE " +
258             "(" + vars.useridField + " = " + uid + ")";
259
260     try
261     {
262         // establish a connection, and query the database
263         var dataBaseConnection: OleDbConnection = new
264             OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) )
265     ;
266
267     // return queryString;
268     dataBaseConnection.Open();
269
270     var dataBaseCommand : OleDbCommand =
271         new OleDbCommand( queryString, dataBaseConnection );
272
273     var dataReader = dataBaseCommand.ExecuteReader();
274
275     if (dataReader.Read())
276     {
277         result = dataReader.GetString ( 1 ) + " " + dataReader.GetString(2); //
278     }
279     // close database connection
280     dataBaseCommand.Connection.Close();
281 }
282 catch (e)
283 {
284     Response.Write(e + " Query String in getName: " + queryString + "<br />");
285 }
286     return result;
287 } // end GetName
288
289 function getLastName(uid : String, table : String) : String
290 {
291
292     var result : String = " *** ERROR *** ";
293
294     var queryString : System.String =
295         "SELECT " +
296             vars.lnField +
297             " FROM " +
298             table +
299             " WHERE " +
```

```

300         "(" + vars.useridField + " = " + uid + ")";
301
302     try
303     {
304         // establish a connection, and query the database
305         var dataBaseConnection: OleDbConnection = new
306             OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) ) ;
307
308
309         // return queryString;
310         dataBaseConnection.Open();
311
312         var dataBaseCommand : OleDbCommand =
313             new OleDbCommand( queryString, dataBaseConnection );
314
315         var dataReader = dataBaseCommand.ExecuteReader();
316
317         if (dataReader.Read())
318         {
319             result = dataReader.GetString ( 0 ); // get the last name
320         }
321         // close database connection
322         dataBaseCommand.Connection.Close();
323     }
324     catch (e)
325     {
326         Response.Write(e + " Query String in getLastName: " + queryString + "<br />");
327     }
328     return result;
329 } // end getLastName
330
331 function createClass( course: String , teach: String, rm: String,
332     yrterm : String, pd : String) : Boolean
333 {
334     var ok : Boolean;
335
336     // establish a connection, and query the database
337     var dataBaseConnection: OleDbConnection = new
338         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
339
340     var queryString : System.String =
341         "INSERT INTO " +
342             vars.classTable +
343             " (" +
344                 vars.courseidField + ", " + vars.teacheridField + ", " + vars.
345                 rmidField
346                 + ", " + vars.yrtermidField + ", " + vars.periodField + ")" +
347                 " VALUES" +
348                 "(" + course + ", " + teach + ", " + rm
349                 + ", " + yrterm + ", " + pd + ")";
350
351     var dataBaseCommand : OleDbCommand =
352         new OleDbCommand( queryString );
353
354     dataBaseCommand.set_Connection(dataBaseConnection);
355
356     dataBaseConnection.Open();
357
358     try
359     {
360         dataBaseCommand.ExecuteNonQuery();
361
362         // close database connection
363         dataBaseCommand.get_Connection().Close();

```

```

363     }
364     catch (e)
365     {
366         Response.Write("<p>Exception: " + e.ToString() +
367             "<b/> QueryString = " + queryString + "</p>");
368         ok = false; // we failed for some reason
369     }
370
371     var classid = getClassID1(course, teach, rm, yrterm, pd)
372     if(addCGSclassID(classid))
373         ok = true;
374
375     return ok;
376 } // end createClass
377
378 function getClassID1( course: String, teach: String, rm: String, yrterm : String, pd
    : String )
379 {
380     var result = -1;
381     var queryString : System.String =
382         "SELECT " +
383             vars.classidField +
384             " FROM " +
385             vars.classTable +
386             " WHERE " +
387             "(" + vars.courseidField + " = " + course + ")" + " AND " +
388             "(" + vars.teacheridField + " = " + teach + ")" + " AND " +
389             "(" + vars.rmidField + " = " + rm + ")" + " AND " +
390             "(" + vars.yrtermidField + " = " + yrterm + ")" + " AND " +
391             "(" + vars.periodField + " = " + pd + ")";
392
393     try
394     {
395         // establish a connection, and query the database
396         var dataBaseConnection: OleDbConnection = new
397             OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString"
398
399
400
401         dataBaseConnection.Open();
402
403         var dataBaseCommand : OleDbCommand =
404             new OleDbCommand( queryString, dataBaseConnection );
405
406         var dataReader = dataBaseCommand.ExecuteReader();
407
408         if (dataReader.Read())
409             result = dataReader.GetInt32 ( 0 ) ; // get the ID
410         else
411             result = -1;
412
413         // close database connection
414         dataBaseCommand.Connection.Close();
415     }
416     catch (e)
417     {
418         Response.Write(e + " Query String in getClassId: " + queryString + "<br
419
420
421     return result;
422 } // end getClassID1
423
424 function getClassID2( name : String )
425 {
426     var courseid = getCourseID(name);
427     var result = -1;
428     var queryString : System.String =

```

```

426         "SELECT " +
427             vars.classidField +
428         " FROM " +
429             vars.classTable +
430         " WHERE " +
431             "(" + vars.courseidField + " = " + courseid + ")";

432     try
433     {
434         // establish a connection, and query the database
435         var dataBaseConnection: OleDbConnection = new
436             OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString"
437     );
438
439         dataBaseConnection.Open();
440
441         var dataBaseCommand : OleDbCommand =
442             new OleDbCommand( queryString, dataBaseConnection );
443
444         var dataReader = dataBaseCommand.ExecuteReader();
445
446         if (dataReader.Read())
447             result = dataReader.GetInt32 ( 0 ) ; // get the ID
448         else
449             result = -1;
450
451         // close database connection
452         dataBaseCommand.Connection.Close();
453     }
454     catch (e)
455     {
456         Response.Write(e + " Query String in getClassId: " + queryString + "<br>
457     }
458     return result;
459 } // end getClassID2
460
461 function getCourseID( name : String )
462 {
463     var result = -1;
464     var queryString : System.String =
465         "SELECT " +
466             vars.courseidField +
467         " FROM " +
468             vars.courseTable +
469         " WHERE " +
470             "(" + vars.courseNameField + " = '" + name + "'" );
471
472     try
473     {
474         // establish a connection, and query the database
475         var dataBaseConnection: OleDbConnection = new
476             OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString"
477     );
478
479         dataBaseConnection.Open();
480
481         var dataBaseCommand : OleDbCommand =
482             new OleDbCommand( queryString, dataBaseConnection );
483
484         var dataReader = dataBaseCommand.ExecuteReader();
485
486         if (dataReader.Read())
487             result = dataReader.GetInt32 ( 0 ) ; // get the ID
488         else
489             result = -1;

```

```

488
489         // close database connection
490         dataBaseCommand.Connection.Close();
491     }
492     catch (e)
493     {
494         Response.Write(e + " Query String in getClassId: " + queryString + "<br />");
495     }
496     return result;
497 } // end getCourseID
498
499 function addCGSclassID( clas: String ) : Boolean
500 {
501     var ok : Boolean = true;
502     // establish a connection, and query the database
503     var dataBaseConnection: OleDbConnection = new
504         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
505
506     var queryString : System.String =
507         "INSERT INTO " +
508             vars.classGradeScaleTable +
509             " (" +
510                 vars.classidField + " )" +
511             " VALUES " +
512             "(" + clas + ")";
513
514     var dataBaseCommand : OleDbCommand =
515         new OleDbCommand( queryString );
516
517     dataBaseCommand.set_Connection(dataBaseConnection);
518
519     dataBaseConnection.Open();
520
521     try
522     {
523         dataBaseCommand.ExecuteNonQuery();
524
525         // close database connection
526         dataBaseCommand.get_Connection().Close();
527     }
528     catch (e)
529     {
530         Response.Write("<p>Exception: " + e.ToString() +
531             "<b/> QueryString = " + queryString + "</p>");
532         ok = false; // we failed for some reason
533     }
534
535     return ok;
536 } // end addCGSclassID
537
538 function createRoom(rm: String, description : String) : Boolean
539 {
540     var ok : Boolean = true;
541
542     // establish a connection, and query the database
543     var dataBaseConnection: OleDbConnection = new
544         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
545
546     var queryString : System.String =
547         "INSERT INTO " +
548             vars.roomTable +
549             " (" +
550                 vars.rmidField + ", " + vars.descriptionField + " )" +
551             " VALUES " +
552             "(" + rm + ", " + description + ")";

```

```

553
554     var dataBaseCommand : OleDbCommand =
555         new OleDbCommand( queryString );
556
557     dataBaseCommand.set_Connection(dataBaseConnection);
558
559     dataBaseConnection.Open();
560
561     try
562     {
563         dataBaseCommand.ExecuteNonQuery();
564
565         // close database connection
566         dataBaseCommand.get_Connection().Close();
567     }
568     catch (e)
569     {
570         Response.Write("<p>Exception: " + e.ToString() +
571             "<b/> QueryString = " + queryString + "</p>");
572         ok = false; // we failed for some reason
573     }
574
575     return ok;
576 } // end createRoom
577
578 function createUser(prefix : String, fn : String, mn : String, ln : String,
579     suffix : String, addid : String, city : String, state : String,
580     postal : String, wphone : String, cphone : String, faxnum : String,
581     hphone : String, eadd : String, pass : String) : Boolean
582 {
583     var ok : Boolean = true;
584     // establish a connection, and query the database
585     var dataBaseConnection: OleDbConnection = new
586         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
587
588     var queryString : System.String =
589         "INSERT INTO " +
590             vars.userTable +
591             " (" +
592                 vars.prefixField + ", " + vars.fnField + ", " + vars.mnField + ", " + ↵
593                 vars.lnField + ", " +
594                 vars.suffixField + ", " + vars.addField + ", " + vars.cityField + ", ↵
595                 vars.stateField
596                 + ", " + vars.postalField + ", " + vars.workphoneField + ", " + vars. ↵
597                 cellphoneField + ", " +
598                 vars.faxnumField + ", " + vars.homephoneField + ", " + vars. ↵
599                 eaddField
600                 + ", " + vars.passwordField + ")" +
601                 " VALUES" +
602                 "(" + prefix + ", " + fn + ", " + mn + ", " + ln + ", " + ↵
603                 suffix + ", " + addid
604                 + ", " + city + ", " + state + ", " + postal + ", " + wphone ↵
605                 + ", " + cphone
606                 + ", " + faxnum + ", " + hphone + ", " + eadd + ", " + pass + ↵
607                 ")";
608
609     var dataBaseCommand : OleDbCommand =
610         new OleDbCommand( queryString );
611
612     dataBaseCommand.set_Connection(dataBaseConnection);
613
614     dataBaseConnection.Open();
615
616     try
617     {
618         dataBaseCommand.ExecuteNonQuery();

```

```
612
613     // close database connection
614     dataBaseCommand.get_Connection().Close();
615 }
616 catch (e)
617 {
618     Response.Write("<p>Exception: " + e.ToString() +
619         "<b/> QueryString = " + queryString + "</p>");
620     ok = false; // we failed for some reason
621 }
622
623     return ok;
624 } // end createParent
625
626 function classExists(course : String, teacher : String, yrterm : String) : Boolean
627 {
628     // establish a connection, and query the database
629     var dataBaseConnection: OleDbConnection = new
630         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
631
632     var queryString : System.String =
633         "SELECT " +
634             vars.classidField +
635             " FROM " +
636             vars.classTable +
637             " WHERE " +
638             "(" + vars.courseidField + " = " + course + ")" + " AND " +
639             "(" + vars.teacheridField + " = " + teacher + ")" + " AND " +
640             "(" + vars.yrtermidField + " = " + yrterm + ")";
641
642     dataBaseConnection.Open();
643
644     var dataBaseCommand : OleDbCommand =
645         new OleDbCommand( queryString, dataBaseConnection );
646
647     var dataReader = dataBaseCommand.ExecuteReader();
648
649     var ok : Boolean;
650
651     ok = dataReader.Read();
652     // close database connection
653     dataBaseCommand.Connection.Close();
654
655     return ok;
656 } //end classExists
657
658 function roomExists(rm : String) : Boolean
659 {
660
661     // establish a connection, and query the database
662     var dataBaseConnection: OleDbConnection = new
663         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
664
665     var queryString : System.String =
666         "SELECT " +
667             vars.rmidField +
668             " FROM " +
669             vars.roomTable +
670             " WHERE " +
671             "(" + vars.rmidField + " = " + rm + ")";
672
673
674     dataBaseConnection.Open();
675
676     var dataBaseCommand : OleDbCommand =
```

```
677     new OleDbCommand( queryString, dataBaseConnection );
678
679     var dataReader = dataBaseCommand.ExecuteReader();
680
681     var ok : Boolean;
682
683     ok = dataReader.Read();
684     // close database connection
685     dataBaseCommand.Connection.Close();
686
687     return ok;
688 } //end roomExists
689
690 function chgPass(uid : String, newpass : String, table : String) : String
691 {
692     var ok : Boolean = true;
693     var result : String = " *** ERROR *** ";
694     // establish a connection, and query the database
695     var dataBaseConnection: OleDbConnection = new
696         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
697
698     var queryString : System.String =
699         "UPDATE " +
700             table +
701         " SET " +
702             vars.passwordField + " = '" + newpass + "'" +
703         " WHERE " +
704             "(" + vars.useridField + " = " + uid + ")";
705
706     var dataBaseCommand : OleDbCommand =
707         new OleDbCommand( queryString );
708
709     dataBaseCommand.set_Connection(dataBaseConnection);
710
711     dataBaseConnection.Open();
712
713     try
714     {
715         dataBaseCommand.ExecuteNonQuery();
716
717         // close database connection
718         dataBaseCommand.get_Connection().Close();
719     }
720     catch (e)
721     {
722         Response.Write("<p>Exception: " + e.ToString() +
723             "<b/> QueryString = " + queryString + "</p>");
724         ok = false; // we failed for some reason
725     }
726
727     return ok;
728 } // end chgPass
729
730 function UserIsA(uid, table) : Boolean
731 {
732
733     var ok : Boolean;
734
735     var queryString : System.String =
736         "SELECT " +
737             vars.useridField +
738         " FROM " +
739             table +
740         " WHERE " +
741             "(" + vars.useridField + " = " + uid + ")";
742 }
```

```
743     try
744     {
745         // establish a connection, and query the database
746         var dataBaseConnection: OleDbConnection = new
747             OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) )
748     ;
749
750         // return queryString;
751         dataBaseConnection.Open();
752
753         var dataBaseCommand : OleDbCommand =
754             new OleDbCommand( queryString, dataBaseConnection )
755
756         var dataReader = dataBaseCommand.ExecuteReader();
757
758         if (dataReader.Read())
759         {
760             ok = true
761         }
762         else
763         {
764             ok = false;
765         }
766         // close database connection
767         dataBaseCommand.Connection.Close();
768     }
769     catch (e)
770     {
771         Response.Write(e + " Query String in GetFAMID: " + queryString + "<br />")
772     }
773     return ok;
774 } // end UserIsA
775
776 function getUSERTYPE(uid) : String
777 {
778
779     var result : String = vars.studenttype;           //default usertype is a student
780
781     if (UserIsA(uid,vars.isPTable) == true)
782     {
783         result = vars.parenttype;
784     }
785     if (UserIsA(uid,vars.isTTable) == true)
786     {
787         result = vars.teachertype;
788     }
789     if (UserIsA(uid,vars.isATable) == true)
790     {
791         result = vars.admintype;
792     }
793
794     return result;
795 } // end GetUSERTYPE
796
797 function addParent(uid : String, table : String) : Boolean
798 {
799     var ok : Boolean = true;
800
801     // establish a connection, and query the database
802     var dataBaseConnection: OleDbConnection = new
803         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
804
805     var queryString : System.String =
806         "INSERT INTO " +
```

```
807         table +
808         " (" +
809         vars.useridField + ")" +
810         " VALUES" +
811         "(" + uid + ")";
812
813     var dataBaseCommand : OleDbCommand =
814         new OleDbCommand( queryString );
815
816     dataBaseCommand.set_Connection(dataBaseConnection);
817
818     dataBaseConnection.Open();
819
820     try
821     {
822         dataBaseCommand.ExecuteNonQuery();
823
824         // close database connection
825         dataBaseCommand.get_Connection().Close();
826     }
827     catch (e)
828     {
829         Response.Write("<p>Exception: " + e.ToString() +
830             "<b/> QueryString = " + queryString + "</p>");
831         ok = false; // we failed for some reason
832     }
833
834     return ok;
835 } // end addParent
836
837 function addTeacher(uid : String, table : String) : Boolean
838 {
839     var ok : Boolean = true;
840
841     // establish a connection, and query the database
842     var dataBaseConnection: OleDbConnection = new
843         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
844
845     var queryString : System.String =
846         "INSERT INTO " +
847         table +
848         " (" +
849         vars.useridField + ")" +
850         " VALUES" +
851         "(" + uid + ")";
852
853     var dataBaseCommand : OleDbCommand =
854         new OleDbCommand( queryString );
855
856     dataBaseCommand.set_Connection(dataBaseConnection);
857
858     dataBaseConnection.Open();
859
860     try
861     {
862         dataBaseCommand.ExecuteNonQuery();
863
864         // close database connection
865         dataBaseCommand.get_Connection().Close();
866     }
867     catch (e)
868     {
869         Response.Write("<p>Exception: " + e.ToString() +
870             "<b/> QueryString = " + queryString + "</p>");
871         ok = false; // we failed for some reason
872     }
```

```
873
874     return ok;
875 } // end addTeacher
876
877 function addAdmin(uid : String, table : String) : Boolean
878 {
879     var ok : Boolean = true;
880
881     // establish a connection, and query the database
882     var dataBaseConnection: OleDbConnection = new
883         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
884
885     var queryString : System.String =
886         "INSERT INTO " +
887         table +
888         " (" +
889         vars.useridField + ")" +
890         " VALUES" +
891         "(" + uid + ")";
892
893     var dataBaseCommand : OleDbCommand =
894         new OleDbCommand( queryString );
895
896     dataBaseCommand.set_Connection(dataBaseConnection);
897
898     dataBaseConnection.Open();
899
900     try
901     {
902         dataBaseCommand.ExecuteNonQuery();
903
904         // close database connection
905         dataBaseCommand.get_Connection().Close();
906     }
907     catch (e)
908     {
909         Response.Write("<p>Exception: " + e.ToString() +
910             "<b/> QueryString = " + queryString + "</p>");
911         ok = false; // we failed for some reason
912     }
913
914     return ok;
915 } // end addAdmin
916
917 function addStudent(uid : String, table : String) : Boolean
918 {
919     var ok : Boolean = true;
920
921     // establish a connection, and query the database
922     var dataBaseConnection: OleDbConnection = new
923         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
924
925     var queryString : System.String =
926         "INSERT INTO " +
927         table +
928         " (" +
929         vars.useridField + ")" +
930         " VALUES" +
931         "(" + uid + ")";
932
933     var dataBaseCommand : OleDbCommand =
934         new OleDbCommand( queryString );
935
936     dataBaseCommand.set_Connection(dataBaseConnection);
937
938     dataBaseConnection.Open();
```

```

939
940     try
941     {
942         dataBaseCommand.ExecuteNonQuery();
943
944         // close database connection
945         dataBaseCommand.get_Connection().Close();
946     }
947     catch (e)
948     {
949         Response.Write("<p>Exception: " + e.ToString() +
950             "<b/> QueryString = " + queryString + "</p>");
951         ok = false; // we failed for some reason
952     }
953
954     return ok;
955 } // end addStudent
956
957 function addParentStudent(puid : String, suid : String, table : String) : Boolean
958 {
959     var ok : Boolean = true;
960
961     if (parentStudentExists(puid, suid, table))
962     {
963         return false;
964     }
965
966     // establish a connection, and query the database
967     var dataBaseConnection: OleDbConnection = new
968         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
969
970
971
972     var queryString : System.String =
973         "INSERT INTO " +
974         table +
975         " (" +
976         vars.parentidField + ", " + vars.studentidField + ")" +
977         " VALUES" +
978         "(" + puid + ", " + suid + ")";
979
980     var dataBaseCommand : OleDbCommand =
981         new OleDbCommand( queryString );
982
983     dataBaseCommand.set_Connection(dataBaseConnection);
984
985     dataBaseConnection.Open();
986
987     try
988     {
989         dataBaseCommand.ExecuteNonQuery();
990
991         // close database connection
992         dataBaseCommand.get_Connection().Close();
993     }
994     catch (e)
995     {
996         Response.Write("<p>Exception: " + e.ToString() +
997             "<b/> QueryString = " + queryString + "</p>");
998         ok = false; // we failed for some reason
999     }
1000
1001     return ok;
1002 } // end addParentStudent
1003
1004 function parentStudentExists(puid : String, suid : String, table : String) : Boolean

```

```
1005 {
1006     var ok : Boolean;
1007
1008     // establish a connection, and query the database
1009     var dataBaseConnection: OleDbConnection = new
1010         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1011
1012     var queryString : System.String =
1013         "SELECT " +
1014             vars.parentidField +
1015             " FROM " +
1016             table +
1017             " WHERE " +
1018             "(" + vars.parentidField + " = " + puid + ")" + " AND " +
1019             "(" + vars.studentidField + " = " + suid + ")";
1020
1021     dataBaseConnection.Open();
1022
1023     var dataBaseCommand : OleDbCommand =
1024         new OleDbCommand( queryString, dataBaseConnection );
1025
1026     var dataReader = dataBaseCommand.ExecuteReader();
1027
1028     if (dataReader.Read())
1029         ok = true;
1030     else
1031         ok = false;
1032
1033     dataBaseCommand.Connection.Close();
1034
1035     return ok;
1036 } // end parentStudentExists
1037
1038 function rmvParentStudent(puid : String, suid : String, table : String) : Boolean
1039 {
1040     var ok : Boolean = true;
1041
1042     // establish a connection, and query the database
1043     var dataBaseConnection: OleDbConnection = new
1044         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1045
1046     var queryString : System.String =
1047         "DELETE * FROM " +
1048             table +
1049             " WHERE " +
1050             "(" + vars.parentidField + " = " + puid + ")" + " AND " +
1051             "(" + vars.studentidField + " = " + suid + ")";
1052
1053     var dataBaseCommand : OleDbCommand =
1054         new OleDbCommand( queryString );
1055
1056     dataBaseCommand.set_Connection(dataBaseConnection);
1057
1058     dataBaseConnection.Open();
1059
1060     try
1061     {
1062         dataBaseCommand.ExecuteNonQuery();
1063
1064         // close database connection
1065         dataBaseCommand.get_Connection().Close();
1066     }
1067     catch (e)
```

```
1068 {
1069     Response.Write("<p>Exception: " + e.ToString() +
1070         "<b/> QueryString = " + queryString + "</p>");
1071     ok = false; // we failed for some reason
1072 }
1073
1074 return ok;
1075 } // end rmvParentStudent
1076
1077 function addStudentYear(studentUID : String, gradeLvl : String, table : String) : Boolean
1078 {
1079     var ok : Boolean = true;
1080
1081     // establish a connection, and query the database
1082     var dataBaseConnection: OleDbConnection = new
1083         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1084
1085     var queryString : System.String =
1086         "INSERT INTO " +
1087         table +
1088         " (" +
1089         vars.studentidField + ", " + vars.gradeidField + ")" +
1090         " VALUES" +
1091         "(" + studentUID + ", " + gradeLvl + ")";
1092
1093     var dataBaseCommand : OleDbCommand =
1094         new OleDbCommand( queryString );
1095
1096     dataBaseCommand.set_Connection(dataBaseConnection);
1097
1098     dataBaseConnection.Open();
1099
1100     try
1101     {
1102         dataBaseCommand.ExecuteNonQuery();
1103
1104         // close database connection
1105         dataBaseCommand.get_Connection().Close();
1106     }
1107     catch (e)
1108     {
1109         Response.Write("<p>Exception: " + e.ToString() +
1110             "<b/> QueryString = " + queryString + "</p>");
1111         ok = false; // we failed for some reason
1112     }
1113
1114     return ok;
1115 } // end addStudentYear
1116
1117 function createDivision( name : String) : Boolean
1118 {
1119     var ok : Boolean = true;
1120
1121     // establish a connection, and query the database
1122     var dataBaseConnection: OleDbConnection = new
1123         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1124
1125     var queryString : System.String =
1126         "INSERT INTO " +
1127         vars.divisionTable +
1128         " (" +
1129         vars.divNameField + ")" +
1130         " VALUES" +
1131         "(" + name + ")";
1132 }
```

```
1133     var dataBaseCommand : OleDbCommand =
1134         new OleDbCommand( queryString );
1135
1136     dataBaseCommand.set_Connection(dataBaseConnection);
1137
1138     dataBaseConnection.Open();
1139
1140     try
1141     {
1142         dataBaseCommand.ExecuteNonQuery();
1143
1144         // close database connection
1145         dataBaseCommand.get_Connection().Close();
1146     }
1147     catch (e)
1148     {
1149         Response.Write("<p>Exception: " + e.ToString() +
1150             "<b/> QueryString = " + queryString + "</p>");
1151         ok = false; // we failed for some reason
1152     }
1153
1154     return ok;
1155 } // end createDivision
1156
1157 function divisionExists(name : String) : Boolean
1158 {
1159     // establish a connection, and query the database
1160     var dataBaseConnection: OleDbConnection = new
1161         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1162
1163     var queryString : System.String =
1164         "SELECT " +
1165             vars.divisionidField +
1166             " FROM " +
1167             vars.divisionTable +
1168             " WHERE " +
1169             "(" + vars.divNameField + " = '" + name + "'";
1170
1171     dataBaseConnection.Open();
1172
1173     var dataBaseCommand : OleDbCommand =
1174         new OleDbCommand( queryString, dataBaseConnection );
1175
1176     var dataReader = dataBaseCommand.ExecuteReader();
1177
1178     var ok : Boolean;
1179
1180     ok = dataReader.Read();
1181     // close database connection
1182     dataBaseCommand.Connection.Close();
1183
1184     return ok;
1185 } //end divisionExists
1186
1187 function createCourse( name : String, div : String) : Boolean
1188 {
1189     var ok : Boolean = true;
1190
1191     // establish a connection, and query the database
1192     var dataBaseConnection: OleDbConnection = new
1193         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1194
1195     var queryString : System.String =
1196         "INSERT INTO " +
1197             vars.courseTable +
```

```
1199         " (" +
1200             vars.courseNameField + ", " + vars.divisionidField + ") " +
1201         " VALUES" +
1202         "(" + name + ", " + div + ")";
1203
1204     var dataBaseCommand : OleDbCommand =
1205         new OleDbCommand( queryString );
1206
1207     dataBaseCommand.set_Connection(dataBaseConnection);
1208
1209     dataBaseConnection.Open();
1210
1211     try
1212     {
1213         dataBaseCommand.ExecuteNonQuery();
1214
1215         // close database connection
1216         dataBaseCommand.get_Connection().Close();
1217     }
1218     catch (e)
1219     {
1220         Response.Write("<p>Exception: " + e.ToString() +
1221             "<b/> QueryString = " + queryString + "</p>");
1222         ok = false; // we failed for some reason
1223     }
1224
1225     return ok;
1226 } // end createCourse
1227
1228 function courseExists(name : String) : Boolean
1229 {
1230     // establish a connection, and query the database
1231     var dataBaseConnection: OleDbConnection = new
1232         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1233
1234     var queryString : System.String =
1235         "SELECT " +
1236             vars.courseNameField +
1237             " FROM " +
1238             vars.courseTable +
1239             " WHERE " +
1240             "(" + vars.courseNameField + " = '" + name + "'";
1241
1242     dataBaseConnection.Open();
1243
1244     var dataBaseCommand : OleDbCommand =
1245         new OleDbCommand( queryString, dataBaseConnection );
1246
1247     var dataReader = dataBaseCommand.ExecuteReader();
1248
1249     var ok : Boolean;
1250
1251     ok = dataReader.Read();
1252     // close database connection
1253     dataBaseCommand.Connection.Close();
1254
1255     return ok;
1256 } //end courseExists
1257
1258 function getCourseName(cid : String) : String
1259 {
1260     var result : String = " *** ERROR *** ";
1261
1262     var queryString : System.String = "SELECT Course.CourseName FROM Course "
```

```
1265 + "INNER JOIN Class ON Course.CourseID = Class.CourseID "
1266 + "WHERE ((Class.ClassID)= " + cid + " ) )";
1267
1268 try
1269 {
1270     // establish a connection, and query the database
1271     var dataBaseConnection: OleDbConnection = new
1272         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) )
1273 ;
1274
1275     // return queryString;
1276     dataBaseConnection.Open();
1277
1278     var dataBaseCommand : OleDbCommand =
1279         new OleDbCommand( queryString, dataBaseConnection );
1280
1281     var dataReader = dataBaseCommand.ExecuteReader();
1282
1283     if (dataReader.Read())
1284     {
1285         result = dataReader.GetString ( 0 ); // get the course name
1286     }
1287     // close database connection
1288     dataBaseCommand.Connection.Close();
1289 }
1290 catch (e)
1291 {
1292     Response.Write(e + " Query String in getNAME: " + queryString + "<br />");
1293 }
1294 return result;
1295 } // end GetCourseName
1296
1297 function teacherExists(teachUID : String) : Boolean
1298 {
1299     // establish a connection, and query the database
1300     var dataBaseConnection: OleDbConnection = new
1301         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1302
1303     var queryString : System.String =
1304         "SELECT " +
1305         vars.useridField +
1306         " FROM " +
1307         vars.isTTable +
1308         " WHERE " +
1309         "(" + vars.useridField + " = " + teachUID + ")";
1310
1311     dataBaseConnection.Open();
1312
1313     var dataBaseCommand : OleDbCommand =
1314         new OleDbCommand( queryString, dataBaseConnection );
1315
1316     var dataReader = dataBaseCommand.ExecuteReader();
1317
1318     var ok;
1319
1320     if (dataReader.Read())
1321     {
1322         ok = true;
1323     }
1324     else
1325     {
1326         ok = false;
1327     }
1328     dataBaseCommand.Connection.Close();
1329
1330     return ok;
1331 } // end teacherExists
```

```
1329
1330 function enrollStudent(suid : String, classid : String, table : String) : Boolean
1331 {
1332     var ok : Boolean = true;
1333
1334     if (studentEnrolled(suid, classid, table))
1335     {
1336         return false;
1337     }
1338
1339     // establish a connection, and query the database
1340     var dataBaseConnection: OleDbConnection = new
1341         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1342
1343     var queryString : System.String =
1344         "INSERT INTO " +
1345         table +
1346         " (" +
1347         vars.studentidField + ", " + vars.classidField + ")" +
1348         " VALUES" +
1349         "(" + suid + ", " + classid + ")";
1350
1351     var dataBaseCommand : OleDbCommand =
1352         new OleDbCommand( queryString );
1353
1354     dataBaseCommand.set_Connection(dataBaseConnection);
1355
1356     dataBaseConnection.Open();
1357
1358     try
1359     {
1360         dataBaseCommand.ExecuteNonQuery();
1361
1362         // close database connection
1363         dataBaseCommand.get_Connection().Close();
1364     }
1365     catch (e)
1366     {
1367         Response.Write("<p>Exception: " + e.ToString() +
1368             "<b/> QueryString = " + queryString + "</p>");
1369         ok = false; // we failed for some reason
1370     }
1371
1372     return ok;
1373 } // end enrollStudent
1374
1375 function unEnrollStudent(suid : String, classid : String, table : String) : Boolean ✓
1376 {
1377     var ok : Boolean = true;
1378
1379     // establish a connection, and query the database
1380     var dataBaseConnection: OleDbConnection = new
1381         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) ); ✓
1382
1383     var queryString : System.String =
1384         "DELETE * FROM " +
1385         table +
1386         " WHERE" +
1387         "(" + vars.studentidField + " = " + suid + ")" + " AND " +
1388         "(" + vars.classidField + " = " + classid + ")";
1389
1390     var dataBaseCommand : OleDbCommand =
1391         new OleDbCommand( queryString );
1392
```

```

1393     dataBaseCommand.set_Connection(dataBaseConnection);
1394
1395     dataBaseConnection.Open();
1396
1397     try
1398     {
1399         dataBaseCommand.ExecuteNonQuery();
1400
1401         // close database connection
1402         dataBaseCommand.get_Connection().Close();
1403     }
1404     catch (e)
1405     {
1406         Response.Write("<p>Exception: " + e.ToString() +
1407             "<b/> QueryString = " + queryString + "</p>");
1408         ok = false; // we failed for some reason
1409     }
1410
1411     return ok;
1412 } // end unEnrollStudent
1413
1414 function studentEnrolled(suid : String, classid : String, table : String) : Boolean ✓
1415 {
1416     var ok : Boolean;
1417
1418     // establish a connection, and query the database
1419     var dataBaseConnection: OleDbConnection = new
1420         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1421
1422     var queryString : System.String =
1423         "SELECT " +
1424             vars.studentidField +
1425             " FROM " +
1426             table +
1427             " WHERE " +
1428             "(" + vars.studentidField + " = " + suid + ")" + " AND " +
1429             "(" + vars.classidField + " = " + classid + ")";
1430
1431     dataBaseConnection.Open();
1432
1433     var dataBaseCommand : OleDbCommand =
1434         new OleDbCommand( queryString, dataBaseConnection );
1435
1436     var dataReader = dataBaseCommand.ExecuteReader();
1437
1438     if (dataReader.Read())
1439         ok = true;
1440     else
1441         ok = false;
1442
1443     dataBaseCommand.Connection.Close();
1444
1445     return ok;
1446 } // end studentEnrolled
1447
1448 function getEnrollID(suid : String, classid : String)
1449 {
1450     var result = -1;
1451     var queryString : System.String =
1452         "SELECT " +
1453             vars.classenrollmentidField +
1454             " FROM " +
1455             vars.classEnrollmentTable +
1456             " WHERE " +
1457             "(" + vars.studentidField + " = " + suid + ") AND " +

```

```
1458         "(" + vars.classidField + " = " + classid + ")";
1459
1460     try
1461     {
1462         // establish a connection, and query the database
1463         var dataBaseConnection: OleDbConnection = new
1464             OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString"
1465     ) );
1466
1467         dataBaseConnection.Open();
1468
1469         var dataBaseCommand : OleDbCommand =
1470             new OleDbCommand( queryString, dataBaseConnection );
1471
1472         var dataReader = dataBaseCommand.ExecuteReader();
1473
1474         if (dataReader.Read())
1475             result = dataReader.GetInt32 ( 0 ) ; // get the ID
1476         else
1477             result = -1;
1478
1479         // close database connection
1480         dataBaseCommand.Connection.Close();
1481     }
1482     catch (e)
1483     {
1484         Response.Write(e + " Query String in UserId: " + queryString + "<br />");
1485     }
1486     return result;
1487 } // end getEnrollID
1488
1489 function addClassGradeEnrollID(ceid : String, table : String) : Boolean
1490 {
1491     var ok : Boolean = true;
1492
1493     // establish a connection, and query the database
1494     var dataBaseConnection: OleDbConnection = new
1495         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1496
1497     var queryString : System.String =
1498         "INSERT INTO " +
1499         table +
1500         " (" +
1501         vars.classenrollmentidField + ") " +
1502         " VALUES " +
1503         "(" + ceid + ")";
1504
1505     var dataBaseCommand : OleDbCommand =
1506         new OleDbCommand( queryString );
1507
1508     dataBaseCommand.set_Connection(dataBaseConnection);
1509
1510     dataBaseConnection.Open();
1511
1512     try
1513     {
1514         dataBaseCommand.ExecuteNonQuery();
1515
1516         // close database connection
1517         dataBaseCommand.get_Connection().Close();
1518     }
1519     catch (e)
1520     {
1521         Response.Write("<p>Exception: " + e.ToString() +
1522             "<b/> QueryString = " + queryString + "</p>");
1523         ok = false; // we failed for some reason
1524     }
1525 }
```

```
1523     }
1524
1525     return ok;
1526 } // end addClassGradeEnrollID
1527
1528 function rmvClassGradeEnrollID(ceid : String, table : String) : Boolean
1529 {
1530     var ok : Boolean = true;
1531
1532     // establish a connection, and query the database
1533     var dataBaseConnection: OleDbConnection = new
1534         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1535
1536     var queryString : System.String =
1537         "DELETE * FROM " +
1538         table +
1539         " WHERE " +
1540         "(" + vars.classenrollmentidField + " = " + ceid + ")";
1541
1542     var dataBaseCommand : OleDbCommand =
1543         new OleDbCommand( queryString );
1544
1545     dataBaseCommand.set_Connection(dataBaseConnection);
1546
1547     dataBaseConnection.Open();
1548
1549     try
1550     {
1551         dataBaseCommand.ExecuteNonQuery();
1552
1553         // close database connection
1554         dataBaseCommand.get_Connection().Close();
1555     }
1556     catch (e)
1557     {
1558         Response.Write("<p>Exception: " + e.ToString() +
1559             "<b/> QueryString = " + queryString + "</p>");
1560         ok = false; // we failed for some reason
1561     }
1562
1563     return ok;
1564 } // end rmvClassGradeEnrollID
1565
1566 function absentTardyStudent(suid : String, classid : String,
1567     date : String, table : String) : Boolean
1568 {
1569     var ok : Boolean = true;
1570
1571     var classEnrollID = getEnrollID(suid, classid);
1572
1573     if (absentTardyExists(classEnrollID, date, table))
1574     {
1575         return false;
1576     }
1577
1578     // establish a connection, and query the database
1579     var dataBaseConnection: OleDbConnection = new
1580         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1581
1582     var queryString : System.String =
1583         "INSERT INTO " +
1584         table +
1585         " (" +
1586         vars.classenrollmentidField + ", " + vars.dateField + ")" +
```

```

1588         " VALUES" +
1589         "(" + classEnrollID + ", #" + date + "#)";
1590
1591     var dataBaseCommand : OleDbCommand =
1592         new OleDbCommand( queryString );
1593
1594     dataBaseCommand.set_Connection(dataBaseConnection);
1595
1596     dataBaseConnection.Open();
1597
1598     try
1599     {
1600         dataBaseCommand.ExecuteNonQuery();
1601
1602         // close database connection
1603         dataBaseCommand.get_Connection().Close();
1604     }
1605     catch (e)
1606     {
1607         Response.Write("<p>Exception: " + e.ToString() +
1608             "<b/> QueryString = " + queryString + "</p>");
1609         ok = false; // we failed for some reason
1610     }
1611
1612     dataBaseCommand.Connection.Close();
1613
1614     return ok;
1615 } // end absentTardyStudent
1616
1617 function absentTardyExists(classenrollid : String, date : String, table : String) : Boolean
1618 {
1619     // establish a connection, and query the database
1620     var dataBaseConnection: OleDbConnection = new
1621         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1622
1623     var queryString : System.String =
1624         "SELECT " +
1625         vars.classenrollmentidField +
1626         " FROM " +
1627         table +
1628         " WHERE " +
1629         "(" + vars.classenrollmentidField + " = " + classenrollid + ")" + " AND
1630         "(" + vars.dateField + " = #" + date + "#)";
1631
1632     dataBaseConnection.Open();
1633
1634     var dataBaseCommand : OleDbCommand =
1635         new OleDbCommand( queryString, dataBaseConnection );
1636
1637     try
1638     {
1639         var dataReader = dataBaseCommand.ExecuteReader();
1640
1641         var ok;
1642
1643         if (dataReader.Read())
1644             ok = true;
1645         else
1646             ok = false;
1647         dataBaseCommand.Connection.Close();
1648     }
1649     catch (e)
1650     {
1651         Response.Write("<p>Exception: " + e.ToString() +

```

```
1652         "<b/> QueryString = " + queryString + "</p>");
1653     ok = false; // we failed for some reason
1654 }
1655
1656     dataBaseCommand.Connection.Close();
1657
1658     return ok;
1659 } // end absentTardyExists
1660
1661 function createQuizTest(desc : String, type : String, date : String,
1662     classid : String, table : String) : Boolean
1663 {
1664     var ok : Boolean = true;
1665
1666     if (quizTestExists(desc, type, date, classid, table))
1667     {
1668         return false;
1669     }
1670
1671     // establish a connection, and query the database
1672     var dataBaseConnection: OleDbConnection = new
1673         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1674
1675     var queryString : System.String =
1676         "INSERT INTO " +
1677             table +
1678             " (" +
1679                 vars.descriptionField + ", " + vars.typeField + ", " + vars.dateField
1680                 + ", " + vars.classidField + ")" +
1681             " VALUES " +
1682             "(" + desc + ", " + type + ", " + date + ", " + classid + ")";
1683
1684     var dataBaseCommand : OleDbCommand =
1685         new OleDbCommand( queryString );
1686
1687     dataBaseCommand.set_Connection(dataBaseConnection);
1688
1689     dataBaseConnection.Open();
1690
1691     try
1692     {
1693         dataBaseCommand.ExecuteNonQuery();
1694     }
1695     catch (e)
1696     {
1697         Response.Write("<p>Exception: " + e.ToString() +
1698             "<b/> QueryString = " + queryString + "</p>");
1699         ok = false; // we failed for some reason
1700     }
1701
1702     dataBaseCommand.Connection.Close();
1703
1704     return ok;
1705 } // end createQuizTest
1706
1707 function quizTestExists(desc : String, type : String, date : String,
1708     classid : String, table : String) : Boolean
1709 {
1710     var ok : Boolean;
1711
1712     // establish a connection, and query the database
1713     var dataBaseConnection: OleDbConnection = new
1714         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1715
1716     var queryString : System.String =
1717         "SELECT " +
```

```
1718         vars.descriptionField +
1719         " FROM " +
1720         table +
1721         " WHERE " +
1722         "(" + vars.descriptionField + " = '" + desc + "'" + " AND " +
1723         "(" + vars.typeField + " = '" + type + "'" + " AND " +
1724         "(" + vars.dateField + " = '" + date + "'" + " AND " +
1725         "(" + vars.classidField + " = '" + classid + "'";
1726
1727     dataBaseConnection.Open();
1728
1729     var dataBaseCommand : OleDbCommand =
1730         new OleDbCommand( queryString, dataBaseConnection );
1731
1732     var dataReader = dataBaseCommand.ExecuteReader();
1733
1734     if (dataReader.Read())
1735     {
1736         ok = true;
1737     }
1738     else
1739     {
1740         ok = false;
1741     }
1742
1743     dataBaseCommand.Connection.Close();
1744
1745     return ok;
1746 } // end quizTestExists
1747
1748 function getQTID(desc : String, classid : String, table : String)
1749 {
1750     var result = -1;
1751     var queryString : System.String =
1752         "SELECT " +
1753         vars.quizTestIDField +
1754         " FROM " +
1755         table +
1756         " WHERE " +
1757         "(" + vars.descriptionField + " = '" + desc + "'" + " AND " +
1758         "(" + vars.classidField + " = '" + classid + "'";
1759
1760     try
1761     {
1762         // establish a connection, and query the database
1763         var dataBaseConnection: OleDbConnection = new
1764             OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) )
1765         ;
1766
1767         dataBaseConnection.Open();
1768
1769         var dataBaseCommand : OleDbCommand =
1770             new OleDbCommand( queryString, dataBaseConnection );
1771
1772         var dataReader = dataBaseCommand.ExecuteReader();
1773
1774         if (dataReader.Read())
1775             result = dataReader.GetInt32 ( 0 ) ; // get the ID
1776         else
1777             result = -1;
1778
1779         // close database connection
1780         dataBaseCommand.Connection.Close();
1781     }
1782     catch (e)
1783     {
```

```
1783     Response.Write(e + "  Query String in UserId: " + queryString + "<br />");
1784 }
1785 return result;
1786 } // end getQTID
1787
1788 function initializeGrade(qtid : String, classid : String) : Boolean
1789 {
1790     var ok : Boolean = true;
1791
1792     // establish a connection, and query the database
1793     var dataBaseConnection: OleDbConnection = new
1794         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1795
1796     var queryString : System.String = "INSERT INTO Grade ( QuizTestID,
1797     classEnrollmentID) "
1798     + "SELECT " + qtid + ", ClassEnrollment.classEnrollmentID "
1799     + "FROM ClassEnrollment WHERE ClassEnrollment.ClassID =" + classid + "";
1800
1801     var dataBaseCommand : OleDbCommand =
1802         new OleDbCommand( queryString );
1803
1804     dataBaseCommand.set_Connection(dataBaseConnection);
1805
1806     dataBaseConnection.Open();
1807
1808     try
1809     {
1810         dataBaseCommand.ExecuteNonQuery();
1811
1812         // close database connection
1813         dataBaseCommand.get_Connection().Close();
1814     }
1815     catch (e)
1816     {
1817         Response.Write("<p>Exception: " + e.ToString() +
1818             "<b/> QueryString = " + queryString + "</p>");
1819         ok = false; // we failed for some reason
1820     }
1821
1822     dataBaseCommand.Connection.Close();
1823
1824     return ok;
1825 } // end initializeGrade
1826
1827 function addQTPerc( classid : String, quiz : String, test : String,
1828     hw : String, table : String ) : Boolean
1829 {
1830     var ok : Boolean = true;
1831     // establish a connection, and query the database
1832     var dataBaseConnection: OleDbConnection = new
1833         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1834
1835     var queryString : System.String =
1836         "UPDATE " +
1837         table +
1838         " SET " +
1839         vars.quizField + " = '" + quiz + "', " +
1840         vars.testField + " = '" + test + "', " +
1841         vars.HWField + " = '" + hw +
1842         "' WHERE " +
1843         "(" + vars.classidField + " = " + classid + ")";
1844
1845     var dataBaseCommand : OleDbCommand =
1846         new OleDbCommand( queryString );
```

```
1846
1847     dataBaseCommand.set_Connection(dataBaseConnection);
1848
1849     dataBaseConnection.Open();
1850
1851     try
1852     {
1853         dataBaseCommand.ExecuteNonQuery();
1854
1855         // close database connection
1856         dataBaseCommand.get_Connection().Close();
1857     }
1858     catch (e)
1859     {
1860         Response.Write("<p>Exception: " + e.ToString() +
1861             "<b/> QueryString = " + queryString + "</p>");
1862         ok = false; // we failed for some reason
1863     }
1864
1865     return ok;
1866 } // end addQTPerc
1867
1868 function getStudentClassesEnrolled(suid : String)
1869 {
1870     var arr = new Array();
1871     var i = 0;
1872
1873     // establish a connection, and query the database
1874     var dataBaseConnection: OleDbConnection = new
1875         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1876
1877     var queryString : System.String =
1878         "SELECT " +
1879             vars.classenrollmentidField +
1880             " FROM " +
1881             vars.classEnrollmentTable +
1882             " WHERE " +
1883             "(" + vars.studentidField + " = " + suid + ")";
1884
1885     var dataBaseCommand : OleDbCommand =
1886         new OleDbCommand( queryString );
1887
1888     dataBaseCommand.set_Connection(dataBaseConnection);
1889
1890     dataBaseConnection.Open();
1891
1892     var dataReader = dataBaseCommand.ExecuteReader();
1893
1894     while (dataReader.Read())
1895     {
1896         arr[i] = dataReader.GetInt32(0);
1897         i++;
1898     }
1899
1900     dataBaseCommand.Connection.Close();
1901
1902     for (var j = 0; j < arr.length; j++)
1903     {
1904         calcQAvg( arr[j] );
1905         calcTAvg( arr[j] );
1906         calcHWAvg( arr[j] );
1907         calcCGAvg( arr[j] );
1908     }
1909
1910 } // end getStudentClassesEnrolled
1911
```

```
1912 function getStudentsEnrolled(cid : String)
1913 {
1914     var arr = new Array();
1915     var i = 0;
1916
1917     // establish a connection, and query the database
1918     var dataBaseConnection: OleDbConnection = new
1919         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1920
1921     var queryString : System.String =
1922         "SELECT " +
1923             vars.classenrollmentidField +
1924             " FROM " +
1925             vars.classEnrollmentTable +
1926             " WHERE " +
1927             "(" + vars.classidField + " = " + cid + ")";
1928
1929     var dataBaseCommand : OleDbCommand =
1930         new OleDbCommand( queryString );
1931
1932     dataBaseCommand.set_Connection(dataBaseConnection);
1933
1934     dataBaseConnection.Open();
1935
1936     var dataReader = dataBaseCommand.ExecuteReader();
1937
1938     while (dataReader.Read())
1939     {
1940         arr[i] = dataReader.GetInt32(0);
1941         i++;
1942     }
1943
1944     dataBaseCommand.Connection.Close();
1945
1946     for (var j = 0; j < arr.length; j++)
1947     {
1948         calcQAvg( arr[j] );
1949         calcTAvg( arr[j] );
1950         calcHWAvg( arr[j] );
1951         calcCGAvg( arr[j] );
1952     }
1953 } // end getStudentsEnrolled
1954
1955
1956 function calcQAvg(classenrollid : String)
1957 {
1958     var qAvg = 0;
1959     var sum = 0;
1960     var count = 0;
1961
1962     // establish a connection, and query the database
1963     var dataBaseConnection: OleDbConnection = new
1964         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
1965
1966     var queryString : System.String = "SELECT Grade.Grade FROM QuizTestTable INNER
1967 JOIN "
1968 + "((ClassEnrollment INNER JOIN ClassGrade ON ClassEnrollment.ClassEnrollmentID
1969 = "
1970 + "ClassGrade.classEnrollmentID) INNER JOIN Grade ON ClassEnrollment.
1971 ClassEnrollmentID = "
1972 + "Grade.classEnrollmentID) ON QuizTestTable.QuizTestID = Grade.QuizTestID WHERE
1973 + "(((ClassGrade.classEnrollmentID)= " + classenrollid + " ) "
1974 + "AND ((QuizTestTable.Type) = " + vars.quizField + "));"
1975
1976     var dataBaseCommand : OleDbCommand =
```

```

1974     new OleDbCommand( queryString );
1975
1976     dataBaseCommand.set_Connection(dataBaseConnection);
1977
1978     dataBaseConnection.Open();
1979
1980     var dataReader = dataBaseCommand.ExecuteReader();
1981
1982     while (dataReader.Read())
1983     {
1984         sum += dataReader.GetInt32(0);
1985         count++;
1986     }
1987
1988     dataBaseCommand.Connection.Close();
1989
1990     if (count != 0)
1991     {
1992         qAvg = (sum / count);
1993
1994         var queryString2 : System.String = "UPDATE ClassGrade SET ClassGrade.
QuizAverage = "
+ qAvg + " WHERE ( ClassGrade.classEnrollmentID = " + classenrollid + " )";
1995
1996         var dataBaseCommand1 : OleDbCommand =
1997             new OleDbCommand( queryString2 );
1998
1999         dataBaseCommand1.set_Connection(dataBaseConnection);
2000
2001         dataBaseConnection.Open();
2002
2003         dataBaseCommand1.ExecuteNonQuery();
2004
2005         dataBaseCommand1.Connection.Close();
2006     }
2007
2008 }
2009
2010
2011 function calcTAvg(classenrollid : String)
2012 {
2013     var tAvg = 0;
2014     var sum = 0;
2015     var count = 0;
2016
2017     // establish a connection, and query the database
2018     var dataBaseConnection: OleDbConnection = new
2019         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
2020
2021     var queryString : System.String = "SELECT Grade.Grade FROM QuizTestTable INNER
JOIN "
2022     + "((ClassEnrollment INNER JOIN ClassGrade ON ClassEnrollment.ClassEnrollmentID
= "
2023     + "ClassGrade.classEnrollmentID) INNER JOIN Grade ON ClassEnrollment.
ClassEnrollmentID = "
2024     + "Grade.classEnrollmentID) ON QuizTestTable.QuizTestID = Grade.QuizTestID WHERE
"
2025     + "(((ClassGrade.classEnrollmentID)= " + classenrollid + " ) "
2026     + "AND ((QuizTestTable.Type) = '" + vars.testField + "'))";
2027
2028     var dataBaseCommand : OleDbCommand =
2029         new OleDbCommand( queryString );
2030
2031     dataBaseCommand.set_Connection(dataBaseConnection);
2032
2033     dataBaseConnection.Open();
2034

```

```
2035     var dataReader = dataBaseCommand.ExecuteReader();
2036
2037     while (dataReader.Read())
2038     {
2039         sum += dataReader.GetInt32(0);
2040         count++;
2041     }
2042
2043     dataBaseCommand.Connection.Close();
2044
2045     if (count != 0)
2046     {
2047         tAvg = (sum / count);
2048
2049         var queryString2 : System.String = "UPDATE ClassGrade SET ClassGrade.  
TestAverage = "  
+ tAvg + " WHERE ( ClassGrade.classEnrollmentID = " + classenrollid + " )";
2050
2051         var dataBaseCommand1 : OleDbCommand =  
new OleDbCommand( queryString2 );
2052
2053         dataBaseCommand1.set_Connection(dataBaseConnection);
2054
2055         dataBaseConnection.Open();
2056
2057         dataBaseCommand1.ExecuteNonQuery();
2058
2059         dataBaseCommand1.Connection.Close();
2060     }
2061 }
2062
2063 }
2064
2065 function calcHWAvg(classenrollid : String)
2066 {
2067     var hwAvg = 0;
2068     var sum = 0;
2069     var count = 0;
2070
2071     // establish a connection, and query the database
2072     var dataBaseConnection: OleDbConnection = new  
OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
2073
2074     var queryString : System.String = "SELECT Grade.Grade FROM QuizTestTable INNER  
JOIN "  
2075 + "((ClassEnrollment INNER JOIN ClassGrade ON ClassEnrollment.ClassEnrollmentID  
= "  
2076 + "ClassGrade.classEnrollmentID) INNER JOIN Grade ON ClassEnrollment.  
ClassEnrollmentID = "  
2077 + "Grade.classEnrollmentID) ON QuizTestTable.QuizTestID = Grade.QuizTestID WHERE  
2078 + "(((ClassGrade.classEnrollmentID)= " + classenrollid + " ) "  
2079 + "AND ((QuizTestTable.Type) = " + vars.HWField + "));";
2080
2081     var dataBaseCommand : OleDbCommand =  
new OleDbCommand( queryString );
2082
2083     dataBaseCommand.set_Connection(dataBaseConnection);
2084
2085     dataBaseConnection.Open();
2086
2087     var dataReader = dataBaseCommand.ExecuteReader();
2088
2089     while (dataReader.Read())
2090     {
2091         sum += dataReader.GetInt32(0);
2092         count++;
2093     }
2094 }
2095 }
```

```
2096
2097     dataBaseCommand.Connection.Close();
2098
2099     if (count != 0)
2100     {
2101         hwAvg = (sum / count);
2102
2103         var queryString2 : System.String = "UPDATE ClassGrade SET ClassGrade.
2104         HWAverage = "
2105         + hwAvg + " WHERE ( ClassGrade.classEnrollmentID = " + classenrollid + " )";
2106
2107         var dataBaseCommand1 : OleDbCommand =
2108             new OleDbCommand( queryString2 );
2109
2110         dataBaseCommand1.set_Connection(dataBaseConnection);
2111
2112         dataBaseConnection.Open();
2113
2114         dataBaseCommand1.ExecuteNonQuery();
2115
2116         dataBaseCommand1.Connection.Close();
2117     }
2118 }
2119 function calcCGAvg(classenrollid : String)
2120 {
2121     var classGrade = 0;
2122
2123     // establish a connection, and query the database
2124     var dataBaseConnection: OleDbConnection = new
2125         OleDbConnection( ConfigurationSettings.AppSettings("ConnectionString" ) );
2126
2127     var queryString : System.String = "SELECT ClassGrade.QuizAverage, "
2128     + "ClassGrade.TestAverage, ClassGrade.HWAverage, ClassGradeScale.Quiz, "
2129     + "ClassGradeScale.Test, ClassGradeScale.Homework FROM ((Class INNER JOIN
2130     ClassEnrollment ON "
2131     + "Class.ClassID = ClassEnrollment.ClassID) INNER JOIN ClassGradeScale ON Class.
2132     ClassID = "
2133     + "ClassGradeScale.ClassID) INNER JOIN ClassGrade ON ClassEnrollment.
2134     ClassEnrollmentID = "
2135     + "ClassGrade.classEnrollmentID WHERE (((ClassGrade.classEnrollmentID) = "
2136     + classenrollid + "));";
2137
2138     var dataBaseCommand : OleDbCommand =
2139         new OleDbCommand( queryString );
2140
2141     dataBaseCommand.set_Connection(dataBaseConnection);
2142
2143     dataBaseConnection.Open();
2144
2145     var dataReader = dataBaseCommand.ExecuteReader();
2146
2147     if (dataReader.Read())
2148     {
2149         classGrade = (dataReader.GetInt32(0)*dataReader.GetDouble(3))
2150         + (dataReader.GetInt32(1)*dataReader.GetDouble(4))
2151         + (dataReader.GetInt32(2)*dataReader.GetDouble(5));
2152     }
2153
2154     dataBaseCommand.Connection.Close();
2155
2156     var queryString2 : System.String = "UPDATE ClassGrade SET ClassGrade.ClassGrade
2157     = "
2158     + classGrade + " WHERE ( ClassGrade.classEnrollmentID = " + classenrollid + " )"
2159     ;
```

```
2156     var dataBaseCommand1 : OleDbCommand =
2157         new OleDbCommand( queryString2 );
2158
2159     dataBaseCommand1.set_Connection(dataBaseConnection);
2160
2161     dataBaseConnection.Open();
2162
2163     dataBaseCommand1.ExecuteNonQuery();
2164
2165     dataBaseCommand1.Connection.Close();
2166 }
2167 </script>
```

Web.Config

```
1 <!-- Fig 23.33: Web.config -->
2 <!-- Web.Config Configuration File -->
3 <configuration>
4   <appSettings>
5     <add key="ConnectionString" value="Provider=Microsoft.Jet.OLEDB.4.0; &#xA;
      Data Source=E:\iw3http\School2\applicationDB.mdb"/>
6   </appSettings>
7   <system.web>
8     <compilation>
9       <assemblies>
10        <add assembly="MSDATASRC, Version=7.0.3300.0, Culture=neutral, PublicKeyToken=
      b03f5f7f11d50a3a"/></assemblies></compilation></system.web></configuration>
11
```

Index.htm

```
1 <html>
2 <head>
3 <meta http-equiv="Refresh"
4 content="0;url=http://127.0.0.1/School2/password.aspx">
5 </head>
6 </html>
7
```