

COIN 496 Senior Portfolio

Stephen Thackston
November 15, 2007

Programs

1. The stack program was created for COINS 315 or Data Structures. The grade received for this program was a 90 or an A. This program was created using Visual Studio 2005. The program can be used by almost all C++ IDEs, although inherit "quirks" could result if not used by the original IDE.
2. The time2 program was created for COINS 325 or Java. The grade received for this program was a 100 or an A. This program was created using Netbeans 5.5. The program can be used by almost all Java IDEs if it is in the .java form.
3. The quiz program was created for COINS 332 or Applied Networking. The grade received for this program was a 100 or an A. This program was created using Visual Studio 2005. Any web page editor will work with this .htm file. Viewing the web page in any non Internet Explorer browsers could cause problems.
4. This project is substituted for Applied Systems which will be taken in Fall 2008. This project was created for COINS 419 or Database Management. The grade received for this project was a 89 or a B. This project used Microsoft Access 2003 to create the database. It also used Microsoft Visio 2005 to create the UML Design. Accessing this project can only be done through Microsoft Access; different versions of Access other than the one created in could cause problems.

```
// Stephen Thackston
// Lab 6
// October 1, 2007
// November 16, 2007
// COINS 315
// Grade: 90
// Program that creates a stack
#include <iostream>

using namespace std;

class Stack {
public:
    Stack(int size);    //use size for the length of the underlying array

    ~Stack();          //clean up dynamic memory

    bool empty() const; //return true iff stack has no elements

    bool top(int &output) const; //return top element of stack

    bool push(int item);    //add elements to stack

    bool pop();            //remove elements from stack

private:
    int* items;
    int number, maxSize;

};
```

```
// Stephen Thackston
// Lab 6
// October 1, 2007
// November 16, 2007
// COINS 315
// Grade: 90
// Program that creates a stack
#include <iostream>
#include "Stack.h"

using namespace std;

Stack::Stack(int size)
{
    number=0;
    maxSize = size;

    items=new int[maxSize]; // creates array

    for (int i=0; i<maxSize; i++)
    {
        items[i] = 0;    // Initialize all elements to zero.
    }
}

Stack::~~Stack()
{
    delete [] items; //deletes array items
}

// empty stack test
bool Stack::empty() const
{
    return (number==0);
}

bool Stack::top(int &output) const
{
    if(number==0)
    {
        //cout <<"nothing"<<endl;
        return false;
    }
    else
    {
        //cout<<"something"<<endl;
        return items[number-1];
    }
}

// Puts things into a stack
bool Stack::push(int item)
{
    if(number <= maxSize-1)
    {
        items[number] = item;
        //cout<<items[number]<<endl;
        number++;
        return true;
    }
    else return false;
}

// takes things off of a stack
bool Stack::pop()
{
    if (number !=0)
    {
        number--;
        //cout<<"something"<<endl;
    }
}
```

```
        return true;
    }
    else
    {
        //cout <<"nothing"<<endl;
        return false;
    }
}
```

```
#include <iostream>
#include "Stack.h"
using namespace std;

void main()
{
    Stack mystack(5);    //space for 5 elements
    int x;
    mystack.empty();     // should return true
    mystack.pop();       //should return false, nothing to pop
    mystack.top(x);       //should return false, nothing to top, x should remain unchanged

    mystack.push(3);      //should return true;
    mystack.empty();      // should return false
    mystack.top(x);       //should return true, x should now be a 3
    mystack.pop();        //should return true,
    mystack.empty();      // should return true

    for (int i=10; i<=50; i+=10)    //10, 20, 30, 40, 50
        mystack.push(i);           //all 5 pushes should return true;
    mystack.push(3);                //should return false; all full*/
}
```

```
C:\WINDOWS\system32\cmd.exe
false
include <
include "
true
true
Press any key to continue . . . -
ing name:
ack::Stack(
(
number'
maxSize
items=)
for (i)
(
it(
)
)
)
ack::~Stack()
(
delete [] items; //deletes array items
)
}
Stack::empty() const
{
return (number==0);
}
Stack::top(int &output) const
```

Solution 'tab 6' (1)

lab 6

- Header F
- Stack
- Resource
- Source F
- C++ Stack
- C++ tests

Solution Explorer

Properties

pop VCodeFunction

C++

(Name)	pt
Access	pt
CanOverride	F
File	f
FullName	St
IsConstant	F
IsInjected	F
IsInline	F
IsOverloaded	F
IsSealed	F
IsShared	F
IsTemplate	F
IsVirtual	F

(Name)

Sets/returns the name

put from: Build

Build icons: Run, Stop, Break, Step Into, Step Over, Step Out, Step Back, Step Forward, Step Here, Step Next, Step Previous, Step Return, Step Through, Step Through All, Step Through All (Current), Step Through All (Next), Step Through All (Previous), Step Through All (Return), Step Through All (Next), Step Through All (Previous), Step Through All (Return)

```
// Stephen Thackston
// Lab Exercise 1 - Time: Part 1
// February 13, 2007
// November 15, 2007
// COINS 325
// Grade: 100
// Program that increments time

package labexercisetimepart1;

public class Time2
{
    private int hour; // 0 - 23
    private int minute; // 0 - 59
    private int second; // 0 - 59

    // Time2 no-argument constructor: initializes each instance variable
    // to zero; ensures that Time2 objects start in a consistent state
    public Time2()
    {
        this ( 0 , 0 , 0 ); // invoke Time2 constructor with three arguments
    } // end Time2 no-argument constructor

    // Time2 constructor: hour supplied, minute and second defaulted to 0
    public Time2( int h )
    {
        this ( h, 0 , 0 ); // invoke Time2 constructor with three arguments
    } // end Time2 one-argument constructor

    // Time2 constructor: hour and minute supplied, second defaulted to 0
    public Time2( int h, int m )
    {
        this ( h, m, 0 ); // invoke Time2 constructor with three arguments
    } // end Time2 two-argument constructor

    // Time2 constructor: hour, minute and second supplied
    public Time2( int h, int m, int s )
    {
        setTime( h, m, s ); // invoke setTime to validate time
    } // end Time2 three-argument constructor

    // Time2 constructor: another Time2 object supplied
    public Time2( Time2 time )
    {
        // invoke Time2 constructor with three arguments
        this ( time.getHour(), time.getMinute(), time.getSecond() );
    } // end Time2 constructor with Time2 argument

    // Set Methods
    // set a new time value using universal time; perform
    // validity checks on data; set invalid values to zero
    public void setTime( int h, int m, int s )
    {
        setHour( h ); // set the hour
        setMinute( m ); // set the minute
        setSecond( s ); // set the second
    } // end method setTime

    // validate and set hour
    public void setHour( int h )
```



```
{
    hour = ( ( h >= 0 && h < 24 ) ? h : 0 );
} // end method setHour

// validate and set minute
public void setMinute( int m )
{
    minute = ( ( m >= 0 && m < 60 ) ? m:0);
} // end method setMinute

// validate and set second
public void setSecond( int s )
{
    second = ( ( s >= 0 && s < 60 ) ? s:0);
} // end method setSecond

// Get Methods
// get hour value
public int getHour()
{
    return hour;
} // end method getHour

// get minute value
public int getMinute()
{
    return minute;
} // end method getMinute

// get second value
public int getSecond()
{
    return second;
} // end method getSecond

// Tick the time by one second
public void tick()
{
    setSecond(second +1);

    if(second ==0)
    {
        incrementMinute();
    }
}

public void incrementMinute()
{
    setMinute(minute +1);
    if (minute==0)
    {
        incrementHour();
    }
}

public void incrementHour()
{
    setHour(hour +1);
}

// convert to String in universal-time format (HH:MM:SS)
public String toUniversalString()
{
    return String.format(
        "%02d:%02d:%02d", getHour(), getMinute(), getSecond() );
} // end method toUniversalString
```

```
// convert to String in standard-time format (H:MM:SS AM or PM)
public String toString()
{
    return String.format( "%d:%02d:%02d %s" ,
        ( { getHour() == 0 || getHour() == 12 } ? 12 : getHour() % 12 ),
        getMinute(), getSecond(), ( getHour() < 12 ? "AM" : "PM" ) );
} // end method toString
} // end class Time2
```

```
// Stephen Thackston
// Lab Exercise 1 - Time: Part 1
// February 13, 2007
// November 15, 2007
// COINS 325
// Grade: 100
// Program that increments time

package labexercisetimepart1;

import java.util.Scanner;

public class Time2Test
{
    public static void main( String args[] )
    {
        Scanner input = new Scanner( System.in );

        Time2 time = new Time2(); // the Time2 object

        int choice = getMenuChoice();

        while ( choice != 5 )
        {
            switch ( choice )
            {
                case 1 : // set hour
                {
                    System.out.println("Enter Hours: ");
                    int hours = input.nextInt();

                    if (hours >= 24)
                    {
                        System.out.println("Invalid hours");
                    }

                    time.setHour(hours);
                    break;
                }
                case 2 : // set minute
                {
                    System.out.println( "Enter Minutes: " );
                    int minutes = input.nextInt();

                    if (minutes >= 60)
                    {
                        System.out.println("Invalid minutes");
                    }

                    time.setMinute(minutes);

                    break ;
                }
                case 3 : // set seconds
                {
                    System.out.println("Enter Seconds: " );
                    int seconds = input.nextInt();

                    if (seconds >= 60)
                    {
                        System.out.println("Invalid seconds");
                    }

                    time.setSecond(seconds);

                    break ;
                }
                case 4 : //add 1 second
            }
        }
    }
}
```

```
        {
            time.tick();
            break ;
        }
    } // end switch

    System.out.printf( "Hour: %d Minute: %d Second: %d\n",
        time.getHour(), time.getMinute(), time.getSecond() );

    System.out.printf( "Universal time: %s Standard time: %s\n",
        time.toUniversalString(), time.toString() );

    choice = getMenuChoice();

    } // end while
} // end main

// prints a menu and returns a value corresponding to the menu choice
private static int getMenuChoice()
{
    Scanner input = new Scanner( System.in );
    System.out.println( "1. Set Hour" );
    System.out.println( "2. Set Minute" );
    System.out.println( "3. Set Second" );
    System.out.println( "4. Add 1 second" );
    System.out.println( "5. Exit" );
    System.out.println( "Choice: " );

    return input.nextInt();
} // end method getMenuChoice
} // end class Time2Test
```



Output: Lab_Exercise_1_-_Time_Part_1 (run)

```

days-jar:
compile:
run:
1. Set Hour
2. Set Minute
3. Set Second
4. Add 1 second
5. Exit
Choice:
1
Enter Hours:
6
Hour: 6 Minute: 0 Second: 0
Universal time: 06:00:00 Standard time: 6:00:00 AM
1. Set Hour
2. Set Minute
3. Set Second
4. Add 1 second
5. Exit
Choice:
2
Enter Minutes:
5
Hour: 6 Minute: 5 Second: 0
Universal time: 06:05:00 Standard time: 6:05:00 AM
1. Set Hour
2. Set Minute
3. Set Second
4. Add 1 second
5. Exit
Choice:
3
Enter Seconds:
10
Hour: 6 Minute: 5 Second: 10
Universal time: 06:05:10 Standard time: 6:05:10 AM
1. Set Hour
2. Set Minute
3. Set Second
4. Add 1 second
5. Exit
Choice:
4
Hour: 6 Minute: 5 Second: 11
Universal time: 06:05:11 Standard time: 6:05:11 AM
1. Set Hour
2. Set Minute
3. Set Second
4. Add 1 second
5. Exit
Choice:

```

Input

Close Input

Building Lab_Exercise_1_-_Time_Part_1 (run)...

Start | Lab 1

NetBeans IDE 5.0 - La...

Document1 - Microsoft ...

```

<!-- Stephen Thackston
      Lab 6 - Question 6
      January 24, 2007
      November 16, 2007
      COINS 332
      Grade: 100
      Web Page that creates a quiz -->
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/
  xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
  <title>Untitled Page</title>

  <script language="javascript" type="text/javascript">
    <!-- Creates global variables -->
    var upper = 9;
    var lower = 0;
    var size = upper-lower+1;
    var text = new Array ("Text2","Text3","Text4","Text5");
    var questions = new Array ("1+1","1x1","1x2","1x3","1x4","2+1","2+2","2x2",
    ", "3+1", "4x1");
    var answer = new Array (2, 2, 1, 0, 3, 2, 0, 3, 2, 1);
    var answer_text = new Array("2","1","2","3","4","3","4","4","4","4");
    var rand;

<!-- Function that shows questions and allows one to answer it -->
function Button1_onclick()
{
  var temp;
  var duplicate = false;
  rand=Math.floor(lower+Math.random()*size);

  <!-- creates a random question for the text box -->
  document.getElementById("Text1").value = questions[rand];

  document.getElementById(text[answer[rand]]).value = answer_text[rand];
  for (var i =0 ; i <4;i++)
  {
    do{
      duplicate = false;
      temp = Math.floor(lower+Math.random()*10);

      for (var j =0 ;j <4;j++)
      {
        if (temp == parseInt(document.getElementById(text[j]).value))
        {
          duplicate = true;
        }
      } while (duplicate);
      if (i != answer[rand])
      {
        document.getElementById(text[i]).value = temp;
      }
    }
  }

}

<!-- Function for correct or wrong alert -->
function Button2_onclick()
{
  <!-- Sets element to var dom -->
  var dom = document.getElementById ("myForm");

  if (dom.radio[answer[rand]].checked)

```

```
{
    window.alert("Correct");
    location.reload();
}

else
{
    window.alert("Wrong answer!!");
}

}

</script>

</head>
<body>
    <!-- Creates text and radio buttons -->
    <form action="" id="myForm">
        <input id="Text1" type="text" /><br />
        <input id="Radio2" type="radio" name="radio" />
        <input id="Text2" type="text" /><br />
        <input id="Radio3" type="radio" name="radio" />
        <input id="Text3" type="text" /><br />
        <input id="Radio4" type="radio" name="radio" />
        <input id="Text4" type="text" /><br />
        <input id="Radio5" type="radio" name="radio" />
        <input id="Text5" type="text" />
        <br />
        <input id="Button1" type="button" value="Generate Questions" onclick="return
        Button1_onclick()" />
        <input id="Button2" type="button" value="Answer" onclick="return Button2_onclick
        ()" />&nbsp;
    </form>
    <p id="ptext">
    </p>
</body>
</html>
```

File Edit View History Bookmarks Tools Help

Untitled Page - Mozilla Firefox

Back Forward Stop Home

Search Google

3+1

3

6

4

1

Generate Questions Answer

JavaScript Application

Correct

OK

Stephen Thackston

Project 1

August 2, 2007

November 16, 2007

COINS 419

Grade: 89

Project that creates a Database for an animal clinic

Kibble and Bits Animal Center

Project Created By:
Stephen Thackston
Ryan Wyndham

TABLE OF CONTENTS

1. Background
2. Problem Statement
3. Objectives
4. Assumptions
5. System Process

Assumptions:

To accommodate the compressed time schedule of the semester, assumptions were made. One assumption made was that an employee would be able to check their time worked, upcoming schedule, and be able to sign out through the database. This would all stem from one of the first forms that the employee would see. A complex boarding scheduler was substituted by a simple length of stay. The scheduler would have included differentiating price values for the size of dog; such as a medium dog weighing twenty to forty pounds would be charged a higher fee per night than a small dog. Also Kibbles and Bits Animal Center would have a central server which would connect all the terminals together; that would automatically backup the existing data every night. Employees would not be able to edit the same data at the same time, ensuring data integrity.

Background:

This business is a veterinarian boarding facility with the ability to board and treat animals. This business called Kibble and Bits Animal Center is in a highly competitive industry, with rivals such as Pet Smart and Pet Co. The pet industry has a number of regulations such as food and medicine regulations. The U.S. Food and Drug Administration (FDA) and the Center for Veterinary Medicine (CVM) monitor the food and medicine given to animals. The way Kibble and Bits Animal Center measures success is by a growing client base along with fiscal growth. There are many barriers that hinder the creation of a business like this. Competition is the main barrier to the animal care business. Organizations such as Pet Smart and Pet Co. that have a large customer base make it difficult for a local business to prosper. The growing cost for the technology to aid in the care of animals and rising insurance fees pose a hindrance as well. In order to combat these barriers one must need a large client base, and that can only occur with good service; a corner stone to any business. The proposed mission statement of Kibble and Bits Animal Center is "Pleasing People". This is accomplished by doing anything in our power as a business to give our clients the best service and care we can offer.

Objectives:


The objectives of this proposed database is to streamline everyday employee operations. Such as being able to access information about clients and their pets, thus doing away with hard copy files. This will also stop duplication of information and thus insuring data integrity. Orders will now be consolidated allowing employees to change what is needed. The database will also physically benefit our clients with a consolidated invoice.


Problem Statement:

The reason Kibble and Bits Animal Center (KBAC) are creating a database is for many reasons. The first and foremost is to remain competitive. Organizations such as Pet Smart and Pet Co. already implement a database in which it allowed them to be the companies they are today. With this database it will allow KBAC to organize its operations, such as better management towards our order system along with a streamlined system for our employees. This in turn will create increased profits which will help KBAC invest in new technologies. These technologies will help provide better care for our clients and thus also increase our revenue.

System Process:

One system process would add new clients. This would consist of the new client physically being present at Kibbles and Bits Animal Center, with their pet's previous medical records. The employee would then enter the client in the system and from there the client could choose to board or have their pet treated by the veterinarian. Management would be in charge of hiring employees. Once hired the management would input the employee's personal information such as address, date of birth, and social security number.

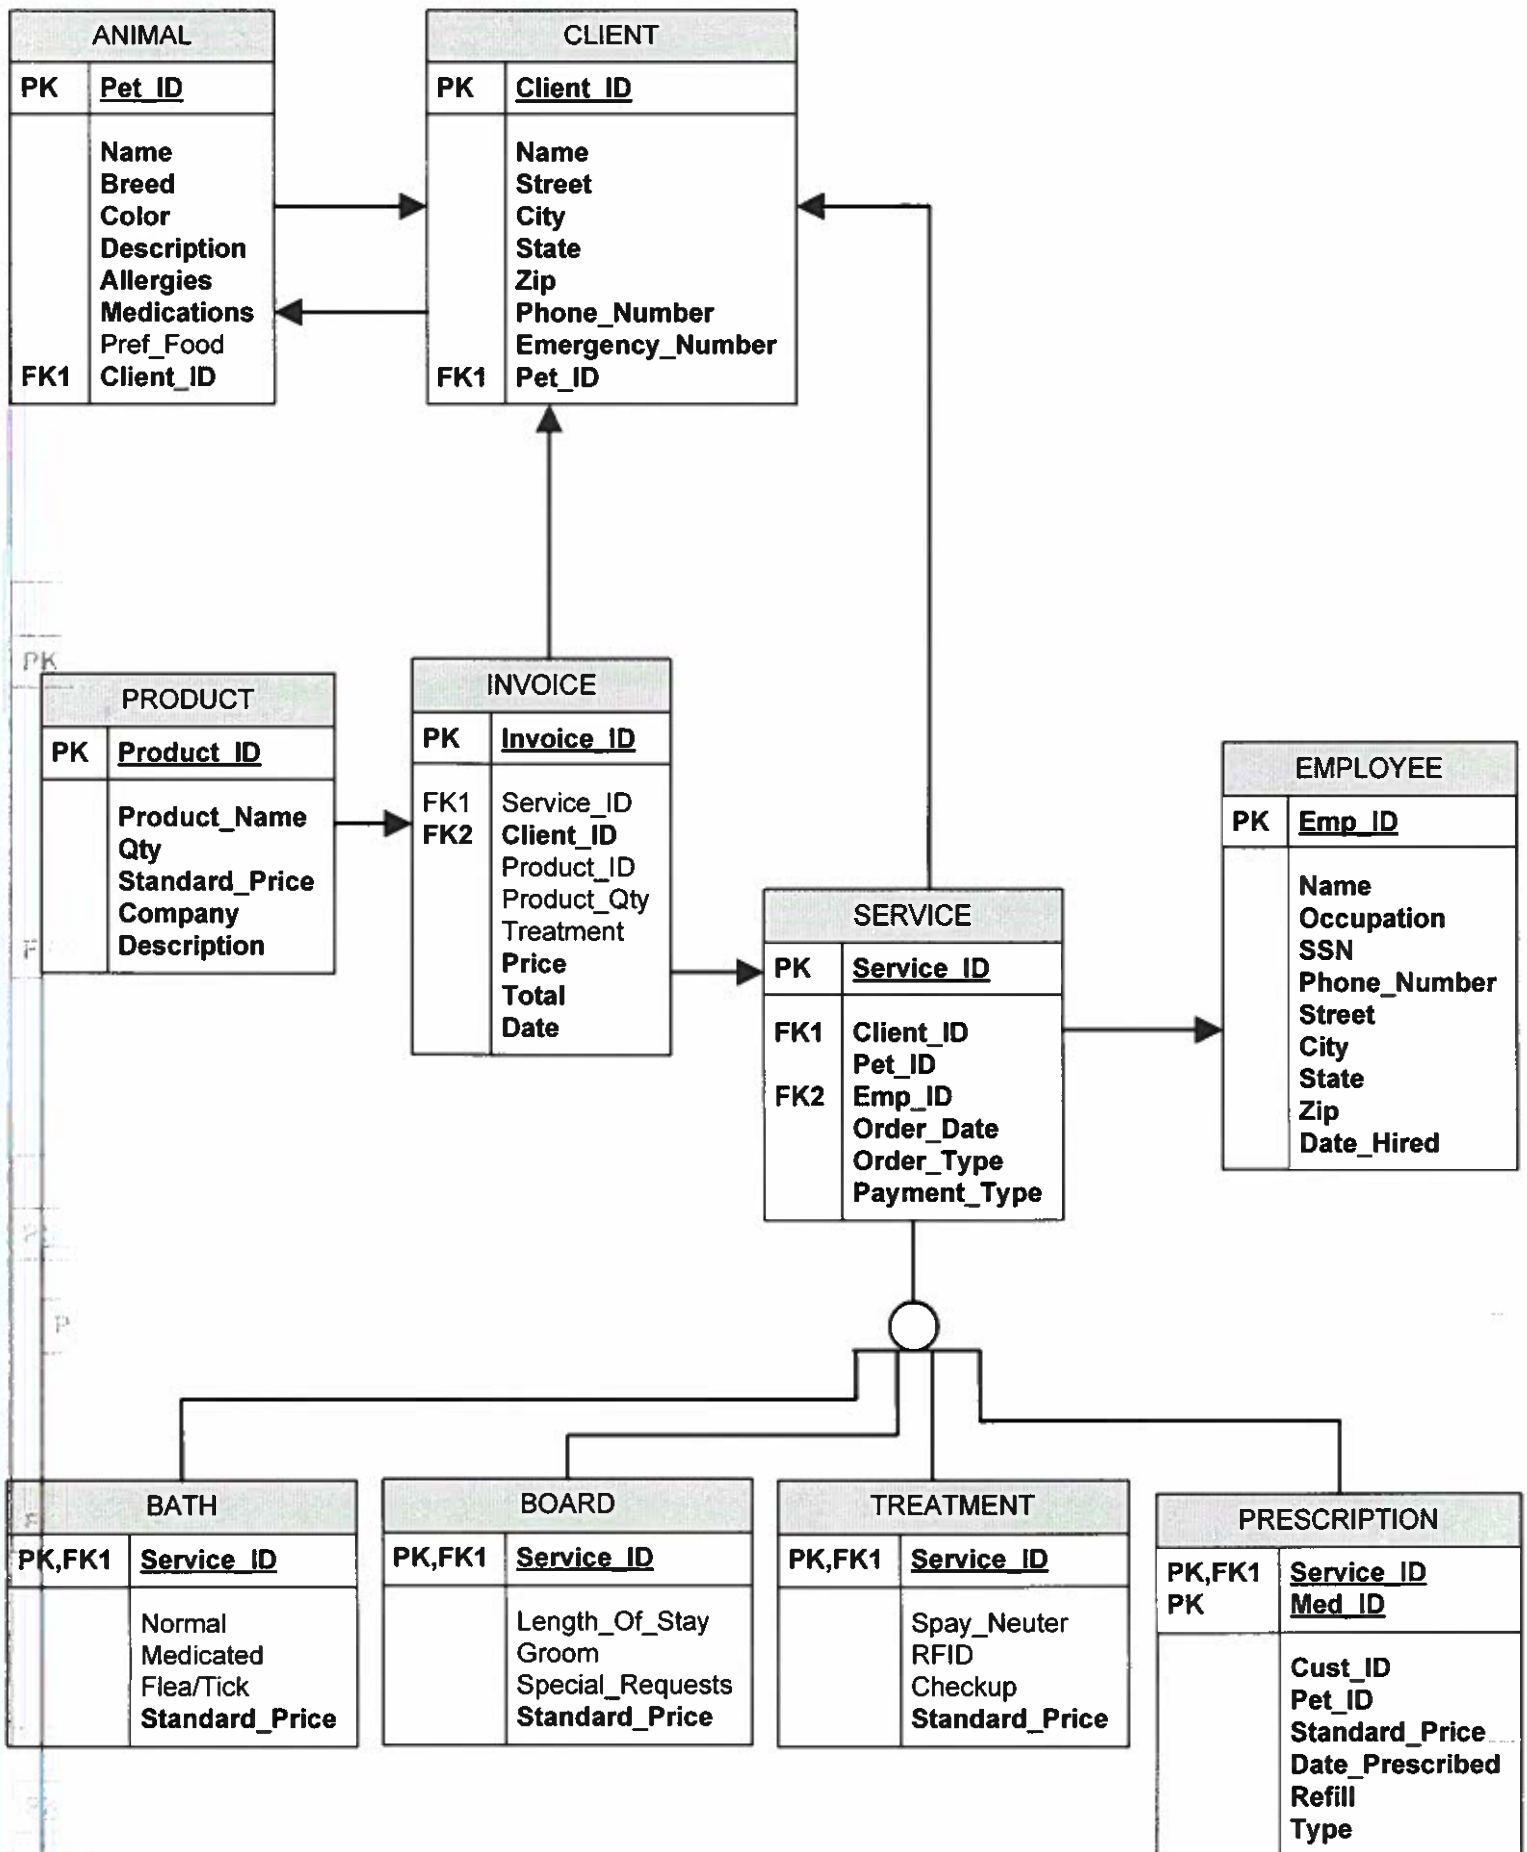

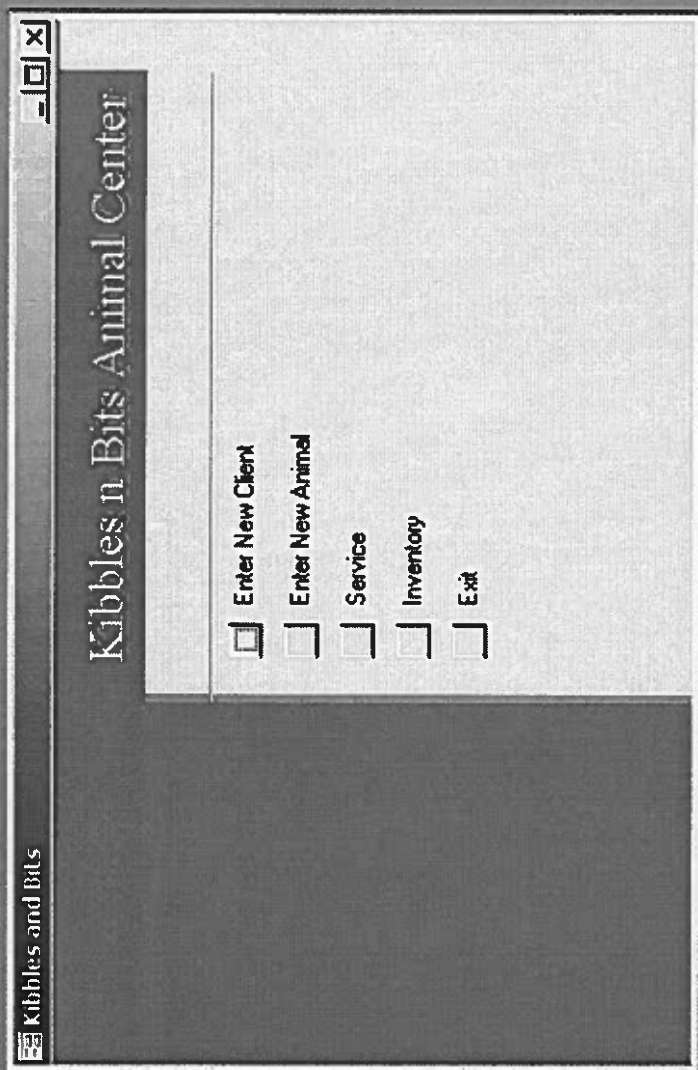

Enter New Client

Client ID

Autoknummer

Name

Street

City

State

Zip

Phone Number

Emergency Number

◀

Add Record

Save Record

▶

Close

Record: 14

1

of 1

(AutoNumber)

Pet ID

Animal Type

Name

Breed

Color

Description

Allergies

Medications

Preferred Food

Client ID

0

Existing Clients

	Client ID	Name	Street
▶	1	Stephen Thackston	543 Sophia Court
	2	Ryan Wyndham	567 Hollow Way
	3	Jeffrey Wadford	123 Elm Street
	4	Heather Gaskins	789 Echo Lane
	5	Noah Starnes	921 Lovely Road
*	(AutoNumber)		

Record: 1 1 of 5

Add Record

Close

Save Record

Record: 1 1 of 1

Service ID

(AutoNumber)

Bath

Client ID

0

Boarding

Employee ID

0

Treatment

Payment Type

Prescription

Invoice

Existing Clients

Name	Street	Client ID
▶ Heather Gaskins	789 Echo Lane	4
Jeffrey Wadford	123 Elm Street	3
Noah Starnes	921 Lovely Road	5
Ryan Wyndham	567 Hollow Way	2
Stephen Thackston	543 Sophia Court	1
*		(AutoNumber)

Record: 14 1 1 1 1 1 of 5

◀

Add Record

Save Record

Close

▶

Record: 14 1 1 1 1 1 of 1

Product

Product ID

Product Name

Standard Price

Company

Description

In Stock

Autocomplete

\$0.00

0

Existing Products

Product ID	Product Name	In Stock
1	Puppy Chow	
2	Advantage	
3	Flee Collar	
4	Dog Bowl	

Record: 1 of 4

Add Record

Refresh

Close

Record: 1 of 1

Ethics Papers

1. The Gambling Ethics Paper was created for COINS 315 or Data Structures. The grade received was an A.
2. The Code of Conduct Ethics Paper was created for COINS 325 or Java. The grade received was an A.
3. The Organ Donation Ethics Paper was created for COINS 332 or Applied Networking. The grade received was an A.

Gambling Ethics Paper

Stephen Thackston

COINS 315

Professor Underwood

September 19, 2007

Gambling; “to stake or risk money, or anything of value, on the outcome of something involving chance.”(Dictionary.com). Online gambling is doing the aforementioned using the internet as the medium. Online gambling comes in many forms such as games of chance or sports gambling. These two forms of gambling may not seem all that different but in the eyes of the law one is legal and the other is not. Federalism is the system that the United States uses. This system gives power to the states and the central government that the states support, because of this the states have their own rights and own laws. Article I, Section 8, Clause 3 of the United States Constitution also grants Congress the power to regulate interstate commerce; this has not been much of an issue until Interstate Wire Act of 1961. Not until the advent of the Internet did the regulation of gambling become a Federal issue. There have been numerous laws passed federally since the Internet’s inception; also the State of South Carolina’s gambling laws have also changed with time. In order to discuss the viewpoint that there should be a minimum number of laws regulating online gambling, I will examine state and federal laws regarding online gambling.

The Interstate Wire Act of 1961 was enacted to help the states enforce their laws on gambling.

“Subsection (a) of the Wire Act, a criminal provision, provides: Whoever being engaged in the business of betting or wagering knowingly uses a wire communication facility for the transmission in interstate or foreign commerce of bets or wagers or information assisting in the placing of bets or wagers on any sporting event or contest, or for the transmission of a wire communication which entitles the recipient to receive

money or credit as a result of bets or wagers, or for information assisting in the placing of bets or wagers, shall be fined under this title or imprisoned not more than two years, or both.[59]" (Gambling-US-Laws)

This of course helped define what could and could not be done through a wire at the time. The Interstate Wire Act was enacted before the conception of the internet as many of us know of it today. In November 2002 the U.S. Fifth Circuit Court of Appeals would deem that only sports wagering would be illegal, this has not yet been ruled on in The Supreme Court.

Many states have various laws regulating online gambling, and some have deemed it illegal. South Carolina has laws that find gambling illegal and thus online gambling illegal. South Carolina currently has a state lottery; but SECTION 16-19-40 states that

"Unlawful games and betting. If any person shall play at any tavern, inn, store for the retailing of spirituous liquors or in any house used as a place of gaming, barn, kitchen, stable or other outhouse, street, highway, open wood, race field or open place at (a) any game with cards or dice, (b) any gaming table, commonly called A, B, C, or E, O, or any gaming table known or distinguished by any other letters or by any figures, (c) any roleypoley table, (d) rouge et noir, (e) any faro bank, (f) any other table or bank of the same or the like kind under any denomination whatsoever or (g) any machine or device licensed pursuant to Section 12-21-2720 and used for gambling purposes, except the games of billiards, bowls, backgammon, chess, draughts, or whist when there is no betting on any such game of billiards, bowls, backgammon, chess, draughts, or whist or shall bet on the sides or hands of such as do game, upon being convicted thereof, before

any magistrate, shall be imprisoned for a period of not over thirty days or fined not over one hundred dollars, and every person so keeping such tavern, inn, retail store, public place, or house used as a place for gaming or such other house shall, upon being convicted thereof, upon indictment, be imprisoned for a period not exceeding twelve months and forfeit a sum not exceeding two thousand dollars, for each and every offense." (Ready Bet Go)

This law prohibits gambling for financial gain and thus applies to online gambling. Also another law to note is that South Carolina also prohibits any game to be played whether or not it is gambling on the Sabbath.

Should we regulate gambling through laws? I believe we should not. I say this as a Christian. Other Christians may disagree with this. Their argument would reflect the history of the Jewish nation of Israel. When Israel was ruled by a man of God, when the people followed God, and when they followed his commandments; the nation was blessed and was pleasing to God. When the nation would rebel and worship other gods, God would become displeased and punish the nation of Israel. The nation of Israel was truly God and state combined. I believe that this would be the perfect scenario for how the United States should be, but there is a division of church and state that was put in place by the founding fathers. This division should be upheld and as such we should not regulate vices. Christians should not be as concerned about regulating sin as we should be concerned about saving the sinners. If we share the gospel with those without the light then they would not do those things that they did when they were of the darkness. The political side of this is that deeming online gambling illegal

affects our global economy. Through the Internet “We exist without skin color, without nationality, without religious bias”(Technozen), it would be an international nightmare to determine where online gambling would take place and also policing such activity. This would be a problem because of other countries; can we regulate what other countries do within their own border? Although we are the most powerful nation in the world we should not and do not have that right to police other countries. Other problems arise when dealing with online gambling; encryption. Through technologies such as Tor and encryption those who need to be discrete will have the ability to hide their activities. We as a nation should not take the time or the resources to police such vices that could possibly provide revenue to the United States economy.

The preamble of the Declaration of Independence states “We hold these truths to be self-evident, that all men are created equal, that they are endowed by their Creator with certain unalienable Rights, that among these are Life, Liberty and the pursuit of Happiness.” United States citizens have the right to the pursuit of happiness the Government of the people by the people for the people should not and does have the right to regulate what makes us happy. That pursuit of course cannot interfere with the rights of others or their pursuit of happiness and gambling does neither.

The viewpoint that gambling should be legal is not a popular viewpoint, yet the United States is slowly approaching this goal, many states have started to legalize online gambling and many others are moving forward with other forms of gambling. South Carolina has made its own forward steps to allowing gambling, the South Carolina lottery was enacted not so long

ago, and it has been a very popular pastime and has provided much needed revenue to the education system it supports. The United States has only to benefit from online gambling yet we as Christians should be careful with such advances. God called us to be a light in the darkness and we are needed as such in a culture that does allow gambling. This may sound like conflicting viewpoints but again if we regulate sin or things leading to sin can we truly be free? That is a job for God, we are free in Christ, we are granted the freedom to do so in the context of Paul's message in 1 Corinthians 8 but we are warned to "be careful, however, that the exercise of your freedom does not become a stumbling block to the weak."

Works Cited

Dictionary.com. 2007.

Lexico Publishing Group, LLC.

19 September 2007 <http://dictionary.com>.

Gambling-Law-Us. 2007.

Chuck Humphrey.

19 September 2007 <http://www.gambling-law-us.com/Federal-Laws/wire-act.htm>.

Ready Bet Go. 2007.

Bob Ciaffone.

19 September 2007 <http://www.readybetgo.com/poker/strategy/south-carolina-poker-1705.html>.

Technozen. 2007

Joseph Barone and the TechnoZen Group.

19 September 2007 <http://www.technozen.com/manifesto.htm>.

The New NIV Message Parallel Bible. Michigan:

Zondervan, 2004.

Code of Conduct Ethics Paper

Stephen Thackston

COINS 325

Dr. Jim Roberts

January 23, 2007

Since the beginning of the educational institution a set of guidelines or rules were created and enforced. These rules or guidelines later came to be known as the school's code of conduct. This code could be applied to the faculty, staff, or the student body. In most cases the code of conduct is applied to the student body. Many of the guidelines in the code of conduct are there to further the academic environment that the college or university tries to uphold. These guidelines could cover tardiness, academic dishonesty, or the progression of classes. Recently many colleges and universities have updated this code to reflect the information age. The information age came about with the formation of the internet or the World Wide Web. Institutions of Academia began to equip their respective campuses with the technology to access this giant network known as the internet. In order to protect the users of this technology these institutions created or updated the code of conduct to form the boundaries of what the user of the institution's network could do while accessing their network. Many school's code of conduct differ when it comes to the area of internet conduct or network conduct. Charleston Southern University has their own code of conduct which deals with the internet this of course is different in some aspects when it is compared to Chesapeake College, Lawrence University, and American University of Beirut versions of their code of conduct.

When each code of conduct is viewed all four have many things in common the first similarity is that each of the institutions list what the network or internet is to be used for. The first difference also occurs in the same area with Lawrence, this university has a policy or mission statement as the rest but it defers as it refers to the employees

not the students. Many of the academic institutions list the possible repercussions if the network is used in a way not permitted in the code of conduct but only the AUB tells the reader that they must accept the conditions before use. Of all four, Lawrence had the most condensed compared to AUB which had the lengthiest one. All four stated that copyrighted material must be obtained legally but only Charleston Southern University went into what type of copyrighted media is allowed. Chesapeake also had a better definition of what a virus was and thus helps with future code of conduct problems when a program that self replicates is not a virus or a worm.

Comparing and contrasting all four showed that Charleston Southern was better organized and easier to find than the others. Charleston also had a detailed list of guidelines that conformed to the type of environment that CSU is. With Charleston Southern being so detailed it also constricted itself to a strict interpretation of the code of conduct. This code will need to grow and be able to encompass other problems or technology that will be created or happen in the future. With that being said Charleston Southern has put them at the fore front of the technology wave and hopefully they will stay a float.

Works Cited

Code of Conduct.

Charleston Southern University. 23 Jan. 2007

<<http://www.charlestonsouthern.edu/adminservices/conduct.asp>>

American University of Beirut Code of Conduct for Users of Computing Systems and Internet Services.

American University of Beirut. 23 Jan. 2007

http://www.aub.edu.lb/info/code_aub.html

Chesapeake Code of Conduct.

Chesapeake College. 23 Jan. 2007

http://www.chesapeake.edu/services_student/activities/StudentCode.pdf

Lawrence University Internet Code of Conduct.

Lawrence University. 23 Jan. 2007

<<http://www.lawrence.edu/dept/hr/handbook/5->

2.11_Internet_Code_of_Conduct.pdf.>

Organ Donation Ethics Paper

Stephen Thackston

COINS 332

Dr. Lin

March 25, 2007

In the Bible it says that God created Heaven and Earth, later it says he created man. In those moments God breathed life into the world and thus the spark of creation was born. Throughout the ages man has only been able to see that spark through the gift of birth. Life is precious and amazing; to some it is a brief glimpse at our creator, but life is also fleeting. Life is as dust in the wind, one moment we are children the next we are in our twilight. The question of what if seems to rear its head in Life's journey. What if we could prolong or give life? This is a question men have pondered for many centuries but has not been realized until now. Medical technology is at a point where this procedure can be attempted; a procedure that can give life. This procedure is called organ donation and just like its name it is the act of giving or donating your organs to another.

The first documented organ donation occurred in 1954 between two identical twins being identical meant that the organ recipient did not reject the organ. Rejection of a transplanted organ was a common occurrence until the creation of immune system suppression medication, which then allowed the procedure to be practiced. The United States allows a person to donate their organs after their death and redundant organs while they are still alive. Currently three hundred people are assigned a position on the organ recipient list a month. Presently there is a high need for organ donations, donations that could save the life of a father, mother, daughter, son, and the list goes on. The best part about this system other than saving countless lives is that it is quick and easy to become an organ donator. All one has to do is to check a small box when receiving a driver's license or renewing one. Through this small act one has just saved a life.

Many questions are raised about donating; such as prior medical conditions, funeral arrangements, and what can be donated. The first question is solved when the surgeons evaluated your medical history and other factors to determine whether the donation will be successful. The second question is asked when the organ donor wishes to have an open casket funeral and yes they can. All surgical incisions are closed after the removal of the organs. The final question is asked frequently also; almost anything in your body can be donated other than your brain. There are many places that can answer other questions one might have.

The act of giving life was something that we as mankind could not accomplish and we still cannot create life by our own means, but through a simple action we can help someone in need have more time to enjoy a gift we take for granted every day. In conclusion this is an amazing procedure that can save many lives and perhaps your life one day.

Presentations

1. This presentation was presented for COMM 110 or Public Speaking. The grade given for this presentation was an A.
2. This presentation was presented for COINS 497 or Senior Project. The grade given for this presentation was an A.

Your Privacy is in Danger!!!

Websites you visit



Instant Messenger Conversations

Emails you read and send

Your passwords are vulnerable

Even your Credit Card Information is at

risk

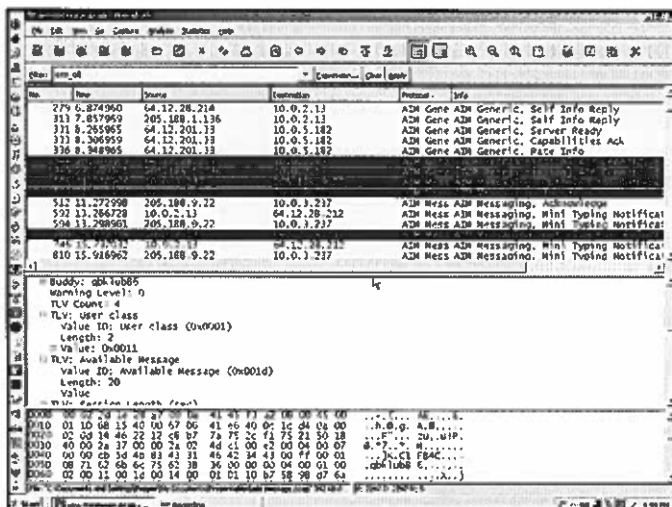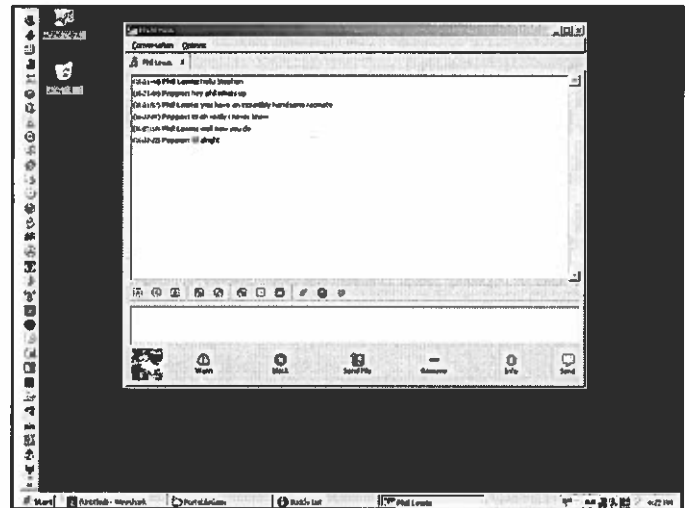

Wireless Security

How to keep prying eyes away

9 Steps for Protection

- Anti-Virus
 - AVG
 - Norton
 - Many Others
- Firewall
 - Zone Alarm
 - Norton
 - Many Others

9 Steps for Protection

- Keep things up to date
 - Windows XP
 - Anti-Virus
 - Firewall
 - Other Programs
- Change Web Browsers
 - Firefox
 - Opera

9 Steps for Protection

- Turn off file sharing in Windows XP




9 Steps for Protection


- Use secure e-mail
 - Y ahoo
 - H otmail
 - G mail



9 Steps for Protection



- Use a secure Instant Messenger Program
 - Gaim
 - Others

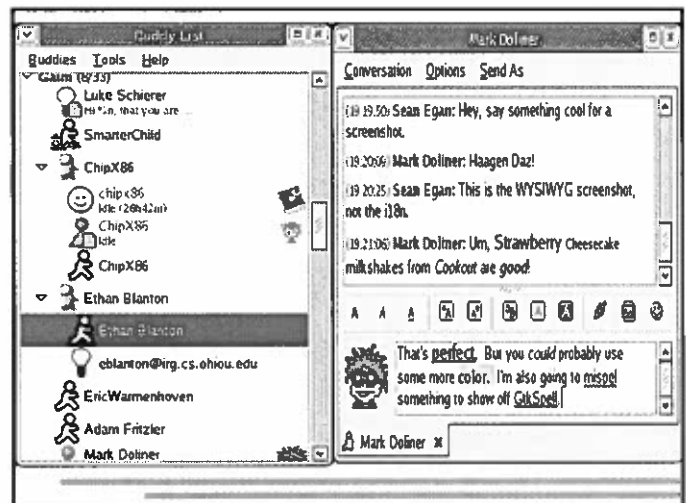

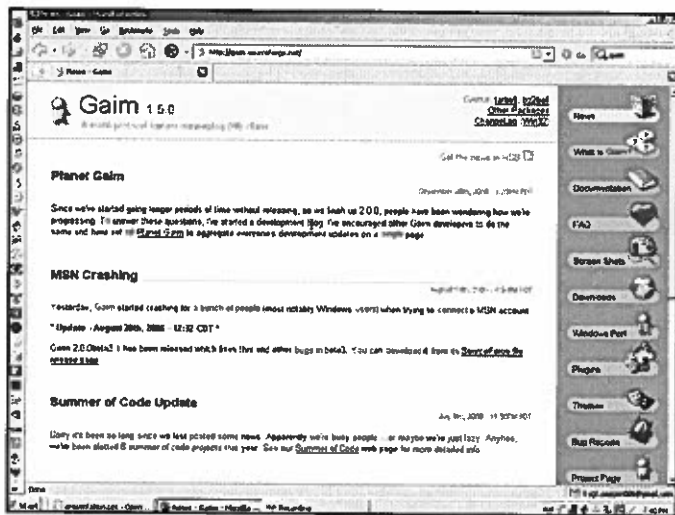

9 Steps for Protection

- VPN (Virtual Private Network)
 - H amachi
 - O thers

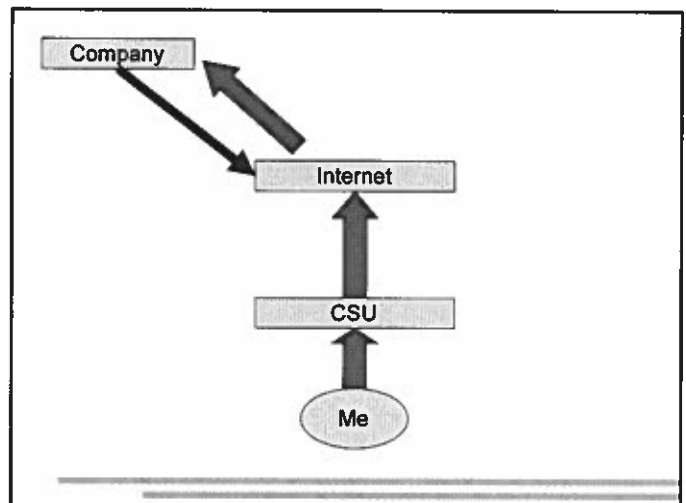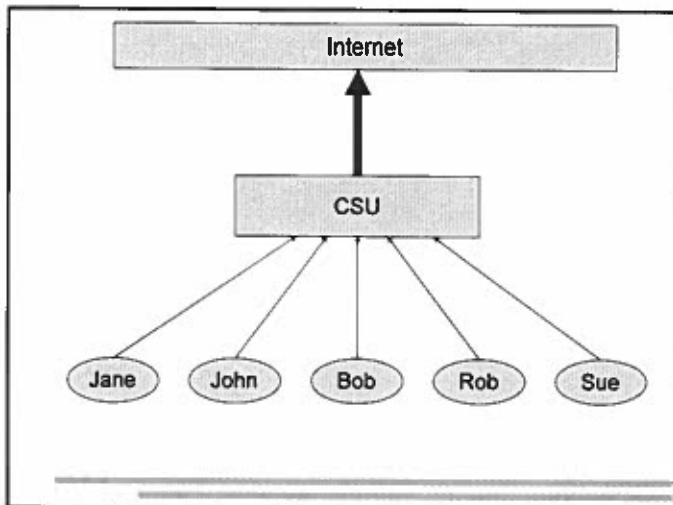



Information Quality DATA SETS

PURPOSE

- In the field the of Information Quality there is a need for data sets whose accuracy levels are well known so that research can fairly judge the algorithms they develop.

PURPOSE

- The purpose of this project is to create a web site in which data sets can be uploaded and retrieved by researchers in data quality.
- Currently there are no sites which offer these test data sets.

TIMELINE RESEARCH PHASE

- October 8th
 - Research on Information Quality data sets
- October 22nd
 - Research on website interface
 - Research on server (hardware needs, security)
- November 5th
 - Java/HTML Research (secure programming)

TIMELINE DESIGN PHASE

- November 19th
 - Interface programming starts
- December 3rd
 - Short/Draft Research Paper
 - Continuing programming

INFORMATION QUALITY

- Information quality (IQ) is a term to describe the quality of the content of information systems.
- This is a subjective term; depending on the context of the data requirements.
- Intrinsic IQ, Contextual IQ, Representational IQ, and Accessibility IQ are terms used to assess Information quality, although this is not the complete list.
- Data quality exists because of "dirty data", data that does not fit the requirements put upon it.

INFORMATION QUALITY

- Possible examples of "dirty data" are spelling or punctuation errors, incorrect data associated with a field, incomplete or outdated data or data that is duplicated.
- Depending on the data sets and the type of information used the website will use a few different options to monitor the data quality of the data sets it receives.
- These options could include automatic data checking (limits the variety of the data sets), human checking (human error and time), or a hybrid of both; this is most likely the best way for the moment.

PHP (HYPERTEXT PREPROCESSOR)

- Main Features
 - Server-side scripting
 - Command line scripting
 - Writing desktop applications
- Can be used on all major operating systems.
- PHP includes features that can output images, PDF files and Flash movies which can be generated on the fly.
- Creating a database is the strongest and most significant feature.
- Supports a wide array of databases (MySQL, Oracle, etc)

LAMP

- L
 - Operating system (Linux)
- A
 - Apache, the Web server
- M
 - MySQL, the database management system
- P
 - PHP, the programming language
- In process of obtaining hardware for server use.

PHP

- Learning through online tutorials and documentation.
- Does allow the use of extensions.
 - Authentication
 - Database
 - Encryption
 - Logging
 - Structures
 - Etc.
- PHP Extension Community Library (PECL) contains C extensions

Timeline

- Still on time with timeline.
- Timeline will be changed according to rate at which PHP is learned.
- Design phase will be pushed back.
- Design phase includes the programming of the website.