

Introductory Page

Guessing Game:

Class: ³²⁵COIN ~~315~~ - Java Programming
Grade: 100
Comments: Written in .java format and ran and compiled using javac and java.

Gacman Pt. 1:

Class: ³¹⁵COIN ~~325~~ - Data Structures
Grade: 100
Comments: Written in C++ language. Compiled and ran using the Microsoft Visual Studio 2008 compiler. This is only the first part of the project, which the goal was to get the player moving and eating the pellets and also updating the score, monsters where not involve.

Word Sort:

Class: COIN 333- Applied Systems
Grade: 100
Comments: Written in C language in Linux. Compiled and ran using gcc in the Linux virtual environment.

Student Homepage:

Class: COIN 332
Grade: 100
Comments: Written in Visual Studios in ASP.NET format. Compiled and ran using the Microsoft Visual Studio 2008 compiler.

GuessGameFrame

```

import java.awt.Color;
import java.awt.FlowLayout;
import java.awt.Graphics;
import java.awt.event.ActionListener;
import java.awt.event.ActionEvent;
import java.util.Random;
import javax.swing.JFrame;
import javax.swing.JTextField;
import javax.swing.JLabel;
import javax.swing.JButton;

public class GuessGameFrame extends JFrame{
    private static Random generator = new Random();
    private int number;
    private int guessCount;
    private int lastDistance;
    private JTextField guessInputJTextField;
    private JLabel prompt1JLabel;
    private JLabel prompt2JLabel;
    private JLabel messageJLabel;
    private JButton newGameJButton;
    private Color background;

    public GuessGameFrame(){
        super("Guessing Game");

        guessCount = 0; // keeps count of how many guesses
        background = Color.LIGHT_GRAY; // sets background color to light
gray
        prompt1JLabel = new JLabel("I have a number between 1 and 1000.");
// creates new label with txt
        prompt2JLabel = new JLabel("Can you guess my number? Enter your
Guess:"); // creates new label with txt

        guessInputJTextField = new JTextField( 5 );
        guessInputJTextField.addActionListener( new GuessHandler());
        messageJLabel = new JLabel("Guess result appears hear.");

        newGameJButton = new JButton("New Game"); // codes program for
button that starts game(below)
        newGameJButton.addActionListener(
            new ActionListener(){
                public void actionPerformed( ActionEvent e){
                    messageJLabel.setText("Guess result appears
hear.");
                    background = Color.LIGHT_GRAY;
                    guessInputJTextField.setText("");
                    theGame();
                    repaint();
                }
            }
        );
        setLayout( new FlowLayout());// following codes adds items to the
frame
        add(prompt1JLabel);
        add(prompt2JLabel);
        add(guessInputJTextField);
        add(messageJLabel);
        add(newGameJButton);
        theGame();
    }

    public void theGame(){

```

```

                                GuessGameFrame
                                number = generator.nextInt(999) + 1; // gets random number between 1
and 1000
                                }


                                public void paint(Graphics g){
                                super.paint(g);
                                getContentPane().setBackground( background); // sets background
color for frame
                                }

                                public void react(int guess){
                                guessCount++;
                                int currentDistance = 1000;

                                if(guessCount == 1){ // code for first guess
                                lastDistance = Math.abs((guess - number));
                                if(guess > number)
                                messageJLabel.setText("Too High. Try a lower
number.");
                                else
                                messageJLabel.setText("Too Low. Try a higher
number.");
                                }
                                else{
                                currentDistance = Math.abs((guess - number));
                                if(guess > number){
                                messageJLabel.setText("Too High. Try a lower
number.");
                                if(currentDistance <= lastDistance)
                                background = Color.RED;
                                else
                                background = Color.BLUE;
                                }
                                else if(guess < number){
                                messageJLabel.setText("Too Low. Try a higher
number.");
                                background = (currentDistance <= lastDistance) ?
Color.RED : Color.BLUE;
                                lastDistance = currentDistance;
                                }
                                else{
                                messageJLabel.setText("Correct!");
                                if(currentDistance <= lastDistance)
                                background = Color.RED;
                                else
                                background = Color.BLUE;
                                }
                                repaint();
                                }
                                }

                                class GuessHandler implements ActionListener{
                                public void actionPerformed( ActionEvent e ){
                                int inputNum = Integer.parseInt( guessInputJTextField.getText());
                                react( inputNum );
                                }
                                }
}

```

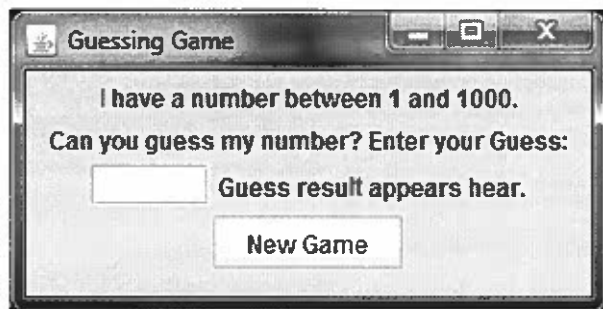

```
//Jezreel Wilson
//Gacman Part 1
//October 17, 2008
//October 29, 2008
//COIN325
//100
```

```
#include "World.h"
```

```
void main(int argc, char *argv[] ) {
    int delay=150;
    World w(delay);
    w.run();
    return;
}
```

```
class Actor;
class Player;
class Maze;
class CConsole;

class World{
public:
    World(int delay);

    void run();

    int getLevel(){
        if(newLevel(level) == true){
            level++;
            return level;
        }
        return level;
    }

    int getPlayerLocationX();
    int getPlayerLocationY();
    int getPlayerStartX();
    int getPlayerStartY();
    int getPlayerLastX();
    int getPlayerLastY();
    int takeAwayPellet();

    bool monstersRun();

    bool monstersDined() {return false;}

    void changeThatPos(int x, int y, char ch);

    char whatsNThatPos(int x, int y);

    char playerChar();

    void drawCharacter(int, int, char);

private:
    void display();

    bool newLevel(int level);

    bool resetLevel();

    Player *gMan;
    CConsole *console;
    Maze *stage;
    int level;
    int wDelay;
};
```

```
#include "Actor.h"
#include "Maze.h"
#include "Player.h"
#include "World.h"
#include "CConsole.h"

World::World(int delay){
    wDelay=delay;
    gMan = new Player(this);
    console = new CConsole();
    stage = new Maze(this, console);
    level=0;
}

void World::run(){
    display();
}

int World::getPlayerLocationX(){
    return gMan->getX();
}

int World::getPlayerLocationY(){
    return gMan->getY();
}

int World::getPlayerStartX(){
    return stage->getPlayerStartX();
}

int World::getPlayerStartY(){
    return stage->getPlayerStartY();
}

void World::changeThatPos(int x, int y, char ch){
    stage->changeMazeValue(x, y, ch);
}

char World::whatsNThatPos(int x, int y){
    return stage->getMazeValue(x,y);
}

char World::playerChar(){
    return gMan->getDisplayChar();
}

void World::display(){
    if(stage->loadMaze()==true){
        gMan->setX(stage->getPlayerStartX());
        gMan->setY(stage->getPlayerStartY());
        for(int y=0; y <21; y++){
            for(int x=0; x<23; x++){
                console->printChar(x, y, whatsNThatPos(x, y));
            }
        }
        waitForEnter();
        while(stage->totalNumPellets() != 0){
            console->delay(wDelay);
            gMan->move();
            console->printString(0, 22,"Lives:  ");
            console->printInt(7, 22, gMan->getNumLivesLeft());
            console->printString(8, 22," Level:  ");
        }
    }
}
```

```
        console->printInt(17, 22, getLevel());
        console->printString(18, 22, " Score: ");
        console->printInt(27, 22, gMan->getScore());
    }
}

int World::takeAwayPellet(){
    return stage->takeAwayPellet();
}

bool World::newLevel(int level){
    if(stage->totalNumPellets() == 0){
        return true;
    }
    return false;
}

void World::drawCharacter(int x, int y, char c) {
    console->printChar(x,y,c);
}
```



```
#include "Actor.h"
#include "CConsole.h"

class Player : public Actor{
public:
    Player(World *toW):Actor(toW){
        lives = 3;
        playerDir = pDir;
        score = 0;
    }

    int getNumLivesLeft(){
        return lives;
    }

    int getScore();

    bool decrementNumLives();

    //int getX(int move);

    //int getY(int move);

    bool setDead();

    bool isDead();

    void resetDir();

    void moveUser(Direction playDir);

    void move(){
        bool gotKey;
        char input;
        gotKey = getInput(input);
        if(gotKey){
            switch(input) {
                case '8':
                    moveUser(UP);
                    break;
                case '4':
                    moveUser(LEFT);
                    break;
                case '6':
                    moveUser(RIGHT);
                    break;
                case '2':
                    moveUser(DOWN);
                    break;
                default:
                    return;
            }
        }
        else {
            moveUser(pDir);
        }
    }

    char getDisplayChar(){
        char gmanIcon = '@';
        return gmanIcon;
    }

private:
    int lives;
    int score;
```

```
    Direction pDir;  
};
```

```
#include "Actor.h"
#include "Player.h"
#include "World.h"

bool Player::decrementNumLives(){
    if(toWorld->monstersDined() == true && lives > 0){
        lives--;
        return true;
    }
    else
        return false;
}

int Player::getScore(){
    return score;
}

void Player::moveUser(Direction playDir){
    if(playDir == DOWN && toWorld->whatsNThatPos(x,y+1)!='#'){
        if(toWorld->whatsNThatPos(x,y+1)=='.' || toWorld->whatsNThatPos(x,y+1)=='*'){
            if (toWorld->whatsNThatPos(x,y+1)=='.' ) score+=10;
            else score +=100;
            toWorld->takeAwayPellet();
        }
        toWorld->changeThatPos(x,y, ' ');
        toWorld->drawCharacter(x,y, ' ');
        y++;
        toWorld->drawCharacter(x,y,getDisplayChar());
        pDir = playDir;
    }else if(playDir == UP && toWorld->whatsNThatPos(x,y-1)!='#' && toWorld->
whatsNThatPos(x,y-1)!='#'){
        if(toWorld->whatsNThatPos(x,y-1)=='.' || toWorld->whatsNThatPos(x,y-1)=='*'){
            if (toWorld->whatsNThatPos(x,y-1)=='.' ) score+=10;
            else score +=100;
            toWorld->takeAwayPellet();
        }
        toWorld->changeThatPos(x,y, ' ');
        toWorld->drawCharacter(x,y, ' ');
        y--;
        toWorld->drawCharacter(x,y,getDisplayChar());
        pDir = playDir;
    }else if(playDir == LEFT && toWorld->whatsNThatPos(x-1,y)!='#'){
        if(toWorld->whatsNThatPos(x-1,y)=='.' || toWorld->whatsNThatPos(x-1,y)=='*'){
            if (toWorld->whatsNThatPos(x-1,y)=='.' ) score+=10;
            else score +=100;
            toWorld->takeAwayPellet();
        }
        toWorld->changeThatPos(x,y, ' ');
        toWorld->drawCharacter(x,y, ' ');
        x--;
        toWorld->drawCharacter(x,y,getDisplayChar());
        pDir = playDir;
    }else if(playDir == RIGHT && toWorld->whatsNThatPos(x+1,y)!='#'){
        if(toWorld->whatsNThatPos(x+1,y)=='.' || toWorld->whatsNThatPos(x+1,y)=='*'){
            if (toWorld->whatsNThatPos(x+1,y)=='.' ) score+=10;
            else score +=100;
            toWorld->takeAwayPellet();
        }
        toWorld->changeThatPos(x,y, ' ');
        toWorld->drawCharacter(x,y, ' ');
        x++;
        toWorld->drawCharacter(x,y,getDisplayChar());
        pDir = playDir;
    }
}
```



```
class CConsole;
class World;
#include <string>
using namespace std;

class Maze{
public:
    Maze(World *w, CConsole *c);

    bool loadMaze();

    void resetDisplay(){
        getPlayerStartX();
        getPlayerStartY();
    }

    int getPlayerStartX(){
        return playerStartX;
    }
    int getPlayerStartY(){
        return playerStartY;
    }

    int getMonstersStartX(){
        return monstersStartX;
    }

    int getMonstersStartY(){
        return monstersStartY;
    }

    bool levelComplete(){
        if(takeAwayPellet() == 0)
            return true;
        return false;
    }

    void changeMazeValue(int x, int y, char ch){
        gameMaze[y][x]= ch;
    }

    char getMazeValue(int x, int y){
        return gameMaze[y][x];
    }
    void clearMazePosition(int x, int y){
        gameMaze[y][x] = ' ';
    }

    int totalNumPellets(){
        return pellets;
    }

    int takeAwayPellet(){
        pellets--;
        return pellets;
    }

private:
    CConsole *console;
    World *toWorld;
    char gameMaze[21][23];
    int pellets;
    int playerStartX;
    int playerStartY;
    int monstersStartX;
```

```
    int monstersStartY;  
};
```

```
#include <fstream>
using namespace std;
#include "Maze.h"
#include "World.h"
#include "CConsole.h"
```

```
Maze::Maze(World * w, CConsole *c){
    pellets =0;
    console=c;
    toWorld=w;
}
```

```
bool Maze::loadMaze(){
    ifstream input;
    char maze[16];
    sprintf_s(maze,15,"MAZE%d.txt",toWorld->getLevel());
    input.open(maze);
    if(!input.is_open())
        return false;
    else{
        char line[50]={0};
        for(int i=0; i < 21; i++){
            input.getline(line, 49, '\n');
            for(int d = 0; d < 23; d++){
                gameMaze[i][d] = line[d];
                if(gameMaze[i][d] == '@'){
                    playerStartX = i;
                    playerStartY = d;
                }
                if(gameMaze[i][d] == '$'){
                    monstersStartX = i;
                    monstersStartY = d;
                }
                if(gameMaze[i][d] == '.' || gameMaze[i][d] == '*')
                    pellets++;
            }
        }
        return true;
    }
}
```

```
#pragma once
#include <string>
#include <conio.h>
#include <windows.h>

enum Color {black=0, blue=FOREGROUND_BLUE, green=FOREGROUND_GREEN, red=FOREGROUND_RED,
purple=FOREGROUND_BLUE + FOREGROUND_RED, cyan=FOREGROUND_BLUE+FOREGROUND_GREEN,
brown=FOREGROUND_GREEN+FOREGROUND_RED, white=FOREGROUND_BLUE+FOREGROUND_GREEN+
    FOREGROUND_RED};

void waitForEnter();// wait until the user presses ENTER
bool getInput(char& ch);

class CConsole {
public:
    CConsole(int width=40, int height=30);
    void setColor(Color fore, Color back) {SetConsoleTextAttribute(m_hConsole, fore +
        (back<<4) );}
    void waitForEnter();// wait until the user presses ENTER
    void gotoXY(int x, int y); //moves cursor to position x (from left), y (from top)
        //0,0 is upper left corner
    void printChar(int x, int y, char ch); //prints ch at x,y, moves cursor over 1 to
        right
    void printChar(char ch) {_putch(ch);} //prints ch where current cursor is, moves
        cursor over 1 to right
    void printString(int x, int y, const std::string& s);
    void printString(const std::string& s);
    void printStringClearLine(const std::string& s); //clears rest of line after string
        printed
    void printStringClearLine(int x, int y, const std::string& s);
    void printInt(int x, int y, int val); //print an integer value at x,y
    void printInt(int val); //print an integer value
    void delay(int amount) {Sleep(amount);}
private:
    HANDLE m_hConsole;
    int m_width;
    int m_height;
};
```



```

#include "CConsole.h"

void waitEnter() { // wait until the user presses ENTER
    int ch;
    do {
        ch = _getch();
    } while ( ch != '\n' && ch != '\r');
}

/* The getInput function checks whether the user has hit a key and immediately
returns (so it does NOT wait for a key to be pressed). It returns:
    true if the user has hit a key; in this case, the ch variable is set to
        the typed character
    false if the user has not hit any key; in this case, the ch variable
        will be unchanged*/
bool getInput(char& ch) {
    if (_kbhit()) { //has key been hit?
        int c = _getch();
        if (c != 0xE0) // first of the two sent by arrow keys, E0 is escape
            ch = c;
        else {
            c = _getch(); //get second char sent by escape sequence from arrows
            switch (c) {
                case 'K': /* left */ ch = '4'; break;
                case 'M': /* right */ ch = '6'; break;
                case 'H': /* up */ ch = '8'; break;
                case 'P': /* down */ ch = '2'; break;
                default: ch = '?'; break; //special character but not arrow
            }
        }
        return true;
    }
    return false;
}

CConsole::CConsole(int width, int height) : m_width(width), m_height(height) {
    m_hConsole = GetStdHandle(STD_OUTPUT_HANDLE);
    CONSOLE_CURSOR_INFO x;
    GetConsoleCursorInfo(m_hConsole, &x);
    x.bVisible=false;
    SetConsoleCursorInfo(m_hConsole, &x); //hides the cursor
}

void CConsole::gotoXY(int x, int y) { //moves cursor to position x (from left), y (from
    top)
    //0,0 is upper left corner
    if (x < 0 || x >= m_width || y < 0 || y >= m_height) //invalid x,y
        return;
    COORD pos = { x, y }; //same as pos.X=x; pos.Y=y;
    SetConsoleCursorPosition(m_hConsole, pos);
}

void CConsole::printChar(int x, int y, char ch) { //prints ch at x,y, moves cursor over 1
    to right
    gotoXY(x,y);
    printChar(ch);
}

void CConsole::printString(int x, int y, const std::string& s) {
    gotoXY(x,y);
    printString(s);
}

void CConsole::printString(const std::string& s) {
    for (size_t i = 0; i < s.length(); i++)
        printChar(s[i]);
}

```

```
}

void CConsole::printStringClearLine(int x, int y, const std::string& s) { //clears rest of ✓
    line after string printed
    gotoXY(x,y);
    printStringClearLine(s);
}

void CConsole::printStringClearLine(const std::string& s) { //clears rest of line after ✓
    string printed
    printString(s);
    CONSOLE_SCREEN_BUFFER_INFO info;
    GetConsoleScreenBufferInfo(m_hConsole,&info);
    for (int col=info.dwCursorPosition.X; col < m_width; col++)
        printChar(' '); //print spaces for rest of line, console b/c don't know if we ✓
        started at 0
}

void CConsole::printInt(int x, int y, int val) { //print an integer value
    gotoXY(x,y);
    printInt(val);
}

void CConsole::printInt(int val) { //print an integer value
    char buf[12]={0};
    _itoa_s(val, buf, 11, 10); //safely convert int to ascii text
    printString(buf); //constructor for string automatically called for char *
}
```

```
#pragma once;
class World;

enum Direction {none, UP, LEFT, DOWN, RIGHT};

class Actor {
public:
    Actor(World *toW) {toWorld=toW;}
    virtual ~Actor() {}


    int getX() const{
        return x;
    }

    int getY() const {
        return y;
    }

    void setX(int newY) {y=newY;}
    void setY(int newX) {x=newX;}
    void resetDirection();

    virtual void move()= 0;
    virtual char getDisplayChar()= 0;

private:
protected:
    World * toWorld;
    int x, y;
    int playerDir;
};
```

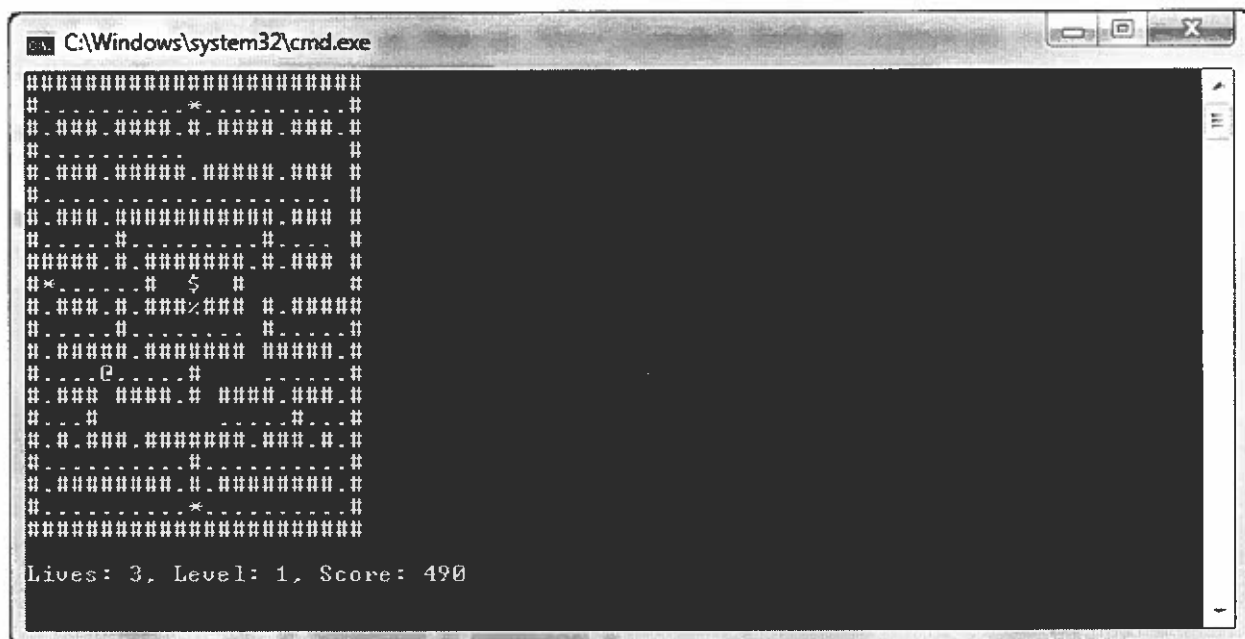

lab11

```
#Jezreel Wilson
#Sort words
#March 10, 2009
#March 15, 2009
#COIN333
#100
```

```
open(WORDS, "words2sort.txt") or die "cant't open file: $!\n";
```

```
@ARGV= <WORDS>;
close(WORDS);
```

```
open(WORDS, ">>words2sort.txt") or die "can't open file: $!\n"; #opens the file and
puts it in WORDS and returns msg if open fails
```

```
print WORDS"\n\n";
```

```
for($i=0; $i <= $#ARGV; $i++){
    @word = split(/\s+/, $ARGV[$i]); #puts words on individual lines into word
array
```

```
    @sortedwords = sort @word;      #puts words in correct position in
```

```
sortedwords array
```

```
    print WORDS "@sortedwords\n";   #prints sorted words
```

```
}
```

```
close(WORDS);                      #closes file
```

words2sort

rhubarbs aba
rhubarbs baa
rhubarb abas
rhubarb baas
abash bar rub
brush aba bar
brush baa bar
shrub aba bar
shrub baa bar

words2sort - Notepad

File Edit Format View Help

```
abash bar rub  
brush aba bar  
brush baa bar  
rhubarb abas  
rhubarb baas  
rhubarbs aba  
rhubarbs baa  
shrub aba bar  
shrub baa bar
```

```

<%--Jezreel Wilson
Student Homepage
February 17, 2010
March 25, 2010
COIN 332
Grade: 100--%>

```

```

<%@ Page Language="VB" AutoEventWireup="false" CodeFile="Default.aspx.vb" Inherits=
    "_Default" %>

```

```

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/
    xhtml1/DTD/xhtml1-transitional.dtd">

```

```

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Jezreel Wilson</title>

```

```

</head>

```

```

<body>

```

```

    <form id="form1" runat="server">
    <p>

```

```

```

```

    </p>

```

```

    <p><b><h1>All About JEZZY!!!</h1></b></p>

```

```

    <br /><br /><br /> <%--My Info--%>

```

```

    <p>Welcome to the homepage of Jezreel Wilson. My hometown is Kingstree, South
    Carolina, which is where I graduated from Kingstree Senior High School in
    2007. I entered Charleston Southern University in the Summer of 2007 and
    started the Bachelor of Science in Computer Science. I like to play video games, work
    with computers, liftweights, and have fun with friends.</p>

```

```

    <br /><br /><br /><br /><br /><br /><br />

```

```

    <p style="float:right">Contact Me:&nbsp;<a href="jhwilson@csustudent.net">jhwilson@
    csustudent.net</a></p><br /> <br /><br />

```

```

    <a href="myFam.aspx">My Fams</a><br /> <%--Link to my Family page--%>

```

```

    <a href="Gallery.aspx">Gallery</a>

```

```

    <p style="background-color:Blue; color:White; text-align:center">My Lab Assignments:
    </p>

```

```

    <table width="100%">

```

```

        <tr><td align="center"><a href="Lab1.aspx">Lab 1</a></td></tr> <%--Link to Lab 1
        page--%>

```

```

        <tr><td align="center"><a href="Lab2.aspx">Lab 2</a><br /></td></tr> <%--Link to
        Lab 2--%>

```

```

        <tr><td align="center"><a href="Lab3.aspx">Lab 3</a><br /></td></tr> <%--Link to
        Lab 3--%>

```

```

        <tr><td align="center"><a href="Lab4.aspx">Lab 4</a><br /></td></tr> <%--Link to
        Lab 4--%>

```

```

        <tr><td align="center"><a href="Lab5.aspx">Lab 5</a><br /></td></tr> <%--Link to
        Lab 5--%>

```

```

        <tr><td align="center"><a href="Default.aspx">Lab 6</a><br /></td></tr> <%--Labs
        we have yet do--%>

```

```

        <tr><td align="center"><a href="Default.aspx">Lab 7</a><br /></td></tr> <%--Labs
        we have yet do--%>

```

```

        <tr><td align="center"><a href="Default.aspx">Lab 8</a><br /></td></tr> <%--Labs
        we have yet do--%>

```

```

        <tr><td align="center"><a href="Default.aspx">Lab 9</a><br /></td></tr> <%--Labs
        we have yet do--%>

```

```

        <tr><td align="center"><a href="Default.aspx">Lab 10</a><br /></td></tr> <%--Labs
        we have yet do--%>

```

```

    </table>

```

```

    </form>

```

```

</body>

```


</html>

```
<%@ Page Language="VB" AutoEventWireup="false" CodeFile="myFam.aspx.vb" Inherits="myFam"
%>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/
xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Untitled Page</title>
</head>
<body>
    <form id="form1" runat="server">
        
        <b><h1>My Family</h1></b>
        <br />
        <p style="font-size:20px">My dad's name is Harold Wilson. He has taken care of me and
        my little sister by hisself since I was 5 years old. He stays in Kingstree,
        SC and he has been retired for bout 10 years. He supports both me and my
        sister and I love him to death.</p><br />
        <p style="font-size:20px">My little sister is Siberia Wilson. She is majoring in
        psychology and from what I can tell she likes it very much. She is a sophemore
        at Coker College but is sitting out this semester so she can have my nephew in
        March. I love her big-headed self so much.</p>
    </form>
</body>
</html>
```

```
<%@ Page Language="VB" AutoEventWireup="false" CodeFile="Lab1.aspx.vb" Inherits="Default2" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/
xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Untitled Page</title>
</head>
<body>
    <form id="form1" runat="server">
        <ul> <%--Below are the links to each problem in Lab 1--%>
        <li><a href="Lab1-2.aspx">Problem 2</a></li>
        <li><a href="Lab1-3.aspx">Problem 3</a></li>
        <li><a href="Lab1-5.aspx">Problem 5</a></li>
        <li><a href="Lab1-6.aspx">Problem 6</a></li>
        <li><a href="Lab1-7a.aspx">Problem 7a</a></li>
        <li><a href="Lab1-7b.aspx">Problem 7b</a></li>
        <li><a href="Lab1-7c.aspx">Problem 7c</a></li>
        <li><a href="Lab1-8.aspx">Problem 8</a></li>
        </ul>
    </form>
</body>
</html>
```

```
<%@ Page Language="VB" AutoEventWireup="false" CodeFile="Lab2.aspx.vb" Inherits="Lab2" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/
xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Untitled Page</title>
</head>
<body>
    <form id="form1" runat="server">
        <ul> <!--Below are the links to each problem in Lab 2-->
        <li><a href="Default.aspx">Problem 2</a></li>
        <li><a href="Lab2-3.aspx">Problem 3</a></li>
        <li><a href="Lab2-4.aspx">Problem 4</a></li>
        <li><a href="Lab2-5.aspx">Problem 5</a></li>
        <li><a href="Lab2-6.aspx">Problem 6</a></li>
        <li><a href="Lab2-8.aspx">Problem 8</a></li>
        <li><a href="Lab2-9.aspx">Problem 9</a></li>
        </ul>
    </form>
</body>
</html>
```

```
<%@ Page Language="VB" AutoEventWireup="false" CodeFile="Lab3.aspx.vb" Inherits="Lab3" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/
    xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Untitled Page</title>
</head>
<body>
    <form id="form1" runat="server">
        <ul> <%--Below are the links to each problem in Lab 3--%>
            <li><a href="lab3-1.aspx">Problem 1</a></li>
            <li><a href="lab3-2.aspx">Problem 2</a></li>
            <li><a href="lab3-3.aspx">Problem 3</a></li>
        </ul>

        </form>
    </body>
</html>
```

```
<%@ Page Language="VB" AutoEventWireup="false" CodeFile="Lab4.aspx.vb" Inherits="Lab4" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/
    xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Untitled Page</title>
</head>
<body>
    <form id="form1" runat="server">
    <div>
    <ul> <%--Below are the links to each problem in Lab 4--%>
        <li><a href="Lab4-1.aspx">Problem 1</a></li>
        <li><a href="Lab4-2.aspx">Problem 2</a></li>
        <li><a href="Lab4-3.aspx">Problem 3</a></li>
        <li><a href="Lab4-4.aspx">Problem 4</a></li>
        <li><a href="Lab4-5.aspx">Problem 5</a></li>
    </ul>
    </div>
    </form>
</body>
</html>
```

```
<%@ Page Language="VB" AutoEventWireup="false" CodeFile="Lab5.aspx.vb" Inherits="Lab5" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/
xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Untitled Page</title>
</head>
<body>
    <form id="form1" runat="server">
        <ul> <!--Below are the links to each problem in Lab 5-->
            <li><a href="Lab5-1.aspx">Problem 1</a></li>
            <li><a href="Lab5-2.aspx">Problem 2</a></li>
            <li><a href="Lab5-3.aspx">Problem 3</a></li>
            <li><a href="Lab5-4.aspx">Problem 4</a></li>
        </ul>
    </form>
</body>
</html>
```



All About JEZZY!!!

Welcome to the homepage of Jezzeel Wilson. My hometown is Kingstree, South Carolina, which is where I graduated from Kingstree Senior High School in 2007. I entered Charleston Southern University in the Summer of 2007 and started the Bachelor of Science in Computer Science. I like to play video games, work with computer, lift weights, and have fun with friends.

Contact Me: jwilson@csuofcs.net

[My Favs](#)
[Gallery](#)

My Lab Assignments

[Lab 1](#)
[Lab 2](#)
[Lab 3](#)
[Lab 4](#)
[Lab 5](#)
[Lab 6](#)
[Lab 7](#)
[Lab 8](#)
[Lab 9](#)
[Lab 10](#)

Jezreel Wilson

Coins 315 01

Prof. Gary Underwood

2008 September 10

Grade: 80