

# COIN 496 Senior Portfolio

---

**Christopher Wyant**

**3/22/2010**

# Programs

---

**Christopher Wyant**

COIN 315: MiniSearch

COIN 325: theRace

COIN 332: Hyped Website

COIN 333: (Applied Systems- have not taken yet)

# COIN 315: Data Structures

---

**Program**

**Grade: A**

The program for COIN 315 was written in the C++ programming language. The program was compiled using Microsoft Visual Studio 2005. Open the program using Microsoft Visual Studio 2005 or a later version. Click Project->Project6 properties. In the open window under Configuration Properties click Debugging. In the command arguments type \*.txt yes/no word. For example: \*.txt yes "have NOT like". After the yes/no enter either a single word without quotations or two words separated by either AND, OR, NOT all in quotations like the example above. Once finished press OK. To Run the program press Ctrl+F5.

```

/*
 * Student Name: Christopher Wyant
 * Program Name: MiniSearch
 * Creation Date: 12/5/2009
 * Last Modified Date: 12/16/2009
 * COIN Course: COIN 315
 * Grade Recieved: A
 */

#include <string>
#include <vector>
#include <map>
#include <fstream>
#include <iostream>
#include "MiniSearch.h"

using namespace std;

MiniSearch::MiniSearch(){

} //This constructor has no documents

MiniSearch::MiniSearch(const vector<string> &files){
    vecLen = files.size();
    table = new vector<hashNode>[vecLen];
    for(int i = 0; i < vecLen; i++) {
        addDocument(files[i]);
    }
}

//files is a vector of filenames, simply calls addDocument for each
filename.

bool MiniSearch::addDocument(const string &file){
    ifstream search;
    string word;
    bool didOpen = false;
    search.open(file.c_str());
    if(search.is_open()) {
        didOpen = true;
        while(!search.eof()) {
            search >> word;
            setter.insert(word);
        }
        if(search.eof()) {
            hashy.fileName = file;
            hashy.setTree = setter;
            setter.clear();
            table[0].push_back(hashy);
        }
    }
    return didOpen;
}

/*opens and reads file, return true iff it was able to successfully read
file.

```

This is the only method that should open a file. The files will contain only lower case words and no punctuation. There may be more than one word on a line. Use simple methods for reading the file rather than being concerned with speed. So use C++ strings if they are more convenient. \*/

```
int MiniSearch::query(const string &q, vector<string> &result, bool print)
const{
    string word1, word2, oper, nearNum;
    int index = q.length();
    vector<hashNode>::iterator it = table[0].begin();
    for(int i = 0; i < index; i++) {
        while(i < index && q[i] != ' ') {
            word1 += q[i];
            i++;
            if(word1 == "AND" || word1 == "OR" || word1 == "NOT"
|| word1 == "NEAR") {
                oper = word1;
                if(oper == "NEAR") {
                    while(i < index && q[i] != ' ') {
                        nearNum += q[i];
                        i++;
                    }
                }
                }//for multiple statements
            }
            i++;
            while(i < index && q[i] != ' ') {
                oper += q[i];
                i++;
            }
            if(i < index && oper != "AND" && oper != "OR" && oper !=
"NOT" && oper != "NEAR") {
                word1 = oper;
            }//for multiple statements
            i++;
            if(oper == "NEAR" && nearNum == "") {
                while(i < index && q[i] != ' ') {
                    nearNum += q[i];
                    i++;
                }
                i++;
            }
            while(i < index && q[i] != ' ') {
                word2 += q[i];
                i++;
            }
            if(oper.empty()) {
                noOper(word1, result, it);
            }
            if(oper == "AND") {
                andFunction(word1, word2, result, it);
            }
            if(oper == "OR") {
                orFunction(word1, word2, result, it);
            }
        }
    }
```

```

    }
    if(oper == "NOT") {
        notFunction(word1, word2, result, it);
    }
    nearNum = "";
}
if(print == true) {
    for(unsigned int printer = 0; printer < result.size();
printer++) {
        cout << result[printer] <<endl;
    }
}

return result.size();
}
int MiniSearch::hash(const hashNode &item) const{
    string name = item.fileName;
    int pos = (name[0] * name[name.length() - 5] * name[name.length()/2] ) %
vecLen;
    return pos;
}
void MiniSearch::noOper(string word1, vector<string> &res,
vector<hashNode>::iterator &it) const {
    if(it == table->end()) return;
    set<string>::iterator findIt1, findIt2 ;
    findIt1 = it->setTree.find(word1);
    if(findIt1 != it->setTree.end()) {
        res.push_back(it->fileName);
    }
    noOper(word1, res, it + 1);
}
void MiniSearch::andFunction(string word1, string word2, vector<string> &res,
vector<hashNode>::iterator &it) const {
    if(it == table->end()) return;
    set<string>::iterator findIt1, findIt2 ;
    findIt1 = it->setTree.find(word1);
    findIt2 = it->setTree.find(word2);
    if(findIt1 != it->setTree.end() && findIt2 != it->setTree.end()) {
        res.push_back(it->fileName);
    }
    andFunction(word1, word2, res, it + 1);
}
void MiniSearch::orFunction(string word1, string word2, vector<string> &res,
vector<hashNode>::iterator &it) const {
    if(it == table->end()) return;
    set<string>::iterator findIt1, findIt2 ;
    findIt1 = it->setTree.find(word1);
    findIt2 = it->setTree.find(word2);
    if(findIt1 != it->setTree.end() || findIt2 != it->setTree.end()) {
        res.push_back(it->fileName);
    }
    orFunction(word1, word2, res, it + 1);
}
void MiniSearch::notFunction(string word1, string word2, vector<string> &res,
vector<hashNode>::iterator &it) const {
    if(it == table->end()) return;
    set<string>::iterator findIt1, findIt2 ;

```

```

        findIt1 = it->setTree.find(word1);
        findIt2 = it->setTree.find(word2);
        if(findIt1 != it->setTree.end() && findIt2 == it->setTree.end()) {
            res.push_back(it->fileName);
        }
        notFunction(word1, word2, res, it + 1);
    }
}

```

```

#ifndef MINISEARCH_H
#define MINISEARCH_H
#include <string>
#include <vector>
#include <set>
//#include <map>
//#include "HashTable.h"
using namespace std;

class MiniSearch {
public:
    MiniSearch(); //This constructor has no documents

    MiniSearch(const vector<string> &files);
    //files is a vector of filenames, simply calls addDocument for each
    filename.

    bool addDocument(const string &file);
    /*opens and reads file, return true iff it was able to successfully read
    file. This is the only method that should open a file. The files will
    contain only lower case words and no punctuation. There may be more than one
    word on a line. Use simple methods for reading the file rather than being
    concerned with speed. So use C++ strings if they are more convenient. */

    int query(const string &q, vector<string> &result, bool print) const;
    /* q is the query string to be described in the next section
    result should hold list of documents for which q is true, it is an output
    variable
    returns count which is the size of result
    If print is true, it prints the documents in the result, otherwise it
    prints nothing
    query is const because asking about the documents shouldn't change
    anything*/
private:
    int vecLen;
    struct hashNode {
        string fileName;
        set<string> setTree;
    };

    hashNode hashy;
    vector<hashNode> * table;
    set<string> setter;

```

```

    int hash(const hashNode &item) const;
    void noOper(string word1, vector<string> &res, vector<hashNode>::iterator
&it) const;
    void andFunction(string word1, string word2, vector<string> &res,
vector<hashNode>::iterator &it) const;
    void orFunction(string word1, string word2, vector<string> &res,
vector<hashNode>::iterator &it) const;
    void notFunction(string word1, string word2, vector<string> &res,
vector<hashNode>::iterator &it) const;
};

#endif

```

```

C:\Windows\system32\cmd.exe
doc1.txt
doc2.txt
doc3.txt
doc4.txt
Vector (*.txt):doc1.txt, doc2.txt, doc3.txt, doc4.txt.
Preprocess time: 0.1648
Input phrase like OR have
doc1.txt
doc4.txt
2 like OR have:
Query total of 2 matches time: 0.0018
Press any key to continue . . . _

```

```

C:\Windows\system32\cmd.exe
doc1.txt
doc2.txt
doc3.txt
doc4.txt
Vector (*.txt):doc1.txt, doc2.txt, doc3.txt, doc4.txt.
Preprocess time: 0.1674
Input phrase like AND have
doc4.txt
1 like AND have:
Query total of 1 matches time: 0.0007
Press any key to continue . . . _

```



```
C:\Windows\system32\cmd.exe
doc1.txt
doc2.txt
doc3.txt
doc4.txt
Vector (*.txt):doc1.txt, doc2.txt, doc3.txt, doc4.txt,
Preprocess time: 0.1666
Input phrase like NOT have
doc1.txt
1 like NOT have:
Query total of 1 matches time: 0.0007
Press any key to continue . . .
```

```
C:\Windows\system32\cmd.exe
doc1.txt
doc2.txt
doc3.txt
doc4.txt
Vector (*.txt):doc1.txt, doc2.txt, doc3.txt, doc4.txt,
Preprocess time: 0.1603
Input phrase have NOT like
0 have NOT like:
Query total of 0 matches time: 0.0001
Press any key to continue . . .
```

# COIN 325: Java

---

**Program**

**Grade: A+**

The program for COIN 325 was written in the Java programming language. To run the program, open the HTML Document titled theRace. Depending on the browser of choice, it may be necessary to Allow Blocked Content. Once the program is open, insert a number into each text box next to each character's name. Once a number is entered for every character, press the start button to see each character move at the selected speed. Press the stop button to stop the characters in their current location. To start over, refresh the web page.

/\*

\* Student Name: Christopher Wyant

\* Program Name: theRace

\* Creation Date: 4/1/2009

\* Last Modified Date: 4/14/2009

\* COIN Course: COIN 325

\* Grade Recieved: A+

\*

\*/

import java.awt.Graphics;

import java.awt.Image;

import java.awt.TextField;

import javax.swing.JApplet;

import javax.swing.JButton;

import java.awt.Container;

import java.awt.FlowLayout;

import javax.swing.JTextField;

import java.net.\*;

import java.applet.\*;

import java.awt.\*;

import java.awt.event.\*;

import java.awt.event.ActionListener;

import java.awt.event.ActionEvent;

import javax.swing.Timer;

```
public class theRace extends Applet implements ActionListener
{
    int batspeed, spidyspeed, cycspeed, wolvspeed, num1, num2, num3, num4;

    Image image1; //spiderman image

    Image image2; //wolverine image

    Image image3; //cyclops image

    Image image4; //batman image

    Image background; //background image of gotham city

    TextField t1, t2, t3, t4;

    Label lab1 = new Label("Batman:");

    Label lab2 = new Label("Wolverine:");

    Label lab3 = new Label("Spiderman:");

    Label lab4 = new Label("Cyclops:");

    JButton startButton, stopButton; //start and stop button for the java application

    private Timer animationTimer;

    private final int delay = 100;

    public void init()
    {
        t1 = new TextField(2);

        t2 = new TextField(2);
```

```
t3 = new TextField(2);
```

```
t4 = new TextField(2);
```

```
startButton = new JButton("Start");
```

```
stopButton = new JButton("Stop");
```

```
background = getImage(getDocumentBase(), "gotham.jpg");
```

```
image1 = getImage(getDocumentBase(), "Spider.gif");
```

```
image2 = getImage(getDocumentBase(), "wolverine.gif");
```

```
image3 = getImage(getDocumentBase(), "cyclops.gif");
```

```
image4 = getImage(getDocumentBase(), "batman.gif");
```

```
add(lab1);
```

```
add(t1);
```

```
add(lab2);
```

```
add(t2);
```

```
add(lab3);
```

```
add(t3);
```

```
add(lab4);
```

```
add(t4);
```

```
add(startButton);
```

```
add(stopButton);
```

```
startButton.addActionListener(this);
```

```
stopButton.addActionListener(this);
```

```
batspeed = 1100; //position batman on the window  
wolvspeed = 1050; //position wolverine on the window  
spidyspeed = 1100; //position spiderman on the screen  
cycspeed = 1050; //position cyclops on the screen
```

```
}
```

```
public void actionPerformed(ActionEvent e)
```

```
{
```

```
    if(e.getSource() == startButton) //if the start button is pushed do this
```

```
    {
```

```
        num1 = Integer.parseInt( t1.getText() );
```

```
        num2 = Integer.parseInt( t2.getText() );
```

```
        num3 = Integer.parseInt( t3.getText() );
```

```
        num4 = Integer.parseInt( t4.getText() );
```

```
    } //sets the speed of each character based on number entered by user in text
```

```
box
```

```
if(e.getSource() == stopButton) //if stop button pushed do this
```

```
{
```

```
num1 = 0;
```

```
num2 = 0;
```

```
num3 = 0;
```

```
num4 = 0;
```

```
    } //sets all movements to 0
```

```
}
```

```
public void paint(Graphics g)
```

```
{
```

```
    super.paint(g);
```

```
    g.drawImage(background, 0,30, this);
```

```
    g.drawLine(0, 40, 1340, 40);
```

```
    g.drawLine(0, 210, 1340, 210);
```

```
    g.drawLine(0, 360, 1340, 360);
```

```
    g.drawLine(0, 560, 1340, 560);
```

```
    g.drawImage( image1, spidyspeed, 360, this);
```

```
    g.drawImage( image2, wolvspeed, 210, this);
```

```
    g.drawImage( image4, batspeed, 40, this);
```

```
    g.drawImage( image3, cycspeed, 550, this);
```

```
//draws all items to the window

public void update(Graphics g)
{
    paint(g);
} //updates the position of characters. For use when moving


public void start()
{
    if( animationTimer == null)
    {

        animationTimer = new Timer( delay, new TimerHandler() );
        animationTimer.start();

    }
}

//start the timer and movements of characters


public void stop()
{
    animationTimer.stop();

}

//stop all actions
```



```
private class TimerHandler implements ActionListener
```

```
{
```

```
    public void actionPerformed( ActionEvent actionEvent)
```

```
    {
```

```
        batspeed -= num1;
```

```
        if(batspeed <= 0)
```

```
            batspeed = 1150;
```

```
            wolvspeed -= num2;
```

```
        if(wolvspeed <= 0)
```

```
            wolvspeed = 1150;
```

```
        spidyspeed -= num3;
```

```
        if (spidyspeed <= 0)
```

```
            spidyspeed = 1150;
```

```
        cycspeed -= num4;
```

```
        if (cycspeed <= 0)
```



```
            cycspeed = 1150;
```

```
        repaint();
```

```
    } //when character moves off screen, this loops character to other side
```

```
}
```

```
}
```

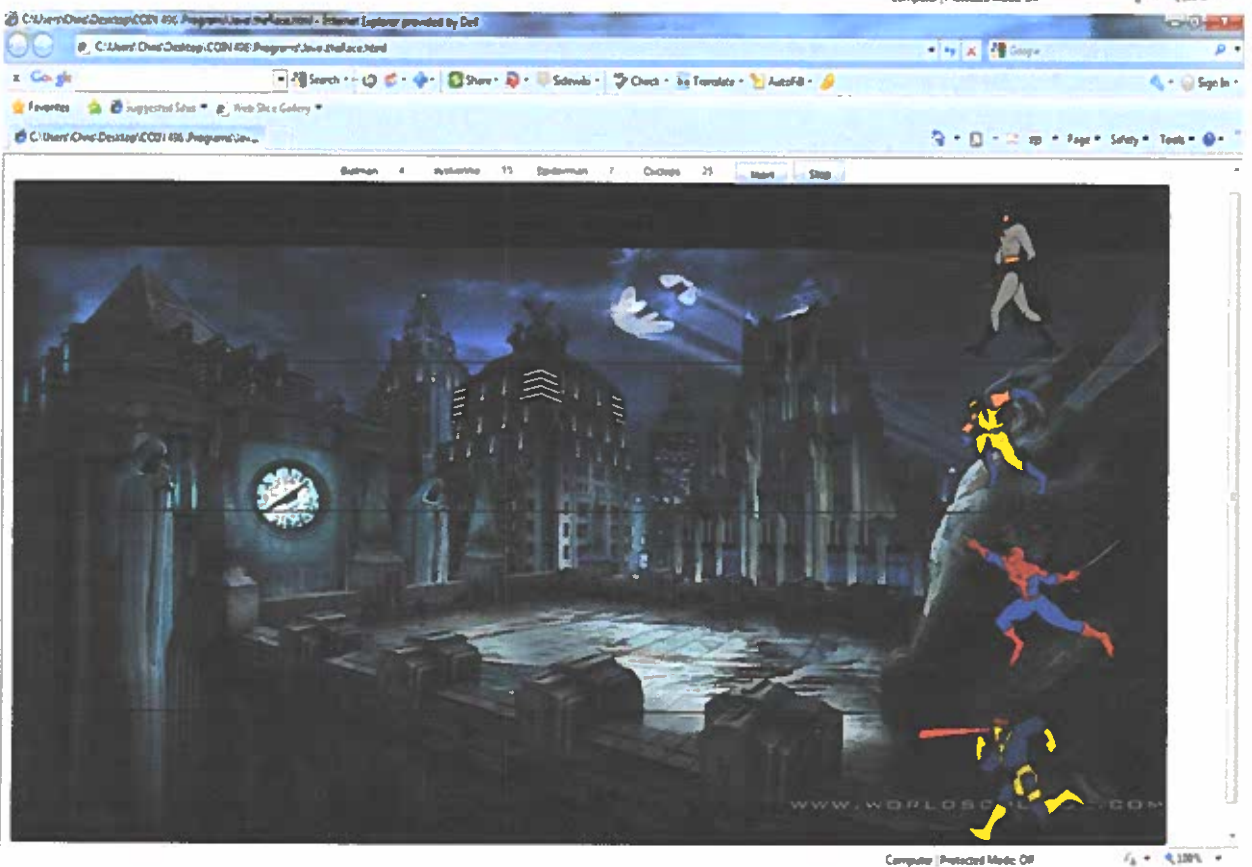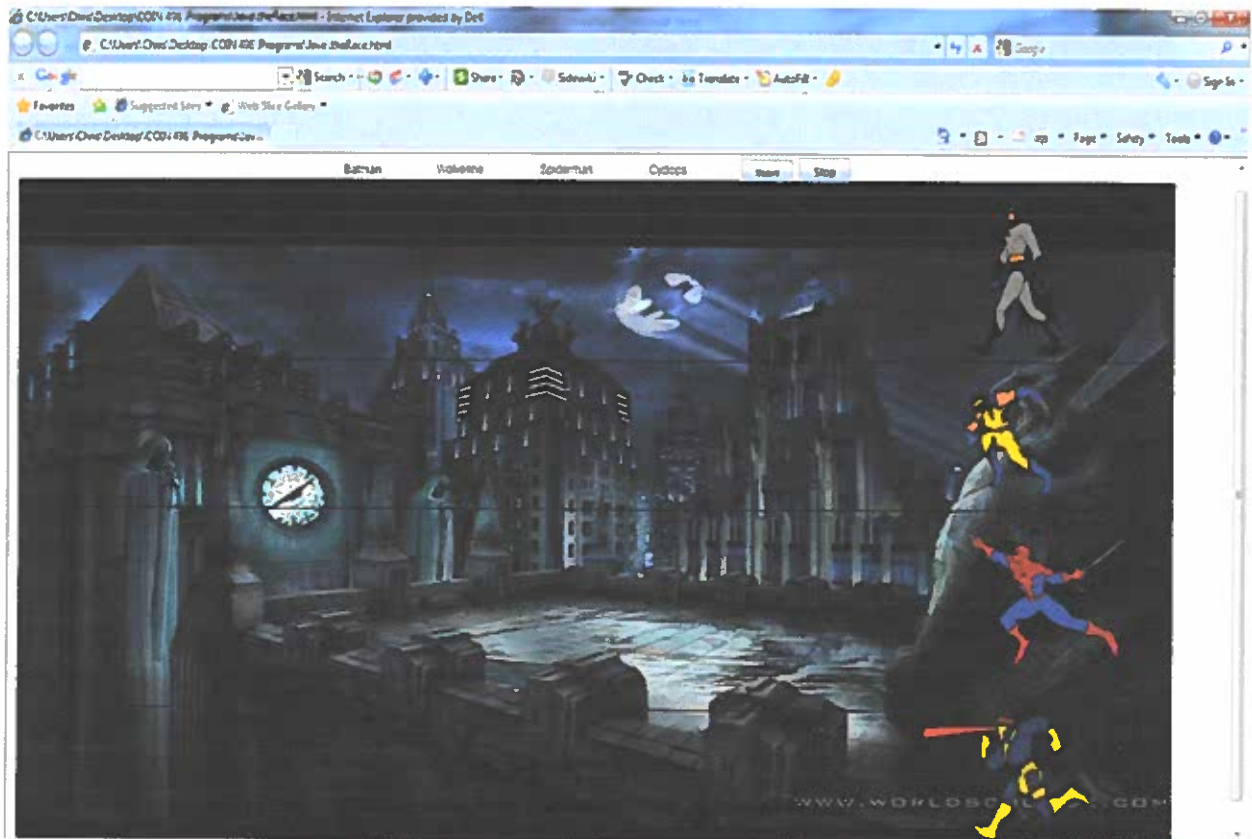




# COIN 332: Applied Networking

---

**Program**

**Grade: B**

The program for COIN 332 was written in ASP.NET. The program was compiled using Microsoft Visual Studio 2008. Open the program using Microsoft Visual Studio 2008 or a later version. To run, click Debug->Start Debugging.

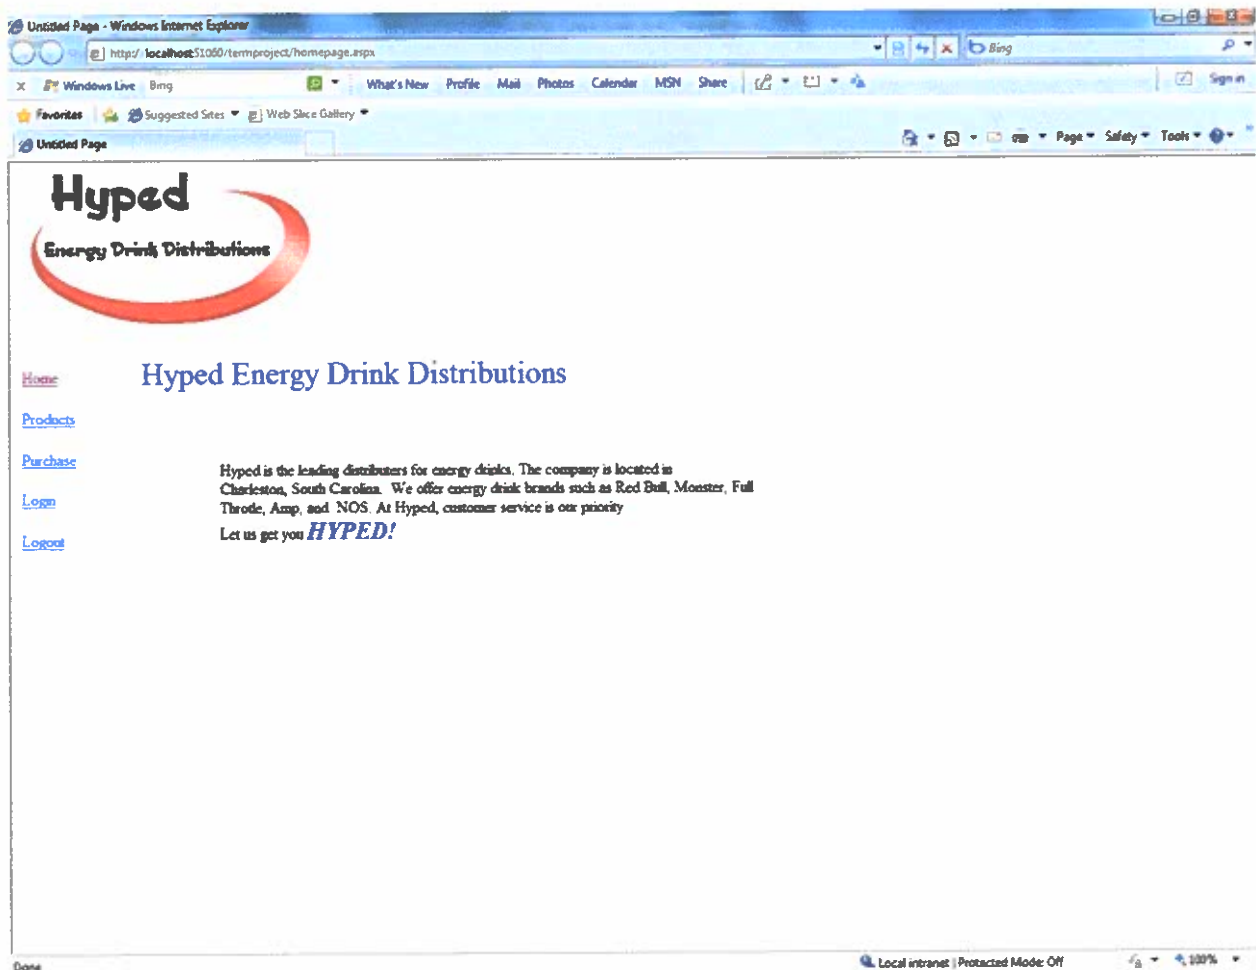

```
'Name: Christopher Wyant
'Program Name : Hyped
'Creation Date: 3/11/2009
'Last Modified Date:4/27/2009
'COIN Course: 332 Applied Networking
'GradeRecieved : B
```



```
<%@ Page Language="VB" AutoEventWireup="false" CodeFile="homepage.aspx.vb"
Inherits="homepage" %>
```


```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml" >
<head runat="server">
  <title>Untitled Page</title>
  <style type="text/css">
    .style1
    {
      width: 10%;
```

```
float: left;
height: 252px;
}
.style2
{
    color: #000099;
}
</style>
</head>
<body>
<form id="form1" runat="server">
<div style="height: 172px">
    &nbsp;<br />
    <asp:Image ID="Image1" runat="server" Height="162px"
ImageUrl=~\hypedlogo.jpg"
Width="294px" />
    &nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<br />
    <br />
    <br />
    <br />
    <br />
&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&~\products.aspx">Products</asp:HyperLink>
    </td>
</tr>
<tr>
    <td>
        <asp:HyperLink ID="HyperLink3" runat="server"
NavigateUrl=~\User/log.aspx">Purchase</asp:HyperLink>
    </td>
</tr>
<tr>
    <td>
        <asp:HyperLink ID="HyperLink4" runat="server"
NavigateUrl=~\login.aspx">Login</asp:HyperLink>
    </td>
</tr>
```





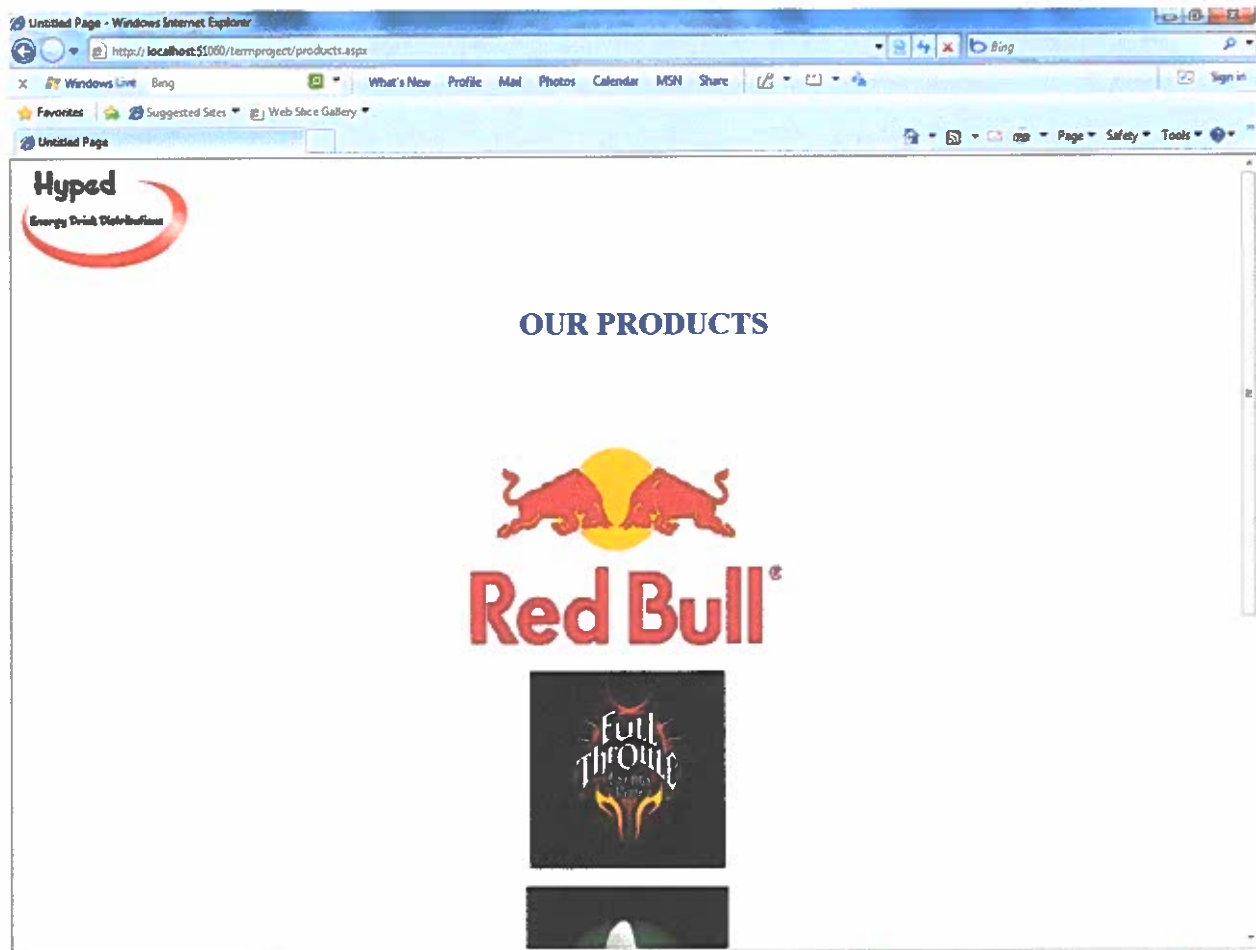

```
<%@ Page Language="VB" AutoEventWireup="false" CodeFile="products.aspx.vb"
Inherits="products" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
```

```
<head runat="server">
```

```
  <title>Untitled Page</title>
```

```
  <style type="text/css">
```

```
    .style1
```

```
    {
```

```
      font-size: xx-large;
```

```
      color: #003399;
```

```
    }
```

```
  .style2
```

```
  {
```

```
    font-weight: bold;
```

```
    color: #000099;
```

```
    text-align: center;
```

```
  }
```

```
  .style3
```

```
  {
```

```
    font-size: xx-large;
```

```
  }
```




```
.style4  
{  
    text-align: center;  
}  
  
</style>  
</head>  
<body>  
    <form id="form1" runat="server">  
        <div style="width: 197px">  
            <asp:ImageButton ID="ImageButton7" runat="server" Height="106px"  
                ImageUrl="~/hypedlogo.jpg" PostBackUrl="~/homepage.aspx"  
                style="text-align: left" Width="174px" />  
        </div>  
        <div class="style4">  
            <br />  
            <br />  
            &nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&~<span class="style3">  
                <span class="style2">OUR PRODUCTS</span></span><span  
class="style1"><br />  
                <br />  
                <br />  
            </span>  
            <br />  
            <br />  
            <asp:ImageButton ID="ImageButton1" runat="server"  
ImageUrl="~/redbulllogo.jpg"  
                PostBackUrl="http://www.redbullusa.com" />  
            <br />  
            <br />  
            <asp:ImageButton ID="ImageButton2" runat="server"  
ImageUrl="~/fullthrotle.jpg"  
                PostBackUrl="http://www.fullthrottleenergy.com" />  
            <br />  
            <br />  
            <asp:ImageButton ID="ImageButton3" runat="server"  
ImageUrl="~/AmpLogo.gif"  
                PostBackUrl="http://www.ampenergy.com/" />  
            <br />  
            <br />  
            <asp:ImageButton ID="ImageButton6" runat="server"  
ImageUrl="~/monsterlogo.jpg"  
                PostBackUrl="http://www.monsterenergy.com/" />  
            <br />  
            <br />  
            <asp:ImageButton ID="ImageButton5" runat="server"  
ImageUrl="~/NOSlogo.jpg"  
                PostBackUrl="http://www.drinknos.com" />  
        </div>  
    </form>  
</body>  
</html>
```

Partial Class products

Inherits System.Web.UI.Page

End Class

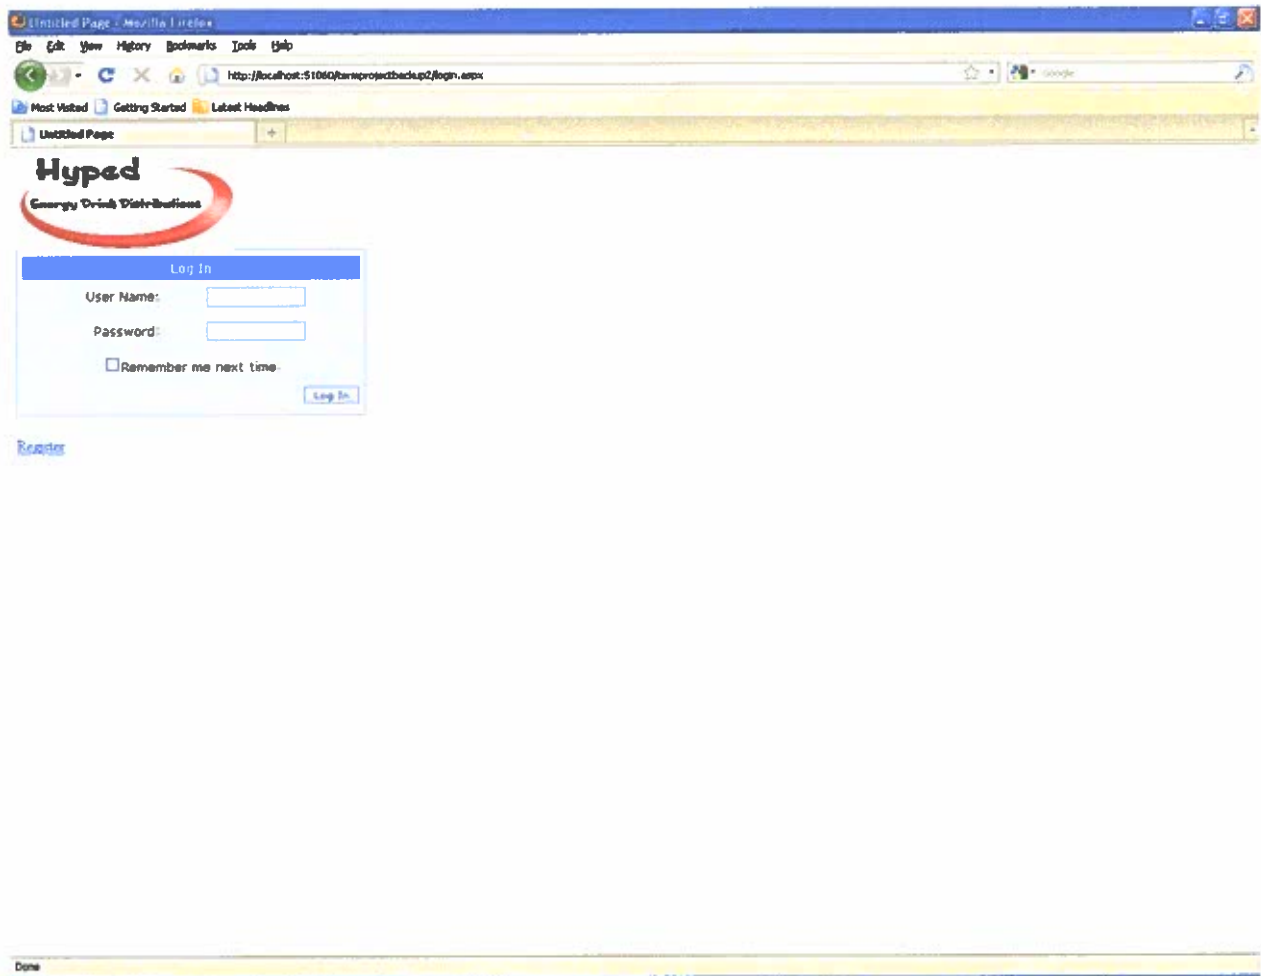

```
<%@ Page Language="VB" AutoEventWireup="false" CodeFile="login.aspx.vb"
Inherits="login" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Untitled Page</title>
</head>
<body>
    <form id="form1" runat="server">
        <div>

            <asp:ImageButton ID="ImageButton1" runat="server" Height="97px"
                ImageUrl="~/hypedlogo.jpg" Width="223px"
                PostBackUrl="~/homepage.aspx" />

        </div>
        <asp:Login ID="Login1" runat="server" BackColor="#EFF3FB"
            BorderColor="#B5C7DE"
            BorderPadding="4" BorderStyle="Solid" BorderWidth="1px" Font-
            Names="Verdana"
```

```

        Font-Size="0.8em" ForeColor="#333333" Height="16px" style="text-align: center"
        Width="348px" DestinationPageUrl="~/User/log.aspx">
        <TextBoxStyle Font-Size="0.8em" />
        <LoginButtonStyle BackColor="White" BorderColor="#507CD1"
BorderStyle="Solid"
        BorderWidth="1px" Font-Names="Verdana" Font-Size="0.8em"
ForeColor="#284E98" />
        <InstructionTextStyle Font-Italic="True" ForeColor="Black" />
        <TitleTextStyle BackColor="#507CD1" Font-Bold="True" Font-Size="0.9em"
        ForeColor="White" />
    </asp:Login>
    <br />
    <asp:HyperLink ID="HyperLink1" runat="server"
        NavigateUrl="~/CreateAccount.aspx">Register</asp:HyperLink>
    &nbsp;</form>
</body>
</html>

```

```

Partial Class login
    Inherits System.Web.UI.Page

End Class

```

Untitled Page - Windows Internet Explorer provided by CSU - COINS Department

http://localhost:31080/homeproject2/01en/01en.asp

Favorites Suggested Sites Web Slice Gallery

Untitled Page

# Hyped

Energy Drink Distributions

Localhost


## Products Page

|                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|    |    |
| Quantity:<br>8 3 Oz 24 pack \$50.00 each                                            | Quantity:<br>16 Oz 16 pack \$31.00 each                                             |
|    |    |
| Quantity:<br>16 Oz 16 pack \$31.00 each                                             | Quantity:<br>16 Oz 24 pack \$50.00 each                                             |
|  |  |

Done

Local intranet | Protected Mode: Off

100%

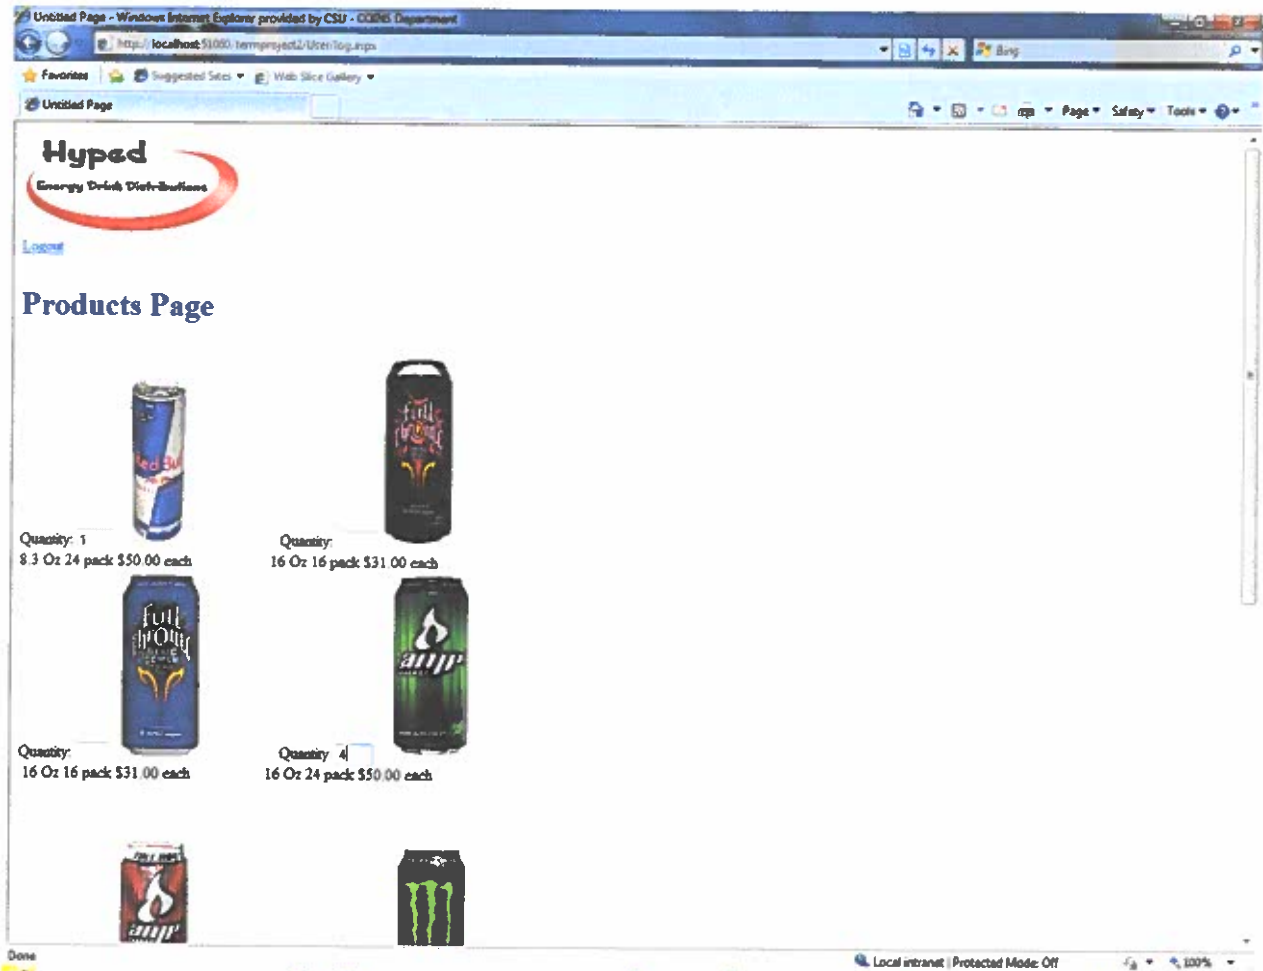

```

<%@ Page Language="VB" AutoEventWireup="false" CodeFile="log.aspx.vb"
Inherits="User_log" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Untitled Page</title>
    <style type="text/css">
        .style1
        {
            font-size: xx-large;
            font-weight: bold;
            color: #000099;
        }
        #form1
        {
            width: 691px;
        }
    </style>
</head>
<body>
    <form id="form1" runat="server">
        <p>

```



[illegible]







```

    If IsNumeric(TextBox3.Text) Then
        bdprice = CDb1(TextBox3.Text) * 31.0
        total += bdprice
        SqlDataSource1.InsertParameters("Brand").DefaultValue = "Full
Throttle Blue Demon"
        SqlDataSource1.InsertParameters("Quantity").DefaultValue =
CInt(TextBox3.Text)
        SqlDataSource1.InsertParameters("Price").DefaultValue = bdprice
        SqlDataSource1.Insert()
    End If
    If IsNumeric(TextBox4.Text) Then
        amprice = CDb1(TextBox4.Text) * 50.0
        total += amprice
        SqlDataSource1.InsertParameters("Brand").DefaultValue = "Amp
Original"
        SqlDataSource1.InsertParameters("Quantity").DefaultValue =
CInt(TextBox4.Text)
        SqlDataSource1.InsertParameters("Price").DefaultValue = amprice
        SqlDataSource1.Insert()
    End If
    If IsNumeric(TextBox5.Text) Then
        aoprice = CDb1(TextBox5.Text) * 50.0
        total += aoprice
        SqlDataSource1.InsertParameters("Brand").DefaultValue = "Amp
Overdrive"
        SqlDataSource1.InsertParameters("Quantity").DefaultValue =
CInt(TextBox5.Text)
        SqlDataSource1.InsertParameters("Price").DefaultValue = aoprice
        SqlDataSource1.Insert()
    End If
    If IsNumeric(TextBox6.Text) Then
        mprice = CDb1(TextBox6.Text) * 50.0
        total += mprice
        SqlDataSource1.InsertParameters("Brand").DefaultValue = "Monster
Original"
        SqlDataSource1.InsertParameters("Quantity").DefaultValue =
CInt(TextBox6.Text)
        SqlDataSource1.InsertParameters("Price").DefaultValue = mprice
        SqlDataSource1.Insert()
    End If
    If IsNumeric(TextBox7.Text) Then
        eprice = CDb1(TextBox7.Text) * 55.0
        total += eprice
        SqlDataSource1.InsertParameters("Brand").DefaultValue = "Monster
M-80"
        SqlDataSource1.InsertParameters("Quantity").DefaultValue =
CInt(TextBox7.Text)
        SqlDataSource1.InsertParameters("Price").DefaultValue = eprice
        SqlDataSource1.Insert()
    End If
    If IsNumeric(TextBox8.Text) Then
        javaprice = CDb1(TextBox8.Text) * 55.0
        total += javaprice
        SqlDataSource1.InsertParameters("Brand").DefaultValue = "Mean
Bean Java Monster"
        SqlDataSource1.InsertParameters("Quantity").DefaultValue =
CInt(TextBox8.Text)

```

```

        SqlDataSource1.InsertParameters("Price").DefaultValue = javaprice
        SqlDataSource1.Insert()
    End If
    If IsNumeric(TextBox9.Text) Then
        nosprice = CDb1(TextBox9.Text) * 55.0
        total += nosprice
        SqlDataSource1.InsertParameters("Brand").DefaultValue = "NOS
Original"
        SqlDataSource1.InsertParameters("Quantity").DefaultValue =
CInt(TextBox9.Text)
        SqlDataSource1.InsertParameters("Price").DefaultValue = nosprice
        SqlDataSource1.Insert()
    End If
    If IsNumeric(TextBox10.Text) Then
        nosfprice = CDb1(TextBox10.Text) * 55.0
        total += nosfprice
        SqlDataSource1.InsertParameters("Brand").DefaultValue = "NOS
Fruit Punch"
        SqlDataSource1.InsertParameters("Quantity").DefaultValue =
CInt(TextBox10.Text)
        SqlDataSource1.InsertParameters("Price").DefaultValue = nosfprice
        SqlDataSource1.Insert()
    End If
    Response.Redirect("Inventory.aspx")
End Sub

Protected Sub Page_Load(ByVal sender As Object, ByVal e As
System.EventArgs) Handles Me.Load

    End Sub
End Class

```

Untitled Page - Windows Internet Explorer provided by CSU - COGIS Department

http://localhost:51060/Inventory/Inventory.aspx

Favorites Suggested Sites Web Slice Gallery

Untitled Page

Logout

## Invoice

| ID | Brand                  | Quantity | Price |
|----|------------------------|----------|-------|
| 1  | Full Throttle Original | 2        | 58    |
| 2  | Red Bull               | 2        | 50    |
| 3  | Full Throttle Original | 4        | 116   |
| 4  | Full Throttle Original | 4        | 116   |
| 5  | Red Bull               | 1        | 25    |
| 6  | Red Bull               | 1        | 25    |
| 7  | Red Bull               | 1        | 25    |
| 8  | Red Bull               | 1        | 50    |
| 9  | Red Bull               | 12       | 600   |
| 10 | Monster Original       | 6        | 174   |
| 11 | NOS Original           | 2        | 58    |
| 12 | Red Bull               | 1        | 50    |
| 13 | Amp Original           | 12       | 348   |
| 14 | Amp Overdrive          | 3        | 87    |
| 15 | Red Bull               | 1        | 50    |
| 16 | Amp Original           | 3        | 87    |
| 17 | Amp Overdrive          | 4        | 116   |
| 18 | NOS Fruit Punch        | 10       | 290   |
| 19 | Full Throttle Original | 2        | 62    |
| 20 | Red Bull               | 1        | 50    |
| 21 | Amp Original           | 2        | 100   |
| 22 | Red Bull               | 1        | 50    |
| 23 | Red Bull               | 1        | 50    |
| 24 | Red Bull               | 1        | 50    |
| 25 | Amp Original           | 4        | 200   |

Done Local intranet | Protected Mode: ON 100%

```
<%@ Page Language="VB" AutoEventWireup="false" CodeFile="Inventory.aspx.vb"
Inherits="User_Inventory" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Untitled Page</title>
</head>
<body>
    <form id="form1" runat="server">
        <div>

            <asp:SqlDataSource ID="SqlDataSource1" runat="server"
                ConnectionString="<%%$ ConnectionStrings:ConnectionString %>"
                DeleteCommand="DELETE FROM [Invoice] WHERE [ID] = @ID"
                InsertCommand="INSERT INTO [Invoice] ([Brand], [Quantity],
[Price]) VALUES (@Brand, @Quantity, @Price)"
                SelectCommand="SELECT * FROM [Invoice]"
                UpdateCommand="UPDATE [Invoice] SET [Brand] = @Brand, [Quantity]
= @Quantity, [Price] = @Price WHERE [ID] = @ID">
                <DeleteParameters>
                    <asp:Parameter Name="ID" Type="Int32" />
                </DeleteParameters>
            </asp:SqlDataSource>
        </div>
    </form>
</body>
</html>
```

[illegible]

```
</form>  
</body>  
</html>
```

```
Partial Class User_Inventory  
    Inherits System.Web.UI.Page
```

```
End Class
```



Sign Up for Your New Account

|                    |                          |
|--------------------|--------------------------|
| User Name:         | <input type="text"/>     |
| Password:          | <input type="password"/> |
| Confirm Password:  | <input type="password"/> |
| E-mail:            | <input type="text"/>     |
| Security Question: | <input type="text"/>     |
| Security Answer:   | <input type="text"/>     |


Done



Sign Up for Your New Account

|                    |                                            |
|--------------------|--------------------------------------------|
| User Name:         | <input type="text" value="test"/>          |
| Password:          | <input type="password" value="*****"/>     |
| Confirm Password:  | <input type="password" value="*****"/>     |
| E-mail:            | <input type="text" value="test@test.com"/> |
| Security Question: | <input type="text" value="test"/>          |
| Security Answer:   | <input type="text" value="test"/>          |

Done

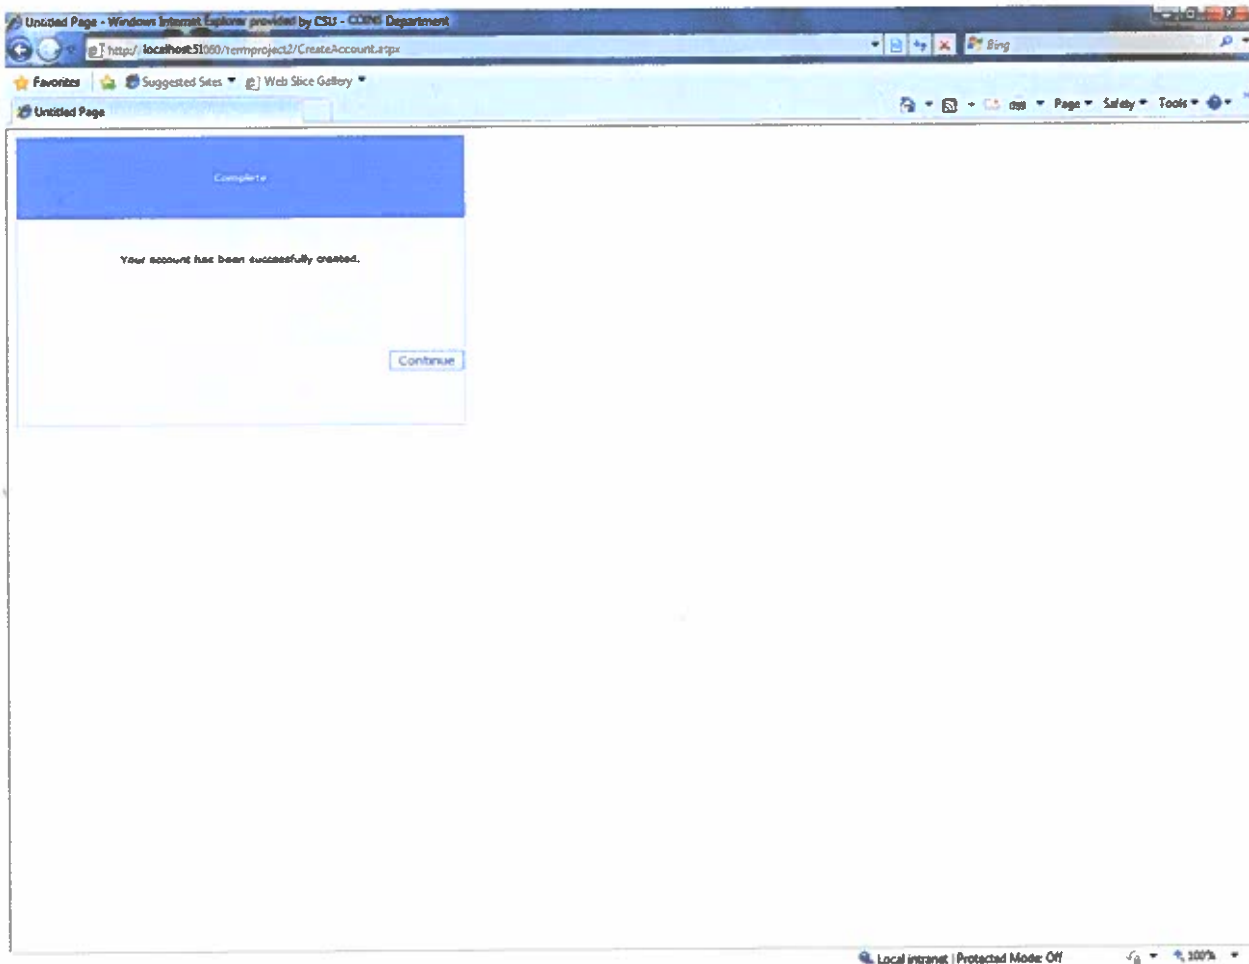

```
<%@ Page Language="VB" AutoEventWireup="false"
CodeFile="CreateAccount.aspx.vb" Inherits="CreateAccount" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
  <title>Untitled Page</title>
</head>
<body>
  <form id="form1" runat="server">
    <div>

      </div>
      <asp:CreateUserWizard ID="CreateUserWizard1" runat="server"
BackColor="#EFF3FB"
        BorderColor="#B5C7DE" BorderStyle="Solid" BorderWidth="1px"
        ContinueDestinationPageUrl="~/homepage.aspx" Font-Names="Verdana"
        Font-Size="0.8em" Height="295px" style="text-align: center"
Width="458px">
        <SideBarStyle BackColor="#507CD1" Font-Size="0.9em"
VerticalAlign="Top" />
        <SideBarButtonStyle BackColor="#507CD1" Font-Names="Verdana"
```