

ImpactTB/BAA: Standard Operating Procedures for Data Analysis

Colorado State University Coding Team

2022-09-08

Contents

1	Overview	5
1.1	About the project	5
1.2	About this book	6
2	Experimental metadata	7
3	Initial mouse characteristics	9
4	Mouse Weights	11
5	Colony forming units to determine bacterial counts	15
5.1	Data description	15
5.2	Read in data	16
5.3	Example one	18
5.4	Exploratory analysis and quality checks	18
5.5	Exploratory analysis	18
5.6	Identify a good dilution for each sample	19
5.7	Calculate CFUs from best dilution/Estimate bacterial load for each sample based on good dilution	19
5.8	Create initial report information for these data	20
5.9	Sample ANOVA	21
5.10	Save processed data to database	22
5.11	Example two	22
6	Enzyme-linked immunosorbent assay (ELISA)	23
6.1	Importance of ELISA	23
6.2	ELISA data analysis	25
6.3	1. Fitting sigmoid model:	26
6.4	2. Endpoint titer method	29
6.5	Apply the fitting sigmoid model and endpoint titer function in our dataset	29
6.6	Create function of Fitted model and endpoint titer, where the output of the fitted model data will be the input of the endpoint titer	34

7	ELISA data processing	37
8	Flow cytometry	43
8.1	Loading packages	43
8.2	panel information	44
8.3	Loading data	44
8.4	Making the data tidy for plotting	45
8.5	boxplot	46
9	Pathology	51
10	Pathology	53

Chapter 1

Overview

1.1 About the project

The objective of the Immune Mechanisms of Protection against Mycobacterium tuberculosis (IMPac-TB) program is to get a thorough understanding of the immune responses necessary to avoid initial infection with *Mycobacterium tuberculosis* (*Mtb*), formation of latent infection, and progression to active TB illness. To achieve these goals, the National Institute of Allergy and Infectious Diseases awarded substantial funding and established multidisciplinary research teams that will analyze immune responses against *Mtb* in animal models (mice, guinea pigs, and non-human primates) and humans, as well as immune responses elicited by promising vaccine candidates. The contract awards establish and give up to seven years of assistance for IMPac-TB Centers to explain the immune responses required for *Mtb* infection protection.

The seven centers that are part of the study are (in alphabetical order):

1. Colorado State University
2. Harvard T.H. Chan School of Public Health
3. Seattle Children Hospital
4. [more]

Colorado State University Team and role of each member:

- Dr. Marcela Henao-Tamayo: Principal Investigator
- Dr. Brendan Podell: Principal Investigator
- Dr. Andres Obregon-Henao: Research Scientist-III
- Dr. Taru S. Dutt: Research Scientist-I
- [more]

1.2 About this book

The aim of this book is to provide data protocols and data collection templates for key types of data that are collected over the course of this project. By using standard templates to record data, as well as starting from defined pipelines to process and analyze the data, we aim to standardize the collection and processing of data across this project.

Here, we have built a comprehensive guide to wet lab data collection, sample processing, and computational tool creation for robust and efficient data analysis and dissemination.

Chapter 2

Experimental metadata

Metadata for an experiment:

- species
- start_date
- end_date
- experimental_groups

Chapter 3

Initial mouse characteristics

At the start of each experiment with a mouse model, we record several measurements or characteristics of each mouse. We record these measurements along with an identifier for each mouse (for example, based on tags or ear notches), so that we can later link the initial characteristics of each mouse with later measurements on the same mouse.

The values that we initially record for each mouse include:

- **group**: An identifier for the experimental group to which the mouse is assigned (e.g., “Control”, “Group 1”)
- **group_detail**: A longer description of the mouse’s treatment group (e.g., “Vaccinated with vaccine candidate A at 4 and 8 weeks”)
- **notch_id**: The ear notch pattern of the mouse (e.g., “0” for no notch, “1R” for one notch in the right ear)
- **mouse_number**: A number that corresponds with the mouse’s ear notch pattern; together with the mouse’s group number, this provides a unique identifier for each mouse in the experiment
- **cage_number**: The number of the cage to which the mouse is first assigned. This may change over the course of the experiment, as mice might be removed from a cage due to fighting, etc. Any of these later changes of cage will be recorded [where]
- **sex**: Whether the mouse is male (“m”) or female (“f”)
- **age**: Age
- **strain**: The strain of the mouse (e.g., “C57BL/6J” for Black 6, “C3HeB/FeJ” for Kramnik)

We have created a spreadsheet template that can be used to record these data, which you can download by clicking [here](#). This template currently includes example data (colored in blue to help you remember that it’s only there as an example). To Use this template, take a look at the example data, then delete it and replace with the real data for your experiment.

Here is an example of how the first rows of this template might look once it's filled out:

	A	B	C	D	E	F
1	group	group_detail	cage_number	m/f	ear_punch_id	mouse_number
2		1 bcg		f		0 1
3		1 bcg		f	1R	2
4		1 bcg		f	1L	3
5		1 bcg		f	1R1L	4
6		2 bcg+id93		f		0 1
7		2 bcg+id93		f	1R	2
8		2 bcg+id93		f	1L	3
9		2 bcg+id93		f	1R1L	4
10		3 saline		f		0 1
11		3 saline		f	1R	2
12		3 saline		f	1L	3
13		3 saline		f	1R1L	4
14		4 saline+id93		f		0 1
15		4 saline+id93		f	1R	2

This template should be used at the initial time when mice are brought into the experiment. The file format is an Excel file, so you can use it by saving it to your computer and then opening and recording data with Excel. Later code in this chapter will read in a file in this template format to provide basic summaries of the data. Later code will read in these files to record the data in a project-wide database, which will allow us to integrate it with other data collected over the course of the experiment.

[Rules for naming the file. Include experiment name / study ID?]

Chapter 4

Mouse Weights

4.0.1 Overview

Extreme weight loss and loss of muscle mass, also known as cachexia, typically presents along side chronic inflammatory illnesses like Tuberculosis disease (Baazim et al., 2022). We now recognize that cachexia is part of a systemic response to inflammation, and has been linked to upregulation of pro-inflammatory cytokines such as TNF, IL-6, and IFN γ in humans (Baazim et al., 2022). Additionally, studies support the role of key immune cell populations such as CD8+ T-cells that, when depleted, counteract muscle and fat deterioration (Baazim et al., 2019), and suggest that CD8+ T-cells may metabolically reprogram adipose tissue.

In recognition of cachexia related illnesses and diseases, we tracked the progression of weight loss over the course of this study, as is done with many TB-mouse studies (Smith et al., 2022; Segueni et al., 2016). These data is also useful when correlating to CFU count as well as expression of cytokines and other biological markers (Smith et al., 2022). Here, mice are weighed in grams weekly to monitor clinical status as TB patients frequently display weight loss as clinical symptom associated with disease progression.

The following contains information about how the data was collected, organized, and curated for analysis in RStudio.

4.0.2 Parameters

Weights are recorded in an excel worksheet.

Column titles are as follows:

- **who_collected**: Record the first name of the person who read the weight for the mouse from the scale.

- **date_collected:** Record the date using quotation marks, with the month, then day, then year. For example, “May 31, 2022”.
- **sex:** Record as “m” for male or “f” for female
- **notch_id:** Make sure that you record consistently across all timepoints, so that each mouse can be tracked across dates. If you are doing single notches, for example, this might be “0” for no notches, “1R” for one notch in the right ear, “1L” for one notch in the left ear, and “1R1L” for one notch in each ear.
- **mouse_number**
- **weight:** Record as a number, with a unit in this column. The next column will be used for the units.
- **unit:** Provide the units that were used to take the weight (e.g., “g” for grams)
- **cage_number:** Provide the cage number. If a provisional cage number is being used, ... If the mouse was switched from its original cage, ...
- **group:** Provide the experimental group of the mouse. Be sure that you use the same abbreviation or notation across each timepoint. Examples of group designations might be: bcg, saline, bcg+id93, saline+id93, saline+noMtb
- **notes:** The notes column contains information regarding clinical observations.

good reference: <https://elifesciences.org/articles/74419#s4>

```
library(readxl)
library(tidyverse)
```

```
## -- Attaching packages ----- tidyverse 1.3.1 --

## v ggplot2 3.3.5      v purrr  0.3.4
## v tibble  3.1.6      v dplyr  1.0.7
## v tidyr   1.1.4      v stringr 1.4.0
## v readr   2.1.1      v forcats 0.5.1

## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()    masks stats::lag()
```

4.0.3 Read in data

Data is stored in one excel sheet, each week is one sheet named as the date -> return vector for each sheet name

4.0.4 Can also use rio to read in the data, more streamlined

4.0.5 Clean data

```
dataset <- data$before_vaccination %>%  
  select("sex", "mouse_number", "weight", "cage_number", "group")  
  
# combining columns mouse_number and cage_number  
  
dataset$mouse_id <- paste(dataset$mouse_number, "-", dataset$cage_number)
```

4.0.6 Body weight over time graph and statistics

4.0.7 Weight loss over time graph and statistics

4.0.8 Weight vs CFU

4.0.9 Weight vs ELISA results

4.0.10 Weight vs lesion burden

Chapter 5

Colony forming units to determine bacterial counts

5.1 Data description

The data are collected in a spreadsheet with multiple sheets. The first sheet (named “[x]”) is used to record some metadata for the experiment, while the following sheets are used to record CFUs counts from the plates used for samples from each organ, with one sheet per organ. For example, if you plated data from both the lung and spleen, there would be three sheets in the file: one with the metadata, one with the plate counts for the lung, and one with the plate counts for the spleen.

The metadata sheet is used to record information about the overall process of plating the data. Values from this sheet will be used in calculating the bacterial load in the original sample based on the CFU counts. This spreadsheet includes the following columns:

- **organ:** Include one row for each organ that was plated in the experiment. You should name the organ all in lowercase (e.g., “lung”, “spleen”). You should use the same name to also name the sheet that records data for that organ for example, if you have rows in the metadata sheet for “lung” and “spleen”, then you should have two other sheets in the file, one sheet named “lung” and one named “spleen”, which you’ll use to store the plate counts for each of those organs.
- **prop_resuspended:** In this column, give the proportion of that organ that was plated. For example, if you plated half the lung, then in the “lung” row of this spread sheet, you should put 0.5 in the **prop_resuspended** column.
- **total_resuspended_uL:** This column contains an original volume of tissue

homogenate. For example, raw lung tissue is homogenized in 500 uL of PBS in a tube containing metal beads.

- `og_aliquot_uL`: 100 uL of the total resuspended slurry would be considered an original aliquot and is used to perform serial dilutions.
- `dilution_factor`: Amount of the original stock solution that is present in the total solution, after dilution(s)
- `plated_uL`: Amount of suspension + diluent plated on section of solid agar

5.2 Read in data

```
library(readxl)
library(dplyr)
library(purrr)
library(tidyr)
library(stringr)
library(tidyverse)
library(gridExtra)
library(ggplot2)
library(ggpubr)

#Replace w/ path to CFU sheet
path <- c("DATA/Copy of baa_cfu_sheet.xlsx")

sheet_names <- excel_sheets(path)
sheet_names <- sheet_names[!sheet_names %in% c("metadata")]

merged_data <- list()

for(i in 1:length(sheet_names)){

  data <- read_excel(path, sheet = sheet_names[i]) %>%
    mutate(organ = paste0(sheet_names[i]))

  data <- data %>%
    #mutate(missing_col = NA) %>%
    mutate_if(is.double, as.numeric) %>%
    mutate_if(is.numeric, as.character) %>%
    pivot_longer(starts_with("dil_"), names_to = "dilution",
                  values_to = "CFUs") %>%
    mutate(dilution = str_extract(dilution, "[0-9]+"),
           dilution = as.numeric(dilution))
}
```



```
merged_data[[i]] <- data

}

all_data <- bind_rows(merged_data, .id = "column_label") %>%
  select(-column_label)

head(merged_data)

## [[1]]
## # A tibble: 342 x 8
##   count_date      who_plated who_counted groups mouse organ dilution CFUs
##   <chr>          <chr>      <chr>    <chr> <chr> <chr>    <dbl> <chr>
## 1 "\"February 21 2022~ BK      BK      group~ A    lung      0 TNTC
## 2 "\"February 21 2022~ BK      BK      group~ A    lung      1 TNTC
## 3 "\"February 21 2022~ BK      BK      group~ A    lung      2 TNTC
## 4 "\"February 21 2022~ BK      BK      group~ A    lung      3 53
## 5 "\"February 21 2022~ BK      BK      group~ A    lung      4 9
## 6 "\"February 21 2022~ BK      BK      group~ A    lung      5 4
## 7 "\"February 21 2022~ BK      BK      group~ A    lung      6 2
## 8 "\"February 21 2022~ BK      BK      group~ A    lung      7 1
## 9 "\"February 21 2022~ BK      BK      group~ A    lung      8 0
## 10 "\"February 21 2022~ BK      BK      group~ B    lung      0 TNTC
## # ... with 332 more rows
##
## [[2]]
## # A tibble: 112 x 8
##   count_date      who_plated who_counted groups mouse organ dilution CFUs
##   <chr>          <chr>      <chr>    <chr> <chr> <chr>    <dbl> <chr>
## 1 "\"April 25 2022\" JR      JR      group_1 A    sple~      0 TNTC
## 2 "\"April 25 2022\" JR      JR      group_1 A    sple~      1 TNTC
## 3 "\"April 25 2022\" JR      JR      group_1 A    sple~      2 53
## 4 "\"April 25 2022\" JR      JR      group_1 A    sple~      3 9
## 5 "\"April 25 2022\" JR      JR      group_1 A    sple~      4 4
## 6 "\"April 25 2022\" JR      JR      group_1 A    sple~      5 2
## 7 "\"April 25 2022\" JR      JR      group_1 A    sple~      6 1
## 8 "\"April 25 2022\" JR      JR      group_1 A    sple~      7 0
## 9 "\"April 25 2022\" JR      JR      group_1 B    sple~      0 TNTC
## 10 "\"April 25 2022\" JR      JR      group_1 B    sple~      1 TNTC
## # ... with 102 more rows
##
head(all_data)

## # A tibble: 6 x 8
##   count_date      who_plated who_counted groups mouse organ dilution CFUs
```

```
##   <chr>                <chr>      <chr>      <chr> <chr> <chr>      <dbl> <chr>
## 1 "\"February 21 2022\~ BK        BK        group~ A    lung        0 TNTC
## 2 "\"February 21 2022\~ BK        BK        group~ A    lung        1 TNTC
## 3 "\"February 21 2022\~ BK        BK        group~ A    lung        2 TNTC
## 4 "\"February 21 2022\~ BK        BK        group~ A    lung        3 53
## 5 "\"February 21 2022\~ BK        BK        group~ A    lung        4 9
## 6 "\"February 21 2022\~ BK        BK        group~ A    lung        5 4
```

5.3 Example one

5.4 Exploratory analysis and quality checks

5.5 Exploratory analysis

Dimensions of input data:

Based on the input data, data were collected for the following organ or organs:

The following number of mice were included for each:

The following number of replicates were recorded at each count date for each experimental group:

The following number of dilutions and dilution level were recorded for each organ:

People who plated and collected the data. Date or dates of counting:

Based on the input data, the plates included in these data were counted by the following person or persons: Based on the input data, the plates included in these data were counted on the following date or dates:

```
all_data %>%
  select(organ, who_plated, who_counted, count_date) %>%
  distinct()
```

```
## # A tibble: 3 x 4
##   organ  who_plated who_counted count_date
##   <chr>  <chr>      <chr>      <chr>
## 1 lung   BK         BK        "\"February 21 2022\"
## 2 lung   BK         BK        "\"April 18 2022\"
## 3 spleen JR         JR        "\"April 25 2022\"
```

```
head(all_data)
```

```
## # A tibble: 6 x 8
##   count_date      who_plated who_counted groups mouse organ dilution CFUs
##   <chr>          <chr>      <chr>      <chr> <chr> <chr>      <dbl> <chr>
## 1 "\"February 21 2022\~ BK        BK        group~ A    lung        0 TNTC
```

```
## 2 "\"February 21 2022\\~ BK      BK      group~ A      lung      1 TNTC
## 3 "\"February 21 2022\\~ BK      BK      group~ A      lung      2 TNTC
## 4 "\"February 21 2022\\~ BK      BK      group~ A      lung      3 53
## 5 "\"February 21 2022\\~ BK      BK      group~ A      lung      4 9
## 6 "\"February 21 2022\\~ BK      BK      group~ A      lung      5 4
```

Distribution of CFUs at each dilution:

Here's a plot that shows how many plates were too numerous to count at each dilution level:

Here is a plot that shows how the CFU counts were distributed by dilution level in the data:

5.6 Identify a good dilution for each sample

```
# Make all_data into tidy data and filter for CFUs between 10-75
```

```
tidy_cfu_data <- all_data %>%
  mutate(dilution = str_extract(dilution, "[0-9]+"),
         dilution = as.numeric(dilution)) %>%
  filter((CFUs >= 5 & CFUs <= 95) | groups == "control") %>%
  mutate(CFUs = as.numeric(CFUs))
```

```
head(tidy_cfu_data)
```

```
## # A tibble: 6 x 8
##   count_date      who_plated who_counted groups mouse organ dilution CFUs
##   <chr>          <chr>      <chr>    <chr> <chr> <chr>    <dbl> <dbl>
## 1 "\"February 21 2022\\~ BK      BK      group~ A      lung      3     53
## 2 "\"February 21 2022\\~ BK      BK      group~ A      lung      4      9
## 3 "\"February 21 2022\\~ BK      BK      group~ C      lung      5      8
## 4 "\"February 21 2022\\~ BK      BK      group~ D      lung      3     53
## 5 "\"February 21 2022\\~ BK      BK      group~ A      lung      2     92
## 6 "\"February 21 2022\\~ BK      BK      group~ A      lung      4      7
```

5.7 Calculate CFUs from best dilution/Estimate bacterial load for each sample based on good dilution

```
# Calculating CFU/ml for every qualifying replicate between 10-75 CFUs. Column binding by organ r
meta <- read_excel(path, sheet = "metadata")
```

```
tidy_cfu_meta_joined <- inner_join(meta, tidy_cfu_data) %>%
  group_by(groups) %>%
  mutate(CFUs_per_ml = (CFUs * (dilution_factor^dilution) *
                        (total_resuspension_mL/volume_plated_ul) * 1000)) %>%
  select(organ, count_date, who_plated, who_counted, groups, mouse, dilution,
         CFUs, CFUs_per_ml) %>%
  ungroup()
```


```
## Joining, by = "organ"
head(tidy_cfu_meta_joined)
```

```
## # A tibble: 6 x 9
##   organ count_date      who_plated who_counted groups mouse dilution CFUs
##   <chr> <chr>          <chr>      <chr>      <chr> <chr>   <dbl> <dbl>
## 1 lung  "\"February 21 2022\~ BK        BK        group~ A      3      53
## 2 lung  "\"February 21 2022\~ BK        BK        group~ A      4      9
## 3 lung  "\"February 21 2022\~ BK        BK        group~ C      5      8
## 4 lung  "\"February 21 2022\~ BK        BK        group~ D      3     53
## 5 lung  "\"February 21 2022\~ BK        BK        group~ A      2     92
## 6 lung  "\"February 21 2022\~ BK        BK        group~ A      4      7
## # ... with 1 more variable: CFUs_per_ml <dbl>
```

5.8 Create initial report information for these data

```
tidy_lung_cfu_plot <- tidy_cfu_meta_joined %>%
  filter(organ == "lung") %>%
  mutate(group = fct_relevel(groups, "group_1", "group_2", "group_3", "group_4")) %>%
  ggplot(aes(x = groups, y = log10(CFUs_per_ml), fill = groups))+
  stat_boxplot(aes(x = groups, y = log10(CFUs_per_ml)),
              geom='errorbar', linetype=1, width=0.5)+
  geom_boxplot(aes(group = groups), fill = NA, show.legend = FALSE, color = "lightgrey")+
  geom_point(show.legend = FALSE)+
  labs(title = paste0("CFUs in early infected mouse lung"), x = "Group", y = "log10(CFUs_per_ml)",
       color = "Group")+
  guides(shape = "none")+
  theme_minimal()+
  stat_compare_means(label = "p.signif", method = "t.test", ref.group = "group_1") +
  scale_y_continuous(expand = c(0, 0), limits = c(0, 8))

tidy_lung_cfu_plot
```

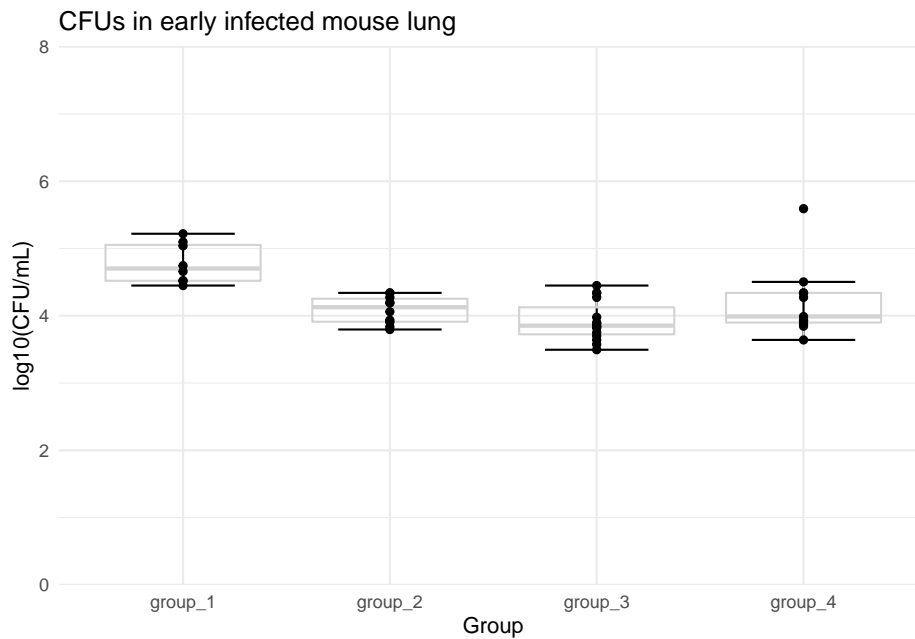

5.9 Sample ANOVA

```
cfu_stats <- tidy_cfu_meta_joined %>%
  group_by(organ) %>%
  nest() %>%
  mutate(aov_result = map(data, ~aov(CFUs_per_ml ~ groups, data = .x)),
         tukey_result = map(aov_result, TukeyHSD),
         tidy_tukey = map(tukey_result, broom::tidy)) %>%
  unnest(tidy_tukey, .drop = TRUE) %>%
  separate(contrast, into = c("contrast1", "contrast2"), sep = "-") %>%
  select(-data, -aov_result, -tukey_result, -term, -null.value) # %>%

## Warning: The `.drop` argument of `unnest()` is deprecated as of tidyr 1.0.0.
## All list-columns are now preserved.
## This warning is displayed once every 8 hours.
## Call `lifecycle::last_lifecycle_warnings()` to see where this warning was generated.

# filter(adj.p.value <= 0.05)

cfu_stats

## # A tibble: 9 x 7
## # Groups:   organ [2]
##   organ contrast1 contrast2 estimate conf.low conf.high adj.p.value
##   <chr>   <chr>      <chr>      <dbl>   <dbl>     <dbl>     <dbl>
```

## 1	lung	group_2	group_1	-60953.	-138742.	16836.	0.171
## 2	lung	group_3	group_1	-63903.	-135699.	7893.	0.0963
## 3	lung	group_4	group_1	-26214.	-102416.	49987.	0.793
## 4	lung	group_3	group_2	-2950.	-69900.	64000.	0.999
## 5	lung	group_4	group_2	34739.	-36915.	106393.	0.569
## 6	lung	group_4	group_3	37689.	-27410.	102787.	0.417
## 7	spleen	group_2	group_1	-6565	-13529.	399.	0.0656
## 8	spleen	group_3	group_1	-7310	-13341.	-1279.	0.0178
## 9	spleen	group_3	group_2	-745.	-6776.	5286.	0.943

5.10 Save processed data to database

5.11 Example two

Chapter 6

Enzyme-linked immunosorbent assay (ELISA)

ELISA is a standard molecular biology assay for detecting and quantifying a variety of compounds, including peptides, proteins, and antibodies in a sample. The sample could be serum, plasma, or bronchoalveolar lavage fluid (BALF).

6.1 Importance of ELISA

An antigen-specific reaction in the host results in the production of antibodies, which are proteins found in the blood. In the event of an infectious disease, it aids in the detection of antibodies in the body. ELISA is distinguishable from other antibody-assays in that it produces quantifiable findings and separates non-specific from specific interactions by serial binding to solid surfaces, which is often a polystyrene multi-well plate.

In IMPAc-TB project, it is crucial to evaluate the if the vaccine is eliciting humoral immunity and generating antibodies against vaccine antigen. ELISA will be used to determine the presence of Immunoglobulin (Ig) IgG, IgA, and IgM in the serum different time points post-vaccination.

6.1.1 Principle of ELISA

ELISA is based on the principle of antigen-antibody interaction. An antigen must be immobilized on a solid surface and then complexed with an enzyme-linked antibody in an ELISA. The conjugated enzyme's activity is evaluated

by incubating it with a substrate to yield a quantifiable result, which enables detection. There are four basic steps of ELISA:

1. Coating multiwell plate with antigen/antibody: This step depends on what we want to detect the sample. If we need to evaluate the presence of antibody, the plate will be coated with the antigen, and vice versa. To coat the plate, a fixed concentration of antigen (protein) is added to a 96 well high-binding plate (charged plate). Plate is incubated over night with the antigen at 4 degree celsius (as proteins are temperature sensitive) so that antigens are completely bound to the well.

2. Blocking: It is possible that not each and every site of the well is coated with the targeted antigen, and there could be uncovered areas. It is important to block those empty spaces so that primary antibody (which we will add to the next step) binds to these spaces and give us false positive results. For this, microplate well surface-binding sites are blocked with an unrelated protein or other substance. Most common blocking agents are bovine serum albumin, skim milk, and casein. One of the best blocking agents is to use the serum from the organism in which your secondary (detection antibody) is raised. For example, if the secondary antibody is raised in goat, then we can use goat serum as a blocking agent.

3. Probing: Probing is the step where we add sample containing antibodies that we want to detect. This will be the primary antibody. If the antibodies against the antigen (which we have coated) are present in the sample, it will bind to the antigen with high affinity.

4. Washing: After the incubation of sample containing primary antibody, the wells are washed so that any unbound antibody is washed away. Washing solution contains phosphate buffer saline + 0.05% tween-20 (a mild detergent). 0.05% tween-20 washes away all the non-specific interactions as those are not strong, but keeps all the specific interaction as those are strong and cannot be detached with mild detergent.

5. Detection: To detect the presence of antibody-antigen complex, a secondary antibody labelled with an enzyme (usually horseradish peroxidase) is added to the wells, incubated and washed.

6. Signal Measurement: Finally to detect “if” and “how much” of the antibody is present, a chromogenic substrate (like 3,3',5,5'-Tetramethylbenzidine) is added to the wells, which can be cleaved by the enzyme that is tagged to the secondary antibody. The color compound is formed after the addition of the substrate, which is directly proportional to the amount of antibody present in the sample. The plate is read on a plate reader, where color is converted to numbers.

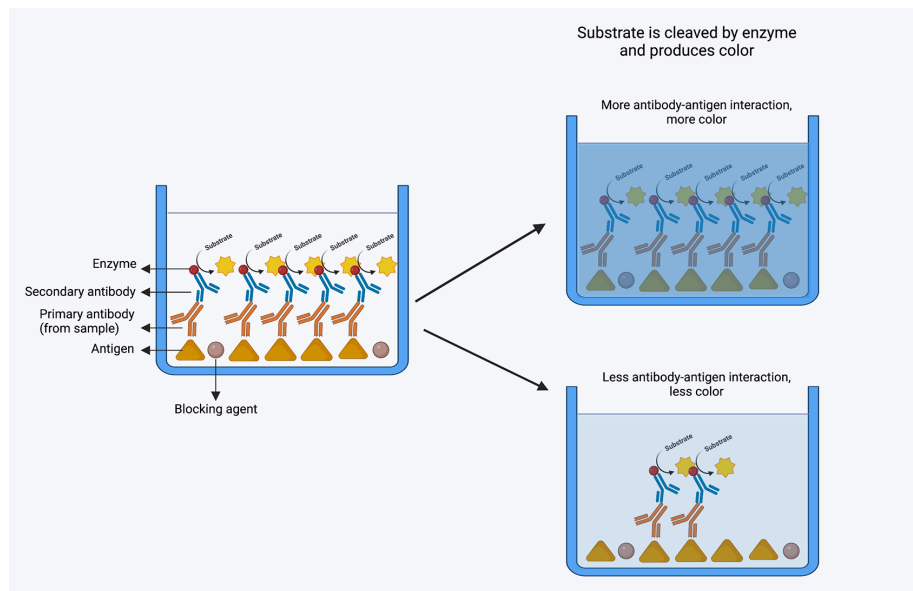


Figure 6.1: A caption

6.1.2 Loading libraries

```
library(readxl)
library(tidyverse)
library(minpack.lm)
library(broom)
library(purrr)
library(ggbeeswarm)
```

6.2 ELISA data analysis

Analysis of ELISA data is the most important part of the ELISA experiment. ELISA data can be analyzed in different ways based on how the data is acquired. There are a few examples of the type of ELISA data :

- 1. With standard curve:** ELISA can be used to determine the concentrations of the antigen and antibody. This type of ELISA data usually have a standard curve with different concentrations of the known analyte and the concentration in the sample is determined by extrapolating the unknown values in the curve. This type of assay is straightforward, easy to interpret and are more robust.
- 2. Without standard curve:** Usually vaccine studies involve investigating the presence of high-affinity (and novel) antibodies against the vaccine antigens. Therefore, plotting a standard curve is not feasible as there is no previous infor-

mation available for antibody concentration or type of antibody. Also, because antibody response to a vaccine will differ depending on the individual, it is not practical to generate a calibration curve from which absolute concentrations can be extrapolated. For this type of ELISA, quantification of the antibody titers is performed using serial dilutions of the test samples, and analysis can be performed using the following three methods (Hartman et al., 2018):

1. Fitting sigmoid model
2. Endpoint titer method 3: Absorbance summation method

Let's have a look at these methods, how we can apply these methods in our data, and R-based packages that we can utilize to perform this analysis.

6.3 1. Fitting sigmoid model:

In this model, we will perform a 8-10 point serial dilution of our sample and plot a 4 parameter sigmoidal curve.

6.3.1 An example of the fitting sigmoid model is below:

6.3.1.1 Read in the data

```
elisa_example_data <- read_excel("DATA/example_elisa_data.xlsx")
```

6.3.1.2 Clean the data

```
# separate 1/

elisa_example_data <- separate(elisa_example_data,
                              col = "dilution",
                              into = c("numerator", "denominator"),
                              sep = "\\/")

elisa_example_data <- elisa_example_data %>%
  mutate_if(is.character, as.numeric)

elisa_example_data$dilution <-
  elisa_example_data$numerator/elisa_example_data$denominator

elisa_example_data <- elisa_example_data %>%
  mutate(log_dilution = log(dilution, base = 3))

head(elisa_example_data)

## # A tibble: 6 x 5
##   numerator denominator absorbance dilution log_dilution
```

```
##          <dbl>          <dbl>          <dbl>          <dbl>          <dbl>
## 1          1             30             4          0.0333          -3.10
## 2          1             90            3.73 0.0111          -4.10
## 3          1            270            2.34 0.00370         -5.10
## 4          1            810            1.1  0.00123         -6.10
## 5          1           2430            0.51 0.000412        -7.10
## 6          1           7290            0.22 0.000137        -8.10

mod_1 <- nlsLM(absorbance ~
               ((a-d)/(1+(log_dilution/c)^b)) + d,
  data = elisa_example_data,
  start = list (a = 4, d = 0, c = -5, b = 1))

# a = maximum absorbance
# d = minimum absorbance
# c = point of maximum growth
# b = slope at c

mod_1

## Nonlinear regression model
##   model: absorbance ~ ((a - d)/(1 + (log_dilution/c)^b)) + d
##   data: elisa_example_data
##       a       d       c       b
## 4.12406 0.04532 -5.31056 7.62972
## residual sum-of-squares: 0.02221
##
## Number of iterations to convergence: 9
## Achieved convergence tolerance: 1.49e-08

summary(mod_1)

##
## Formula: absorbance ~ ((a - d)/(1 + (log_dilution/c)^b)) + d
##
## Parameters:
##   Estimate Std. Error  t value Pr(>|t|)
## a  4.12406    0.05820   70.860 1.75e-12 ***
## d  0.04532    0.02268    1.998  0.0808 .
## c -5.31056    0.03933  -135.037 1.01e-14 ***
## b  7.62972    0.35854   21.280 2.50e-08 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.05269 on 8 degrees of freedom
##
## Number of iterations to convergence: 9
```

```
## Achieved convergence tolerance: 1.49e-08
```

6.3.1.3 Create a fitted sigmoid model function and apply the function to the data

```
tidy_params <- mod_1 %>% tidy()


a <- tidy_params$estimate[tidy_params$term == "a"]
b <- tidy_params$estimate[tidy_params$term == "b"]
c <- tidy_params$estimate[tidy_params$term == "c"]
d <- tidy_params$estimate[tidy_params$term == "d"]

elisa_example_data <- elisa_example_data %>%
  mutate(fitted = predict(mod_1))

elisa_example_data <- elisa_example_data %>%
  mutate(fitted = predict(mod_1))
```

6.3.1.4 Plot the sigmoid curve with fitted sigmoid model

```
elisa_example_data %>%
  ggplot(aes(x = log_dilution, y = absorbance)) +
  geom_point() +
  geom_line(aes(y=fitted), color = "dodgerblue")
```

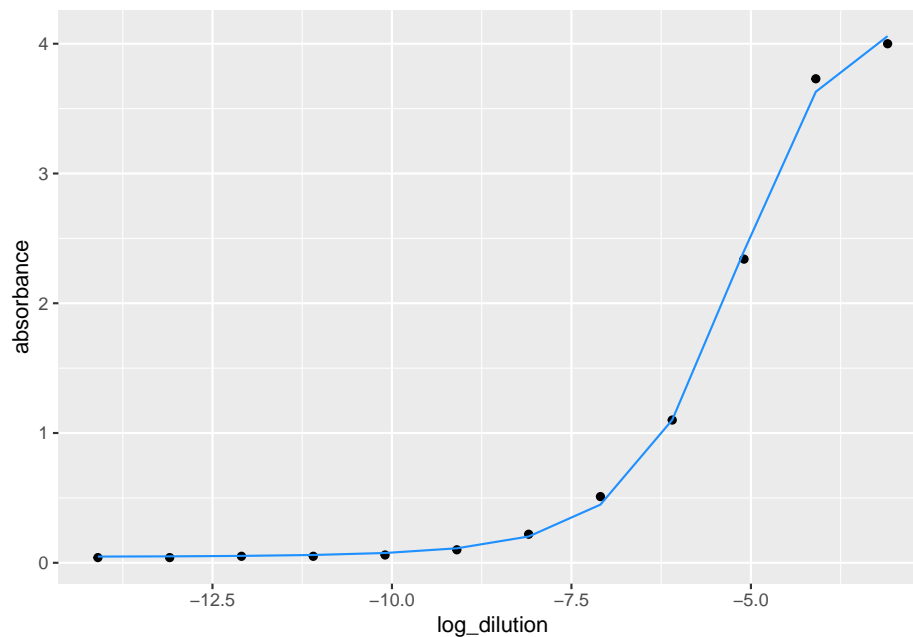

6.4 2. Endpoint titer method

The endpoint titer approach chooses an absorbance value just above the background noise (or the lower asymptotic level). **The highest dilution with an absorbance greater than this predetermined value is the endpoint titer.** This method is based on the assumption that a sample with a higher protein concentration will require a higher dilution factor to achieve an absorbance just above the level of background noise.

6.4.1 Create an endpoint titer function and apply it to the output of the fitted sigmoid model values.

```
endpoint_titer <- c * (((a - d) / (0.2 - d)) - 1) ^ (1 / b)

summary(endpoint_titer)
```

```
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
## -8.113 -8.113 -8.113 -8.113 -8.113 -8.113
```

```
endpoint_titer
```

```
## [1] -8.113285
```

6.4.2 Absorbance summation method

In this model of data analysis, we sum all the absorbance values from each sample to obtain one value. This value is termed as absorption summation (AS). Using the above data, the AS will be calculated as below:

```
AS = 0.04 + 0.04 + 0.05 + 0.05 + 0.06 +
     0.1 + 0.22 + 0.51 + 1.1 + 2.34 + 3.73 + 4.0
```

```
AS
```

```
## [1] 12.24
```

6.5 Apply the fitting sigmoid model and endpoint titer function in our dataset

The presented data is from a mouse study. In this data, presence of IgG antibody has been evaluated against receptor binding domain (RBD) of SARS-CoV-2 virus in two different groups of mice. We need to elucidate which group has higher concentration of the antibodies.

6.5.0.1 Read in the data

```
elisa_data <- read_excel("DATA/elisa_data_serial_dilution.xlsx")
```

6.5.0.2 Tidy the data

```
elisa_data <- pivot_longer(data = elisa_data,
  cols = "Mouse_1":"Mouse_5",
  names_to = "mouse_id",
  values_to = "absorbance")
```

```
head(elisa_data)
```

```
## # A tibble: 6 x 4
##   Groups Dilution mouse_id absorbance
##   <chr>   <chr>   <chr>       <dbl>
## 1 Group 1 1/50    Mouse_1      4.1
## 2 Group 1 1/50    Mouse_2      3.9
## 3 Group 1 1/50    Mouse_3      4.3
## 4 Group 1 1/50    Mouse_4      4.2
## 5 Group 1 1/50    Mouse_5      4
## 6 Group 1 1/100   Mouse_1      3.9
```

```
# separate dilution column and convert it to log2
```

```
elisa_data <- separate(elisa_data,
  col = "Dilution",
  into = c("numerator",
    "denominator"),
  sep = "\\/")
```

```
elisa_data <- elisa_data %>%
  transform(numerator = as.numeric(numerator),
    denominator = as.numeric(denominator))
```

```
elisa_data <- elisa_data %>%
  mutate(dilution =
    elisa_data$numerator/elisa_data$denominator)
```

```
elisa_data <- elisa_data %>%
  mutate(log_dilution = log2(dilution))
```

```
head(elisa_data)
```

```
##   Groups numerator denominator mouse_id absorbance dilution log_dilution
## 1 Group 1          1          50 Mouse_1      4.1      0.02    -5.643856
```

6.5. APPLY THE FITTING SIGMOID MODEL AND ENDPOINT TITER FUNCTION IN OUR DATASET31

```
## 2 Group 1      1      50 Mouse_2      3.9      0.02      -5.643856
## 3 Group 1      1      50 Mouse_3      4.3      0.02      -5.643856
## 4 Group 1      1      50 Mouse_4      4.2      0.02      -5.643856
## 5 Group 1      1      50 Mouse_5      4.0      0.02      -5.643856
## 6 Group 1      1     100 Mouse_1      3.9      0.01      -6.643856
```

```
elisa_data_df <- elisa_data %>%
  group_by(Groups, mouse_id) %>%
  summarize(log_dilution = log_dilution,
            absorbance = absorbance)
```

6.5.0.2.1 converting data into dataframe

`summarise()` has grouped output by 'Groups', 'mouse_id'. You can override using
the `.groups` argument.


```
elisa_data_nested <- elisa_data %>%
  group_by(Groups, mouse_id) %>%
  nest()
```

```
head(elisa_data_nested)
```

```
## # A tibble: 6 x 3
## # Groups:   Groups, mouse_id [6]
##   Groups mouse_id data
##   <chr>   <chr>   <list>
## 1 Group 1 Mouse_1 <tibble [10 x 5]>
## 2 Group 1 Mouse_2 <tibble [10 x 5]>
## 3 Group 1 Mouse_3 <tibble [10 x 5]>
## 4 Group 1 Mouse_4 <tibble [10 x 5]>
## 5 Group 1 Mouse_5 <tibble [10 x 5]>
## 6 Group 2 Mouse_1 <tibble [10 x 5]>
```

```
elisa_data %>%
  ggplot(aes(x = log_dilution, y = absorbance)) +
  geom_point() +
  geom_line() +
  facet_wrap(Groups ~ mouse_id)
```

6.5.0.2.2 plot the curves to evaluate the a, d, c, and b

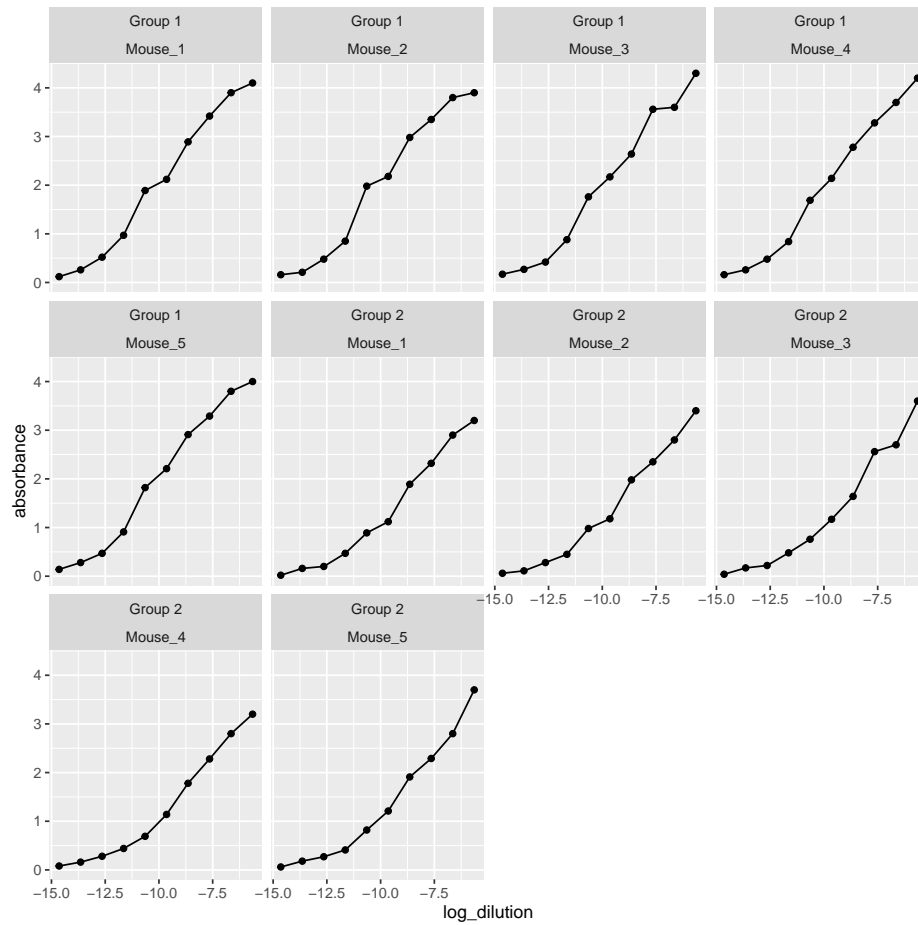

Based on the curve, the values are:

$$a = 4, d = 0, c = 2, b = 1$$

6.5.1 Creating a function for fitting model

```
fitted_model_elisa <- function(df_elisa,
                                start_a, start_d,
                                start_c, start_b) {
  mod_1 <- nlsLM(absorbance ~
    ((a-d)/(1+(log_dilution/c)^b)) + d,
  data = df_elisa,
  start = list(a = start_a, d = start_d, c = start_c, b = start_b))
  return(mod_1)
}
```


6.5. APPLY THE FITTING SIGMOID MODEL AND ENDPOINT TITER FUNCTION IN OUR DATASET33

6.5.1.1 Fitting the model into the dataset

```
fitted_model_elisa(elisa_data_nested$data[[1]],
                   start_a = 4,
                   start_d = 0,
                   start_c = -8,
                   start_b = 1)

## Nonlinear regression model
##   model: absorbance ~ ((a - d)/(1 + (log_dilution/c)^b)) + d
##   data: df_elisa
##       a       d       c       b
## 4.3070 -0.6009 -10.2577  5.2893
## residual sum-of-squares: 0.1199
##
## Number of iterations to convergence: 7
## Achieved convergence tolerance: 1.49e-08
```

6.5.1.2 Apply the fitted model function to the whole dataframe

```
elisa_fitted_data <- elisa_data_nested %>%
  mutate(fitted_data =
    purrr::map(data, ~
      fitted_model_elisa(.x, start_a = 4,
                          start_d = 0,
                          start_c = -8,
                          start_b = 1)))

head(elisa_fitted_data)

## # A tibble: 6 x 4
## # Groups:   Groups, mouse_id [6]
##   Groups mouse_id data          fitted_data
##   <chr>   <chr>   <list>         <list>
## 1 Group 1 Mouse_1 <tibble [10 x 5]> <nls>
## 2 Group 1 Mouse_2 <tibble [10 x 5]> <nls>
## 3 Group 1 Mouse_3 <tibble [10 x 5]> <nls>
## 4 Group 1 Mouse_4 <tibble [10 x 5]> <nls>
## 5 Group 1 Mouse_5 <tibble [10 x 5]> <nls>
## 6 Group 2 Mouse_1 <tibble [10 x 5]> <nls>
```

6.5.1.3 Take out the summary of the data

```
elisa_fitted_data_summary <- elisa_fitted_data %>%
  mutate(elisa_fitted_data_summary =
    purrr::map(fitted_data, broom::glance))
```

```

unnested <- elisa_fitted_data_summary %>%
unnest(elisa_fitted_data_summary) %>%
ungroup() %>%
dplyr::select(Groups, mouse_id, fitted_data)

unnested$fitted_data[[1]]

## Nonlinear regression model
## model: absorbance ~ ((a - d)/(1 + (log_dilution/c)^b)) + d
## data: df_elisa
##      a      d      c      b
## 4.3070 -0.6009 -10.2577  5.2893
## residual sum-of-squares: 0.1199
##
## Number of iterations to convergence: 7
## Achieved convergence tolerance: 1.49e-08

```

6.6 Create function of Fitted model and endpoint titer, where the output of the fitted model data will be the input of the endpoint titer

```

# Fitted model function
fitted_model_elisa <- function(df_elisa,
                               start_a,
                               start_d,
                               start_c,
                               start_b) {
  mod_1 <- nlsLM(absorbance ~
    ((a-d)/(1+(log_dilution/c)^b)) + d,
  data = df_elisa,
  start = list(a = start_a, d = start_d, c = start_c, b = start_b))
  return(mod_1)
}

# Endpoint titer function

endpoint_titer_elisa <- function(fitted_data, back_value) {
  tidy_fitted <- broom::tidy(fitted_data)
  est_a <- tidy_fitted$estimate[tidy_fitted$term == "a"]
  est_b <- tidy_fitted$estimate[tidy_fitted$term == "b"]
  est_c <- tidy_fitted$estimate[tidy_fitted$term == "c"]
}

```

6.6. CREATE FUNCTION OF FITTED MODEL AND ENDPOINT TITER, WHERE THE OUTPUT OF THE FIT

```
est_d <- tidy_fitted$estimate[ tidy_fitted$term == "d"]
endpoint_titer <- est_c * (((est_a - est_d) / (back_value - est_d)) - 1) ^ (1 / est_b)
return(endpoint_titer)
}
```

6.6.0.1 Apply the fitted model function into the nested data and use the output of the fitted data as the input for endpoint titer value evaluation

```
elisa_data_with_fit_model <- elisa_data_nested %>%
  mutate(fitted_data = purrr::map(data,
    ~ fitted_model_elisa(.x, start_a = 4,
                          start_d = 0,
                          start_c = -8,
                          start_b = 1)))

head(elisa_data_with_fit_model)
```

6.6.0.1.1 Run fitted model on the data

```
## # A tibble: 6 x 4
## # Groups:   Groups, mouse_id [6]
##   Groups mouse_id data          fitted_data
##   <chr>   <chr>   <list>          <list>
## 1 Group 1 Mouse_1 <tibble [10 x 5]> <nls>
## 2 Group 1 Mouse_2 <tibble [10 x 5]> <nls>
## 3 Group 1 Mouse_3 <tibble [10 x 5]> <nls>
## 4 Group 1 Mouse_4 <tibble [10 x 5]> <nls>
## 5 Group 1 Mouse_5 <tibble [10 x 5]> <nls>
## 6 Group 2 Mouse_1 <tibble [10 x 5]> <nls>
```


```
elisa_data_with_endpoint_titer <- elisa_data_with_fit_model %>%
  mutate(endpoint_data =
    purrr::map(fitted_data,
      ~ endpoint_titer_elisa(.x, back_value = 0.2)))
```

6.6.0.1.2 Taking output of the fitted model function and into endpoint titer function

6.6.0.2 Plot the endpoint titer data for the two groups

```
elisa_data_with_endpoint_titer$endpoint_data =
  as.numeric(elisa_data_with_endpoint_titer$endpoint_data)
```

```
elisa_data_with_endpoint_titer %>%
  ggplot(aes(x = Groups, y = endpoint_data, color = Groups)) +
  geom_beeswarm(cex = 3)
```

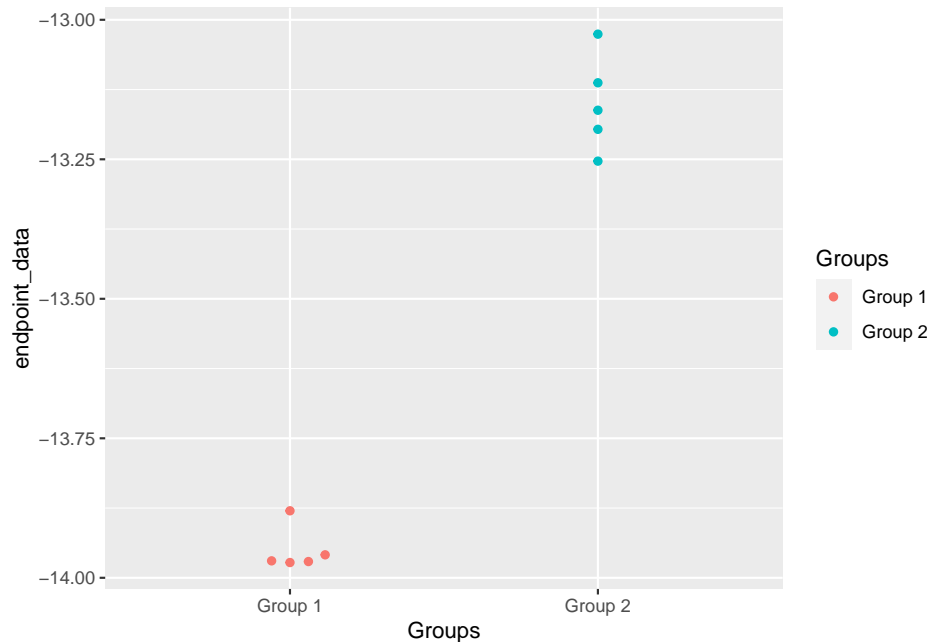

6.6.0.3 Perform statistical analysis on the data

```
elisa_data_stats <- t.test(endpoint_data ~ Groups,
                           data = elisa_data_with_endpoint_titer)

elisa_data_stats %>%
  tidy()
```

```
## # A tibble: 1 x 10
##   estimate estimate1 estimate2 statistic    p.value parameter conf.low conf.high
##   <dbl>      <dbl>      <dbl>      <dbl>      <dbl>      <dbl>      <dbl>      <dbl>
## 1   -0.800      -14.0      -13.2     -18.8 0.00000268      5.63    -0.906    -0.695
## # ... with 2 more variables: method <chr>, alternative <chr>
```

6.6.0.4 Statistical data analysis for more than two groups

Chapter 7

ELISA data processing

We read ELISA plate in a 96 well plate using a plate reader. The plate reader generates the data in form of number in an excel sheet. We have created this pipeline/worksheet to bring out the information from the excl sheet to a tidy format in which the above created fitted model and endpoint titer functions can be applied.

7.0.0.1 Read in the first dataset

Below is the example ELISA data that has came straight out of the plate reader. This data is arranged in a 96-well plate format and contains Optical Density (OD) values.

```
elisa_raw_data <- read_excel("DATA/elisa_s1_07-25-20.xlsx",
                             sheet = "S1", col_names = FALSE,
                             range = "B2:M9")
```

```
## New names:
```

```
## * `` -> ...1
## * `` -> ...2
## * `` -> ...3
## * `` -> ...4
## * `` -> ...5
## * ...
```

```
head(elisa_raw_data)
```

```
## # A tibble: 6 x 12
```

```
##   ...1      ...2 ...3 ...4   ...5 ...6 ...7   ...8 ...9 ...10 ...11 ...12
##   <chr>      <dbl> <dbl> <chr> <dbl> <dbl> <chr> <dbl> <dbl> <chr> <dbl> <dbl>
## 1 5.199999999~ 0.05  0.069 6.3E~ 0.061 0.122 0.16~ 0.145 0.135 6.80~ 0.053 0.05
## 2 7.900000000~ 0.098 0.069 6.80~ 0.115 0.202 5.89~ 0.134 0.069 0.106 0.05 0.075
```

```
## 3 8.899999999~ 0.133 0.119 OVRF~ 3.87 2.32 OVRF~ 3.85 2.12 OVRF~ 3.21 1.02
## 4 OVRFLW      3.46 1.16 OVRF~ 3.80 2.36 OVRF~ 3.70 1.49 OVRF~ 3.68 1.63
## 5 3.815999999~ 1.82 0.446 3.89~ 3.42 1.13 OVRF~ 2.33 0.608 OVRF~ 3.41 1.10
## 6 OVRFLW      3.69 1.43 OVRF~ 3.66 1.27 3.839 1.74 0.444 2.49~ 0.637 0.704
```

7.0.0.2 Tidy dataset 1

It is important to clean the data and arrange it in a format on which we can apply formulas and functions.

```
# Convert all columns to numeric
```

```
elisa_raw_data_numeric <- elisa_raw_data %>%
  mutate_if(is.character, as.numeric)
```

```
## Warning in mask$eval_all_mutate(quo): NAs introduced by coercion
```

```
## Warning in mask$eval_all_mutate(quo): NAs introduced by coercion
```

```
## Warning in mask$eval_all_mutate(quo): NAs introduced by coercion
```

```
## Warning in mask$eval_all_mutate(quo): NAs introduced by coercion
```

```
# pivot longer the data
```

```
elisa_raw_data_tidy <- pivot_longer(data = elisa_raw_data_numeric, cols = "...1":"...12")
```

```
# remove "." from the first column
```

```
elisa_raw_data_tidy$well_id <- str_replace(elisa_raw_data_tidy$well_id, "...", "")
```

```
# Add new column to the data_frame
```

```
elisa_raw_data_tidy_new <- elisa_raw_data_tidy %>%
  mutate(name = rep(LETTERS[1:8], each = 12))
```

```
elisa_raw_data_tidy_new <- elisa_raw_data_tidy_new %>%
  mutate(well_id = paste0(name, well_id)) %>%
  select(-name)
```

```
head(elisa_raw_data_tidy_new)
```

```
## # A tibble: 6 x 2
##   well_id od_450nm
##   <chr>      <dbl>
## 1 A1         0.052
## 2 A2         0.05
## 3 A3         0.069
```

```
## 4 A4          0.063
## 5 A5          0.061
## 6 A6          0.122
```

7.0.0.3 Read in the second data set

The second dataset contains the information such as groups, mouse id, and dilutions for the respective wells of the 96 well plate for the dataset-1.

```
elisa_label_data <- read_excel("DATA/elisa_s1_07-25-20.xlsx",
                               sheet = "S1", col_names = FALSE,
                               range = "Q2:AB9")
```

```
## New names:
```

```
## * `` -> ...1
## * `` -> ...2
## * `` -> ...3
## * `` -> ...4
## * `` -> ...5
## * ...
```

```
head(elisa_label_data)
```

```
## # A tibble: 6 x 12
```

```
##   ...1      ...2    ...3    ...4    ...5    ...6    ...7    ...8    ...9    ...10   ...11   ...12
##   <chr>      <chr> <chr> <chr> <chr> <chr> <chr> <chr> <chr> <chr> <chr> <chr>
## 1 blank      secon~ naiv~ 1A-1~ 1A-1~ 1A-1~ 1A-2~ 1A-2~ 1A-2~ 1A-3~ 1A-3~ 1A-3~
## 2 1A-4 (1/250 1A-4 ~ 1A-4~ 1B-1~ 1B-1~ 1B-1~ 1B-2~ 1B-2~ 1B-2~ 1B-3~ 1B-3~ 1B-3~
## 3 1B-4 (1/250 1B-4 ~ 1B-4~ 2A-1~ 2A-1~ 2A-1~ 2A-2~ 2A-2~ 2A-2~ 2A-3~ 2A-3~ 2A-3~
## 4 2B-1 (1/250 2B-1 ~ 2B-1~ 2B-2~ 2B-2~ 2B-2~ 2B-3~ 2B-3~ 2B-3~ 2B-4~ 2B-4~ 2B-4~
## 5 3A-1 (1/250 3A-1 ~ 3A-1~ 3A-2~ 3A-2~ 3A-2~ 3A-3~ 3A-3~ 3A-3~ 3A-4~ 3A-4~ 3A-4~
## 6 3B-1 (1/250 3B-1 ~ 3B-1~ 3B-2~ 3B-2~ 3B-2~ 3B-3~ 3B-3~ 3B-3~ 3B-4~ 3B-4~ 3B-4~
```

7.0.0.4 Tidy dataset-2

```
# pivot longer the data
```

```
elisa_label_data_tidy <- pivot_longer(data = elisa_label_data,
                                       cols = "...1":"...12",
                                       names_to = "well_id",
                                       values_to = "information")
```

```
# remove "..." from the first column
```

```
elisa_label_data_tidy$well_id <- str_replace(elisa_label_data_tidy$well_id, "...", "")
```

```
# Add new column to the data_frame
```

```

elisa_label_data_tidy_new <- elisa_label_data_tidy %>%
  mutate(name = rep(LETTERS[1:8], each = 12))

elisa_label_data_tidy_new <- elisa_label_data_tidy_new %>%
  mutate(well_id = paste0(name, well_id)) %>%
  select(-name)

head(elisa_label_data_tidy_new)

## # A tibble: 6 x 2
##   well_id information
##   <chr>    <chr>
## 1 A1      blank
## 2 A2      secondary
## 3 A3      naïve (1/250)
## 4 A4      1A-1 (1/250)
## 5 A5      1A-1 (1/1250)
## 6 A6      1A-1 (1/6250)

```

7.0.0.5 Merge dataset-1 (with OD information) with dataset-2 (with respective data information)

To create a complete full dataset with Groups, mouse-id, dilutions, and OD, we merged the dataset-1 and dataset-2 together. We also cleaned the data set so that mouse-ID and dilution columns are separate and have their own columns.

#Merge the two datasets

```

elisa_data = elisa_raw_data_tidy_new %>% inner_join(elisa_label_data_tidy_new,
                                                    by="well_id")

head(elisa_data)

```

```

## # A tibble: 6 x 3
##   well_id od_450nm information
##   <chr>    <dbl> <chr>
## 1 A1      0.052 blank
## 2 A2      0.05  secondary
## 3 A3      0.069 naïve (1/250)
## 4 A4      0.063 1A-1 (1/250)
## 5 A5      0.061 1A-1 (1/1250)
## 6 A6      0.122 1A-1 (1/6250)

```

Separate the information table into sample ID and dilution columns

```

tidy_elisa_data <- separate(elisa_data, col = "information",

```



```
into = c("sample_id", "dilution"),
sep = "\\(")
```

```
## Warning: Expected 2 pieces. Missing pieces filled with `NA` in 2 rows [1, 2].
```

```
head(tidy_elisa_data)
```

```
## # A tibble: 6 x 4
##   well_id od_450nm sample_id dilution
##   <chr>      <dbl> <chr>      <chr>
## 1 A1         0.052 "blank"    <NA>
## 2 A2         0.05  "secondary" <NA>
## 3 A3         0.069 "naïve "   1/250)
## 4 A4         0.063 "1A-1 "    1/250
## 5 A5         0.061 "1A-1 "    1/1250
## 6 A6         0.122 "1A-1 "    1/6250
```

```
tidy_elisa_data <- tidy_elisa_data %>%
  mutate(dilution = str_extract(dilution, "(/)[0-9]+"),
         dilution = str_replace(dilution, "/", ""),
         dilution = as.numeric(dilution))
```

```
tidy_elisa_data <- tidy_elisa_data %>%
  select(well_id, sample_id, dilution, od_450nm)
```

```
head(tidy_elisa_data)
```

```
## # A tibble: 6 x 4
##   well_id sample_id dilution od_450nm
##   <chr>    <chr>      <dbl>    <dbl>
## 1 A1      "blank"         NA      0.052
## 2 A2      "secondary"      NA      0.05
## 3 A3      "naïve "        250     0.069
## 4 A4      "1A-1 "        250     0.063
## 5 A5      "1A-1 "       1250     0.061
## 6 A6      "1A-1 "       6250     0.122
```


Chapter 8

Flow cytometry

Flow cytometry data can be quantified in many different ways and with different techniques. For the purpose of these data analyses, manual gating has been achieved in FlowJo and cell frequencies and populations exported as a `.csv` file. This `.csv` file is the primary input for this R pipeline which aims to output box plots for each gated cell population.

This example data set is from an innate response study which investigated the immune response in the lungs during the first 28 days of infection.

8.1 Loading packages

```
library(readxl)
library(ggplot2)
library(RColorBrewer)
library(dplyr)
library(tidyverse)
library(scales)

##
## Attaching package: 'scales'

## The following object is masked from 'package:purrr':
##
##      discard

## The following object is masked from 'package:readr':
##
##      col_factor
```

```

library(stringr)
library(tidyr)
library(knitr)
library(forcats)
library(broom)
library(ggfortify)
library(stats)
library(ggpubr)
library(grDevices)
library(rstatix)

##
## Attaching package: 'rstatix'

## The following object is masked from 'package:stats':
##
##      filter
library(writexl)

```

8.2 panel information

```
# antibody_panel <- read_excel
```

8.3 Loading data

```

Df <- read_excel("DATA/innate_normalized45.xlsx", sheet = "CD3CD11b No Day 14")

marker_legend <- read_excel("DATA/marker legend.xlsx")

# Remove Freq of Parent columns
Df1 <- Df %>%
  select(-matches("Parent"))
# Remove "Leukocytes/LIVE/Single Cells/" from col names
names(Df1) <- str_remove(names(Df1), "Leukocytes/LIVE/Single Cells/")

Df1 <- Df1 %>%
  rename_all(funs(str_replace(., "\\|.|+", "")))# Remove "/Freq of..." from col names

## Warning: `funs()` was deprecated in dplyr 0.8.0.
## Please use a list of either functions or lambdas:
##
##   # Simple named list:
##   list(mean = mean, median = median)

```

```
##
##   # Auto named with `tibble::lst()`:
##   tibble::lst(mean, median)
##
##   # Using lambdas
##   list(~ mean(., trim = .2), ~ median(., na.rm = TRUE))
## This warning is displayed once every 8 hours.
## Call `lifecycle::last_lifecycle_warnings()` to see where this warning was generated.
Df1 <- Df1 %>%
  rename_all(funs(str_replace_all(., "\\Q[:digit:]+\\:", ""))) %>%
  rename_all(funs(str_replace(., "\\/", " "))) %>%
  rename_all(funs(str_replace(., "\\,", " "))) %>%
  rename_all(funs(str_replace(., "\\ \\", " ")))

# str_extract_all(names(Df1), "[:alpha:]+[:digit:]+[\\+|\\-]")
#
#
#
#
#
#
# marker_select <- function(col_title) {
#   marker_df <- str_detect(names(DATA1), "[\\+|\\-]")
#   return(marker_df)
# }
```

8.4 Making the data tidy for plotting

```
tidy_Df1 <- pivot_longer(data = Df1, cols = starts_with("CD45+"), names_to = "cell_types", value_to = "value")

tidy_Df1 <- tidy_Df1 %>%
  separate(col = "SAMPLE", into = c("day", "replicate"))

tidy_Df1 %>%
  select(cell_types) %>%
  unique()

## # A tibble: 128 x 1
##   cell_types
##   <chr>
## 1 "CD45+ "
## 2 "CD45+ CD3-   CD11b+ "
## 3 "CD45+ CD3-   CD11b+ CD25+ "
```

```
## 4 "CD45+ CD3-   CD11b+ CD103+ "
## 5 "CD45+ CD3-   CD11b+ gamma_delta "
## 6 "CD45+ CD3-   CD11b+ NKp46+ "
## 7 "CD45+ CD3-   CD11b+ CD11c+  CD64- "
## 8 "CD45+ CD3-   CD11b+ CD11c-  CD64- "
## 9 "CD45+ CD3-   CD11b+ CD86-   CD64+ "
## 10 "CD45+ CD3-   CD11b+ CD86+   CD64+ "
## # ... with 118 more rows
```

```
tidy_Df1 <- tidy_Df1 %>%
  filter(percentage_of_CD45 > 0.005)

head(tidy_Df1, n=10)
```

```
## # A tibble: 10 x 4
##   day replicate cell_types                percentage_of_CD45
##   <chr> <chr>    <chr>                <dbl>
## 1 CNT   1      "CD45+ "                82.9
## 2 CNT   1      "CD45+ CD3-   CD11b+ "        29.3
## 3 CNT   1      "CD45+ CD3-   CD11b+ CD25+ "    0.88
## 4 CNT   1      "CD45+ CD3-   CD11b+ CD103+ "   0.75
## 5 CNT   1      "CD45+ CD3-   CD11b+ gamma_delta " 4.77
## 6 CNT   1      "CD45+ CD3-   CD11b+ NKp46+ "    7.3
## 7 CNT   1      "CD45+ CD3-   CD11b+ CD11c+  CD64- " 3.65
## 8 CNT   1      "CD45+ CD3-   CD11b+ CD11c-  CD64- " 24.3
## 9 CNT   1      "CD45+ CD3-   CD11b+ CD86-   CD64+ " 0.43
## 10 CNT  1      "CD45+ CD3-   CD11b+ CD86+   CD64+ " 0.85
```

```
# Select CD3 & CD11b populations and create new data frames
```

```
CD3pos_CD11bneg <- tidy_Df1 %>%
  filter(str_detect(cell_types, "CD3\\+ + CD11b\\-"))

CD3neg_CD11bpos <- tidy_Df1 %>%
  filter(str_detect(cell_types, "CD3\\- + CD11b\\+"))

CD3neg_CD11bneg <- tidy_Df1 %>%
  filter(str_detect(cell_types, "CD3\\- + CD11b\\-"))
```

8.5 boxplot

```
CD3pos_CD11bneg_bar_plot <- CD3pos_CD11bneg %>%
  mutate(day = fct_relevel(day,
    "CNT", "D3", "D7",
    "D28")) %>%
```

```

ggplot(aes(x = day, y = percentage_of_CD45, fill= day)) +
stat_boxplot( aes(day, percentage_of_CD45),
  geom='errorbar', linetype=1, width=0.5)+
geom_boxplot(aes(day, percentage_of_CD45)) +
facet_wrap(~cell_types, scale = "free_y", labeller = label_wrap_gen(width=15), ncol = 5, nrow = 5) +
theme_bw() +
theme(axis.text.x = element_blank(), axis.text.y = element_text(size = 20),
  axis.title.x = element_text(size = 20, face = "bold"),
  axis.title.y = element_text(size = 20, face = "bold"),
  legend.text = element_text(size = 20),
  legend.title = element_text(size = 20),
  plot.title = element_text(color="black", size=30, face="bold")) +
labs (y="Percentage of CD45", x = "Day") +
theme(strip.text = element_text(size=12, face = "bold")) + theme(legend.position="bottom") +
ggtitle("Changes in immune cell populations (lung) CD3+ CD11b-") +
stat_compare_means(label = "p.signif", method = "t.test",
  ref.group = "CNT")

```

```

CD3neg_CD11bpos_bar_plot <- CD3neg_CD11bpos %>%
mutate(day = fct_relevel(day,
  "CNT", "D3", "D7",
  "D28")) %>%
ggplot(aes(x = day, y = percentage_of_CD45, fill= day)) +
stat_boxplot( aes(day, percentage_of_CD45),
  geom='errorbar', linetype=1, width=0.5)+
geom_boxplot( aes(day, percentage_of_CD45)) +
facet_wrap(~cell_types, scale = "free_y", labeller = label_wrap_gen(width=15), ncol = 5, nrow = 5) +
theme_bw() +
theme(axis.text.x = element_blank(), axis.text.y = element_text(size = 20),
  axis.title.x = element_text(size = 20, face = "bold"),
  axis.title.y = element_text(size = 20, face = "bold"),
  legend.text = element_text(size = 20),
  legend.title = element_text(size = 20),
  plot.title = element_text(color="black", size=30, face="bold")) +
labs (y="Percentage of CD45", x = "Day") +
theme(strip.text = element_text(size=12, face = "bold")) + theme(legend.position="bottom") +
ggtitle("Changes in immune cell populations (lung) CD3- CD11b+") +
stat_compare_means(label = "p.signif", method = "t.test",
  ref.group = "CNT")

```

```

CD3neg_CD11bneg_bar_plot <- CD3neg_CD11bneg %>%


```

```

mutate(day = fct_relevel(day,
  "CNT", "D3", "D7",
  "D28")) %>%
ggplot(aes(x = day, y = percentage_of_CD45, fill= day)) +
stat_boxplot( aes(day, percentage_of_CD45),
  geom='errorbar', linetype=1, width=0.5)+
geom_boxplot( aes(day, percentage_of_CD45)) +
facet_wrap(~cell_types, scale = "free_y", labeller = label_wrap_gen(width=15), ncol = 2)
theme_bw() +
theme(axis.text.x = element_blank(), axis.text.y = element_text(size = 20),
  axis.title.x = element_text(size = 20, face = "bold"),
  axis.title.y = element_text(size = 20, face = "bold"),
  legend.text = element_text(size = 20),
  legend.title = element_text(size = 20),
  plot.title = element_text(color="black", size=30, face="bold")) +
labs (y="Percentage of CD45", x = "Day") +
theme(strip.text = element_text(size=12, face = "bold")) + theme(legend.position="bottom")
ggtitle("Changes in immune cell populations (lung) CD3+ CD11b-") +
stat_compare_means(label = "p.signif", method = "t.test",
  ref.group = "CNT")

```

CD3pos_CD11bneg_bar_plot

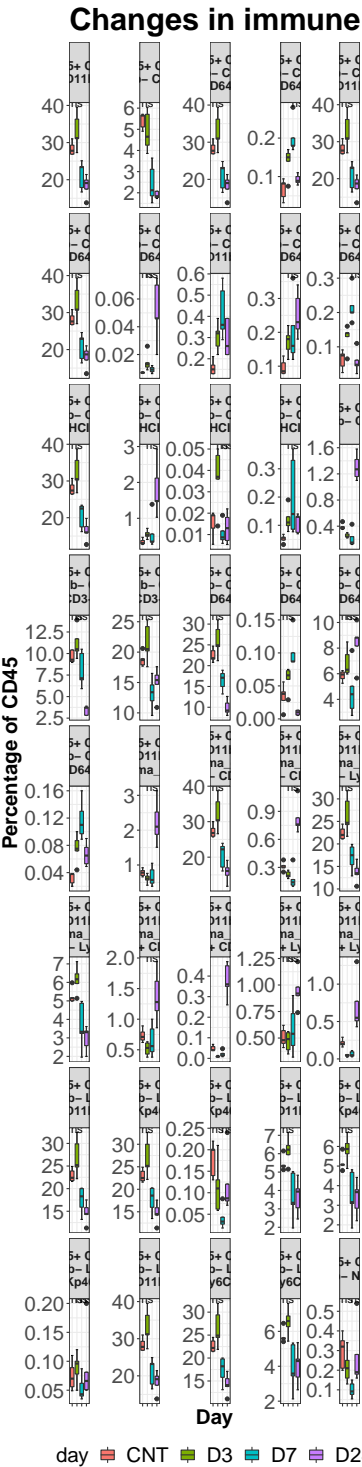

```
# CD3neg_CD11bpos_bar_plot  
# CD3neg_CD11bneg_bar_plot
```

Chapter 9

Pathology

Chapter 10

Pathology

Bibliography

- Baazim, H., Antonio-Herrera, L., and Bergthaler, A. (2022). The interplay of immunology and cachexia in infection and cancer. *Nature Reviews Immunology*, 22(5):309–321.
- Baazim, H., Schweiger, M., Moschinger, M., Xu, H., Scherer, T., Popa, A., Gallage, S., Ali, A., Khamina, K., Kosack, L., et al. (2019). Cd8+ t cells induce cachexia during chronic viral infection. *Nature immunology*, 20(6):701–710.
- Hartman, H., Wang, Y., Schroeder Jr, H. W., and Cui, X. (2018). Absorbance summation: a novel approach for analyzing high-throughput elisa data in the absence of a standard. *PloS one*, 13(6):e0198528.
- Segueni, N., Tritto, E., Bourigault, M.-L., Rose, S., Erard, F., Le Bert, M., Jacobs, M., Di Padova, F., Stiehl, D. P., Moulin, P., et al. (2016). Controlled mycobacterium tuberculosis infection in mice under treatment with anti-il-17a or il-17f antibodies, in contrast to tnf-alpha neutralization. *Scientific Reports*, 6(1):1–17.
- Smith, C. M., Baker, R. E., Proulx, M. K., Mishra, B. B., Long, J. E., Park, S. W., Lee, H.-N., Kiritsy, M. C., Bellerose, M. M., Olive, A. J., et al. (2022). Host-pathogen genetic interactions underlie tuberculosis susceptibility in genetically diverse mice. *Elife*, 11:e74419.