

Getting Started

Contents

- Getting Started.....3**
 - What is3
 - Getting Familiar with the Interface.....4
 - Supported Document Types..... 13
 - Resources to Help You Get Started Using 14
 - Your First Document or Project.....15
 - Your First XML Document.....15
 - Getting Started with DITA.....20
 - Creating a New Project..... 30
 - Getting Help.....33
 - Help Menu..... 34
 - Frequently Used Shortcut Keys.....38
 - Accessibility Support in Oxygen.....41
 - VPAT Accessibility Conformance Report.....44
- Index.....62**

Getting Started

This section provides a variety of resources to help you get the most out of the application. Typically, the first step of getting started with would be to install the software. For detailed information about that process, see the [Installation chapter](#).

After installation, when you launch for the first time, you are greeted with a **Welcome** dialog box. It presents upcoming events, useful video demonstrations, helpful resources, the tip of the day, and also gives you easy access to recently used files and projects and to create new ones.

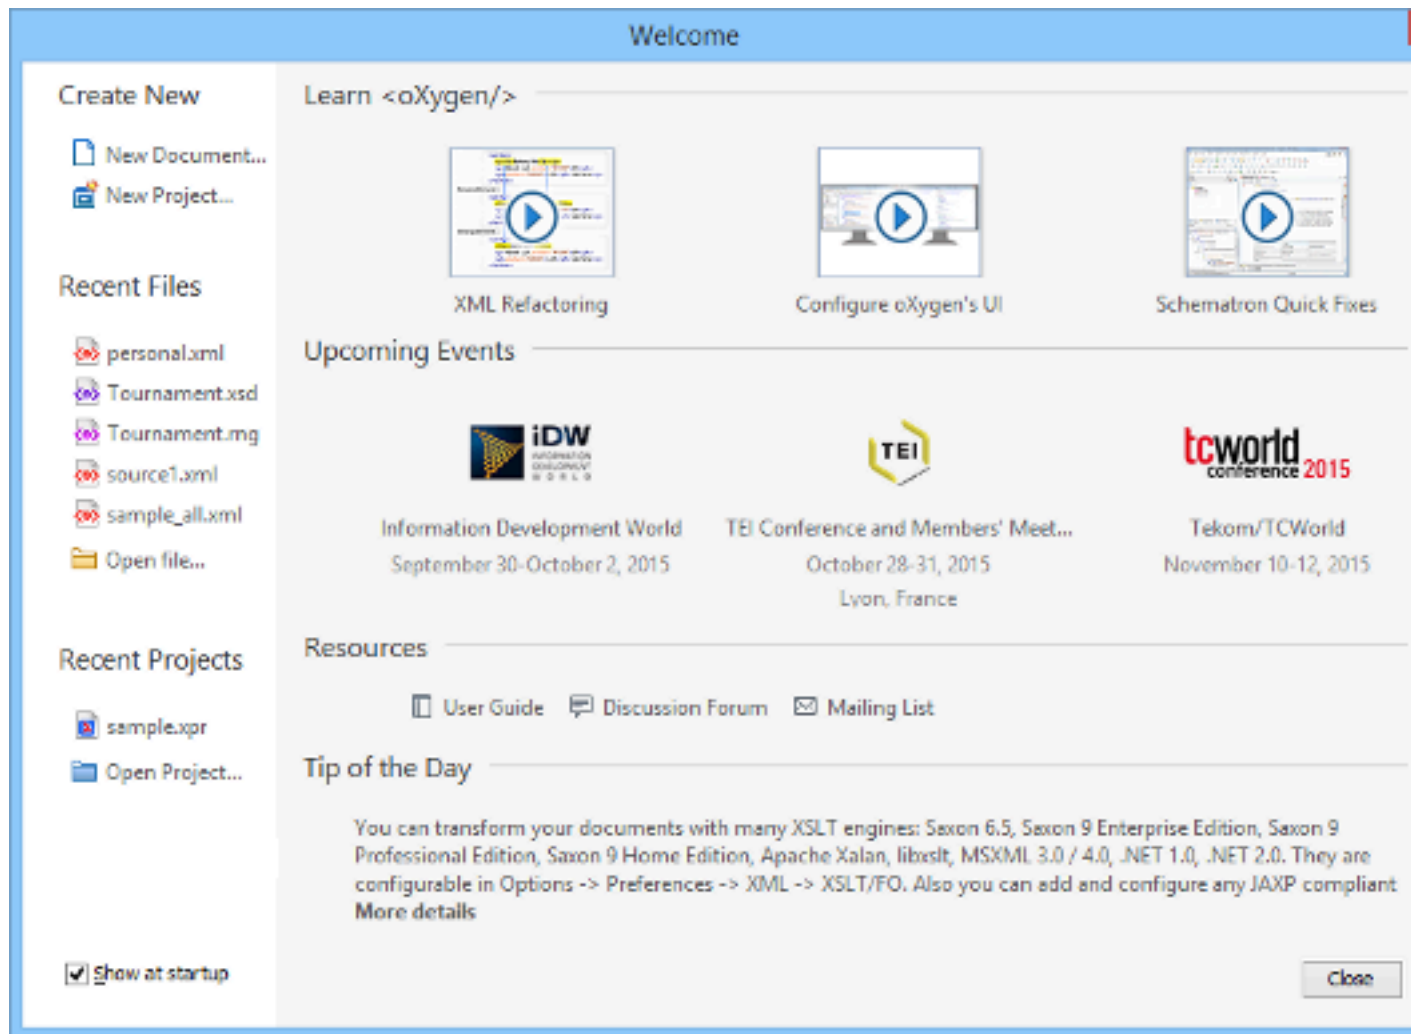


Figure 1: Welcome Dialog Box

If you do not want it to be displayed every time you launch, deselect the **Show at startup** option in the bottom-left corner of the dialog box. To display it any time, go to **Help > Welcome**.

What is

is the best XML editor available and is a complete XML development and authoring solution. It is designed to accommodate a large number of users, ranging from beginners to XML experts. It is the only XML tool that supports all of the XML schema languages and provides a large variety of powerful tools for editing and publishing XML documents.

You can use `oxygen` to work with most XML-based standards and technologies. It is a cross-platform application available on all the major operating systems (Windows, macOS, Linux, Solaris) and can be used either as a standalone application or as an Eclipse plugin.

`oxygen` is a specialized tool designed for editing JSON documents. It offers a wide range of features and views, including Text, Grid, and Author editing modes, along with Design mode for JSON Schema. The intuitive interface and comprehensive set of tools make it easy to navigate, understand, and modify your JSON, JSON Schema files, as well as YAML and OpenAPI files. It also supports other technologies, including HTML, CSS, LESS, Python, JavaScript, AsyncAPI, Shell, SQL, and more. You can even edit XML files in **Text** mode.

With powerful validation assistance, you can ensure that your JSON and YAML documents are well-formed and accurately validated against custom JSON Schema. Additionally, `oxygen` provides convenient conversion tools to transform XML structures or YAML instances into valid JSON data, and vice versa.


For a list of many of the features and technologies that are included in `oxygen`, see the [Oxygen Website](#)[Oxygen JSON Editor website](#).

Getting Familiar with the Interface

`oxygen` includes several *perspectives* and [editing modes](#) to help you accomplish a wide range of tasks. Each *perspective* and editing mode also includes a large variety of helper views, menu actions, toolbars, and contextual menu functions.


`oxygen` includes several editing modes (**Text**, **Grid**, **Author**, and **Design**) and a large variety of helper views, menu actions, toolbars, and contextual menu functions.

There are various ways that you can [configure the layout of the views or editors](#), and you can [customize the toolbars](#).

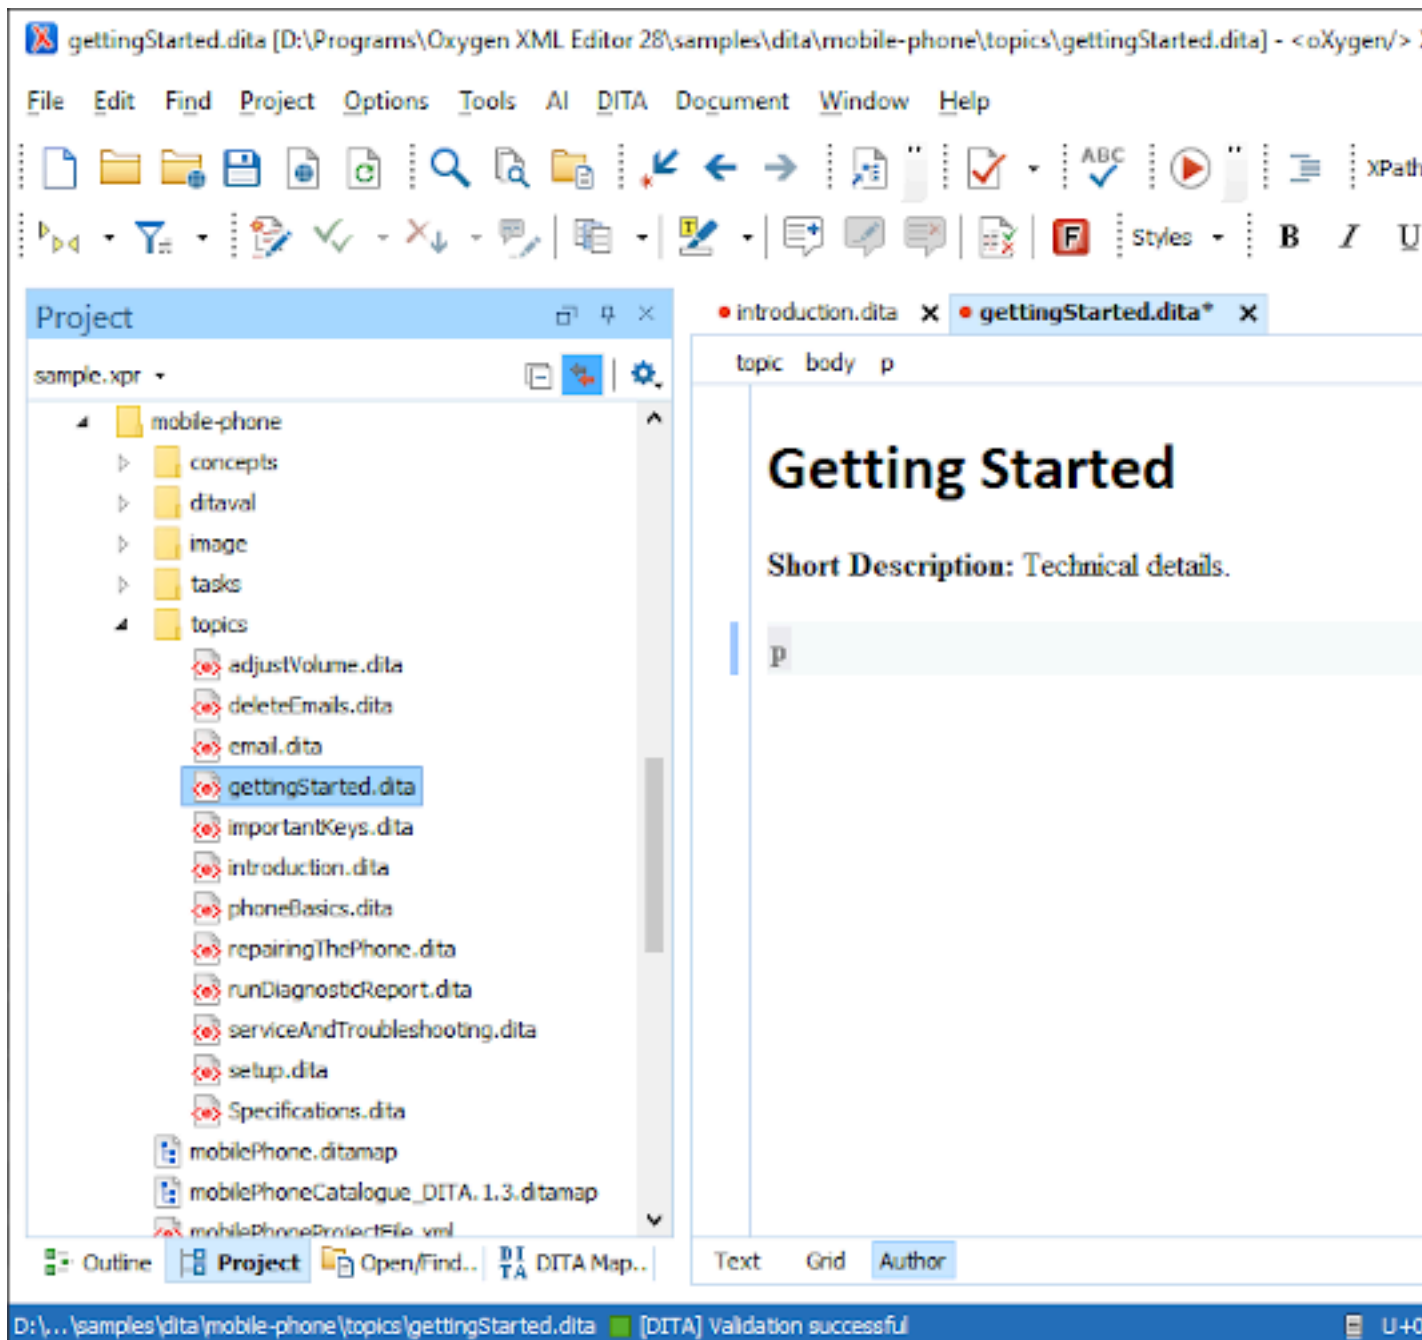

1. Menus
2. Toolbars
3. Left-side Helper Views
4. Right-side Helper Views
5. Editor Pane
6. Perspectives
7. Status Bar
8. Editing Modes


Figure 2: Clickable Image Map of the Interface

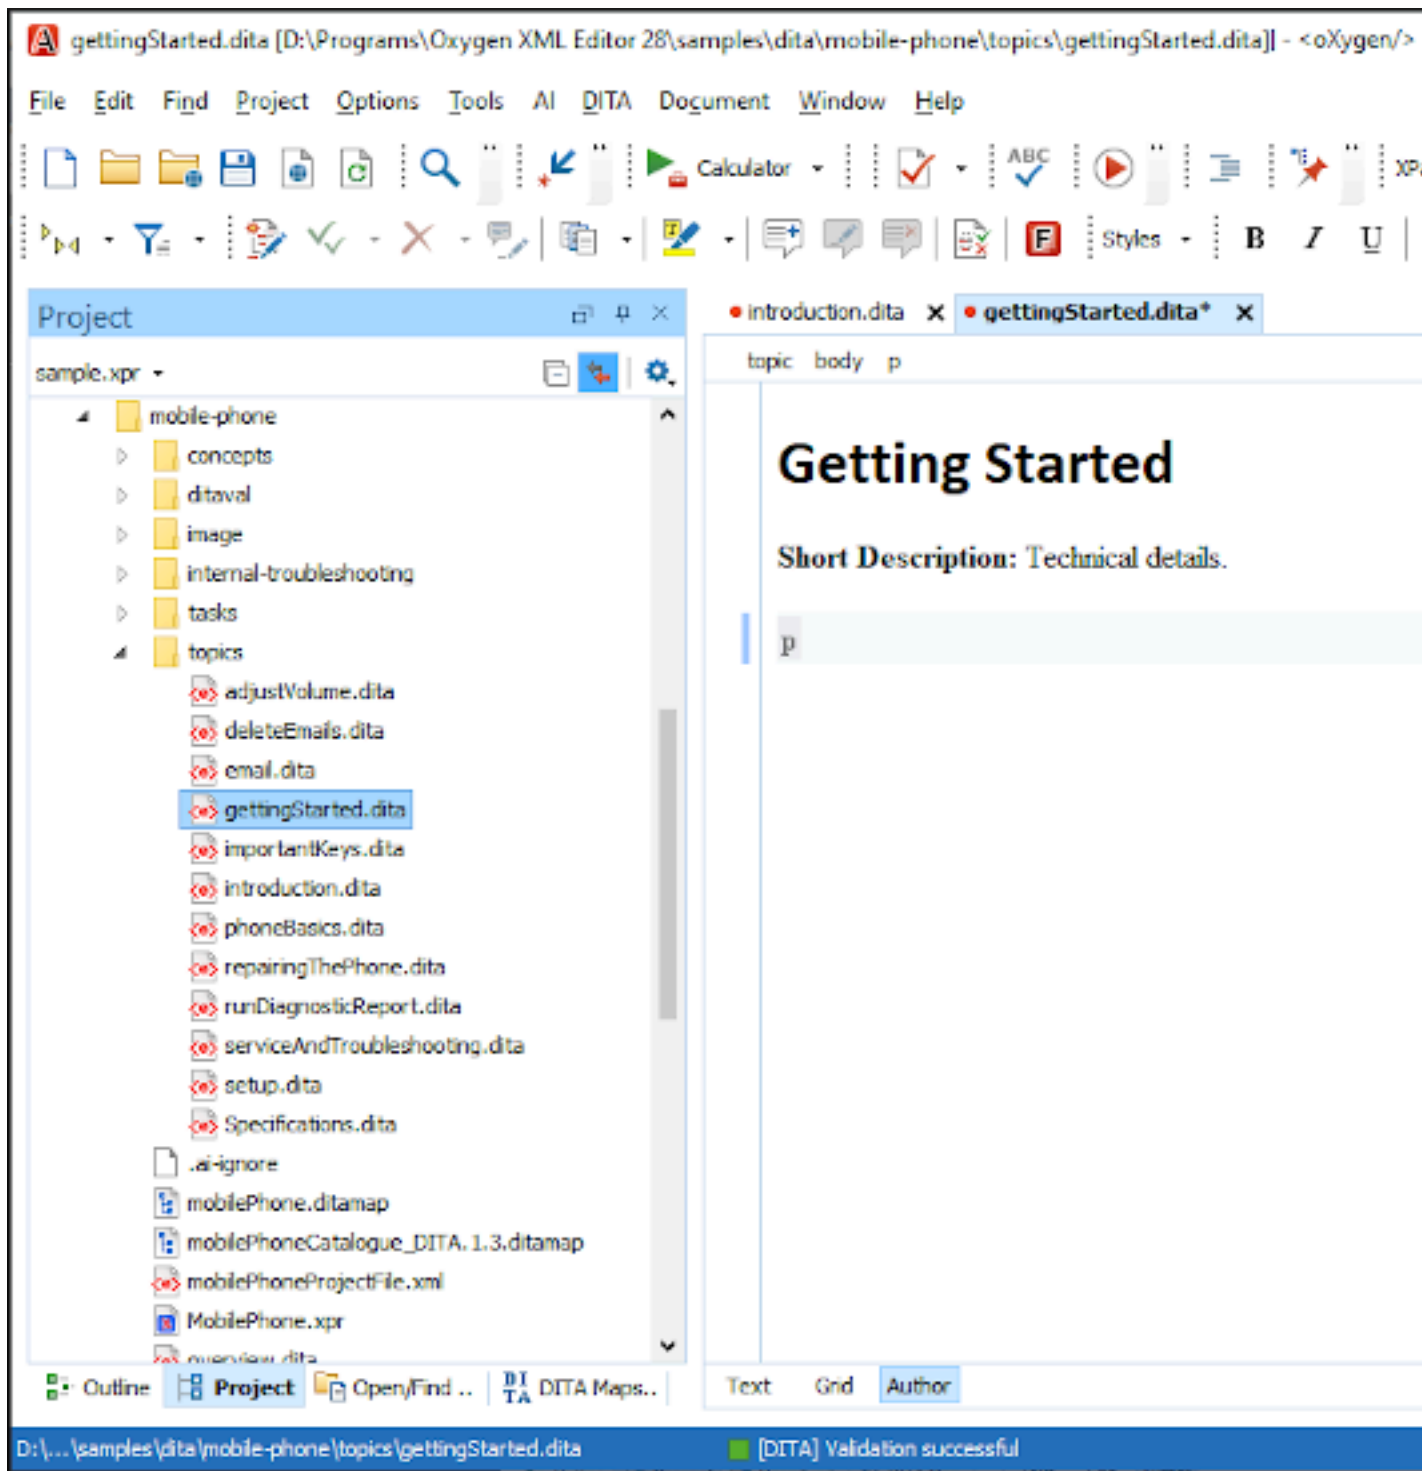

1. Menus
2. Toolbars
3. Left-side Helper Views
4. Right-side Helper Views
5. Editor Pane
6. Perspectives
7. Status Bar

8. Editing Modes


Figure 3: Clickable Image Map of the Interface

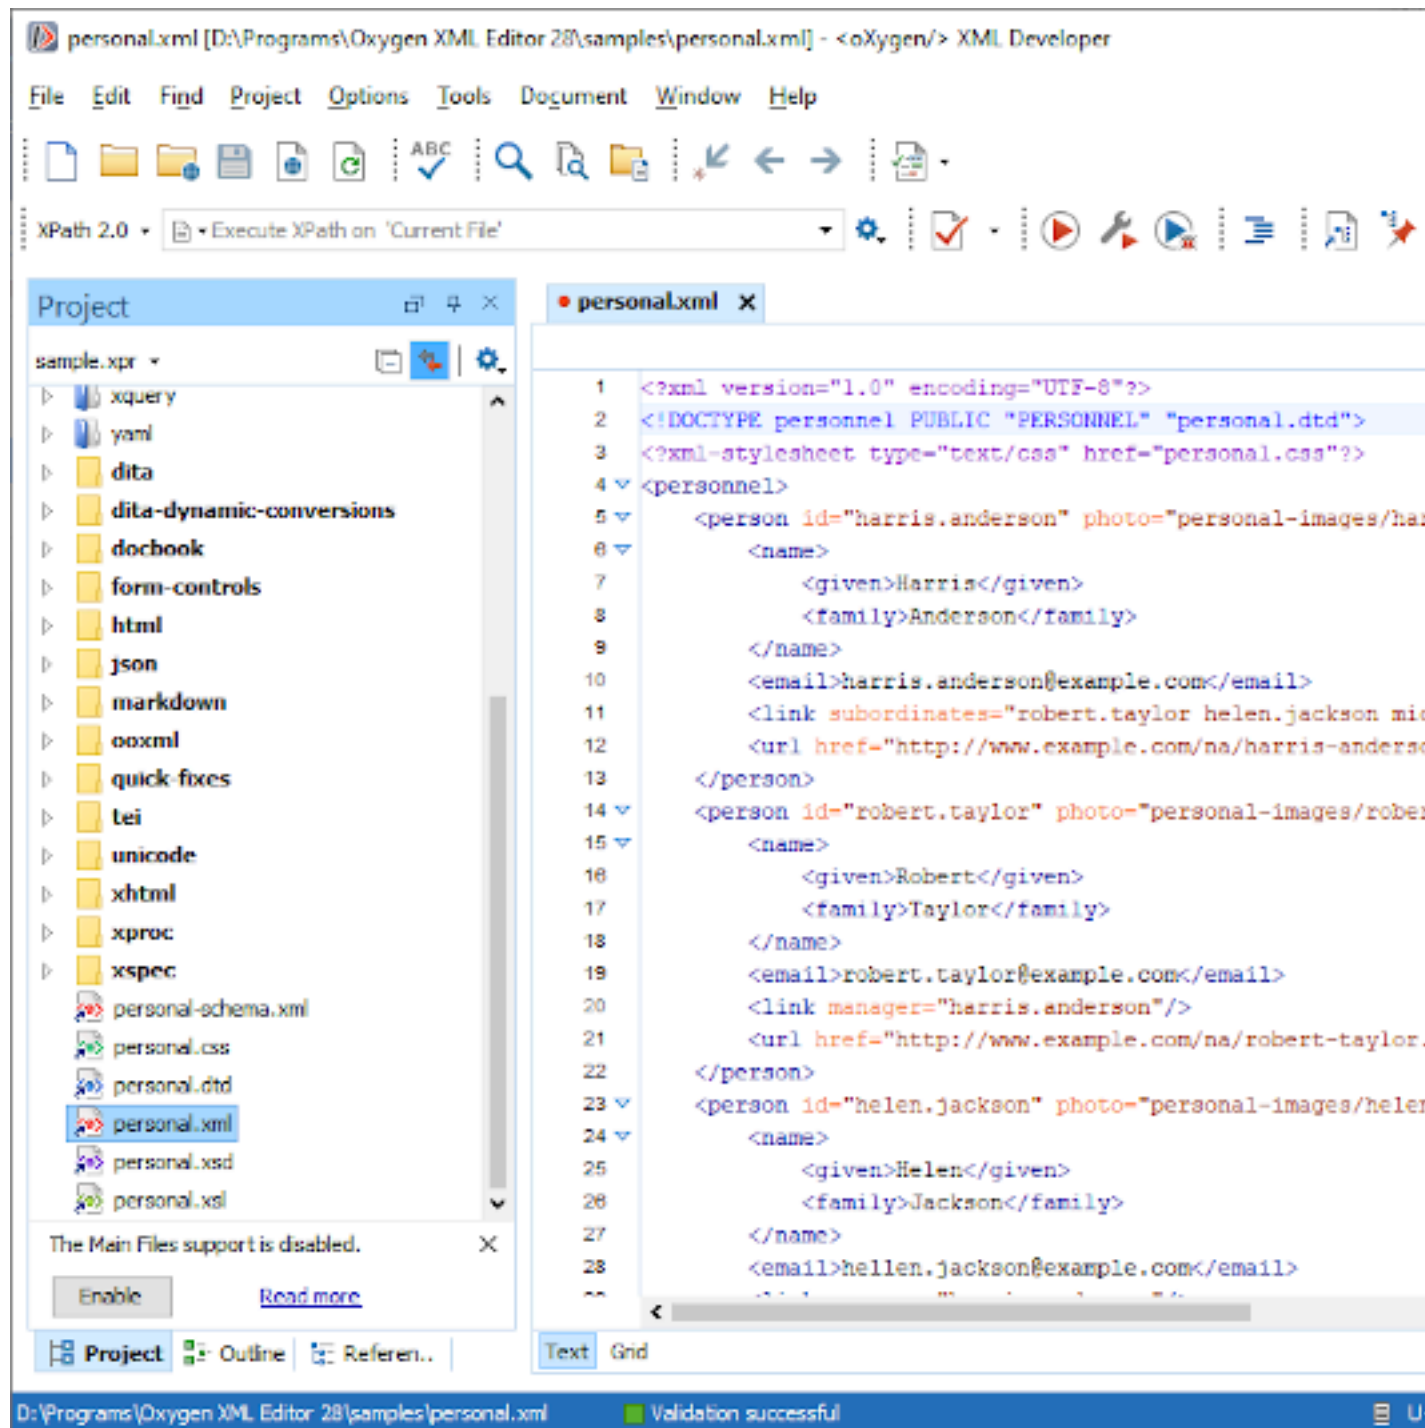

1. Menus
2. Toolbars
3. Left-side Helper Views
4. Right-side Helper Views
5. Editor Pane
6. Perspectives


7. Status Bar
8. Editing Modes

Figure 4: Clickable Image Map of the Interface

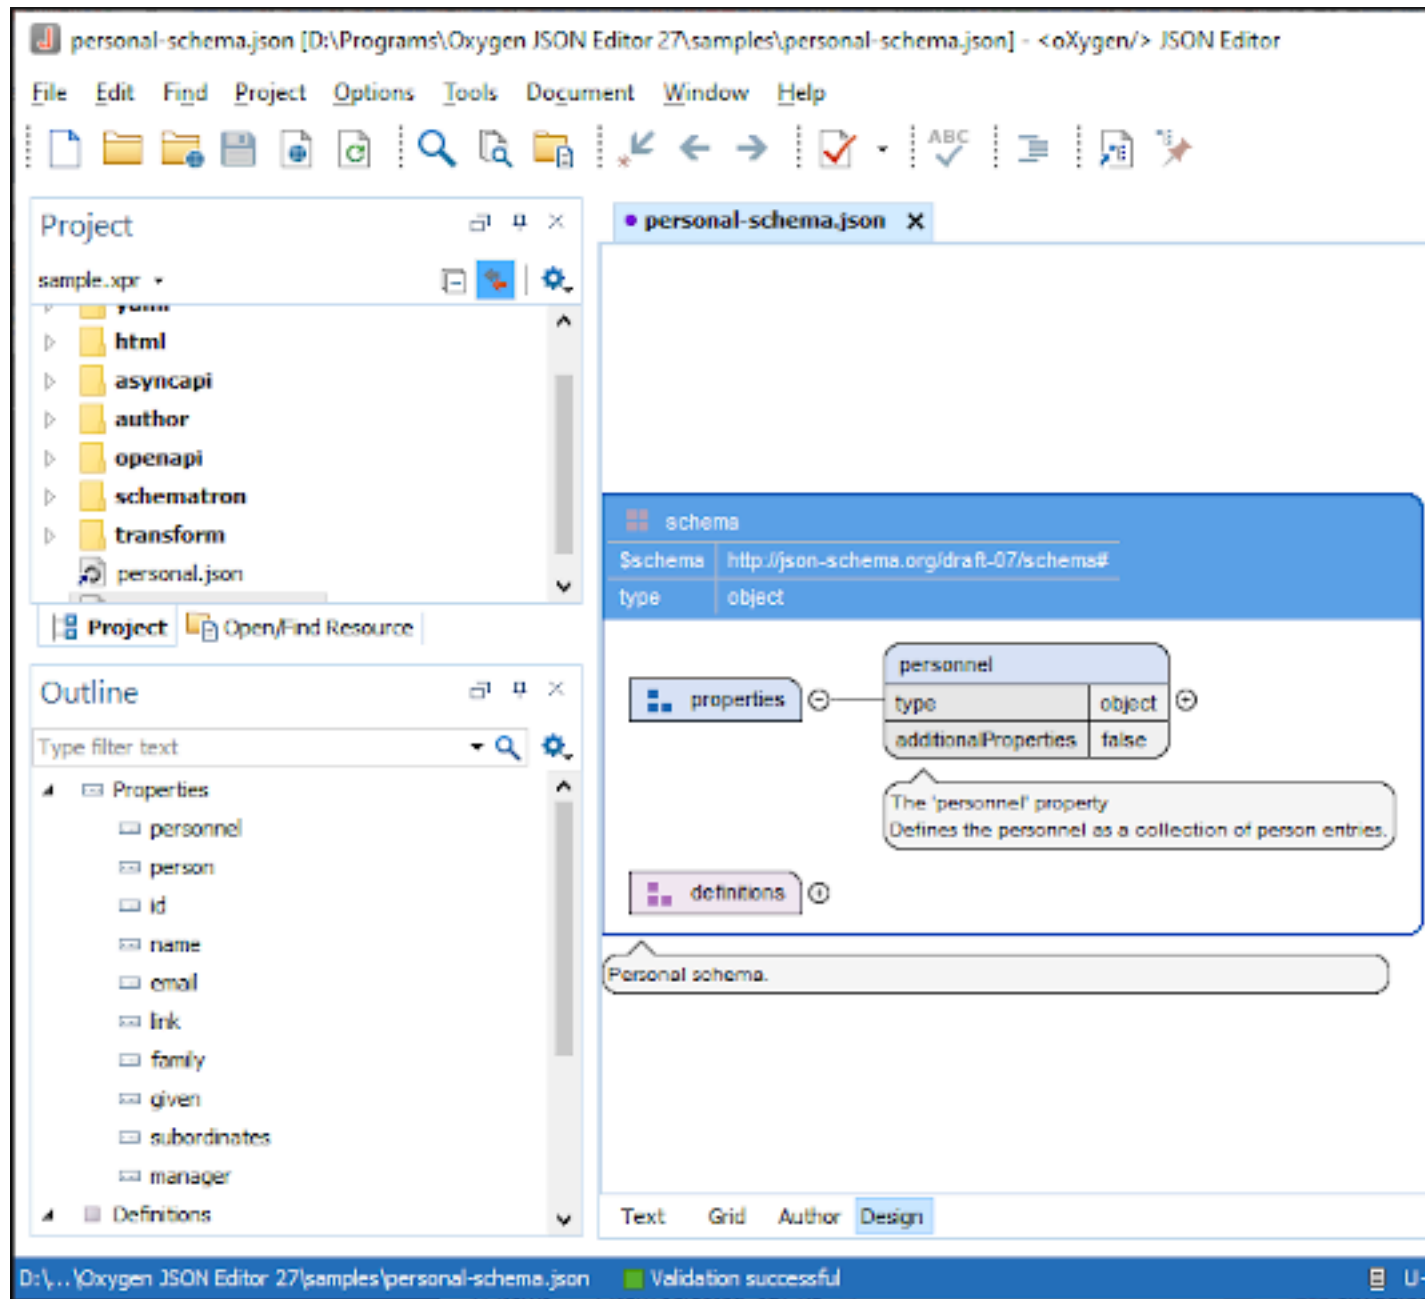


1. Menus
2. Toolbars
3. Left-side Helper Views
4. Right-side Helper Views
5. Editor Pane
6. Status Bar
7. Editing Modes

Figure 5: Clickable Image Map of the Interface

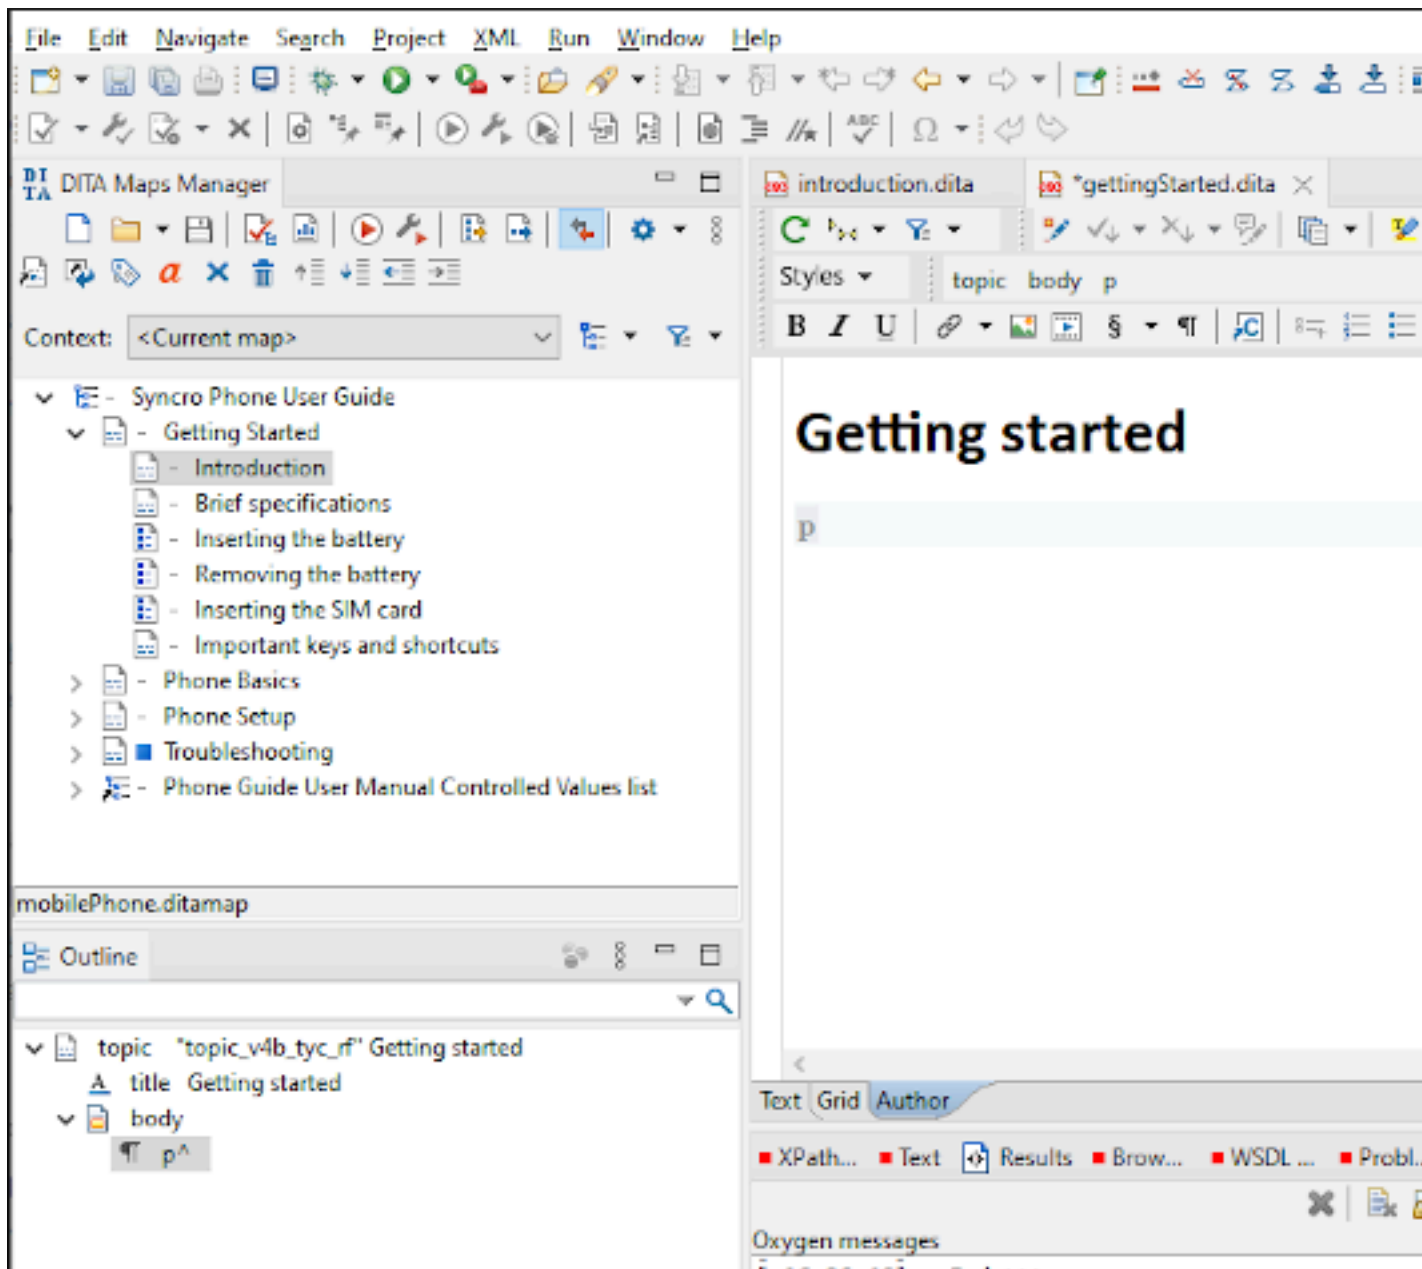


1. [Menus](#)
2. [Toolbars](#)
3. [Left-side Helper Views](#)
4. [Right-side Helper Views](#)
5. [Editor Pane](#)
6. [Perspectives](#)
7. [Editing Modes](#)

Figure 6: Clickable Image Map of the Interface

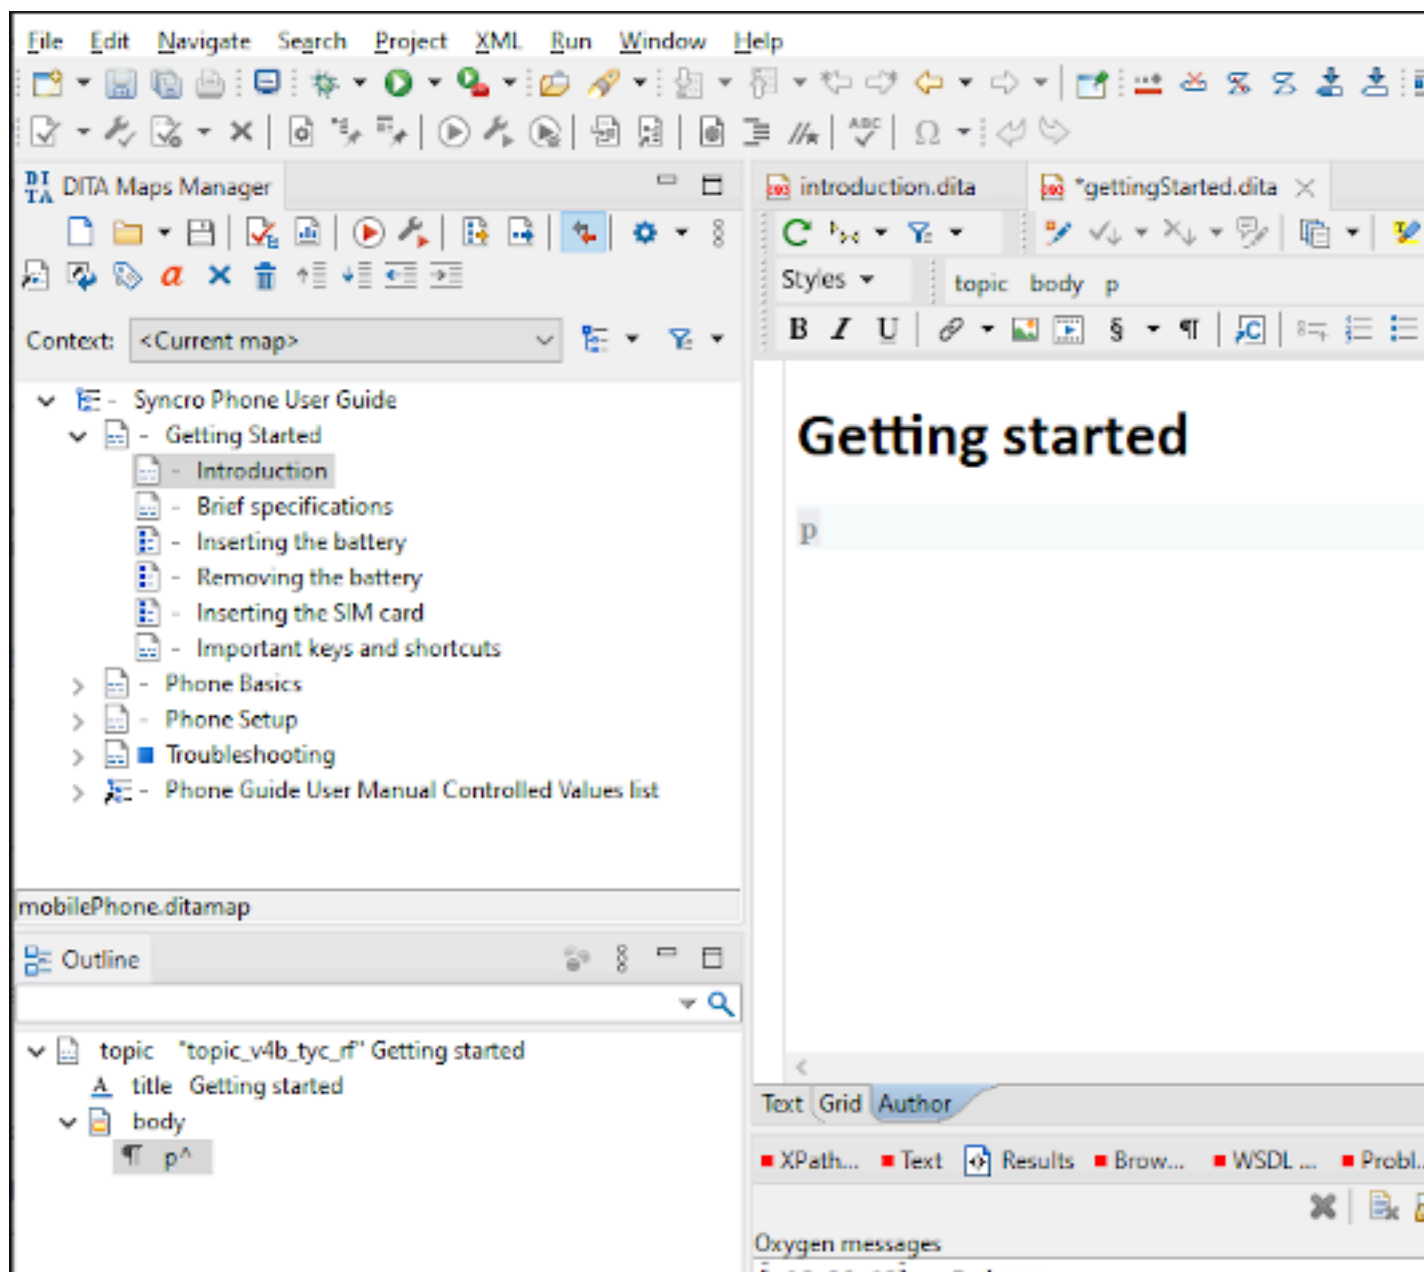

1. [Menus](#)
2. [Toolbars](#)
3. [Left-side Helper Views](#)
4. [Right-side Helper Views](#)
5. [Editor Pane](#)
6. [Perspectives](#)
7. [Editing Modes](#)

Figure 7: Clickable Image Map of the Interface

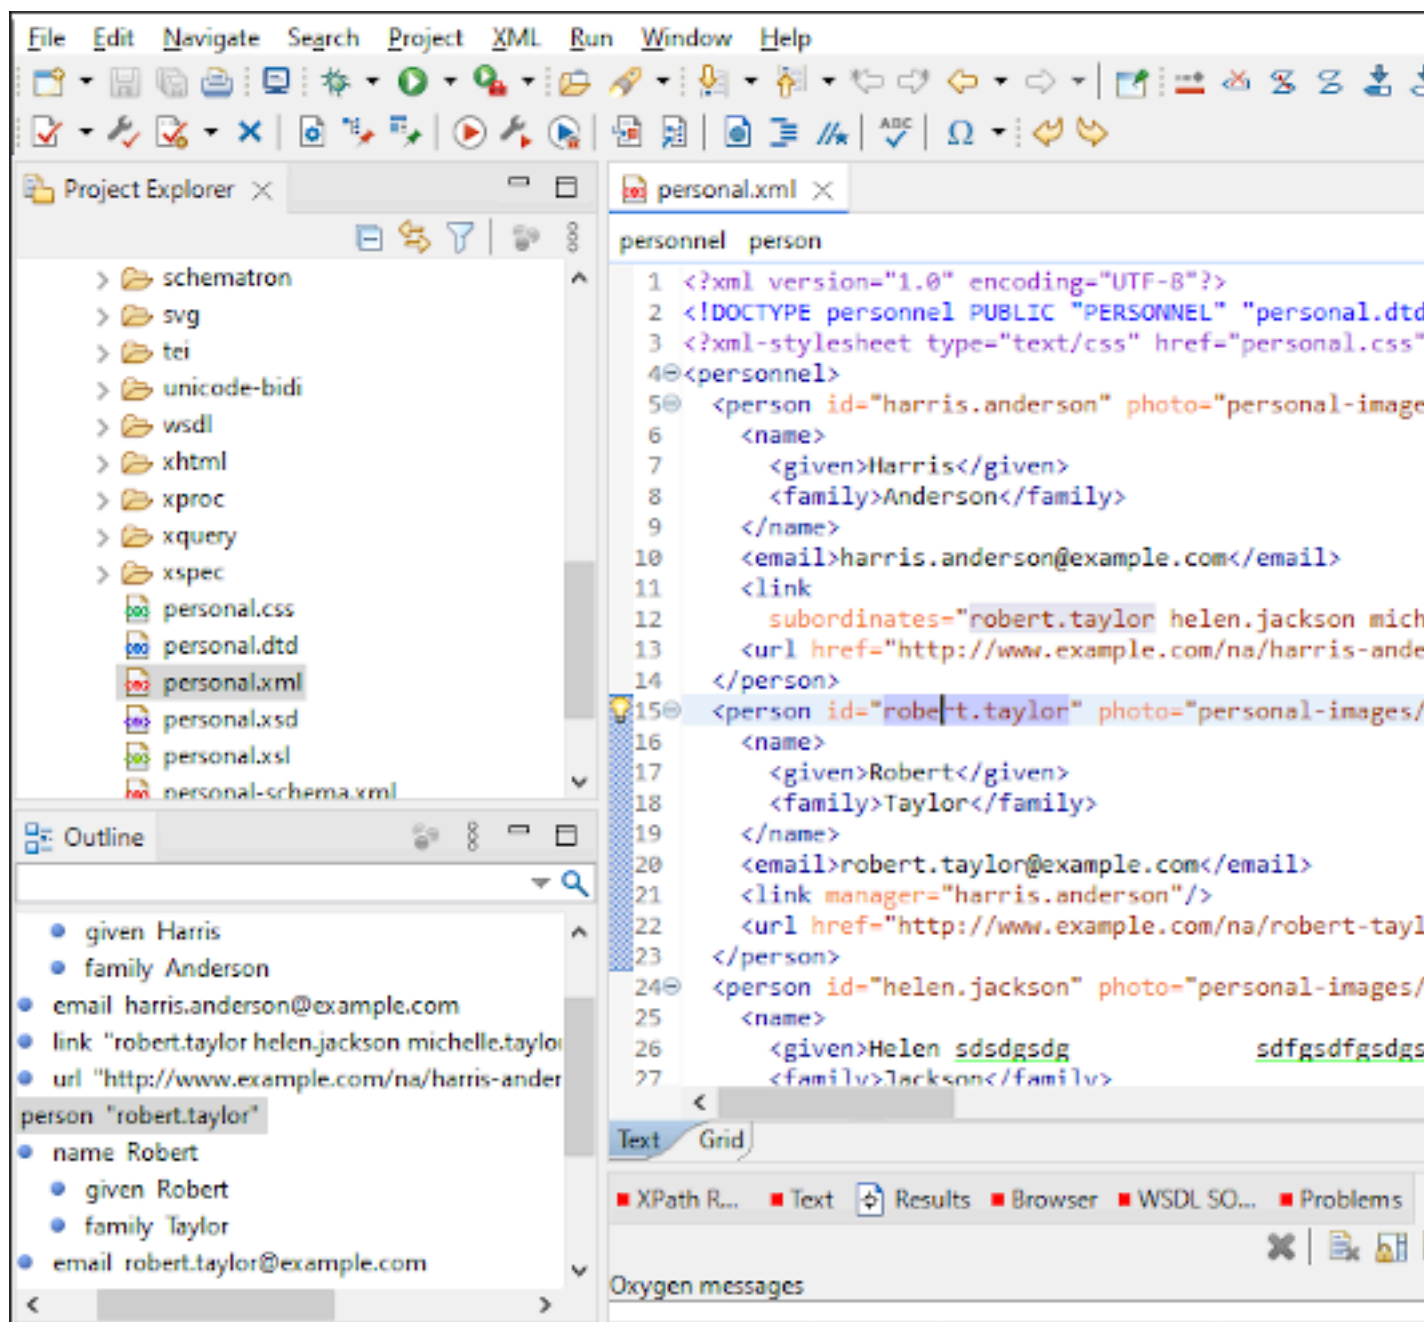

1. Menus
2. Toolbars
3. Left-side Helper Views
4. Right-side Helper Views
5. Editor Pane
6. Perspectives
7. Editing Modes

Figure 8: Clickable Image Map of the Interface

Regardless of the *perspective* or editing mode that you are working with, the default layout consists of the following areas:

Menus

Menu-driven access to all the features and functions available in . Most of the menus are common for all types of documents, but also includes some context-sensitive and *framework*-specific menus and actions that are only available for a specific context or type of document.

Toolbars

Easy access to common and frequently used functions. Each icon is a button that acts as a shortcut to a related function. Some of the toolbars are common for all *perspectives*, editing modes, and types of documents, while others are specific to the particular *perspective* or mode. Some toolbars are also *framework*-specific, depending on the type of document that is being edited. All the [toolbars can be configured](#) to suit your specific needs.

Helper Views

includes a large variety of *dockable* views to assist you with editing, viewing, searching, validating, transforming, and organizing your documents. Many of the views also contain useful contextual menu actions, toolbar buttons, or menus. The most commonly used views for each *perspective* and editing mode are displayed by default and you can choose to display others to suit your specific needs. The [layout of the views can also be configured](#) according to your preferences.

Editor Pane

The main editing area in the center of the application. Each editing mode provides a main editor pane where you spend most of your time reading, editing, applying markup, and validating your documents. The editor pane in each editing mode also includes various contextual menu actions and other features to help streamline your editing tasks. Each file that has been opened has a tab at the top of the editing pane and there are [several ways to switch between tabs or move them](#).

Perspectives

includes [several different perspectives](#) that you can use to work with your documents. The **EditorOxygen XML** *perspective* is the most commonly used *perspective* used for displaying and editing the content of your XML documents, and it is the default *perspective* when you start for the first time. also includes a **Database** *perspective* that allows you to manage databases and their connections and a few debugging *perspectives* that allow you to detect problems in XSLT or XQuery transformations.

Status Bar

The status bar at the bottom of the application contains some useful information when you are working with documents. It includes the following information, in the order it is displayed from left to right:

- The path of the current document.
- The [Unicode value](#) for the character directly to the right of the current cursor position.
- The status of the current document. The status of **Modified** is displayed for documents that have not yet been saved. Otherwise, this section is left blank.

- In **Text** editing mode, the current line and character position is displayed.
- If the **Check for notifications** option is selected, this section will show you when new messages have been received. The types of messages include the addition of new videos on the website, the announcement of upcoming webinars and conferences where the team will participate, and more.
- The memory consumption, including the memory used by the application and the maximum amount that is allocated to the application.
- If the **Show memory status** option is selected, a  **Free unused memory** icon is displayed in the bottom-right corner and you can use this icon to free up unused memory.

Supported Document Types

You can use the main editing pane in to edit a large variety of document types. You can see the type of document association by the special icons displayed in the tabs of the editor title bar.

The supported document types include the following:

-  - XML documents
-  - XSLT stylesheets
-  - XML Schema
-  - DTD (Document Type Definition) schemas
-  - RELAX NG full syntax schemas
-  - RELAX NG compact syntax schemas
-  - NVDL (Namespace-based Validation Dispatching Language) schemas
-  - XSL:FO documents
-  - XQuery documents
-  - WSDL documents (Deprecated)
-  - Schematron documents
-  - JavaScript documents
-  - Python documents
-  - CSS documents
-  - LESS documents
-  - XProc scripts

-  - SQL documents
-  - JSON documents
-  - JSON Schema documents
-  - YAML documents
-  - Ant build scripts
-  - Markdown documents
- Additional supported document types include: Text, Java, Properties, Batch, Shell, PowerShell, Dockerfile, and PHP.

Resources to Help You Get Started Using

Configuring

There are numerous ways that you can configure to accommodate your specific needs.

See the [Configuring Oxygen section](#) for details on the various ways that you can configure the application and its features.

Video Tutorials and Webinars

The website includes numerous video demonstrations and webinars that present many of the features that are available in and show you how to complete specific tasks or how to use the various features.

Go to the [Oxygen Videos page](#) to see the list of video tutorials.

Go to the [Oxygen Events page](#) to see all the upcoming and past webinars, conferences, and other events.

Documentation

The documentation includes a plethora of sections and topics to provide you with a variety of information, ranging from basic authoring tasks to advanced developer techniques. You can, of course, search through the documentation using standard search mechanisms, but you can also place the cursor in any particular position in the interface and use the **F1** key to open a dialog box that presents a section in the documentation that is appropriate for the context of the current cursor position. Aside from the other topics in this *Getting Started* section, the following are links to other sections of the documentation that might be helpful for your specific needs:

- [Text Editing Mode Section](#) - Provides information about the **Text** editor.
- [Author Editing Mode Section](#) - Provides information about the visual WYSIWYG-like **Author** editing mode.
- [XML Schema Diagram Editor](#) - Provides information about the schema design mode.
- [JSON Schema Diagram Editor](#) - Provides information about the schema design mode.
- [Editing Specific Document Types Chapter](#) - Includes information about editing numerous different types of documents.
- [DITA Authoring Chapter](#) - Provides information about using DITA to edit and structure your content.
- [Publishing Chapter](#) - Provides information about the various ways that you can publish content.
- [Importing Data Chapter](#) - Provides information about importing data from text files, MS Excel files, database data, and HTML files.
- [Tools Chapter](#) - Details about the various built-in tools that are available in .
- [Add-ons Chapter](#) - Information about how to extend the functionality of through add-ons.

Sample Documents

Your installation of includes a large variety of sample documents and projects that you can use as templates to get started and to experiment with the various features and technologies. They are located in the **samples** folder that is located in the installation directory of . You will find files and folders for various types of documents, including the following:

- **Sample project file (sample.xpr)** - A sample project file that will allow you to experiment with how projects can be structured and used. When you open this project file, you will be able to see all the sample files and folders in the **Project Explorer** view.
- **Sample files (personal.xml, etc.)(personal.json, etc.)** - A collection of interrelated sample files that will allow you to experiment with the structure and relationship between files, stylesheets, and schemas.
- **Various document type folders** - The various folders contain sample files for numerous document types, such as CSS, DITA, DocBook, ePub, TEI, XHTML, and many others.

Other Resources

The following list includes links to various other resources that will help you get started using the features of :

- See the [Blog Site](#) for a large variety of current and archived blogs regarding numerous features, requests, and instructional topics.
- Take advantage of the [Forum](#) to see various announcements and learn more about specific issues that other users have experienced.
- If you are using DITA, see the incredibly helpful [DITA Style Guide Best Practices for Authors](#).
- To learn about the WebHelp features in , see the [Publishing DITA to WebHelp](#) section of the website.
- For more information about various additional tools that are integrated into , see the [Tools section](#).
- See the [External Resource Page](#) for links to various other helpful resources, such as discussion lists, external tutorials, and more.
- See the [Oxygen SDK](#) section for details about the SDK that allows you to extend and develop *frameworks* and *plugins*, and to integrate Eclipse plugins.
- For a list of new features that were implemented in the latest version of , see the [What's New Section on the website](#)What's New Section on the websiteWhat's New Section on the websiteWhat's New Section on the website.
- You can select the **Tip of the Day** action in the **Help menu** to display a dialog box that includes a variety of tips for using .
- You can select **Show Dynamic Help view** from the **Help menu** to dynamically opens a topic that is relevant to the focused editor, view, or dialog box.

Your First Document or Project

This section includes several topics that will help you get started with your first document or project.

Your First XML Document

To create your first XML document, select **File** >  **New** or click the  **New**File > **New** > **Other** > **Oxygen** or click the  **New** button on the toolbar. The **New** document wizard is displayed:

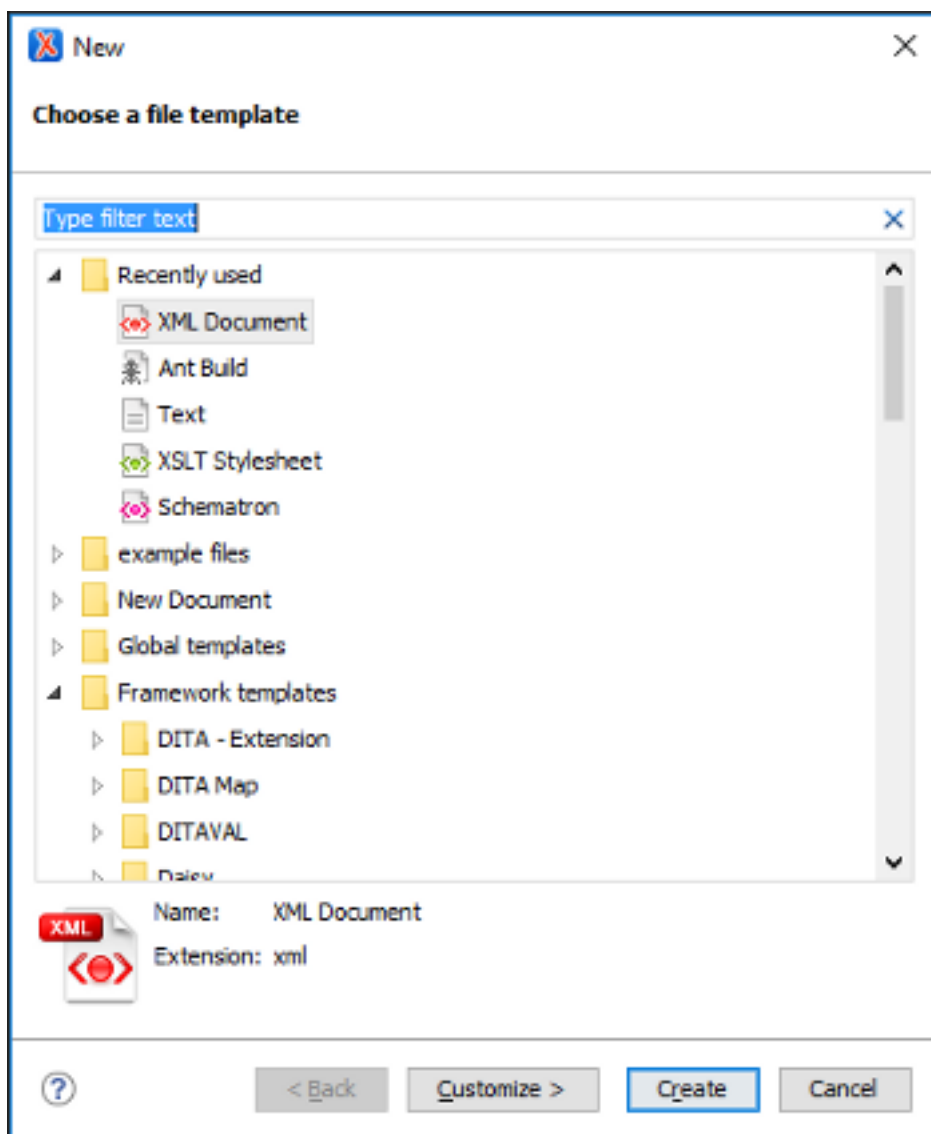


Figure 9: New Document Wizard

You can either create a new XML document from scratch by choosing one of the available types in the wizard. You can also create one from a template by selecting **File > New > New from Templates** and choosing a template from the **Global templates** or **Framework templates** folders. If you are looking for a common document type, such as DITA or DocBook, you can find templates for these document types in the **Framework templates** folder. If your company has created its own templates, you can also find them there. After you use this dialog box to create a few documents, those document types will appear in the **Recently used** folder, which allows you to easily create other new documents of those types.

For some document types, you may find a lot of different templates. For example, there are numerous templates for DocBook documents, and DITA topic types and maps. Choose the template that best meets your needs.

Writing Your First Document

Depending on the type of document you choose, the interface changes to support editing that document type. This may include new menus, toolbar buttons, and items in the contextual menus.

Also, depending on the type of document you choose, may open your document in **Text** or **Author** mode. **Text** mode shows the raw XML source file, while **Author** mode shows a graphical view of the document.

The availability of **Author** mode for your document type depends on the type you choose and if there is a CSS stylesheet available to create the **Author** mode. includes default **Author** mode views for most of the document types it supports. If your company has created its own document types, **Author** mode stylesheets may have also been created for that type. However, if you create a plain XML file, or one based on a schema that is not included in the built-in support, you need to edit it in **Text** mode or [create your own Author mode CSS](#) for it.

You can switch back and forth between **Author** mode and **Text** mode at any time by clicking the buttons at the bottom left of the editor window. You do not lose any formatting when switching from **Author** to **Text** mode. **Text** and **Author** modes are just different views for the same XML document.

There is also a [Grid mode](#) available that displays all content in an XML document as a structured grid of nested tables. This is useful for certain kinds of documents, particularly those that are structured like databases. You can also use it when you want to display XML content in a table-like manner (for example, if you need to [extract XML content to a spreadsheet](#)).

If you use **Author** mode, you might find that it is similar to word processors that you are used to. Likewise, the **Text** mode is similar to many other typical text editors. If you are new to XML, the biggest difference is that XML documents have a particular structure that you have to follow. assists you with a continuous validation of the XML markup.

Structuring Your First Document

Each XML document type has a particular structure that you have to follow as you write and edit the document. Some document types give you a lot of choices, while others give you very few. In either case, you need to make sure that your document follows the particular structure for the document type you are creating. This means:

- At any given location in the document, there are only certain XML elements allowed. helps you determine which elements are allowed. In **Author** mode, when you press Enter, assumes that you want to enter a new element and shows you a list of elements that can be created in this location. Keep typing until the element you want is highlighted and press Enter to insert the element. If you want to view the overall structure of a document and see what is allowed (and where), you can use the [Model view](#) (**Window > Show View > Model**).
- When you create certain elements, you may find that your text gets a jagged red underline and you get a warning that your content is invalid. This is usually because the element you have just created requires certain other elements inside of it. Your document will be invalid until you create those elements. helps you with this. If there is only one possible element that can go inside the element you just created, creates it for you. However, if there is more than one possibility, you have to create the appropriate elements yourself. In many cases, presents [XML Quick Fixes](#) that help you resolve errors by offering proposals to quickly fix problems such as missing required attributes or invalid elements.

Editing Your First Document

Once you have completed the first draft of your document, you may need to edit it. As with any editor, provides the normal cut, copy, and paste options as well as drag and drop editing. However, when you are editing an XML document, you have to make sure that your edits respect the structure of the XML document type. In fact, you are often editing the structure as well as the content of your document.

provides many tools to help you edit your structure and to keep your structure valid while editing text.

The Document Breadcrumbs

Across the top of the editor window (in **Text** mode), there is a set of breadcrumbs that shows you exactly where the insertion point is in the structure of the document. You can click any element in the breadcrumbs to select that entire element in the document.

book chapter sect1 sect2 sect3 para figure tit

Showing Tags

To see exactly where you are in the structure of the document, you can show the tags graphically in the

Author view. There are several levels of tag visibility

that you can choose using the  **Tags Display Mode** drop-down menu on the toolbar (the button may look a little different than this, as it changes to reflect the level of tags currently displayed).

Outline View

The **Outline view** shows you the structure of your document in outline format. You can use it to select elements, or to move elements around in the document.

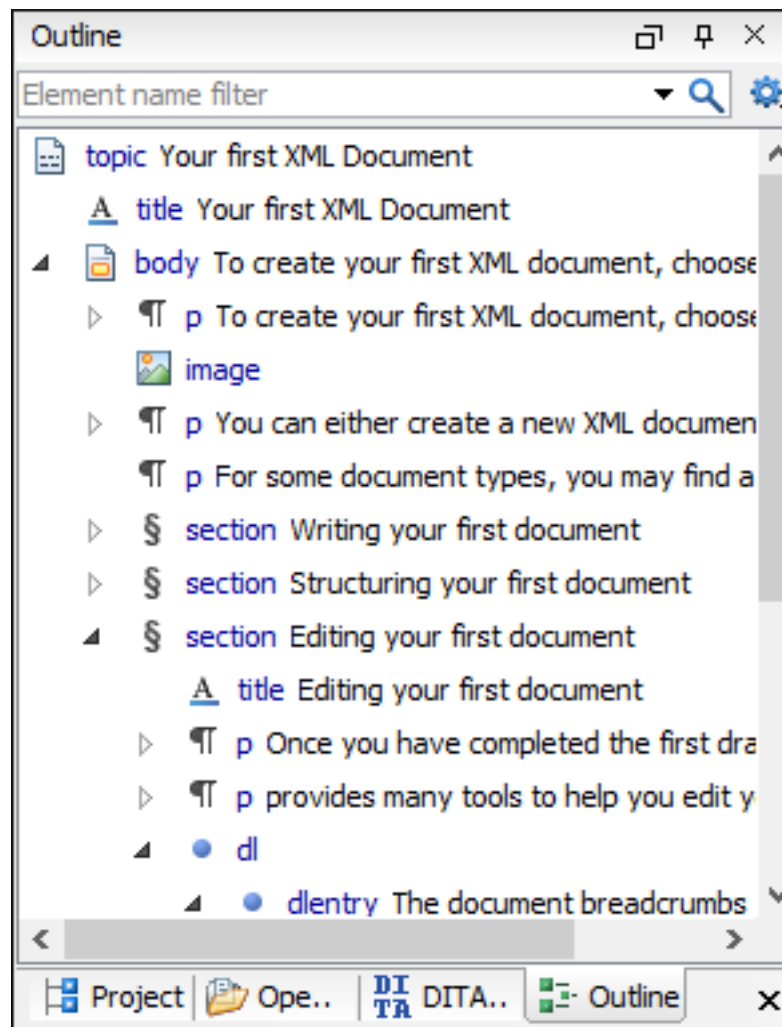


Figure 10: Outline View

You can configure the **Outline** view to determine what is shown, such as element names, attributes, and comments. Certain choices may work better for particular document types. You can also filter the **Outline** view to show only elements with a certain name.

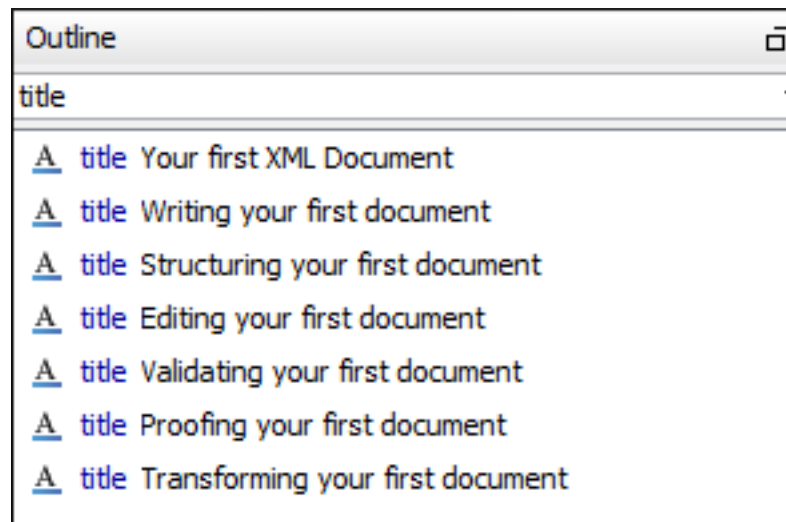


Figure 11: Outline View Filtered to only Show Element Names

Cut and Paste, Drag and Drop

You can cut and paste or drag and drop text, just as you would in any other editor. However, when you do this in **Author** view, it is important to remember that you are actually moving blocks of XML. When you cut and paste or drag and drop a block of XML, the result has to be valid both where the content is inserted, and where it is removed from.

A big part of doing this correctly is to make sure that you pick up the right block of text in the first place. Using the breadcrumbs or **Outline** view, or showing tags and using them to select content, can help ensure that you are selecting the right chunk of XML.

If you do try to paste or drop a chunk of XML somewhere that is not valid, warns you and tries to suggest actions that make it valid (such as by removing surrounding elements from the chunk you are moving, by creating a new element at the destination, or by inserting it in a nearby location).

If you are using **Author** mode, you can also switch to **Text** mode to see exactly which bits of XML you are selecting and moving.

Refactoring actions

You can perform many common structure edits, such as renaming an element or wrapping text in an element, using the actions in the **Refactoring** menu of the contextual menu (or the **Document > Markup** menu). More advanced refactoring operations are also available using the [XML Refactoring tool](#) that is available in the **ToolsXML Tools** menu.

Validating Your First Document

Validation is the process of making sure that an XML document abides by the rules of its schema. If you know how to find the schema, it validates the document for you as you type. It finds the schema automatically for most of the document types created from templates. However, in some cases, you may have to [tell it how to find the schema](#).

When you validate as you type, there is a small bar at the right edge of the editor that shows you if the document is invalid and where errors are found. If the indicator at the top of that bar is green, your document is valid. If the document is invalid, the indicator turns red and a red flag shows you where the errors are found. Click that flag to jump to the error. Remember that sometimes your document is invalid simply because the structure you are creating is not yet complete.

In addition to problems with the validity of the XML document itself, it also reports warnings for a number of conditions, such as if your document contains a cross reference that cannot be resolved, or if it cannot find the schema specified by the document. The location of these warnings is marked in yellow on the validation bar. If the document contains warnings, but no errors, the validity indicator turns yellow.

You can also validate your document at any time by selecting the  **Validate** action from the  **Validation** toolbar drop-down menu or the **Document > ValidateXML** menu. When you validate in this manner, if errors are found, the validation result opens in a new pane at the bottom of the editor that shows each validation error on a separate line. Clicking the error takes you to the location in your document where the error was detected.

Note: Be aware that the problem is sometimes in a different location from where the validator detects the error. To get more information about a validation error, right-click a validation error message, and select **Show Message**.

Proofing Your First Document

includes an [automatic \(as-you-type\) spell checking feature](#), as well as a manual spell checking action. To check the spelling of your document manually, use the  **Check Spelling** action on the toolbar or from the **Edit** menu.

Transforming Your First Document

An XML document must be transformed to be published. Transformations are specific to the particular type of document you have created. For example, a DITA transformation cannot be used on a DocBook file, or vice versa. A single document type may have many multiple transformations that produce different kinds of outputs. For some document types, such as DITA, many different content files may be combined together by a transformation. You need to locate and launch a transformation that is appropriate for your document type and the kind of output you want to generate.

uses [transformation scenarios](#) to control the transformation process. Depending on the document type you have created, there may be several transformation scenarios already configured for your use. This may include the default transformation scenarios supplied by or ones created by your organization.

To see the list of transformations available for your document, select the  **Apply Transformation Scenario(s)** action from the toolbar or the **Document > TransformationXML** menu. A list of available transformation scenarios is displayed. Choose one or more scenarios to apply, and click **Apply associated**. Exactly how your transformed content appears depends on how the transformation scenario is configured.

Getting Started with DITA

The information in this topic is meant to be a very basic starting point for those who are just getting started using DITA in . It makes it easy to create, edit, manage, and publish DITA content, but it requires at least some basic DITA knowledge. To truly get the most out of it and all of its DITA-related features, you should explore resources in the online DITA community to acquire knowledge of its concepts and uses.

Understanding DITA Topics

It is important to understand the role that a DITA topic plays in a DITA project. A DITA topic is not associated with a single published document. It is a separate entity that can potentially be included in many different books, help

systems, or websites. Therefore, when you write a DITA topic you are not writing a book, a help system, or a website. You are writing an individual piece of content. This affects how you approach the writing task and how [works](#) to support you as you write.

Most of your topics are actually related to other topics, and those relationships can affect how you write and handle things such as links and content reuse. [helps](#) you manage those relationships. Depending on how your topics are related, you can use the tools provided in [, along with the features of DITA](#), in a variety of ways.

Creating a DITA Topic in

To [create a DITA topic](#):

1. Select **File** >  **New** or click the  **NewFile** > **New** > **Other** > , or click the  **New** button on the toolbar, and select **New from Templates**.

Step Result: The [New Document Wizard](#)[New from Templates Wizard](#) is displayed:

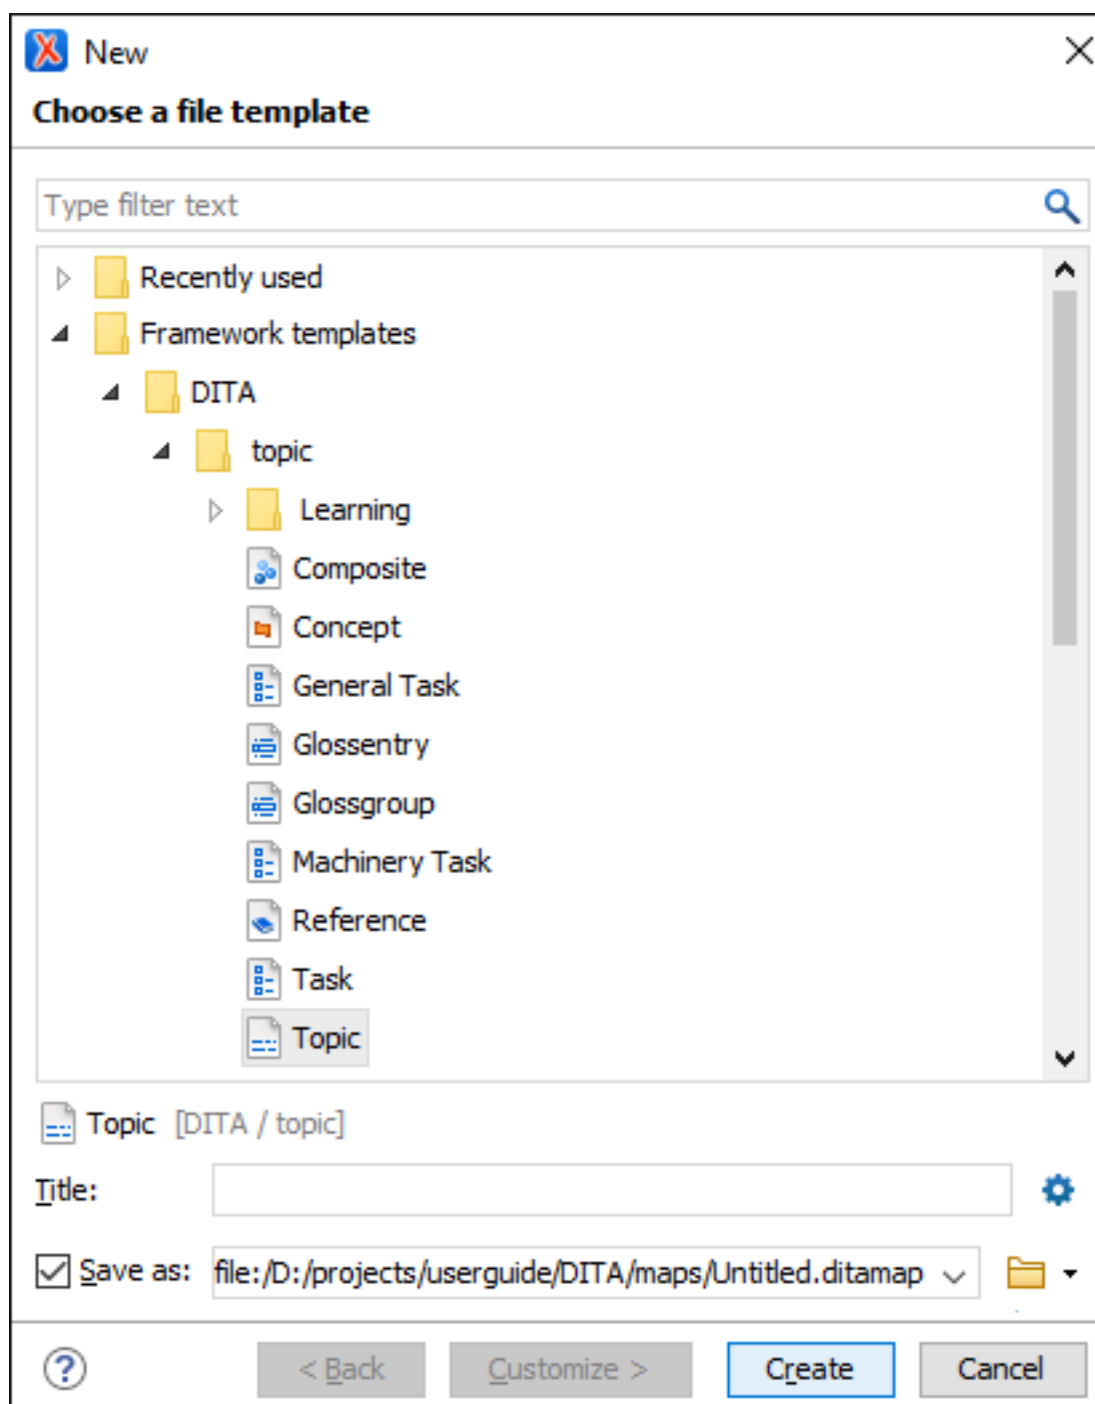


Figure 12: New DITA Document Wizard

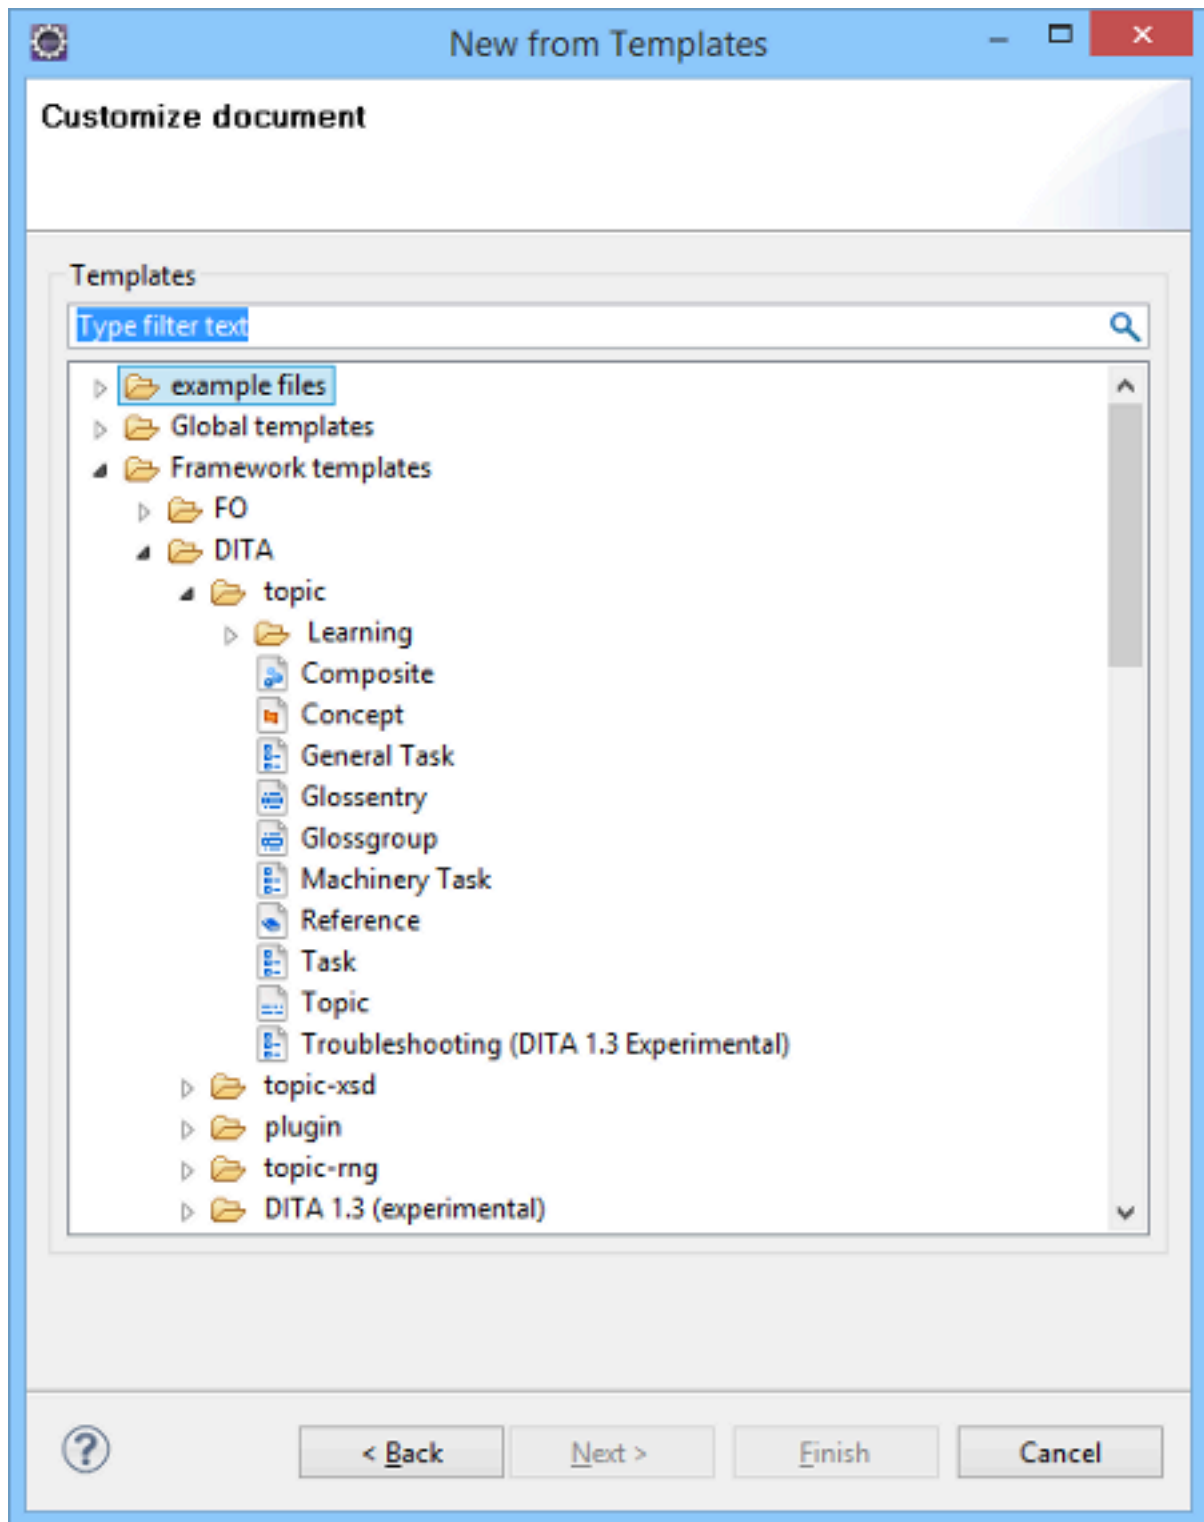


Figure 13: New DITA Document from Templates Wizard

2. Go to **Framework templates** > **DITA** > **topic** and select the type of topic that you want to create, then click **Next**.

Note: If your organization has created DITA customizations, the appropriate template files may be in another location, and various types of topics may be provided for your use. Check with the person who manages your DITA system to see if you should be using templates from another directory.

3. Select a file path where it will be saved. You can also optionally specify a title.

4. Click **CreateFinish**.

Result: Your document is opened in the editor. Eventually, you will need to [add a reference to it in your DITA map](#).

Your DITA topic is an XML document, thus all [the editing features that provides for editing XML documents](#) also apply to DITA topics. [also provides additional specific DITA-related support for working with DITA topics](#), their associated *DITA maps*, and for creating DITA output.

Role of Maps

The basic method that DITA uses to express the relationship between topics is through a *DITA map*. Other relationships between topics, such as cross references, generally need to be made between topics in the same root map. DITA uses maps to determine which topics are part of any output that you create. While customized DITA solutions can use other mechanisms, generally DITA is not used as a way to publish individual topics. Output is created from a map and includes all the topics referenced by the map.

A publication is not always represented by a single map. For instance, if you are writing a book, you might use a submap to create each chapter and then organize the chapters in a main root map to create the book. This helps you to manage your content, offers the possibility of reusing submaps, and segregates content to support multiple people working on the same project.

Creating a Map in

To [create a map](#):

1. Select **File** >  **New** or click the  **NewFile** > **New** > **Other** > , or click the  **New** button on the toolbar, and select **New from Templates**.
2. Go to **Framework templates** > **DITA Map** > **map** and select the type of map you want to create.
3. Choose whether you want to open the map in the **Editor** or in the **DITA Maps Manager**. Usually, opening it in the **DITA Maps Manager** is the best choice. The **DITA Maps Manager** presents a view of the *DITA map* that is similar to a table of contents.

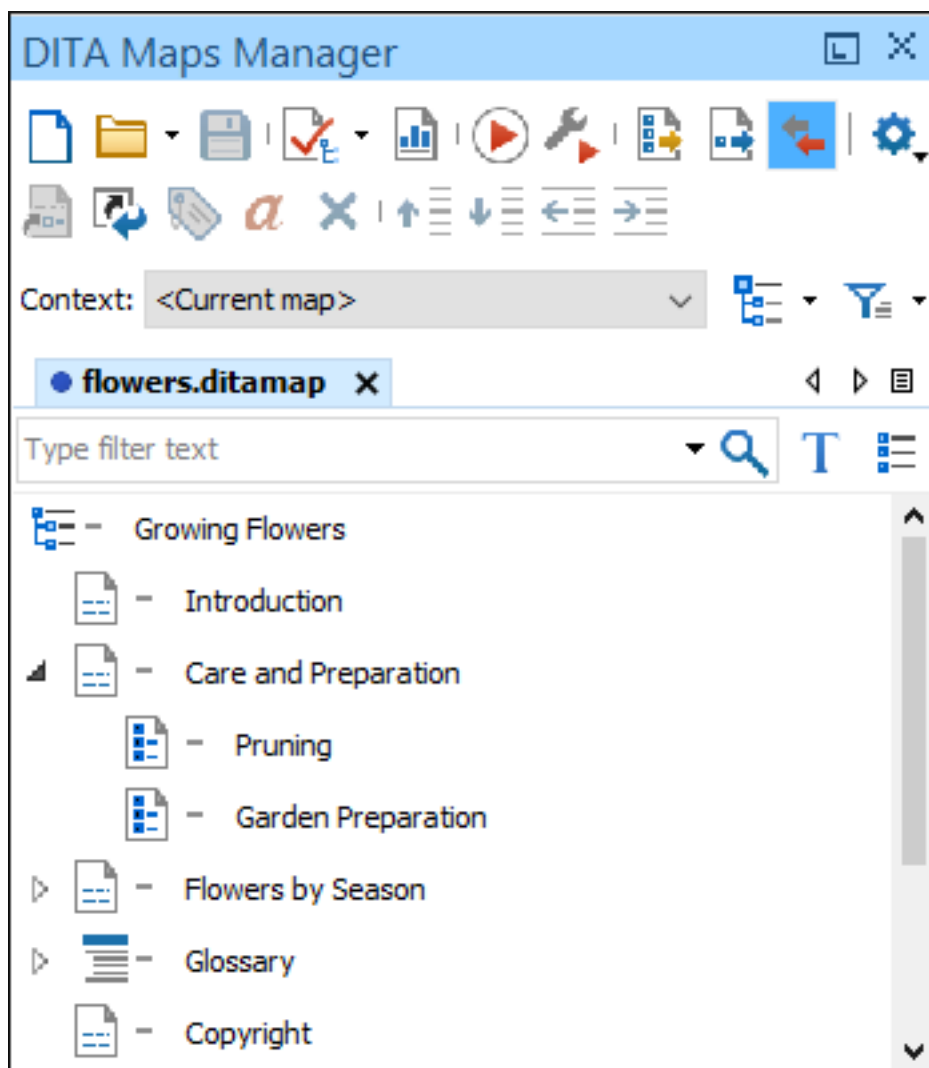


Figure 14: DITA Maps Manager View

Adding Existing Topics to a Map in

There are several ways to [add a topic reference to a map](#). Perhaps the easiest method is to add a reference to a topic that is already open in the editor:

1. Open the DITA topic in the main editing window.
2. Right-click the *DITA map* in the [DITA Maps Manager view](#) and choose **Reference to the currently edited file** from the **Append Child**, **Insert Before**, or **Insert After** submenu.

Step Result: This opens the [Insert Reference dialog box](#) with all of the required fields already filled in for you.

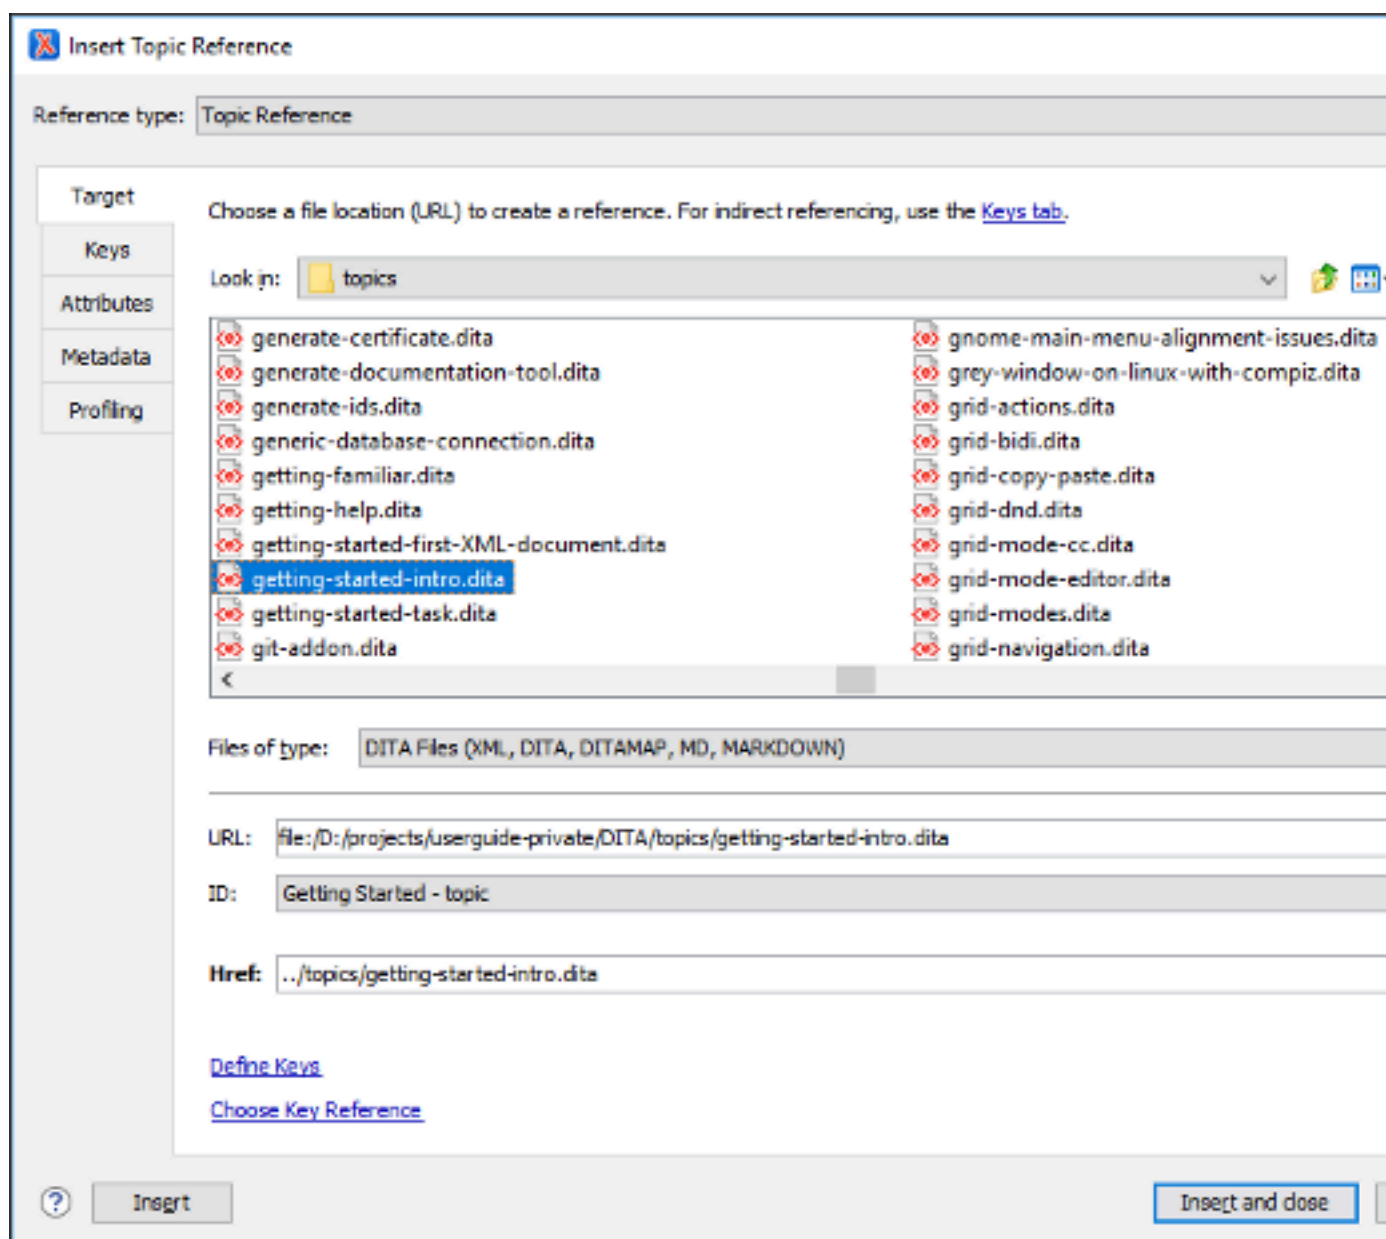


Figure 15: Insert Reference Dialog Box

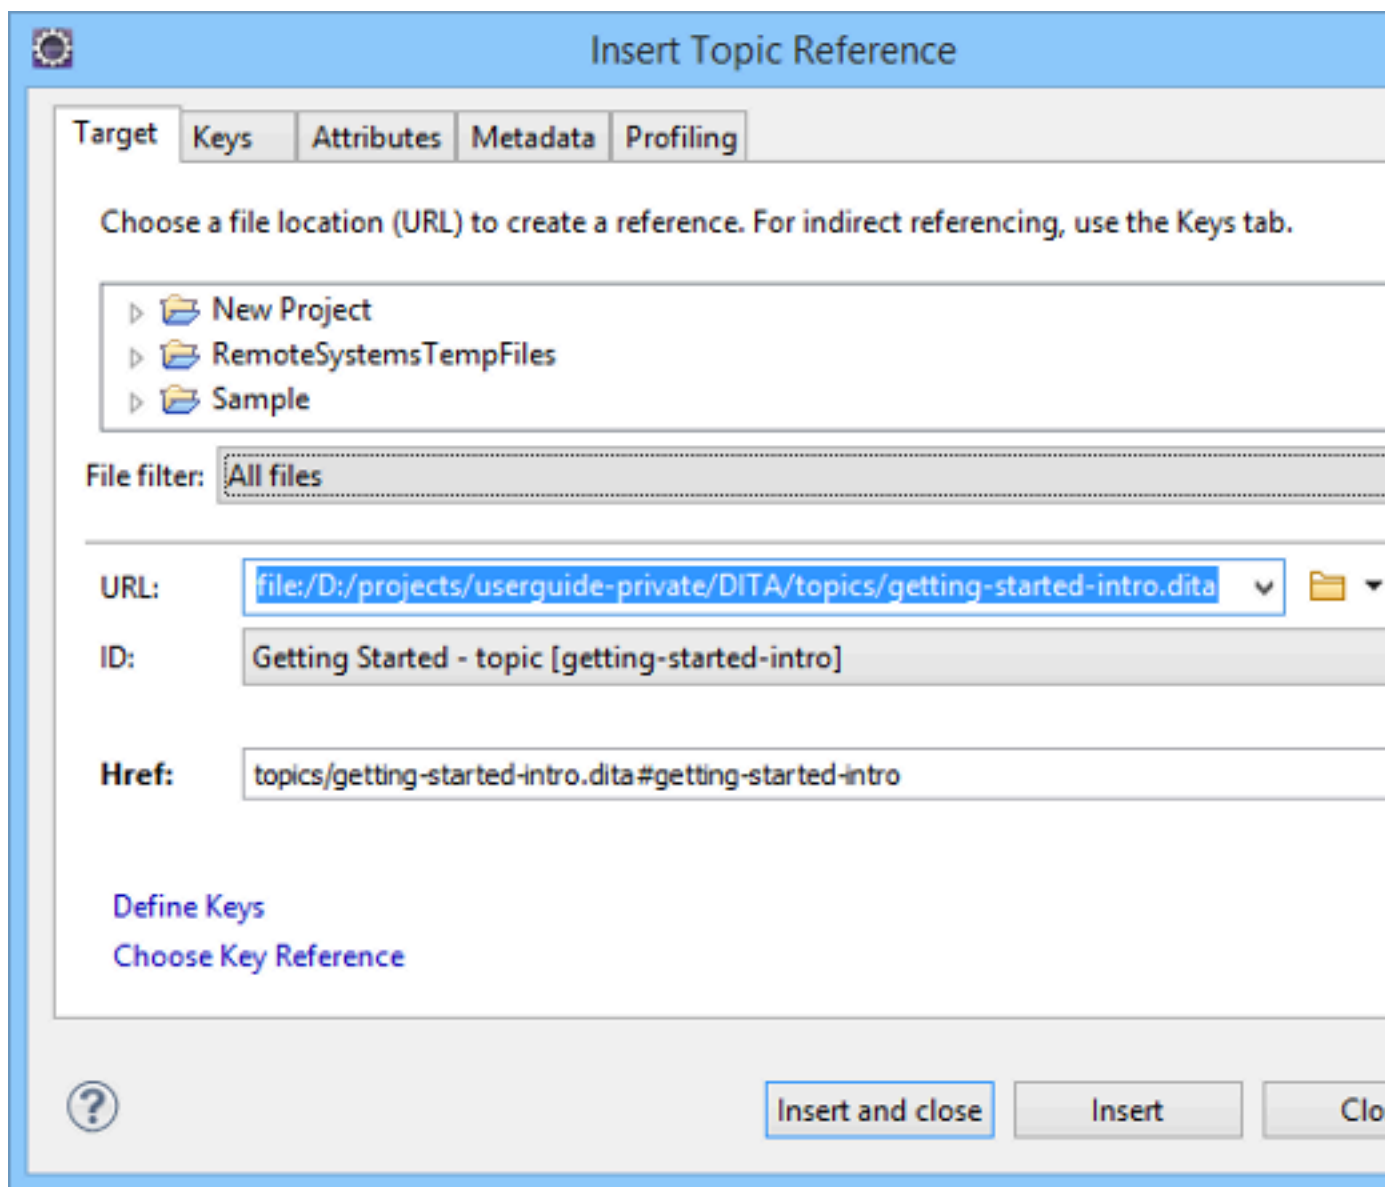


Figure 16: Insert Reference Dialog Box

3. You can fill in additional information in the various tabs in this dialog box or add it to the map later.
4. Select **Insert and close** to add a reference to your topic in the map.
5. Save the *DITA map*.

Adding New Topics to a Map in

As you add topics to your map, you may want to create a new topic as a child or sibling of another topic. This is usually done at the map level.

To [add a new topic to a map](#), follow these steps:

1.

You can also change the order and nesting of topics in the **DITA Maps Manager** view by doing either of the following:

- Select the topic to move while holding down the **Alt** key and use the arrow keys to move it around.
- Use the mouse to drag and drop the topic to the desired location.

The way your parent and child topics are organized in any particular output depends on both the configuration of those topics in the map and the rules of the output transformation that is applied to them. Do not assume that your topics must have the same organization for all output types. The map defines the organization of the topics, not the topics themselves. It is possible to create a variety of maps, each with different organization and configuration options to produce a variety of outputs.

Adding Submaps in

If you have a large set of information, such as a long book or extensive help system, a single map can become long and difficult to manage. To make it easier to manage, you can [break up the content into smaller submaps](#). A submap might represent a chapter of a book, a section of a user manual, or a page on a website. To build a publication out of these smaller maps, you must add them to a map that represents the overall publication.

To [add a child map to the current map](#):

1. Right-click the parent *DITA* map in the [DITA Maps Manager view](#) and choose **Append child > Map reference**.
Step Result: This opens the [Insert Reference dialog box](#) with all of the required fields already filled in for you.
2. You can fill in additional information in the various tabs in this dialog box or add it to the map later.
3. Select **Insert and close** to add a reference to your submap in the main map.
4. Save the main *DITA* map.

Validating a Map in

Just as it is with your individual topics, it is important to validate your maps. provides a validation function for *DITA* maps that does more than simply validating that the XML is well-formed. It also does the following:

- Validates all of the relationships defined in the maps.
- Validates all of the files that are included in the map.
- Validates all of the links that are expressed in the files.

Validating the map that describes your entire publication validates all the files that make up the publication and all of the relationships between them.

To validate a map:

1. Click the  **Validate and Check for Completeness** button in the [DITA Maps Manager view](#).
Step Result: This opens the **DITA Map Completeness Check** dialog box.
2. Select any of the various options you want to check.
3. Click **Check** to run the validation process.

Publishing Your Topics in

As noted previously, in DITA standards you usually do not publish output from an individual topic. Instead, you create published output by running a DITA transformation on a map. This collects all the topics that are referenced in the map, organizes them, and produces output in a particular format. By default, uses the transformations provided by the **DITA Open Toolkit** for publishing to various output formats (such as PDF, WebHelp or EPUB). Your organization may have created various custom transformations or modified the built-in **DITA Open Toolkit** transformations. In either case, manages them by using transformation scenarios.

To publish output for a map:

1. Click the  **Configure Transformation Scenario(s)** button in the [DITA Maps Manager view](#).
Step Result: This opens the [Configure Transformation Scenario\(s\) dialog box](#).

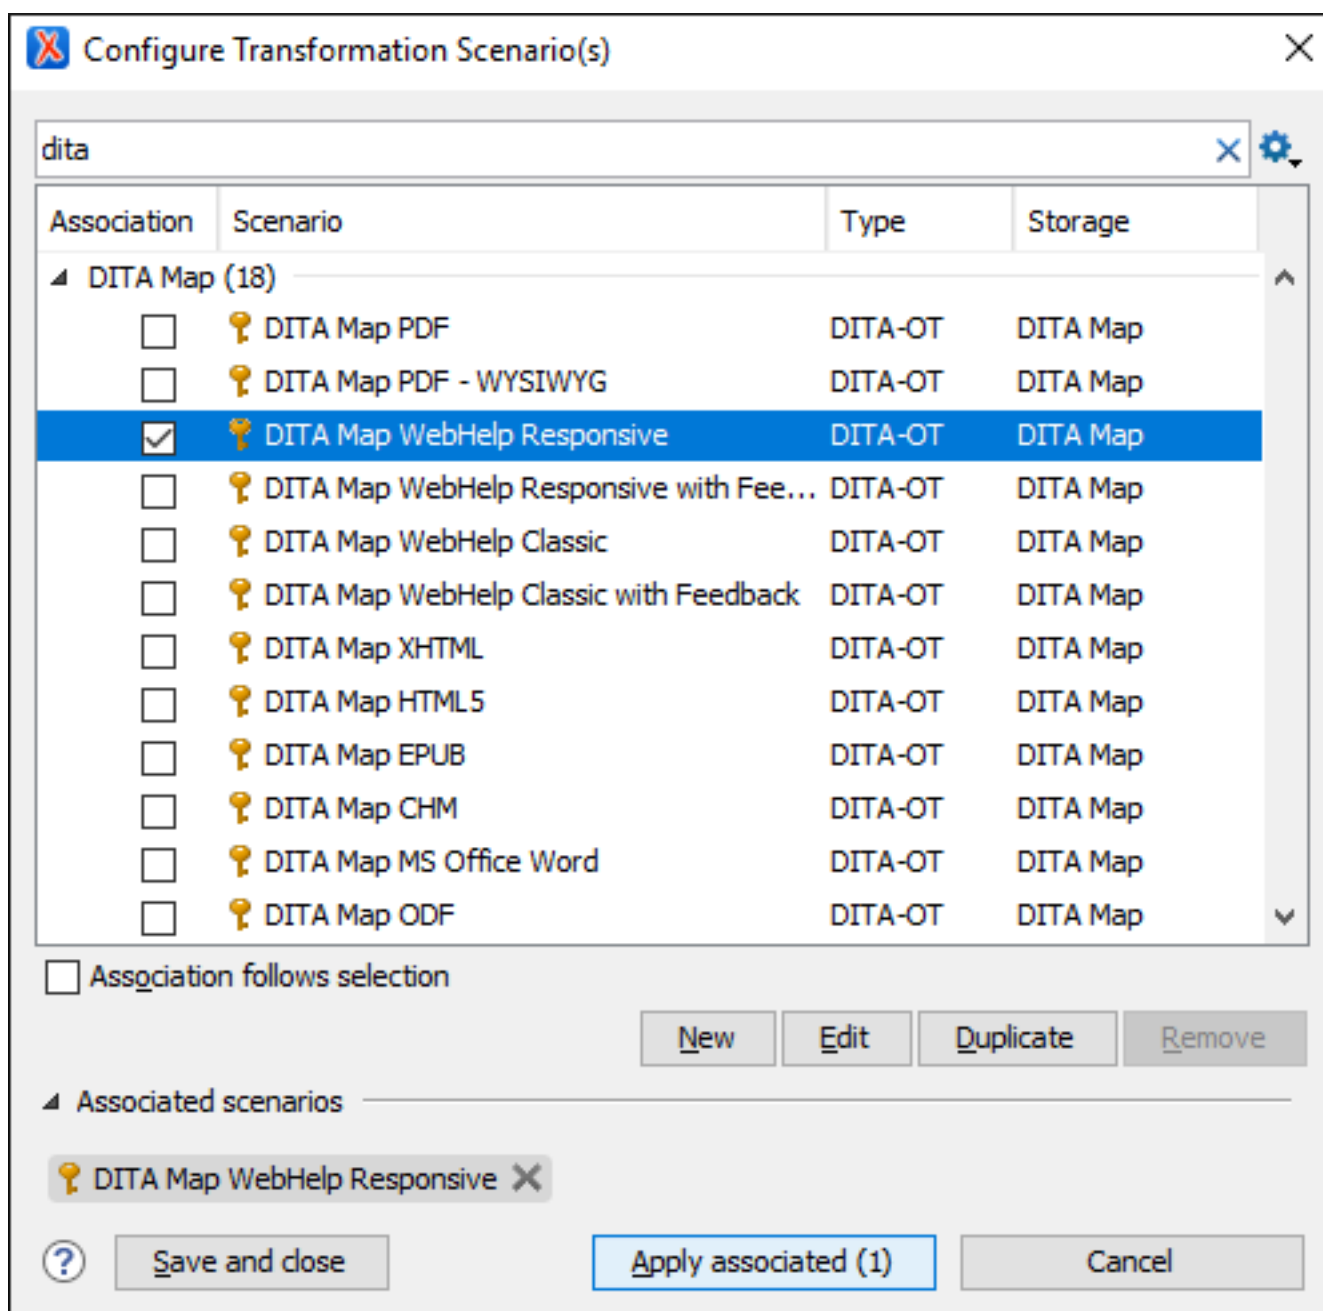


Figure 17: Configure Transformation Scenarios Dialog Box

2. Select the appropriate transformation depending on the type of output you desire.
3. To change or view the configuration or storage options for a transformation scenario, select the transformation and click **Edit**.
4. Click **Apply associated**.

Result: Depending on the configuration of the transformation scenario, when the transformation is finished, your output may automatically be opened in the appropriate application.

DITA Projects

Once you have a basic understanding of DITA and how to work with DITA topics and maps, you probably want to [create a DITA project to organize and manage your planned content/resources](#). includes a [Project view](#) that helps

you organize your projects and offers a variety of helpful project-related features and makes it easy to share your projects with other members of your team.

Note:

Resources

For more information about getting started with DITA and how to work with DITA in , see our compiled collection of DITA-related webinars that are meant to help you with your journey into working with DITA: [Webinars: Working with DITA in Oxygen](#).

Related information

[DITA Authoring](#)

[Editing XML Documents in Author Mode](#)

<https://www.oxygenxml.com/dita/1.3/specs/>

[Webinars: Working with DITA in Oxygen](#)

[Doctales - DITA Introduction](#)

Creating a New Project

allows you to organize your XML-related files into projects. This helps you manage and organize your files and also allows you to perform batch operations (such as validation and transformation) over multiple files. You can also [share your project settings and transformation/validation scenarios](#) with other users. Use the **ProjectProject Explorer** view to manage projects, and the files and folders contained within.

Creating a New Project

To create a new project, select  **New Project** from the **Project** menu, the **New** menu in the contextual menu, or the drop-down menu at the top-left of the **Project** view.

This opens a new project wizard:

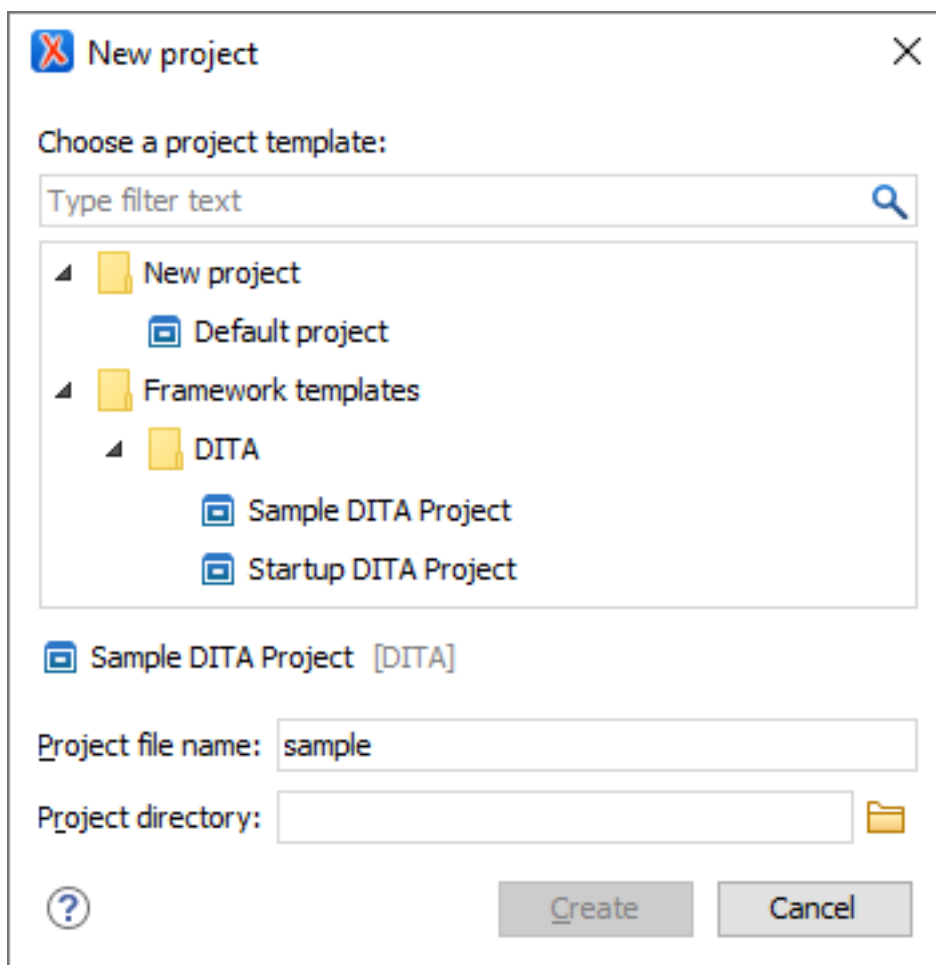


Figure 18: New Project Wizard

Note:

With the exception of the *Default project* template, which is a pseudo-template and does not exist on the local disk (it is used only to create a new `.xpr` file), project templates are actually ZIP archives (with a `.zxpr` extension) and are stored within the file template directory structure (for example, `frameworks\dita\templates\sample-project\Sample DITA Project.zxpr`).

Tip: Archives with a `.zxpr` extension can be edited in the [Archive Browser](#) view.

After selecting a project template, you can specify the following:

Project file name

Specifies the name of the new project file. provides a default proposal for the file name based on the following rules:

- If there is an `.xpr` file inside the archive, its name is used.
- Otherwise, the name of the template is used.

Project directory

Specifies the directory where the archive content will be extracted.

Note: The archive should not contain an extra single folder as the root. For the **Project directory** path to work properly, the archive must have the `.xpr` file on the first level, along with the other resources (files and folders).

Once you are done, click the **Create** button to begin the creation process. extracts the content from the archive inside the path specified in the **Project directory** field.

Editor Variables in Project Templates

By default, the editor variables inside project resources created from a project template are not resolved. To start having them resolved, the project template [must be customized](#) by using the `expandEditorVariablesIncludeFilter` property. This filter determines the resources where the editor variables will be resolved. If you need to exclude a subset of resources from the set specified by the `expandEditorVariablesIncludeFilter` property, the `expandEditorVariablesExcludeFilter` property can be used.

Note: Usually, project files (*.xpr), framework files (*.framework), and framework extension scripts (*.exf) should be excluded from the editor variable resolving process.

The values of the inclusion and exclusion filters can be file paths relative to the project directory that can use wildcards or simply wildcards. Each filter can have multiple values, separated by spaces.

Possible filter values:

- `./*` - Matches all resources from the first level in the project directory.
- `*` or `./**` - Matches all resources on all levels inside the project directory.
- `dir1/dir2/*.dita` - Matches all `.dita` files from `[PROJECT_DIR]/dir1/dir2`, but not from subdirectories of `dir2`.
- `dir1/dir2/**/*.dita` - Matches all `.dita` files from `[PROJECT_DIR]/dir1/dir2`, including those from subdirectories of `dir2`.
- `dir1/**/*.dita` - Matches all resources on all levels inside `[PROJECT_DIR]/dir1`.
- `dir1/article1.xml, dir2/article2.xml` - Matches only the two `.xml` files.
- `./**/*_suffix.md, ./**/prefix_*.html` - Matches all `.md` files with names that end with `_suffix` and all `.html` files with names that start with `prefix_`.

Creating a New Project

To create a new project, select **New > XML Project** or **New > Sample XML Project** from the contextual menu or **File** menu.

This opens a dialog box that allows you to create and customize a new project and adds it to the structure of the project in the **Project Explorer** view.

You can either create a new XML document from scratch by choosing one of the available types in the wizard. You can also create one from a template by selecting **File > New > New from Templates** and choosing a template from the **Global templates** or **Framework templates** folders. If you are looking for a common document type, such as DITA or DocBook, you can find templates for these document types in the **Framework templates** folder. If your company has created its own templates, you can also find them there.

Adding Items to the Project

To add items to the project, select the desired document type or folder from the **New** menu of the contextual menu, when invoked from the **Project Explorer** view (or from the **File** menu). You can also create a document from a template by selecting **New > New from Templates** from the contextual menu. any of the following actions that are available when invoking the contextual menu in the **Project** view:

New >  File

Opens a **New** file dialog box that helps you create a new file and adds it to the project structure.

New >  Folder

Opens a **New Folder** dialog box that allows you to specify a name for a new folder and adds it to the structure of the project.

The project itself is considered a logical folder. You can add a logical folder, or content to a logical folder, by using one of the following actions that are available in the contextual menu, when invoked from the *project root*:

New >  Logical Folder

Creates a logical folder in the tree structure (the icon is a magenta folder on macOS - .

New > Logical Folders from Web

Replicates the structure of a remote folder accessible over SFTP/WebDAV, as a structure of logical folders. The newly created logical folders contain the file structure of the folder it points to.

 Add Folder

Adds a link to a physical folder, whose name and content mirror a real folder that exists in the local file system (the icon of this action is different on macOS - .

 Add Files

Adds links to files on the local file system.

 Add Edited File

Adds a link to the currently edited file in the project.

Using Linked Folders (Shortcuts)

Another easy way to organize your XML working files is to place them in a directory and then to create a corresponding linked folder in your project. If you add new files to that folder, you can simply use the  **Refresh (F5)** action from the project contextual menu and the **Project Explorer view** will display the existing files and subdirectories. If your files are scattered among several folders, but represent the same class of files, you might find it useful to combine them in a logical folder.

You can create linked folders (shortcuts) by dragging and dropping folders from the Windows Explorer (macOS Finder) to the project tree, or by selecting  **Add Folder** in the contextual menu from the *project root*. Linked folders are displayed in the **Project view** with bold text. To create a file inside a linked folder, select the **New > File** action from the contextual menu. The linked files presented in the **Project view** are marked with a special icon. You can create linked folders (shortcuts) by dragging and dropping folders from the Windows Explorer (macOS Finder) to the project tree, or by using the contextual menu from the location in the project tree where you want it added and selecting **New > Folder > Advanced**. The linked folders presented in the **Project Explorer view** are marked with a special icon. To create a file inside a linked folder, use the contextual menu and select **New > File** (you can use the **Advanced** button to link to a file in the local file system).

Note: Files may have multiple instances within the folder system, but cannot appear twice within the same folder.

For more information on managing projects and their content, see [Project Explorer View](#).

For more details about how you can share projects with other users, see [Sharing a Project - Team Collaboration](#).

Related information

[Using Projects to Group Documents](#)

Getting Help

If you run into specific problems while using you can take advantage of a variety of support related resources. Those resources include the following:

- [The Support Section of the Website](#)
- [The Forum](#)
- [The Video Tutorials](#)
- [The Common Problems and Solutions Section of the User Manual](#)
- [The Online Technical Support Form](#)

The application also includes various specific help-related resources in the **Help** menu.

Help Menu

The **Help** menu provides various resources to assist you with your tasks.

This menu includes the following actions or options:

Welcome

This option opens the **Welcome** screen that includes some resources to assist you with using .

Help (F1)Help Contents

Use this action (or the **F1** key) to open a dialog box that presents Eclipse help topics and it includes a section that is specific to . Also, you can use the **F1** key to open a **Help** view that presents a section in the User Manual that is appropriate for the context of the current cursor position. If the **Use online help** option is selected, this action will open the User Manual in an online mode.

Show Dynamic Help view

Use this action to open a view that loads the latest online WebHelp version of the User Manual, and dynamically opens a topic that is relevant to the focused editor, view, or dialog box.

You can also open the **Dynamic Help** view by selecting it from the **Window > Show View** menu.

Download User Manual

Opens the appropriate HTML page for downloading the User Manual. This action is helpful if your internet access is restricted and you need to access the user guide.

Install new add-ons

Opens a dialog box that allows you to install new *add-ons* to extend the functionality of .

Note:

Check for add-ons updates

Opens a dialog box that allows you to check for updates on installed *add-ons*.

Manage add-ons

Opens a dialog box that allows you to manage installed *add-ons*.

Check for a New Version

Use this action to view information about the latest version of .

Check for notifications

Use this action to have the application check **Oxygen's** website for news and events that will be displayed in a dialog box.

Browse Oxygen Website

Opens the website in your default internet browser.

Register

If you encounter problems with your license, you can use this option to open a dialog box that provides options for obtaining or using a license key.

Lock/Unlock floating license

If you are using a *Floating License*, you can lock it so that it does not get [released to the pool](#) unless you or the system administrator unlocks it.

Report problemReport Oxygen problem

You can use this option to open a dialog box that allows you to write the description of a problem that was encountered while using the application. You can also

select additional information to be sent to the technical support team in the five tabs:

- **General info** - You can edit your contact details in case you want to be contacted for further details or to be notified of a resolution.
- **Class Loader URLs** - You can choose whether or not to include the listed *Class Loader URLs* with your report.
- **System properties** - You can choose whether or not to include the listed system property details with your report.

Tip: You are able to change the URL where the reported problem is sent by using the `com.oxygenxml.report.problems.url` system property. The report is sent in XML format through the `report` parameter of the POST HTTP method.

- **Plugins** - You can choose whether or not to include details about your installed *plugins* with your report.
- **Frameworks** - You can choose whether or not to include details about your installed *frameworks* with your report.

Support Center

Support Tools > Clipboard Inspector

Use this option to open the [Support Section of the Website](#).

Opens a dialog box that displays extensive details of all the transferable objects from the clipboard. This is helpful if you experience problems while copying content from other applications and pasting it into . You can use the **Copy** button to copy all of this data and then paste it into an email to be sent to the *Oxygen* support team.

Support Tools > Randomize XML text content

Use this action when you need to send samples to the *Oxygen* support team and you want to keep the text content confidential. It opens a dialog box that allows you to select the resources that will have the text content randomized. You can then save the resources and send them to the *Oxygen* support team without fear of compromising sensitive or private data. For more information, see [Randomize XML Text Content](#) on page 36.



Warning: Before using this action, it is highly recommended that you copy the XML resources to be processed, save them in a separate folder, and then process this operation on the copies instead of the original files. Otherwise, you may lose your original content.

Tip of the Day

AboutAbout Eclipse

Opens a dialog box that offers tips for using .

Use this option and then click the icon to open a dialog box that contains information about and the installed version. This dialog box includes the following tabs:

- **Copyright** - This tab contains general information about the product and the version of the product you are using, along with contact details and the *SGN* number. Details regarding the memory usage are also presented at the bottom of the dialog box.
- **Libraries** - This tab presents the list of third-party libraries that uses. To view the End-User Licence Agreement of each library, double-click it.
- **Frameworks** - This tab contains a list with the *frameworks* that are bundled with .
- **System Properties** - This tab contains a list with system properties and their values. The contextual menu allows you to select and copy the properties.

Related information

[Details to Submit in a Request for Technical Support Using the Online Form](#)

Randomize XML Text Content

includes an action that randomizes the text content of an XML document. This action is available in the **Help > Support Tools** menu. It is helpful if you need to send XML samples to the *Oxygen* support team and you want to keep the text content confidential. It opens a dialog box that allows you to select the resources that will have the text content randomized. You can then save the resources and send them to the *Oxygen* support team without fear of compromising sensitive or private data.



Warning: Before using this action, it is highly recommended that you copy the XML resources to be processed, save them in a separate folder, and then perform this operation on the copies instead of the original files. Otherwise, you may lose your original content.

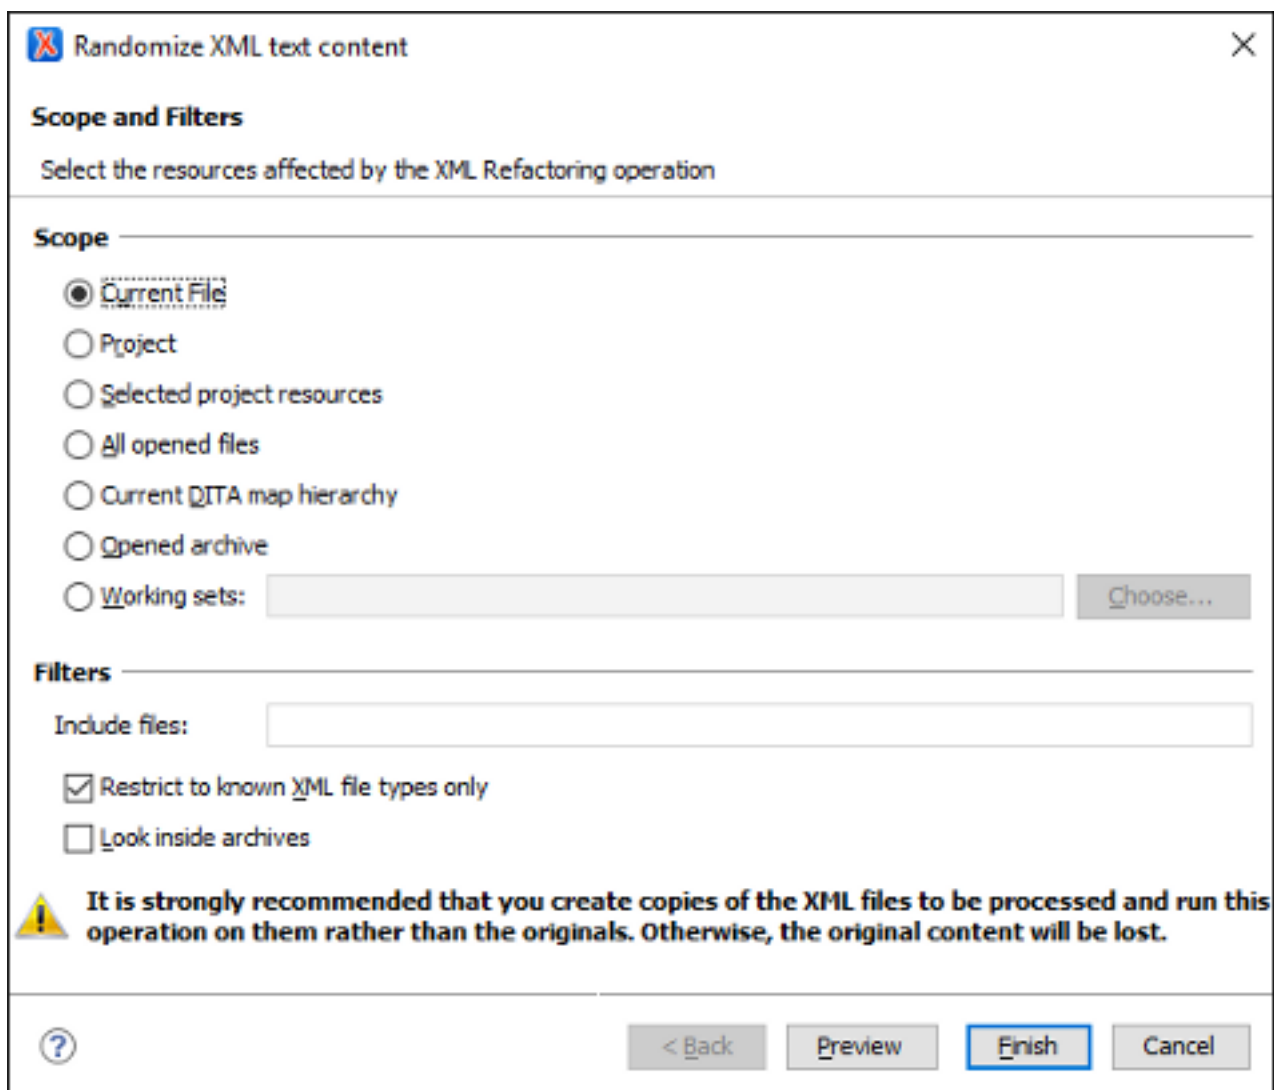


Figure 19: Randomize XML Text Content Dialog Box

The **Randomize XML Text Content** dialog box includes the following options:

Scope

Allows you to select the set of files whose text content will be randomized by the operation. You can select from predefined resource sets (such as the current file, your whole project, the current *DITA map* hierarchy for DITA projects, etc.) or you can define your own set of resources by creating a *working set*.

Filters

This section includes the following options:

- **Include files** - Allows you to filter the selected resources by using a file pattern. For example, to restrict the operation to only analyze build files you could use `build*.xml` for the file pattern.
- **Restrict only to known XML file types** - When selected, only resources with a known XML file type will be affected by the operation.
- **Look inside archives** - When selected, the resources inside archives will also be affected.

Frequently Used Shortcut Keys

includes numerous shortcut keys that are assigned to actions to help you edit content. All the shortcuts that are assigned to actions are displayed in the table in the [Menu Shortcut Keys preference page](#).

For information about how to assign or configure shortcut keys, see [How to Assign a Shortcut Key or Edit an Existing Shortcut](#).

Table 1: Frequently Used Shortcut Keys in

Action	Windows/Linux Shortcut Keys	macOS Shortcut Keys	Description of Default Assigned Action
Attribute Editor	<u>Alt + Enter</u>	<u>Option + Enter</u>	Opens the in-place attribute editor
Beginning	<u>Ctrl + Home</u>	<u>Command + Home</u>	Navigates to the beginning of the document
Check Spelling	<u>F7</u>	<u>F7</u>	Opens the spell checking dialog box
Check Well-Formedness	<u>Ctrl + Shift + W</u>	<u>Command + Shift + W</u>	Check well-formedness of current document
Configure Transformation	<u>Ctrl + Shift + C</u>	<u>Command + Shift + C</u>	Opens the Configure Transformation Scenario dialog box
Content Completion / New Line	<u>Enter</u>	<u>Enter</u>	• Author mode - Opens the content completion window • Text mode - Moves cursor to the next line
Content Completion (Text Mode)	<u>Ctrl + Space</u>	<u>Command + Space</u>	Opens the content completion window in Text mode
Create Bookmark #	<u>Ctrl + Shift + 1-9</u>	<u>Command + Shift + 1-9</u>	Create bookmarks numbered 1 through 9
Create Next Bookmark	<u>F9</u>	<u>F9</u>	Create bookmark numbered whatever is next in sequence
Delete Next Word	<u>Ctrl + Delete</u>	<u>Command + Delete</u>	Deletes the next word or whitespace
Delete Previous Word	<u>Ctrl + Backspace</u>	<u>Command + Backspace</u>	Deletes the previous word or whitespace
Delete Tags	<u>Alt + Shift + X</u>	<u>Command + Option + X</u>	Deletes the start and end tag of the current element
Duplicate Lines Up (Text Mode)	<u>Ctrl + Shift + UpArrow</u>	<u>Option + Shift + UpArrow</u>	Duplicates the selected lines (or current line) and inserts it above the current selection/line

Action	Windows/Linux Shortcut Keys	macOS Shortcut Keys	Description of Default Assigned Action
Duplicate Lines Down (Text Mode)	<u>Ctrl + Shift + DownArrow</u>	<u>Option + Shift + DownArrow</u>	Duplicates the selected lines (or current line) and inserts it below the current selection or line
End	<u>Ctrl + End</u>	<u>Command + End</u>	Navigates to the end of the document
Exit	<u>Ctrl + Q</u>	<u>Command + Q</u>	Exit the application
Find	<u>Ctrl + F</u>	<u>Command + F</u>	Opens Find/Replace dialog box
Find Next	<u>F3</u>	<u>Command + G</u>	Finds next occurrence of the last searched term
Find Previous	<u>Shift + F3</u>	<u>Command + Shift + G</u>	Finds previous occurrence of the last searched term
Go To Bookmark	<u>Ctrl + 1-9</u>	<u>Command + 1-9</u>	Go to specific bookmark
Go To Definition	<u>Shift + Ctrl + Enter</u>	<u>Shift + Command + Enter</u>	Go to the definition of the selected item in the associated schema.
Help	<u>F1</u>	<u>F1</u>	Opens help documentation
Insert Para / Format Indent	<u>Ctrl + Shift + P</u>	<u>Command + Shift + P</u>	Author mode - Inserts a paragraph at the cursor position Text mode - Formats and indents current document
Move Tab Left	<u>Ctrl + Alt + Comma</u>	<u>Ctrl + Option + Comma</u>	Moves the current file tab one position to the left
Move Tab Right	<u>Ctrl + Alt + Period</u>	<u>Ctrl + Option + Period</u>	Moves the current file tab one position to the right
Move Node Down (Author)	<u>Alt + DownArrow</u>	<u>Option + DownArrow</u>	Moves the selected XML node down in Author mode
Move Node Down (Text)	<u>Ctrl + Alt + DownArrow</u>	<u>Command + Option + DownArrow</u>	Moves the selected XML node down in Text mode
Move Node Up (Author)	<u>Alt + UpArrow</u>	<u>Option + UpArrow</u>	Moves the selected XML node up in Author mode
Move Node Up (Text)	<u>Ctrl + Alt + UpArrow</u>	<u>Command + Option + UpArrow</u>	Moves the selected XML node up in Text mode
New File	<u>Ctrl + N</u>	<u>Command + N</u>	Opens wizard for creating new documents
Next Word	<u>Ctrl + RightArrow</u>	<u>Command + RightArrow</u>	Navigates to next word
Open/Find Resource	<u>Ctrl + Shift + R</u>	<u>Command + Shift + R</u>	Opens the Open/Find Resource dialog box

Action	Windows/Linux Shortcut Keys	macOS Shortcut Keys	Description of Default Assigned Action
Previous Word	<u>Ctrl + LeftArrow</u>	<u>Command + LeftArrow</u>	Navigates to previous word
Print Preview	<u>Ctrl + P</u>	<u>Command + P</u>	Opens the print preview (page setup) dialog box
Quick Assist	<u>Alt + 1</u>	<u>Command + Option + 1</u>	Opens Quick Assist menu if actions are available in the current context (usually indicated with a bulb  icon in the left stripe)
Quick Find	<u>Alt + Shift + F</u>	<u>Option + Shift + F</u>	Opens the Quick Find mechanism at the bottom of the editor
Redo	<u>Ctrl + Y</u> (Windows) - <u>Ctrl + Shift + Z</u> (Linux)	<u>Command + Shift + Z</u>	Redo last editing action
Refresh	<u>F5</u>	<u>F5</u>	Refresh
Remove Bookmarks	<u>Ctrl + F7</u>	<u>Command + F7</u>	Removes all bookmarks
Reopen Last Closed Editor	<u>Ctrl + Alt + T</u>	<u>Command + Option + T</u>	Reopens the editor tab that was closed most recently
Reset Zoom	<u>Ctrl + NumPad0</u>	<u>Command + NumPad0</u>	Resets zoom (default font size)
Save	<u>Ctrl + S</u>	<u>Command + S</u>	Saves current document
Save All	<u>Ctrl + Shift + S</u>	<u>Command + Shift + S</u>	Saves all open files
Scroll Down	<u>Ctrl + DownArrow</u>	<u>Command + DownArrow</u>	Scrolls the editor down
Scroll Up	<u>Ctrl + UpArrow</u>	<u>Command + Up Arrow</u>	Scrolls the editor up
Select Content of Element	<u>Alt + [Mouse Triple Click]</u>	<u>Option + [Mouse Triple Click]</u>	Selects the content of an element in Author mode.
Shift Left	<u>Shift + Tab</u>	<u>Shift + Tab</u>	• Author mode - Moves the cursor to the previous XML node • Text mode - Shifts content to the left
Shift Right	<u>Tab</u>	<u>Tab</u>	• Author mode - Moves cursor to the next XML node • Text mode - Shifts content to the right
Split Element	<u>Alt + Shift + D</u>	<u>Ctrl + Option + D</u>	Splits the element the cursor position
Surround With	<u>Ctrl + E</u>	<u>Command + E</u>	Surrounds selected content with specified tag

Action	Windows/Linux Shortcut Keys	macOS Shortcut Keys	Description of Default Assigned Action
Switch Tabs	<u>Ctrl + Tab</u> / <u>Ctrl + Shift + Tab</u>	<u>Command + Tab</u> / <u>Command + Shift + Tab</u>	Switches between open tabs
Transform	<u>Ctrl + Shift + T</u>	<u>Command + Shift + T</u>	Opens a dialog box for selecting a transformation scenario
Underline / Open URL	<u>Ctrl + U</u>	<u>Command + U</u>	- Underlines selected content (in the main editor) - Opens the URL (when focus is outside the main editor)
Undo	<u>Ctrl + Z</u>	<u>Command + Z</u>	Undo last editing action
Zoom In	<u>Ctrl + NumPad+</u>	<u>Command + NumPad+</u>	Zooms in (increase font size)
Zoom Out	<u>Ctrl + NumPad-</u>	<u>Command + NumPad-</u>	Zooms out (decrease font size)



Trouble: If you encounter problems with keyboard shortcuts not working as expected, see [Keyboard Shortcuts Result in Unexpected Behavior](#) or [Keyboard Shortcuts Do Not Work At All](#).

Table 2: Supported Emacs Key Bindings for macOS

Action	macOS Shortcut Key	Editing Mode Availability
Move cursor to start of line	<u>Ctrl + A</u>	Text and Author mode
Move cursor to end of line	<u>Ctrl + E</u>	Text and Author mode
Move cursor up one line	<u>Ctrl + P</u>	Text and Author mode
Move cursor down one line	<u>Ctrl + N</u>	Text and Author mode
Move cursor left one character	<u>Ctrl + B</u>	Text and Author mode
Move cursor right one character	<u>Ctrl + F</u>	Text and Author mode
Delete character to the right of cursor	<u>Ctrl + D</u>	Text and Author mode
Delete character to the left of cursor	<u>Ctrl + H</u>	Text and Author mode
Scroll Down	<u>Ctrl + V</u>	Text and Author mode
Delete the selection (cut text)	<u>Ctrl + K</u>	Text mode
Retrieve deleted text (paste)	<u>Ctrl + Y</u>	Text mode
Insert line break w/ o moving cursor	<u>Ctrl + O</u>	Text mode

Accessibility Support in Oxygen

The **Oxygen** team is dedicated to developing software products that are usable for everyone, including those with physical challenges and disabilities. is designed to adhere to the U.S. Government Section 508 accessibility standards: https://www.oxygenxml.com/xml_editor/section508.html.

Adjusting Fonts and Colors

If you have low vision, go to **Options > Preferences > Appearance > Fonts** where you can adjust the font styles and sizes used in the entire application, both for the editing areas and UI labels. If you have color blindness, you can also adjust most of the colors used in by going to **Options > Preferences > Appearance** and changing the current color theme. You can also search for other color-related settings in the **Preferences** dialog box.

Installing

Installation kits for Windows and Linux are made using the Install4j product. If you have problems navigating the Install4j installation wizard, you can run the installation from a [command-prompt application using the -c flag](#) like this:

```
C:\Users\your_user_name\Downloads\oxygenAuthor-64bit.exe -c
```

Screen Reader Software (Windows OS)

If you are using a text-to-speech narrator, supports this since it is a Java application and it is periodically tested on Windows using both the NVDA and JAWS screen readers on the Windows operating system.

Using the JAWS Screen Reader (Windows)

The JAWS (Job Access With Speech) screen reader can be downloaded from: <http://www.freedomscientific.com/Products/Blindness/JAWS>.

For JAWS to work, you need to enable the Java access bridge in : http://docs.oracle.com/javase/7/docs/technotes/guides/access/enable_and_test.html.

To enable the Java access bridge:

1. Since comes bundled with its own Java VM, you need to open a command-prompt application and use the **cd** command to go to the installation directory (for example, in Windows, it would be something like this:

```
cd C:\Program Files\Oxygen XML Editor 21.1
```

2. Then run the following command:

```
jre\bin\jabswitch -enable
```

3. Press **Enter** and you should receive a notification that the access bridge has been enabled.

Once the Java access bridge is enabled and as long as the JAWS narrator is active, when starts, the narrator will start reading content from and you can interact with the application and read menus, content from open XML documents, and UI components from dialog boxes and side views.

Using the NVDA Screen Reader (Windows)

The NVDA screen reader can be downloaded for free from: <https://www.nvaccess.org/>.

For NVDA to work, you need to enable the Java access bridge in : http://docs.oracle.com/javase/7/docs/technotes/guides/access/enable_and_test.html.

To enable the Java access bridge:

1. Since comes bundled with its own Java VM, you need to open a command-prompt application and use the **cd** command to go to the installation directory (for example, in Windows, it would be something like this:

```
cd C:\Program Files\Oxygen XML Editor 21.1
```

2. Then run the following command:

```
jre\bin\jabswitch -enable
```

3. Press **Enter** and you should receive a notification that the access bridge has been enabled.

Once the Java access bridge is enabled and as long as the NVDA narrator is started, when starts, the narrator will start reading content from and you can interact with the application and read menus, content from open XML documents, and UI components from dialog boxes and side views.

Important: If after these steps the narrator still does not read anything from a started application, please go to the folder `C:\Windows\SysWOW64\` and make sure the library `WindowsAccessBridge-32.dll` is present there. If it is not present, try to search online, download the library file and copy it to the folder. Then restart .

Besides the main editing area, also has side views (for example, the **Attributes**, **Outline**, **Elements** views) that help with editing the XML content. NVDA versions **2020.1** and older have a [registered bug](#) that makes the narrator read content from the side views when editing in the main editing area. Because of this problem, when using NVDA versions **2020.1** or older, the following workflow is suggested:

1. Start .
2. Go to the **Window** menu and select **Maximize Editing Area** (or **hold Alt, then W, then M**). This action will hide all side views and allow you to properly edit in the main editing area.
3. Whenever you want to open a side view, go to **Window > Show View** (or **hold Alt, then W, then S**) and choose the view you want to open. For example, to show the **Elements** view, you can **hold Alt, then W, then S, then E**.
4. When you are done using the side view, go to the **Window** menu and select **Hide current view** (or **hold Alt, then W, then H**) to hide the side view and return the focus to the main editing area.

Hints for the Visually Impaired

Here are a few hints for using if you are visually impaired:

- The top main menu contains actions to open, save, and close documents, switch between open documents, or switch between the various editing modes for XML documents that are already open. All actions in the main menu bar should have mnemonics making it possible to memorize various shortcuts. For example, using the **alt-w-s-e** shortcut should open the **Window** menu, open the **Show view** submenu from it and show the **Elements** view,
 - The **File** menu contains actions to open, save, or close the currently edited XML document.
 - The **Edit** menu contains actions to undo/redo or cut/copy/paste content. They also have the usual shortcuts that can be used instead of directly invoking the actions from the menu.
 - The **Find** menu contains an action to show the **Find/Replace** dialog box. Sometimes the **JAWS** narrator overloads the **CTRL+F** shortcut and presents its own find/replace window but the **Find/Replace** dialog box provides the ability to perform complex find/replace operations in the open file.
 - In the **Options** menu, you have access to the **Preferences** dialog box that contains global application settings and access to the **Menu Shortcut Keys** table where you can configure shortcuts for the most commonly used actions.
 - The **Window** menu includes actions to switch between open XML documents. Also, you can use the **Show view** submenu to open a particular side view and move the focus to that view.
- An open XML document can be edited with accessibility support either in the **Text** editing mode (where the XML tags are accessible in the edited content) or in the visual **Author** editing mode (where the XML tags are hidden and only the text content is shown). You can switch between these editing modes by using the **Document > Edit Mode** menu.
- **Text** mode provides access to the entire source document with all of its **XML** content, just like you have in any text editing application.

Pressing the **≤** key will present a list of available XML elements. If you do not want to choose from the list whenever you want to insert an XML element, you have two choices:

- After the list of available XML elements is shown, you can press the **ESC** key to close it and continue to manually insert the XML tag.
- You can disable the content completion list from the **Options > Preferences > Editor / Content Completion** page by deselecting **Enable Content Completion**. After the content completion is disabled, you can force it to be displayed by using the **Ctrl+Space** keyboard shortcut.

In addition, using the **Window > Show view** submenu, you can change focus to the **Attributes**, **Elements**, or **Outline** view. The **Attributes** view presents the existing and possible attributes that can be inserted in an XML tag. The **Elements** view shows you the list of XML elements that can be inserted at the cursor position (also, pressing **F2** on a selected element presents its annotation). The **Outline** view shows the current path in the XML structure.

- **Author** mode is useful for reviewing written XML content because it has support for change tracking and for adding comments. Editing in the **Author** visual editing mode, you have access to only the text content in the XML document.

Pressing **Shift+F2** will read the current element context where the cursor is located. Pressing **Ctrl+Shift+F3** will read the current element context and the entire path in the XML structure where the cursor is located. You can also use the **Outline** view to better understand the XML structure.

In the **Author** editing mode, you can also use the **Attributes** and **Elements** views similar to using them in the **Text** editing mode. Pressing **Enter** in the **Author** visual editing mode can also be used to present a list of allowed elements at the current position.

Screen Reader Software (macOS)

On **macOS**, the application can be used with **VoiceOver** but is not rigorously tested with it. Because of processing limitations of the **VoiceOver** application, various limitations may be encountered. To avoid blocking the application, when tree-structure user interface controls are used (e.g. the **Project** or **Outline** view), if a node in the tree contains more than 500 child nodes, only the first 500 child nodes are accessible to the screen reader.

VPAT Accessibility Conformance Report

A Voluntary Product Accessibility Template (VPAT) is a document that explains how information and communication technology (ICT) products such as software, hardware, electronic content, and support documentation meet (conform to) the [Revised 508 Standards](#) for IT accessibility. VPAT documents help Federal agency contracting officials and government buyers to assess ICT for accessibility when doing market research and evaluating proposals.

This document provides information about how addresses the accessibility requirements defined in the international standards.

International Edition

VPAT[®] Version 2.3 – April 2019

Name of Product/Version

Product Description

is a cross-platform application designed to accommodate all of your XML editing, authoring, developing, and publishing needs.

Date

November 2025

Contact Information

support@oxygenxml.com

Notes

has been designed and enhanced to adhere to the [U.S. Government Section 508 accessibility standards](#) and the [Web Content Accessibility Guidelines \(WCAG\)](#). For details, see [Accessibility](#).

Evaluation Methods Used:

The following applications were used for testing :

- NVDA assistive technology
- JAWS assistive technology

Applicable Standards/Guidelines

This report covers the degree of conformance for the following accessibility standards/guidelines:

Standard/Guideline	Included In Report
Web Content Accessibility Guidelines 2.0	Level A - Yes Level AA - Yes Level AAA - No
Web Content Accessibility Guidelines 2.1	Level A - Yes Level AA - Yes Level AAA - No
Revised Section 508 standards published January 18, 2017 and corrected January 22, 2018	Yes
EN 301 549 Accessibility requirements suitable for public procurement of ICT products and services in Europe - V2.1.2 (2018-08)	No

Terms

The terms used in the Conformance Level information are defined as follows:

- **Supports:** The functionality of the product has at least one method that meets the criterion without known defects or meets with equivalent facilitation.
- **Partially Supports:** Some functionality of the product does not meet the criterion.
- **Does Not Support:** The majority of product functionality does not meet the criterion.
- **Not Applicable:** The criterion is not relevant to the product.
- **Not Evaluated:** The product has not been evaluated against the criterion. This can be used only in WCAG 2.0 Level AAA.

WCAG 2.x Report

Tables 1 and 2 also document conformance with:

Revised Section 508: Chapter 5 – 501.1 Scope, 504.2 Content Creation or Editing, and Chapter 6 – 602.3 Electronic Support Documentation.

Note: When reporting on conformance with the WCAG 2.x Success Criteria, they are scoped for full pages, complete processes, and accessibility-supported ways of using technology as documented in the [WCAG 2.0 Conformance Requirements](#).

Table 1: Success Criteria, Level A

Criteria	Conformance Level	Remarks and Explanations
1.1.1 Non-text Content (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	Text alternatives are provided for non-text content.

Criteria	Conformance Level	Remarks and Explanations
<u>1.2.1 Audio-only and Video-only (Prerecorded)</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Not Applicable	The product does not play audio and video content to end users.
<u>1.2.2 Captions (Prerecorded)</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Not Applicable	The product does not provide pre-recorded media that requires captions.
<u>1.2.3 Audio Description or Media Alternative (Prerecorded)</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Not Applicable	The product does not provide pre-recorded media that requires alternate descriptions.
<u>1.3.1 Info and Relationships</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Partially Supports	Information, structure, and relationships conveyed through presentation can be programmatically determined or are available in text, with exceptions that include: • Grid editing mode. • Schema Design editing mode. • The editing of profiling attributes using the Edit profiling attributes and Insert/Edit Topic Reference dialog boxes. • The editing of a DITA map in the Author editing mode.
<u>1.3.2 Meaningful Sequence</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	The product presents content in a meaningful sequence. Authors should use Unicode right-to-left mark (RLM) or left-to-right mark (LRM) to mix text direction inline.

Criteria	Conformance Level	Remarks and Explanations
<u>1.3.3 Sensory Characteristics</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	The product provides textual identification for understanding and operating content.
<u>1.4.1 Use of Color</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	Color is not used as the only visual means of conveying information, indicating an action, prompting a response, or distinguishing a visual element.
<u>1.4.2 Audio Control</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Not Applicable	There is no sound that plays automatically by default.
<u>2.1.1 Keyboard</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Partially Supports	Most of the content is operable through a keyboard interface, with exceptions that include: • Some toolbars in the application not being accessible via a keyboard. • Combo boxes and buttons located inside the table from the dialog box used to create or edit a validation scenario.
<u>2.1.2 No Keyboard Trap</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Partially Supports	The product does not usually have user interface elements that trap the keyboard focus. Exceptions include some trees located in side views and dialog boxes.
<u>2.1.4 Character Key Shortcuts</u> (Level A 2.1 only) Also applies to: Revised Section 508 – Does not apply	Not Applicable	The product does not include character key shortcuts.

Criteria	Conformance Level	Remarks and Explanations
<u>2.2.1 Timing Adjustable</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Not Applicable	The product does not include time limits.
<u>2.2.2 Pause, Stop, Hide</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	Side views update their content automatically as a result of the user interaction with the open documents. They can be hidden or this functionality can be inhibited. The product does not include other elements that automatically move, blink, or scroll.
<u>2.3.1 Three Flashes or Below Threshold</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	The product does not have content that flashes more than three times in any one second.
<u>2.4.1 Bypass Blocks</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) – Does not apply to non-web software • 504.2 (Authoring Tool) • 602.3 (Support Docs) – Does not apply to non-web docs	Not Applicable	The application does not contain blocks of repeated content.
<u>2.4.2 Page Titled</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	Each side view and dialog box in the application has a title.

Criteria	Conformance Level	Remarks and Explanations
<u>2.4.3 Focus Order</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	Focusable components receive focus in an order that preserves meaning and operability.
<u>2.4.4 Link Purpose (In Context)</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	The purpose of each link can be determined from the link text alone or from the link text together with its programmatically-determined link context.
<u>2.5.1 Pointer Gestures</u> (Level A 2.1 only) Also applies to: Revised Section 508 – Does not apply	Not Applicable	The product does not have functionality that requires multi-point or path-based gestures.
<u>2.5.2 Pointer Cancellation</u> (Level A 2.1 only) Also applies to: Revised Section 508 – Does not apply	Partially Supports	Almost all pointer operations in the product are activated on Up events. Exceptions may include selection changes in the dialog box for new files and in the side views.
<u>2.5.3 Label in Name</u> (Level A 2.1 only) Also applies to: Revised Section 508 – Does not apply	Supports	The names of the user interface components contain the text that is presented visually.
<u>2.5.4 Motion Actuation</u> (Level A 2.1 only) Also applies to: Revised Section 508 – Does not apply	Not Applicable	The product does not contain functionality that can be operated by device or user motion.
<u>3.1.1 Language of Page</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Does Not Support	The product does not report the default language for each open document.

Criteria	Conformance Level	Remarks and Explanations
<u>3.2.1 On Focus</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	No changes of context occur when any component receives focus.
<u>3.2.2 On Input</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	Changing the setting of any user interface component does not automatically cause a change of context.
<u>3.3.1 Error Identification</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	Product shows error messages when user input is invalid.
<u>3.3.2 Labels or Instructions</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Partially Supports	Most input areas in the product provide labels and instructions. Exceptions include the content completion windows in the Text , Grid , Author , and schema Design modes.
<u>4.1.1 Parsing</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	All labels presenting HTML content in the product have valid HTML content.
<u>4.1.2 Name, Role, Value</u> (Level A) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Partially Supports	Almost all visual components in the product have identifiable names and roles with exceptions that include: • Grid editing mode. • Schema Design editing mode.

Table 2: Success Criteria, Level AA

Criteria	Conformance Level	Remarks and Explanations
<u>1.2.4 Captions (Live)</u> (Level AA) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Not Applicable	The product does not contain live audio content.
<u>1.2.5 Audio Description (Prerecorded)</u> (Level AA) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Not Applicable	The product does not provide prerecorded video content that requires audio description.
<u>1.3.4 Orientation</u> (Level AA 2.1 only) Also applies to: Revised Section 508 – Does not apply	Supports	Content does not restrict its view and operation to a single display orientation.
<u>1.3.5 Identify Input Purpose</u> (Level AA 2.1 only) Also applies to: Revised Section 508 – Does not apply	Not Applicable	The content does not contain input fields that collect information about the user.
<u>1.4.3 Contrast (Minimum)</u> (Level AA) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Partially Supports	The product has sufficient contrast between the foreground and background colors, with few exceptions, including: • Change tracking content in the document for some of the author colors. • Change tracking content in some review panel items, when the item is selected. • Placeholders shown in empty elements. • Comments marked as done.
<u>1.4.4 Resize text</u> (Level AA) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Partially Supports	In most situations, text in the main editing area, side views, and dialog boxes can be resized to reasonable dimensions by increasing the font without loss of content or functionality and without using assistive technology. Sizes of certain text components cannot be increased.

Criteria	Conformance Level	Remarks and Explanations
1.4.5 Images of Text (Level AA) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	The few buttons with icons containing text characters also provide text alternatives.
1.4.10 Reflow (Level AA 2.1 only) Also applies to: Revised Section 508 – Does not apply	Partially Supports	The majority of the user interface controls can be presented without loss of information or functionality, and without requiring scrolling in two dimensions. In the editor area, the text will re-flow depending on the editor mode (Text/ Grid/Author/Design) and both horizontal and vertical scrolls may be needed.
1.4.11 Non-text Contrast (Level AA 2.1 only) Also applies to: Revised Section 508 – Does not apply	Supports	User interface components and states have sufficient contrast against adjacent colors.
1.4.12 Text Spacing (Level AA 2.1 only) Also applies to: Revised Section 508 – Does not apply	Supports	There is no loss of content or functionality occurs by setting line height (line spacing), spacing following paragraphs, letter spacing, and word spacing.
1.4.13 Content on Hover or Focus (Level AA 2.1 only) Also applies to: Revised Section 508 – Does not apply	Partially Supports	The tooltips for most user interface simple components (buttons) are not hoverable and persistent.
2.4.5 Multiple Ways (Level AA) Also applies to: Revised Section 508 • 501 (Web)(Software) – Does not apply to non-web software • 504.2 (Authoring Tool) • 602.3 (Support Docs) – Does not apply to non-web docs	Supports	There are multiple ways to navigate between the open documents.

Criteria	Conformance Level	Remarks and Explanations
2.4.6 Headings and Labels (Level AA) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	Headings and labels describe the topic or purpose.
2.4.7 Focus Visible (Level AA) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Partially Supports	The product has a visible indication of focus for almost all user interface controls (buttons, text fields, combo boxes, etc.) Exceptions include: • Combo boxes located in the DITA Maps Manager and SharePoint Browser view. • Filtering buttons located in the Templates tab from the New/Edit scenario and the DITA Reusable Components view. • Tab buttons located in the Insert/Edit Topic Reference dialog box. • Toggle buttons in their active state.
3.1.2 Language of Parts (Level AA) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Does Not Support	The language of parts is not specified.
3.2.3 Consistent Navigation (Level AA) Also applies to: Revised Section 508 • 501 (Web)(Software) – Does not apply to non-web software • 504.2 (Authoring Tool) • 602.3 (Support Docs) – Does not apply to non-web docs	Supports	The product has a consistent navigation mechanism.

Criteria	Conformance Level	Remarks and Explanations
<u>3.2.4 Consistent Identification</u> (Level AA) Also applies to: Revised Section 508 • 501 (Web)(Software) – Does not apply to non-web software • 504.2 (Authoring Tool) • 602.3 (Support Docs) – Does not apply to non-web docs	Supports	The product components are identified consistently.
<u>3.3.3 Error Suggestion</u> (Level AA) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Supports	The product provides suggestions for the input error if there are any available.
<u>3.3.4 Error Prevention (Legal, Financial, Data)</u> (Level AA) Also applies to: Revised Section 508 • 501 (Web)(Software) • 504.2 (Authoring Tool) • 602.3 (Support Docs)	Not Applicable	The product does not process legal commitments or financial transactions or modify user-controllable data.
<u>4.1.3 Status Messages</u> (Level AA 2.1 only) Also applies to: Revised Section 508 – Does not apply	Not Applicable	The product does not contain status messages as defined by this criterion.

Table 3: Success Criteria, Level AAA

Criteria	Conformance Level	Remarks and Explanations
<u>1.2.6 Sign Language (Prerecorded)</u> (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
<u>1.2.7 Extended Audio Description (Prerecorded)</u> (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
<u>1.2.8 Media Alternative (Prerecorded)</u> (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	

Criteria	Conformance Level	Remarks and Explanations
1.2.9 Audio-only (Live) (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
1.3.6 Identify Purpose (Level AAA 2.1 only) Revised Section 508 – Does not apply	Not Evaluated	
1.4.6 Contrast Enhanced (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
1.4.7 Low or No Background Audio (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
1.4.8 Visual Presentation (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
1.4.9 Images of Text (No Exception) Control (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
2.1.3 Keyboard (No Exception) (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
2.2.3 No Timing (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
2.2.4 Interruptions (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
2.2.5 Re-authenticating (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
2.2.6 Timeouts (Level AAA 2.1 only) Revised Section 508 – Does not apply	Not Evaluated	
2.3.2 Three Flashes (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
2.3.3 Animation from Interactions (Level AAA 2.1 only) Revised Section 508 – Does not apply	Not Evaluated	

Criteria	Conformance Level	Remarks and Explanations
2.4.8 Location (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
2.4.9 Link Purpose (Link Only) (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
2.4.10 Section Headings (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
2.5.5 Target Size (Level AAA 2.1 only) Revised Section 508 – Does not apply	Not Evaluated	
2.5.6 Concurrent Input Mechanisms (Level AAA 2.1 only) Revised Section 508 – Does not apply	Not Evaluated	
3.1.3 Unusual Words (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
3.1.4 Abbreviations (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
3.1.5 Reading Level (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
3.1.6 Pronunciation (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
3.2.5 Change on Request (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
3.3.5 Help (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	
3.3.6 Error Prevention (All) (Level AAA) Revised Section 508 – Does not apply	Not Evaluated	

Revised Section 508 Report

N/A

Chapter 3: Functional Performance Criteria (FPC)

Criteria	Conformance Level	Remarks and Explanations
302.1 Without Vision	Partially Supports	Much of the product is operable without vision. As noted in 1.3.1 Info and Relationships , some structural and hierarchical information is not communicated to screen readers. Also, as noted in 2.1.1 Keyboard , some components are not accessible via keyboard.
302.2 With Limited Vision	Supports	The product is operable with limited vision.
302.3 Without Perception of Color	Supports	Color is not used as the only visual means of conveying information, indicating an action, prompting a response, or distinguishing a visual element.
302.4 Without Hearing	Supports	The product does not require hearing for use.
302.5 With Limited Hearing	Supports	The product does not require hearing for use.
302.6 Without Speech	Supports	The product does not require speech for use.
302.7 With Limited Manipulation	Partially Supports	Most content of the product is operable for users with limited manipulation who rely on keyboard access. As noted in 2.1.1 Keyboard , some components are not accessible via keyboard.
302.8 With Limited Reach and Strength	Supports	The product is functional with limited reach and limited strength. It supports operating system tools such as <i>StickyKeys</i> and <i>FilterKeys</i> .
302.9 With Limited Language, Cognitive, and Learning Abilities	Partially Supports	The product is operable by users with limited language, cognitive, and learning abilities. To accommodate users with limited cognition, the UI provides icons, text, or a combination of both, for controls. It provides the ability to change the interface language to 6 languages.

Chapter 4: Hardware

Notes: Not Applicable - is not a hardware product.

Chapter 5: Software

501 General

Criteria	Conformance Level	Remarks and Explanations
501.1 Scope – Incorporation of WCAG 2.0 AA	See WCAG 2.x section	See information in WCAG section

502 Interoperability with Assistive Technology

Criteria	Conformance Level	Remarks and Explanations
502.2.1 User Control of Accessibility Features	Not Applicable	The product is not platform software.
502.2.2 No Disruption of Accessibility Features	Supports	The product does not disrupt platform features that are defined in the platform documentation as accessibility features.

502.3 Accessibility Services

Criteria	Conformance Level	Remarks and Explanations
502.3.1 Object Information	Partially Supports	Most of the object information can be programmatically determined. As noted in 1.3.1 Info and Relationships , the content from the Grid and schema Design editing modes is not exposed programmatically.
502.3.2 Modification of Object Information	Partially Supports	States and properties that can be set by the user can be set programmatically. As noted in 1.3.1 Info and Relationships , there are few exceptions.
502.3.3 Row, Column, and Headers	Partially Supports	The insert table feature in the editing area of the product does not communicate information about the headers. Row and column information is presented in a way that can be used by assistive technology.
502.3.4 Values	Partially Supports	The current values of an object can be programmatically determined. As noted in 1.3.1 Info and Relationships , there are few exceptions. The content from the Grid and schema Design editing modes is not exposed programmatically.
502.3.5 Modification of Values	Partially Supports	Values that can be set by the user are capable of being set programmatically. As noted in 1.3.1 Info and Relationships , there are few exceptions. The content from the Grid and schema Design editing modes cannot be set programmatically.

Criteria	Conformance Level	Remarks and Explanations
502.3.6 Label Relationships	Partially Supports	Information, structure, and relationships conveyed through presentation can be programmatically determined or are available in text. As noted in 1.3.1 Info and Relationships , there are few exceptions.
502.3.7 Hierarchical Relationships	Partially Supports	The hierarchical relationships are, in general, accessible programmatically, but as noted in 1.3.1 Info and Relationships , there are few exceptions.
502.3.8 Text	Partially Supports	The content of text objects, text attributes, and the boundary of text rendered to the screen is programmatically determinable. As noted in 1.3.1 Info and Relationships , there are few exceptions, including the text from the Grid and schema Design modes.
502.3.9 Modification of Text	Partially Supports	Text can be set programmatically, including through assistive technology. Text in the editor can be modified using the keyboard. As noted in 1.3.1 Info and Relationships , the text content from the Grid and schema Design editing modes cannot be accessed programmatically.
502.3.10 List of Actions	Supports	Actions that can be executed on an object can be determined programmatically from the context menu or content completion menu.
502.3.11 Actions on Objects	Supports	Actions on objects can performed by users, including those using assistive technologies.
502.3.12 Focus Cursor	Partially Supports	The focus location, selection state, and text insertion point information can be determined programmatically. As noted in 1.3.1 Info and Relationships , the content from the Grid and schema Design editing modes is not exposed programmatically.
502.3.13 Modification of Focus Cursor	Partially Supports	The focus location, selection state and text insertion can be controlled programmatically or through the keyboard. As noted in 1.3.1 Info and Relationships , the content from the Grid and schema Design editing modes cannot be accessed programmatically.

Criteria	Conformance Level	Remarks and Explanations
502.3.14 Event Notification	Supports	The changes in states and other properties are communicated through notifications that are communicated to assistive technology.
502.4 Platform Accessibility Features	Not Applicable	This product is not platform software.

503 Applications

Criteria	Conformance Level	Remarks and Explanations
503.2 User Preferences	Partially Supports	The product permits some of the user preferences from platform settings. Exceptions include • Cursor thickness is not modified in Text, Author, and Grid editing modes. • Some elements may not use the platform font size. The product provides custom preferences for changing the color, font type, and font size.
503.3 Alternative User Interfaces	Not Applicable	The application does not provide an alternative user interface that functions as assistive technology.

503.4 User Controls for Captions and Audio Description

Criteria	Conformance Level	Remarks and Explanations
503.4.1 Caption Controls	Not Applicable	The product does not provide controls for volume adjustment.
503.4.2 Audio Description Controls	Not Applicable	The product does not provide controls for program selection.

504 Authoring Tools

Criteria	Conformance Level	Remarks and Explanations
504.2 Content Creation or Editing (if not authoring tool, enter “not applicable”)	See the WCAG 2.x section	See information in WCAG section
504.2.1 Preservation of Information Provided for Accessibility in Format Conversion	Partially Supports	For the main XML vocabulary supported in the application (DITA), the accessibility information is preserved in the generated main formats (WebHelp, PDF).
504.2.2 PDF Export	Supports	The product is capable of publishing PDF files that conform to PDF/UA-1.

Criteria	Conformance Level	Remarks and Explanations
504.3 Prompts	Partially Supports	For DITA documents, there is an optional Schematron that performs accessibility checks on the content and prompts the authors whenever it detects errors.
504.4 Templates	Does Not Support	The product does provide several templates. However, these templates offer only minimal structure and do not mark content in ways that promote following the WCAG success criteria. The existing templates can be customized.

Chapter 6: Support Documentation and Services

601.1 Scope

602 Support Documentation

Criteria	Conformance Level	Remarks and Explanations
602.2 Accessibility and Compatibility Features	Partially Supports	The documentation of the product lists and explains the accessibility and compatibility features of the product.
602.3 Electronic Support Documentation	Partially Supports	The self-service documentation is generated with Oxygen XML WebHelp . You can find its VPAT statement here .
602.4 Alternate Formats for Non-Electronic Support Documentation	Not Applicable	Documentation is not provided in non-electronic formats.

603 Support Services

Criteria	Conformance Level	Remarks and Explanations
603.2 Information on Accessibility and Compatibility Features	Supports	The support services cover the accessibility features.
603.3 Accommodation of Communication Needs	Supports	Support is provided over a variety of channels including email and phone.

Legal Disclaimer

This report describes ability to support the stated VPAT Standards/Guidelines, subject to Syncro Soft's interpretation of the same. This accessibility report is provided for informational purposes only, and the contents hereof are subject to change without notice. SYNCRO SOFT MAKES NO WARRANTIES, EXPRESS OR IMPLIED, IN THIS DOCUMENT. For more information regarding the accessibility status, please contact us at sales@oxygenxml.com.

© 2020 Syncro Soft SRL. All rights reserved.

Index

D

DITA

Getting started [20](#)

Your first DITA document [20](#)

G

Getting familiar with the interface [4](#)

Getting Started [3](#)

Getting Started with DITA [20](#)

Getting Started with Oxygen

Help [33](#)

Interface [4](#)

Resources to help you with Oxygen [14](#)

Shortcut keys [38](#)

Supported document types [13](#)

Your first XML document [15](#)

H

Help

Randomize XML text content [36](#)

Support related resources [33](#)

Using the Help menu [34](#)

N

New project [30](#)

P

Projects

Adding items to projects [30](#)

Creating new projects [30](#)

S

Shortcut Keys [38](#)

Y

Your first DITA document [20](#)