


# A simple ggplot2 example

`ggplot()` establishes coordinates.  
Takes a data frame as input.

```
ggplot(mpg, aes(displ, hwy, colour = class)) +  
  geom_point()
```

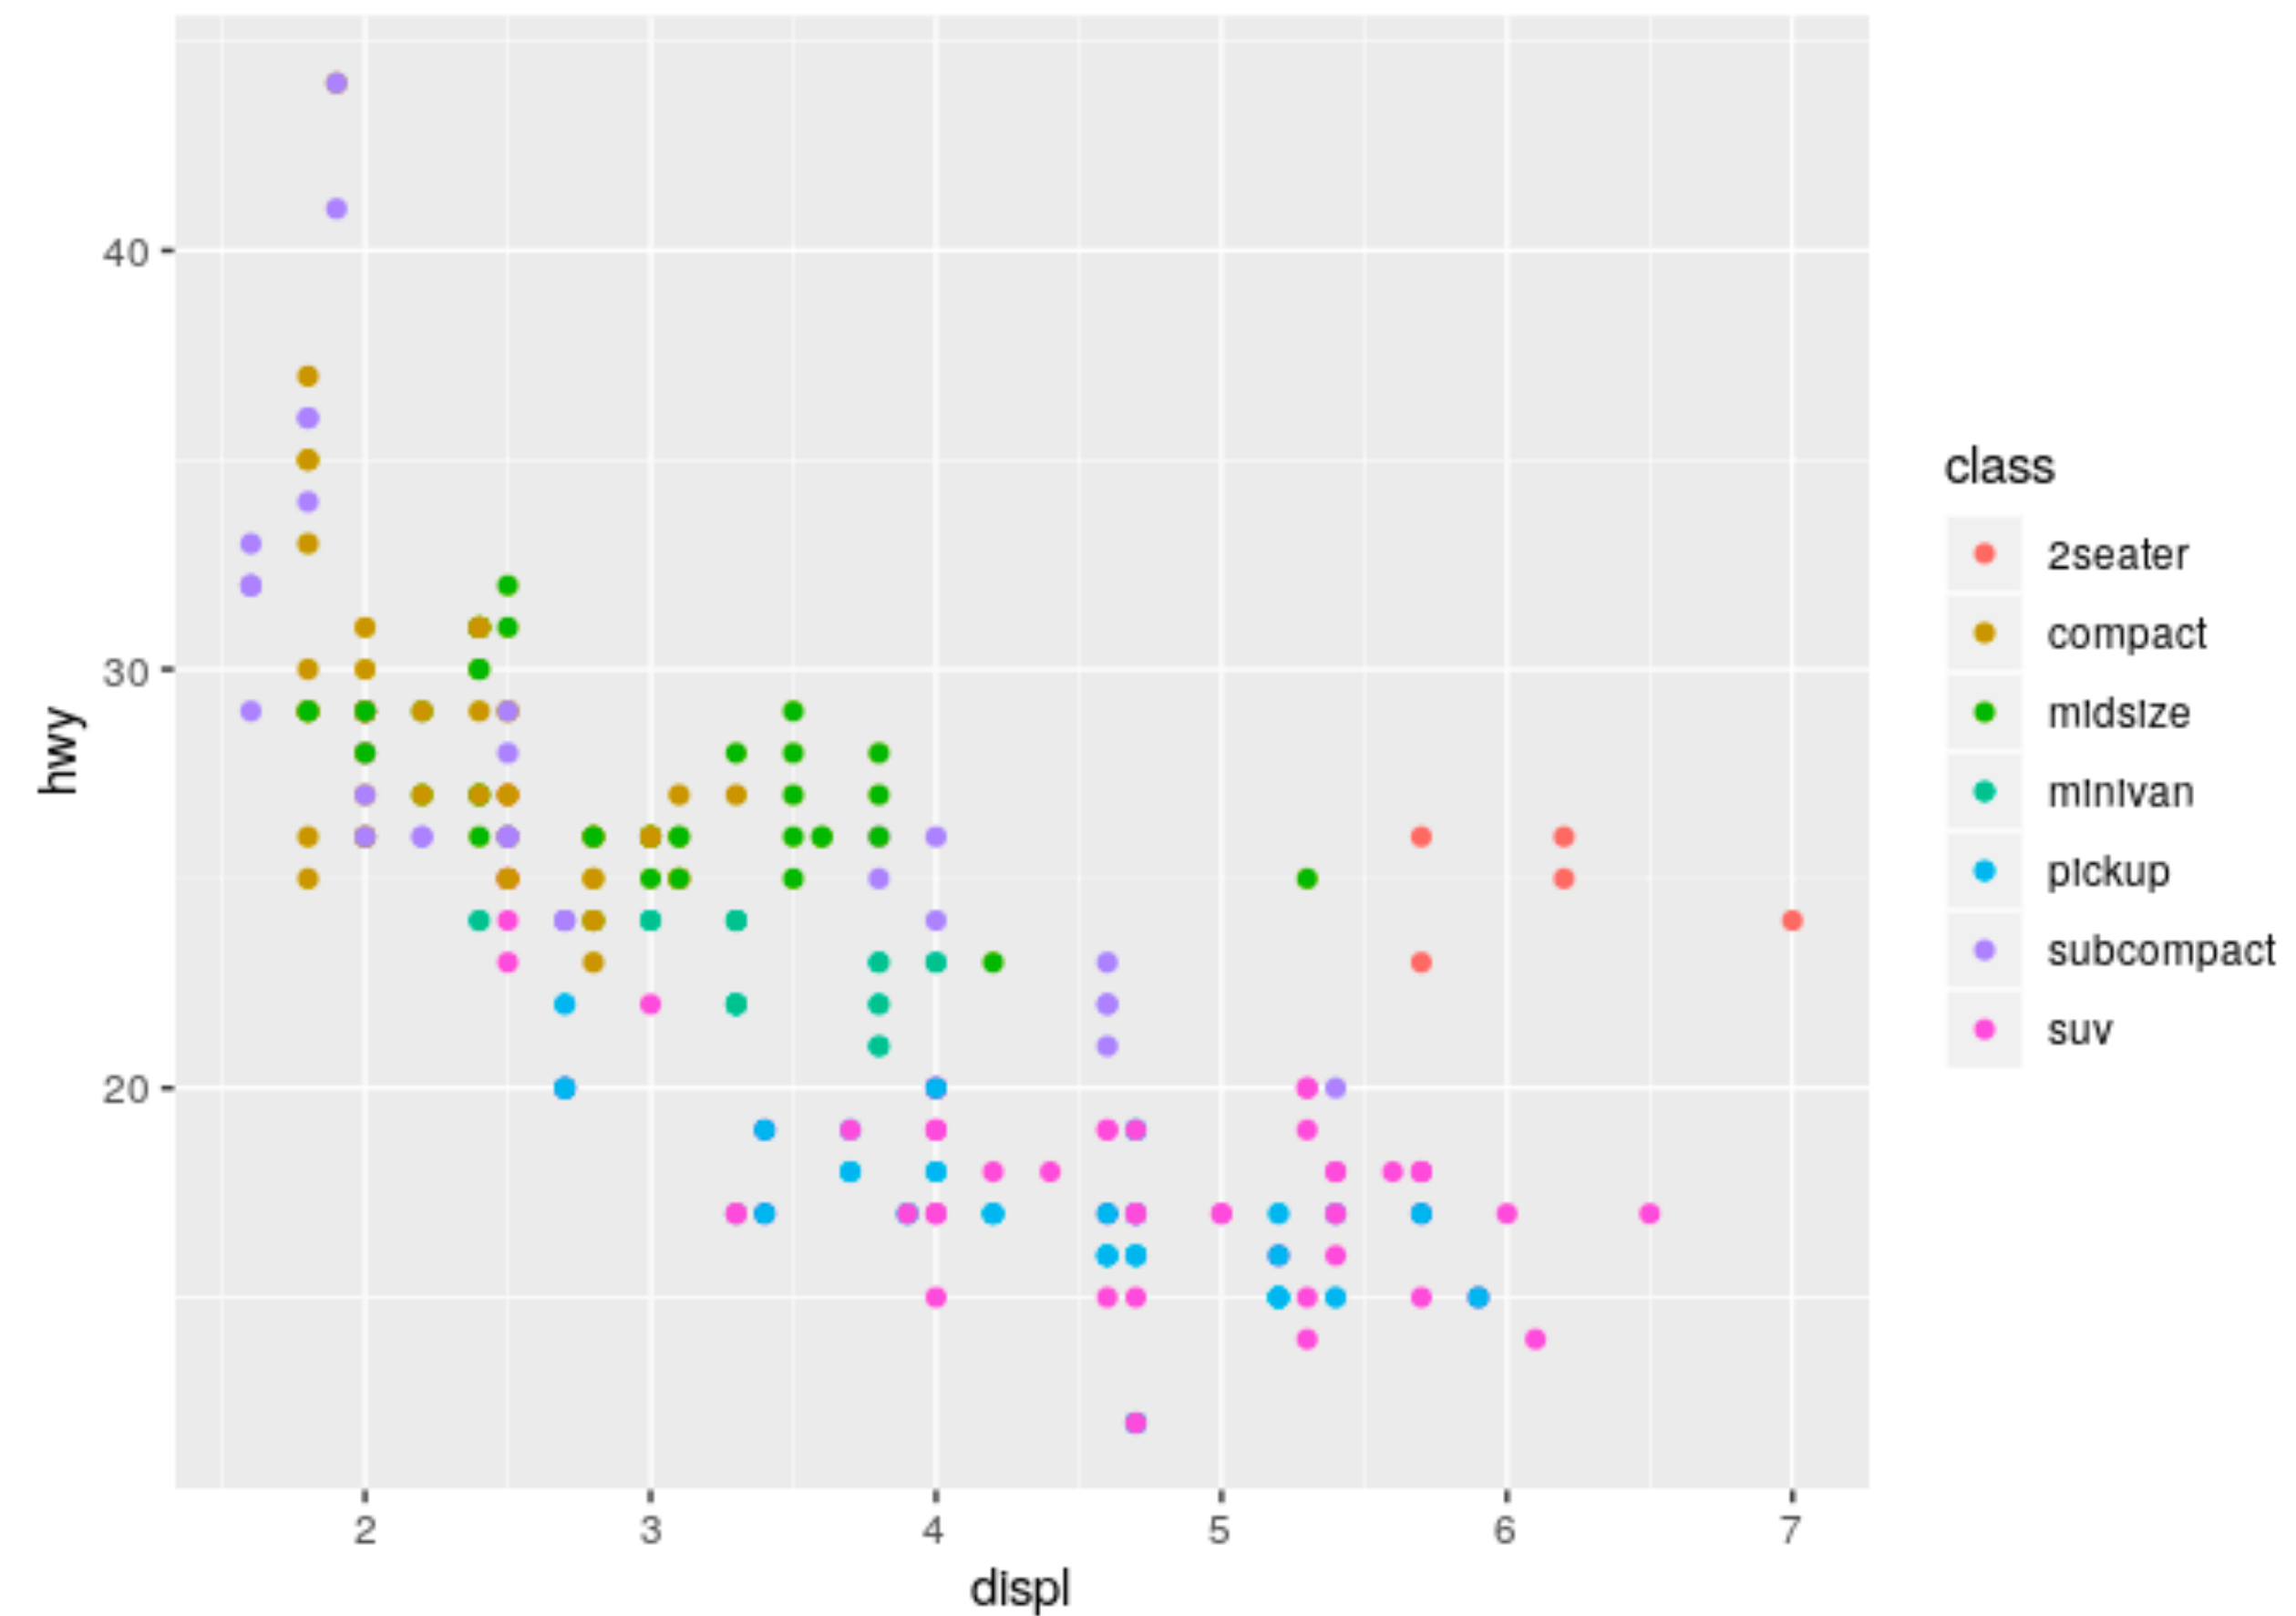

# A simple ggplot2 example

```
ggplot(mpg, aes(displ, hwy, colour = class)) +  
  geom_point()
```

`aes ( )` maps variables in the data frame  
to *aesthetics* in the plot

