



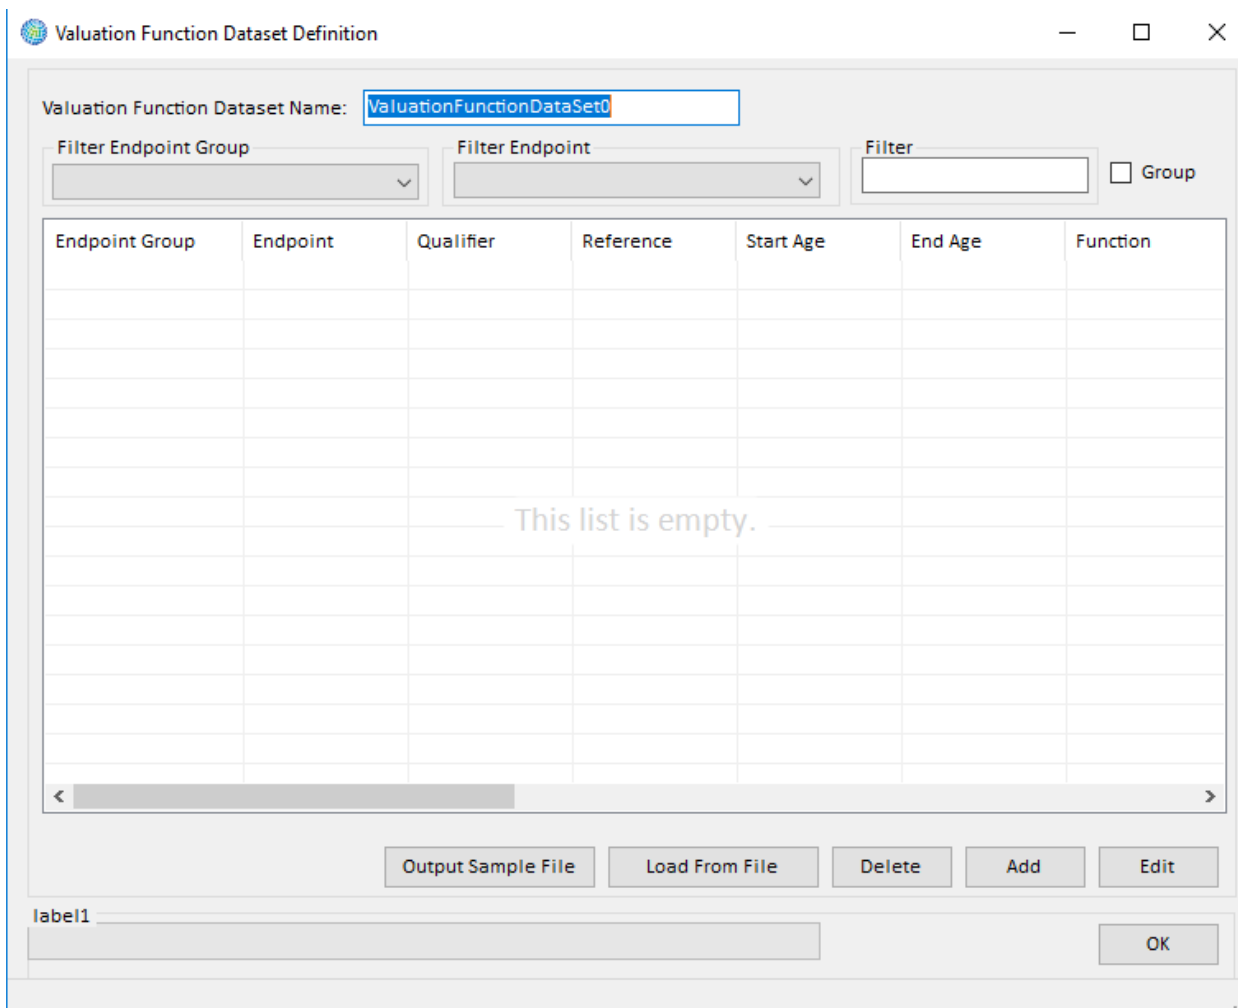

You may load valuation data with an externally-created data file, or you may add individual valuation functions from within BenMAP-CE. To import valuation functions, click on the **Load From File** button. This will bring you to the **Load Valuation Function Dataset** window.

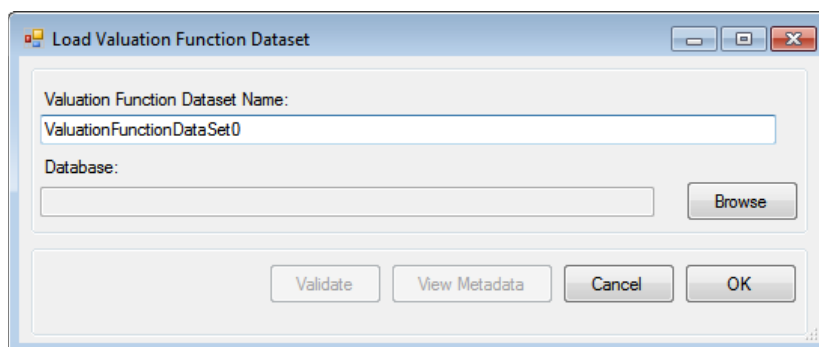

In the **Load Valuation Function Dataset** window provide a name for the valuation function dataset. Use the **Browse** button to choose the valuation database and click **Open**. Once again, you can click the **Validate** button before the file is imported. In

addition, you can create metadata, which includes references and descriptions of the file, by clicking on the **View Metadata** button. Click **OK** on the **Load Valuation Function Dataset** window. This will bring you back to the **Valuation Function Dataset Definition** window. Here you can view the valuation functions that you have in your database.

The columns within each of the list boxes can be rearranged in order to provide the most useful display. (Note that rearranging the columns is only for display and has no effect on the underlying Valuation Function dataset.) You can also change how you view the list by specifying a text string to **Filter** the records (e.g., Asthma), or create groupings of records by their Endpoint Group (click the **Group** option box).

Endpoint Group	Endpoint	Qualifier	Reference	Start Age	End Age	Function
Mortality	Mortality, All C...	VSL, based on 2...		0	99	A*B
Hospital Admissio...	HA, All Respira...	COI: med costs ...		0	99	A+B*((C)/(52*5))

In the **Valuation Function Dataset Definition** window, you can also edit the functions already existing in your dataset by highlighting a particular **Valuation Function** and then clicking the **Edit** button.

If the dataset is large, there are filters available to view a subset of the list by selecting a value from the **Filter Endpoint Group** and/or **Filter Endpoint** drop-down lists. When you are finished, click **OK**.

Valuation Function Definition

Endpoint Group: Hospital Admissions, Respirat Endpoint: HA, All Respiratory

A: 14999

A Description: mean hospital charge, 20005

A Distribution: None

A Parameter1: 0

A Parameter2: 0

B Constant Description: mean length of stay (LOS)

B Constant Value: 5.63

C Constant Description: Median national income

C Constant Value: 41525

D Constant Description:

D Constant Value: 0

Start Age: 0 End Age: 99

Qualifier: COL: med costs + wage loss

Reference:

Edit Function

Available Functions: ABS(x), EXP(x), LOG(x), POW(x,y), SQRT(x), ACOS(x), ASIN(x), ATAN(x)

Available Compiled Functions: AllGoodsIndex, A*AllGoodsIndex, A*MedicalCostIndex, A*B*AllGoodsIndex, A*B*C*AllGoodsIndex, A*MedicalCostIndex+B*Wag, A*EXP(-B*(13-C))*AllGoodsIndex

All Available Functions: A*AllGoodsIndex, A*B*AllGoodsIndex, A*MedicalCostIndex+B*Wag, A*MedicalCostIndex+B*((me, AllGoodsIndex, A*B*C*AllGoodsIndex

Available Variables: A, B, C, D, AllGoodsIndex, MedicalCostIndex, WageIndex, LagAdjustment

Available Setup Variables:

Function: $A+B*((C)/(52*5))$

Cancel OK

From the **Valuation Function Dataset Definition** window you can also manually define a new **Valuation Function**. Click the **Add** button to open the **Valuation Function Definition** window where you can then create a new **Valuation Function**. (See Appendix M: Function Editor for additional information about the syntax for developing functions with this editor.)

After defining the new **Valuation Function**, click **OK**. This will take you back to the **Valuation Function Dataset Definition** window. When you are finished, click **OK**.

This will return you to the **Manage Valuation Function Datasets** window. From this form you can **Add**, **Delete**, or **Edit** the available datasets. In addition, you can view or edit the previously created metadata for a file by selecting an **Available Dataset** and **Valuation Function** and then click the **View Metadata** button. When you are satisfied with the inputs, click **OK**. The **Modify Datasets** window will appear. Here in the **Valuation Function** datasets box you should see any updates to the **Valuation Function** dataset that you just made.

4.1.9.2 Format for Valuation Data

Table 4-14 presents the variables that can be used in **Valuation Datasets**.

Table 4-14. Valuation Dataset Variables

Field Name	Type	Required	Notes
Endpoint Group	Text	Yes	If this doesn't reference an already-defined Endpoint Group, one will be added.
Endpoint	Text	Yes	If this doesn't reference an already-defined Endpoint for the Endpoint Group, one will be added.
Qualifier	Text	No	Provides additional information to identify a particular valuation function.
Reference	Text	No	Bibliographic reference, included to identify the source in the economic literature.
Start Age	Integer	No	Specifies the low and high ages, inclusive. For example, Start Age of '0' and End Age of '1' includes infants through the first 12 months of life and all one-year old infants.
End Age	Integer	No	
Point Estimate	Numeric (double)	Yes	Central estimate of the unit value.
Function	Text	Yes	The functional form, interpreted (executed) by BenMAP-CE when running an analysis.
A Description	Text	No	Description of variable A.
A	Numeric (double)	No	Mean of the A distribution.
A Distribution	Text	No	If A has no distribution, any value is acceptable. Otherwise, should be one of: <i>Normal, Triangular, Poisson, Binomial, LogNormal, Uniform, Exponential, Geometric, Weibull, Gamma, Logistic, Beta, Pareto, Cauchy, Custom</i> .
A Parameter 1	Numeric (double)	No	Parameter 1 of the A distribution (meaning depends on the distribution - for <i>Normal</i> distributions this represents the standard deviation).
A Parameter 2	Numeric (double)	No	Parameter 2 of the A distribution (meaning depends on the distribution - for <i>Normal</i> distributions this is not required).
Constant Description	Text	No	Description of variables, B, C, and D.
Constant Value	Numeric (double)	No	A constant value (denoted by B, C, and/or D) which can be referenced by the Function.