


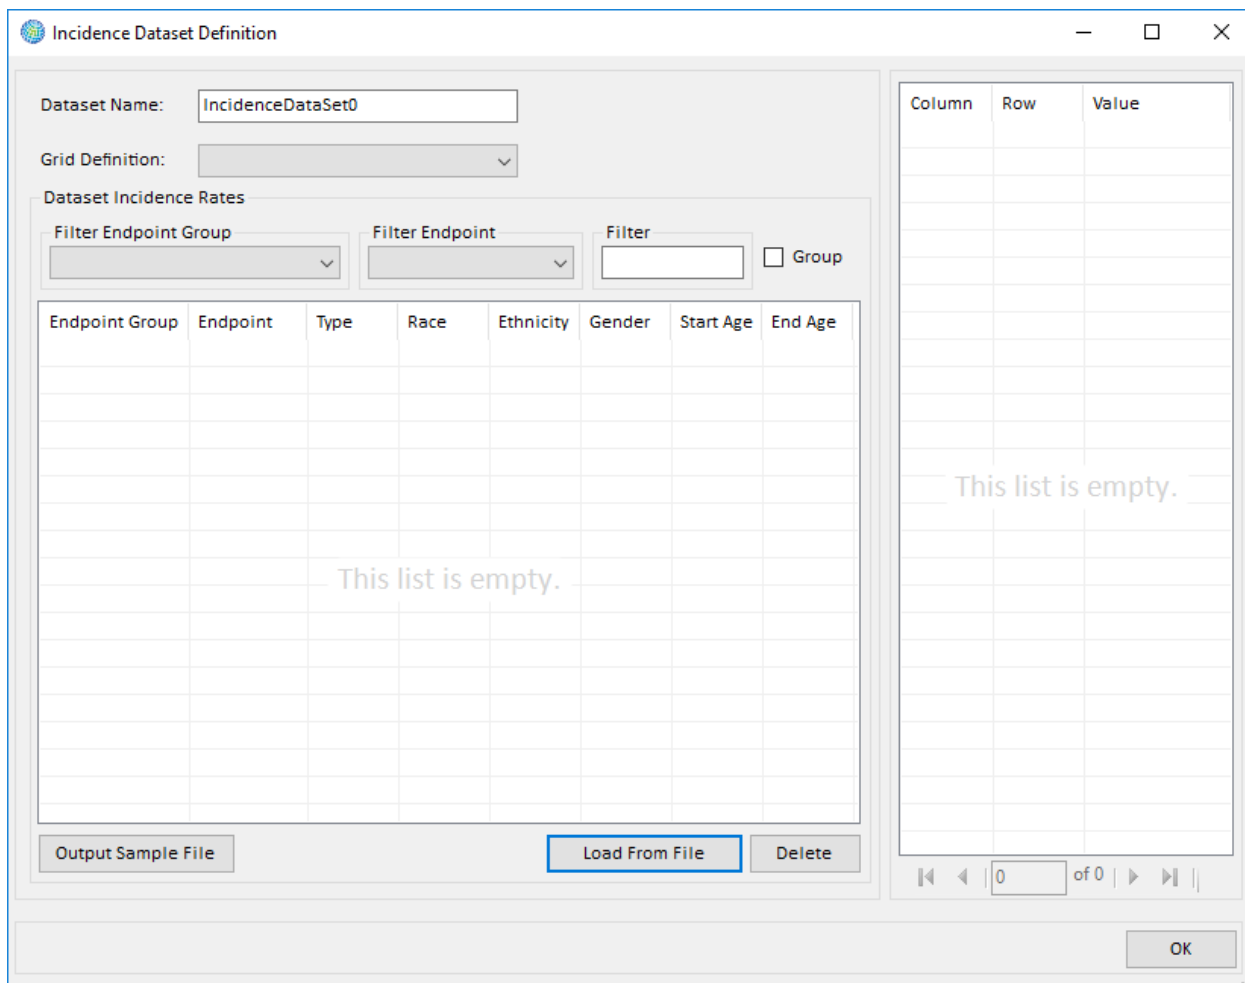


The dialog box is titled "Incidence Dataset Definition". It contains the following fields and controls:

- Dataset Name:** A text box containing "IncidenceDataSet0".
- Grid Definition:** A drop-down menu.
- Dataset Incidence Rates:** A section containing:
 - Filter Endpoint Group:** A drop-down menu.
 - Filter Endpoint:** A drop-down menu.
 - Filter:** A text box.
 - ☐ **Group**
- Table:** A table with 8 columns: Endpoint Group, Endpoint, Type, Race, Ethnicity, Gender, Start Age, End Age. The table is empty, with the text "This list is empty." centered in the body.
- Buttons:** "Output Sample File", "Load From File" (highlighted with a blue border), and "Delete".
- Footer:** An "OK" button.


On the right side of the dialog, there is a separate table with 3 columns: Column, Row, Value. This table is also empty, with the text "This list is empty." centered in the body.

NOTE: If you have multiple incidence or prevalence datasets that vary, for example, by year and grid definition, then use the name to provide a reference to the year and grid definition (e.g., "Mortality Incidence (2000)").


In the **Grid Definition** drop-down list choose the item that matches the grid definition used to develop the incidence/prevalence dataset. Note: The incidence and prevalence rate data must use the same column/row information as the matching grid definition. Click the **Load From File** button. Then click on the **Browse** button, to browse for the dataset file. (The format for the dataset is detailed in the next sub-section.)

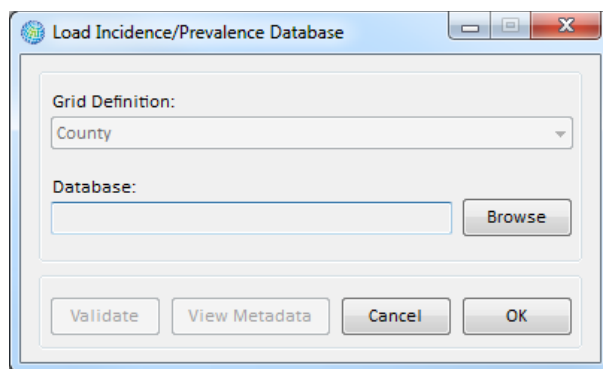

After locating the file, click **Open**. Click the **Validate** button before loading the data. BenMAP-CE's validation tool will review the file format (column names, required columns, and data types) and provide a report with any errors or warnings. You also have the option of adding metadata to the dataset. This is done by clicking the **View Metadata** button and adding any references or descriptions that you see fit. Click **OK** on the **Load Incidence/Prevalence Database** window to load the selected file. The **Incidence Dataset Definition** window will appear, displaying the rates in the data file that you just loaded.

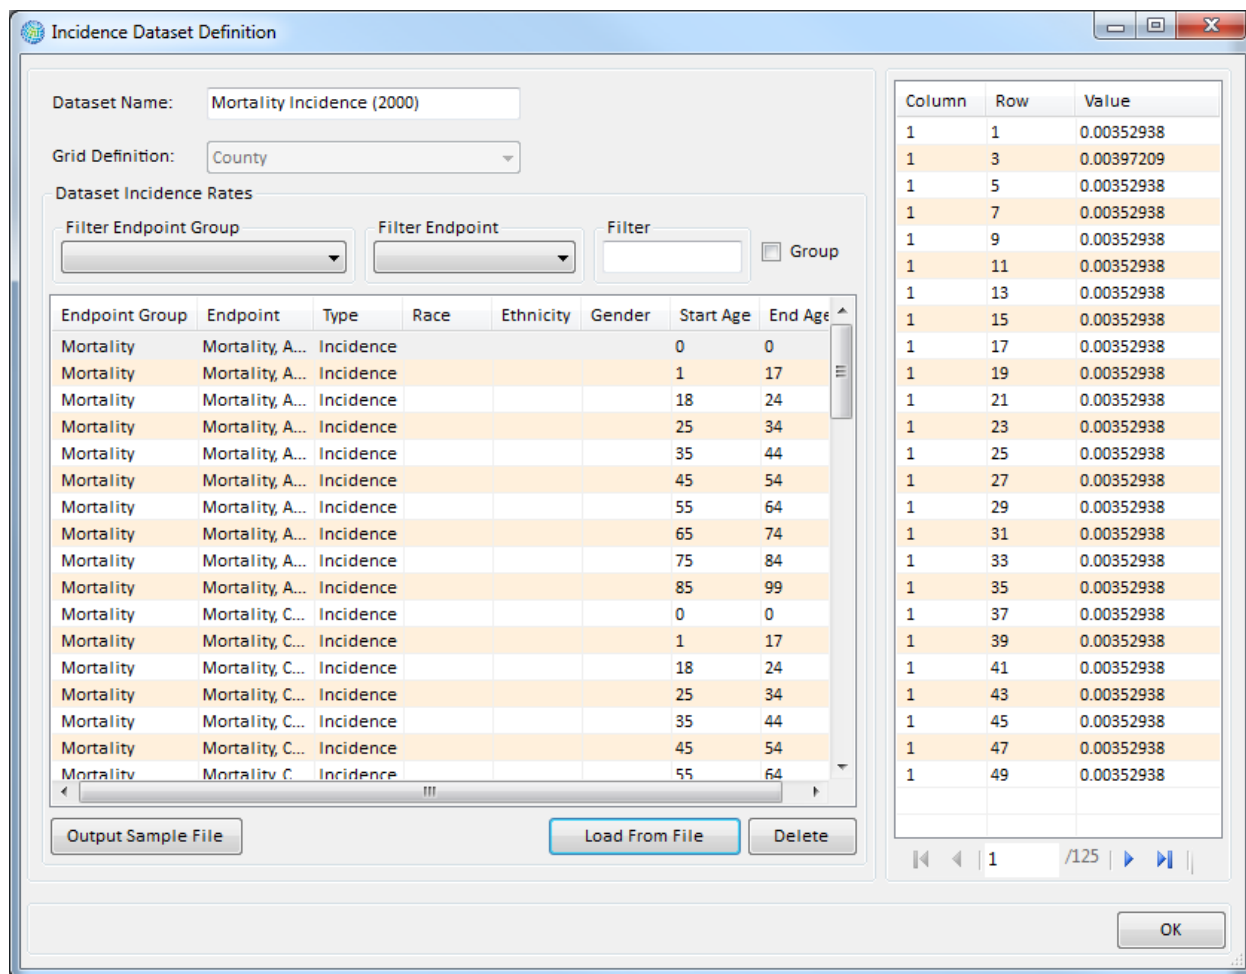

If the data look correct, click **OK**. This will return you to the **Manage Incidence Datasets** window. To view any metadata that was added, select an **Available Dataset** and a **Rate**, and click the **View Metadata** button. The user can view or edit the metadata of the imported files.

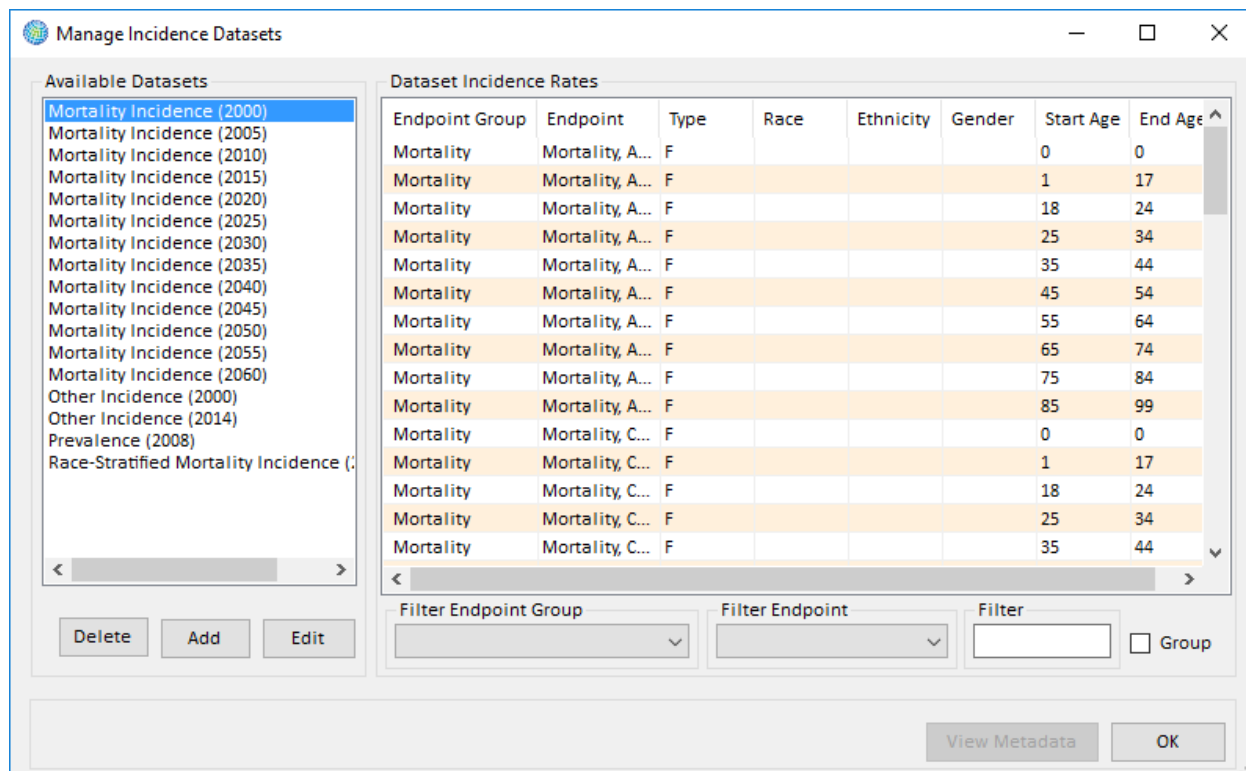

Follow the same procedure for any additional incidence/prevalence datasets that you want to add to the setup database. When you have finished adding data, click **OK** in the **Manage Incidence Datasets** window. The **Incidence/Prevalence Rates** box in the **Modify Datasets** window will show the datasets that you have entered.

Warning

In order to use a baseline incidence or prevalence rate data with a particular health impact function, the **Endpoint Group** and **Endpoint** of the baseline incidence or prevalence rate must match the **Endpoint Group** and **Endpoint** of the health impact function exactly.

4.1.4.2 Format for Incidence/Prevalence Data

Table 4-7a presents the variables that can be used in incidence and prevalence datasets, and Table 4-7b presents a sample dataset that follows this format.

Table 4-7a. Health Incidence and Prevalence Dataset Variables

Field Name	Type	Required	Notes
Endpoint Group	Text	Yes	If this does not reference an already defined Endpoint Group, one will be added.
Endpoint	Text	Yes	If this does not reference an already defined Endpoint for the Endpoint Group, one will be added.
Race	Text	No	Should either be blank (signifying All Races) or reference a defined Race, such as "Black" (from one or more Population Configurations).
Ethnicity	Text	No	Should either be blank (signifying All Ethnicities) or reference a defined Ethnicity, such as "Hispanic" (from one or more Population Configurations).
Gender	Text	No	Should either be blank (signifying All Genders) or reference a defined Gender (from one or more Population Configurations).
Start Age	Integer	Yes	Specifies the low and high ages, inclusive. For example, Start Age of "0" and End Age of "1" include infants through the first 12 months of life and all one-year old infants.
End Age	Integer	Yes	
Column	Integer	Yes	The Column and the Row link the incidence/prevalence data with cells from a Grid Definition.
Row	Integer	Yes	
Value	Numeric (double)	Yes	The incidence/prevalence rate for the specified demographic group for this location.
Type	Text	No	If value is a prevalence rate, then "Prevalence" should be specified. Otherwise BenMAP-CE assumes that the value is an incidence rate.