


TCP sockets

Giảng viên: TS. Trần Hải Anh

Khoa KTMT

Trường CNTT & TT

Introduction

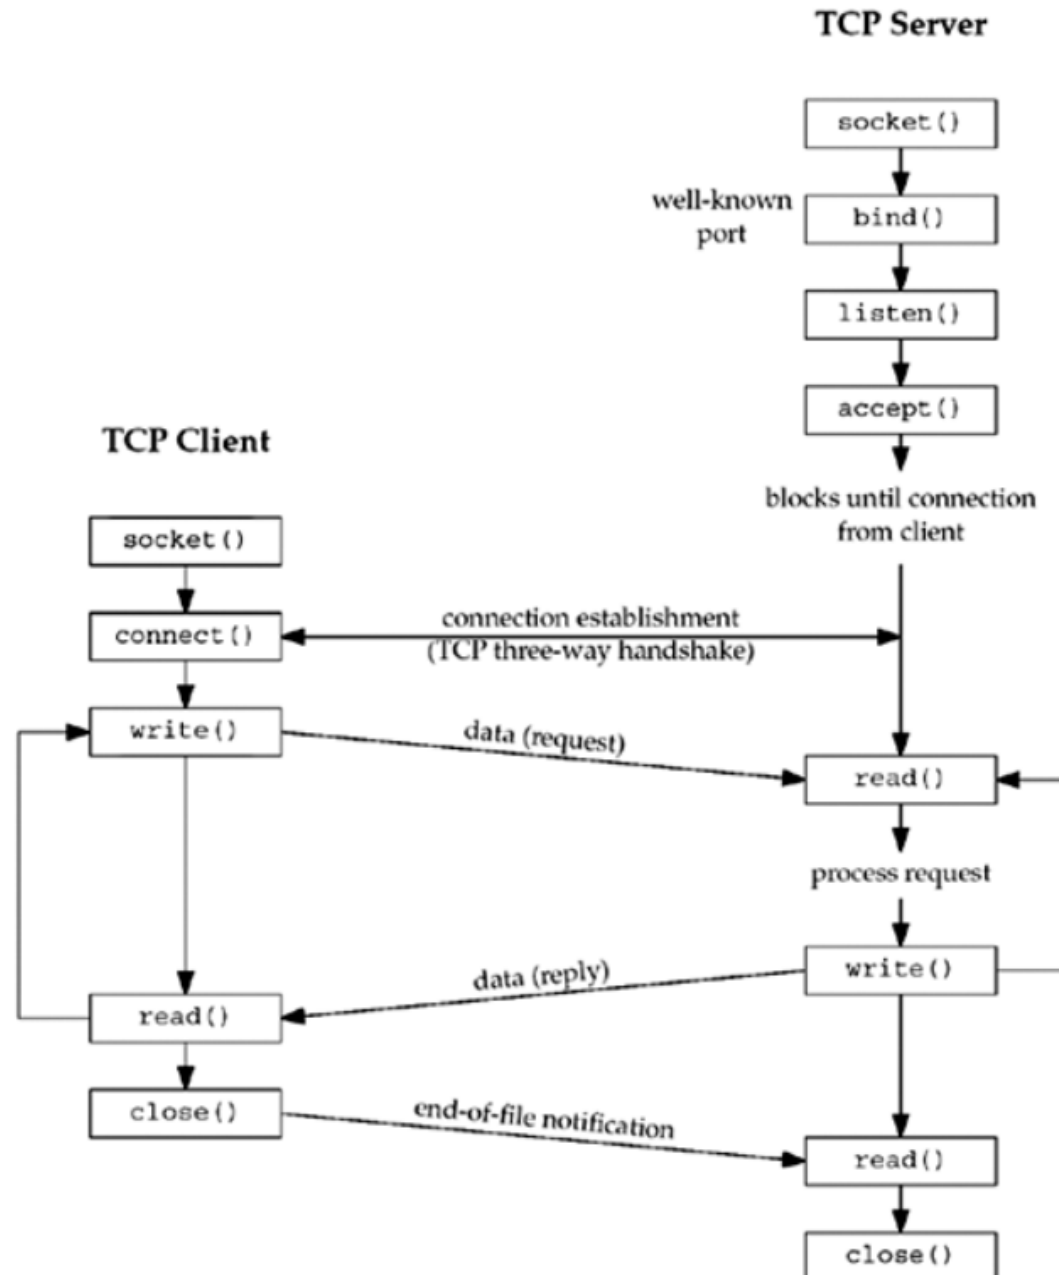

socket function

- To perform network I/O, the first thing a process must do is call the *socket* function

```
#include <sys/socket.h>
```

```
int socket (int family, int type, int protocol);
```

- Returns: non-negative descriptor if OK, -1 on error

<i>family</i>	Description
AF_INET	IPv4 protocols
AF_INET6	IPv6 protocols
AF_LOCAL	Unix domain protocols (Chapter 15)
AF_ROUTE	Routing sockets (Chapter 18)
AF_KEY	Key socket (Chapter 19)

family

<i>type</i>	Description
SOCK_STREAM	stream socket
SOCK_DGRAM	datagram socket
SOCK_SEQPACKET	sequenced packet socket
SOCK_RAW	raw socket

socket

<i>Protocol</i>	Description
IPPROTO_TCP	TCP transport protocol
IPPROTO_UDP	UDP transport protocol
IPPROTO_SCTP	SCTP transport protocol

protocol

socket function

```
int sockfd;
```

```
sockfd = socket(AF_INET, SOCK_STREAM, 0);
```

```
if (sockfd < 0) {
```

```
    perror("Socket creation failed");
```

```
    exit(EXIT_FAILURE);
```

```
}
```

including libraries

Library	Description
<code>sys/socket.h</code>	<code>socket()</code> function
<code>arpa/inet.h</code>	For functions related to Internet operations, such as converting IP addresses between text and binary formats.
<code>netinet/in.h</code>	For the structures and constants used in Internet domain addresses (like <code>sockaddr_in</code>).
<code>unistd.h</code>	For the <code>close()</code> function to close the socket.



Chương trình ví dụ: **`ex_socket.c`**

connect Function


- The connect function is used by a TCP client to establish a connection with a TCP server.

```
#include <sys/socket.h>
```

```
int connect(int sockfd, const struct sockaddr  
            *servaddr, socklen_t addrlen);
```

- Returns: 0 if OK, -1 on error
- *sockfd* is a socket descriptor returned by the *socket* function
- The second and third arguments are a pointer to a socket address structure and its size.
- The client does not have to call *bind* before calling *connect*: the kernel will choose both an ephemeral port and the source IP address if necessary.

Nhắc lại: Thiết lập liên kết TCP : Giao thức bắt tay 3 bước

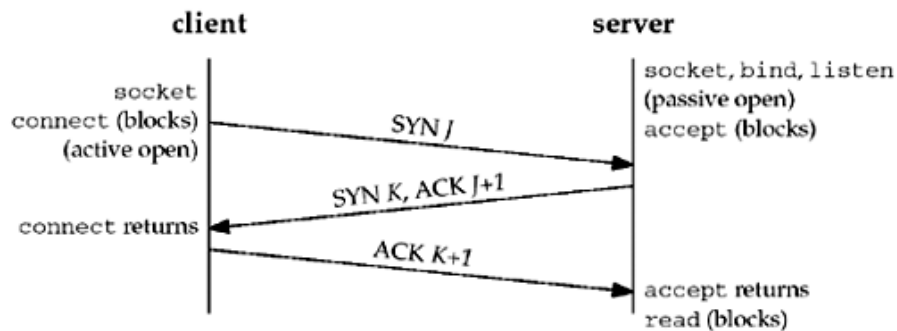

- **Bước 1:** A gửi SYN cho B
 - chỉ ra giá trị khởi tạo seq # của A
 - không có dữ liệu
- **Bước 2:** B nhận SYN, trả lời bằng SYNACK
 - B khởi tạo vùng đệm
 - chỉ ra giá trị khởi tạo seq. # của B
- **Bước 3:** A nhận SYNACK, trả lời ACK, có thể kèm theo dữ liệu

connect Function (2)

- Problems with *connect* function:
 1. If the client TCP receives no response to its SYN segment, ETIMEDOUT is returned. (If no response is received after a total of 75 seconds, the error is returned).
 2. If the server's response to the client's SYN is a reset (RST), this indicates that no process is waiting for connections on the server host at the port specified (i.e., the server process is probably not running). Error: ECONNREFUSED.
 3. If the client's SYN elicits an ICMP "destination unreachable" from some intermediate router, this is considered a soft error. If no response is received after some fixed amount of time (75 seconds for 4.4BSD), the saved ICMP error is returned to the process as either EHOSTUNREACH or ENETUNREACH.



Chương trình ví dụ: `connect_with_errors.c`

bind Function

- The `bind()` function in C is used to associate a socket with a specific IP address and port number on the local machine.
- This is commonly used when creating a server, where the server binds its socket to a specific IP address and port to listen for incoming client connections.

- `#include <sys/socket.h>`

```
int bind (int sockfd, const struct sockaddr *myaddr,  
         socklen_t addrlen);
```

- Returns: 0 if OK, -1 on error

- Example:

```
if (bind(server_fd,  
(struct sockaddr*)&address, sizeof(address)) < 0) {  
    perror("Bind failed");  
    close(server_fd);  
    exit(EXIT_FAILURE);  
}
```



Chương trình ví dụ: **ex_bind.c**

listen Function

- The *listen* function is called only by a TCP server.
- When a socket is created by the *socket* function, it is assumed to be an active socket, that is, a client socket that will issue a *connect*.
- The *listen* function converts an unconnected socket into a passive socket, indicating that the kernel should accept incoming connection requests directed to this socket.
- Move the socket from the CLOSED state to the LISTEN state.


```
#include <sys/socket.h>
```

```
int listen (int sockfd, int backlog);
```

- Returns: 0 if OK, -1 on error


listen Function (2)

- The second argument (*backlog*) to this function specifies the maximum number of connections the kernel should queue for this socket.

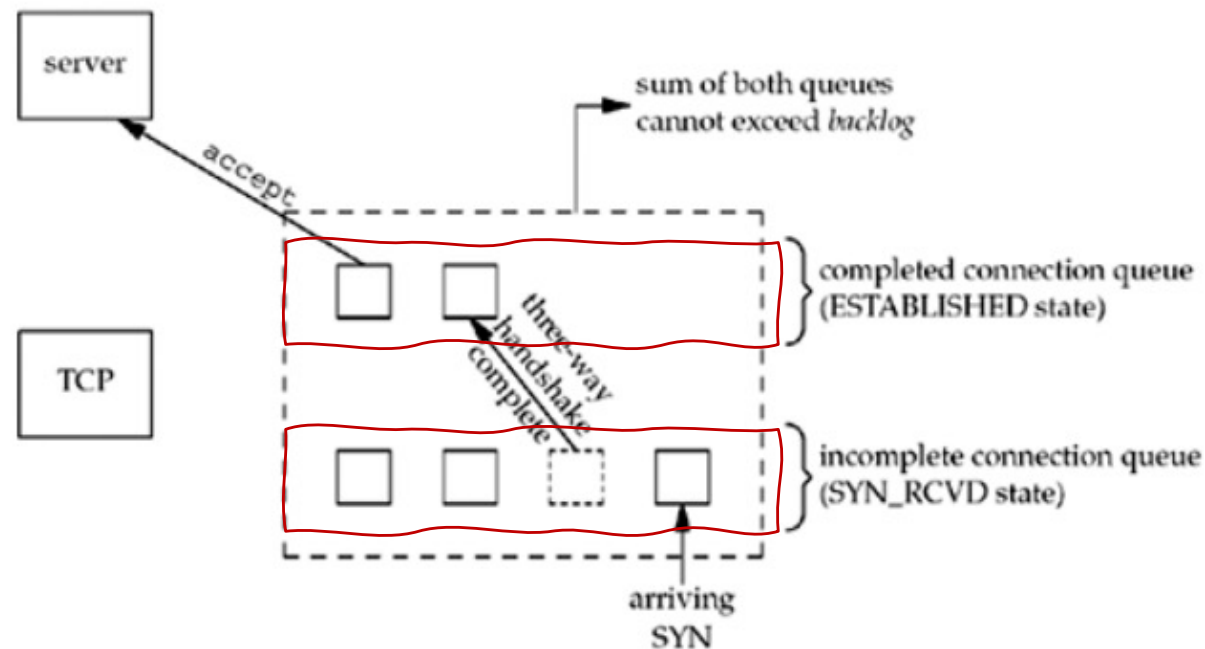

The two queues maintained by TCP for a listening socket

listen Function (3)

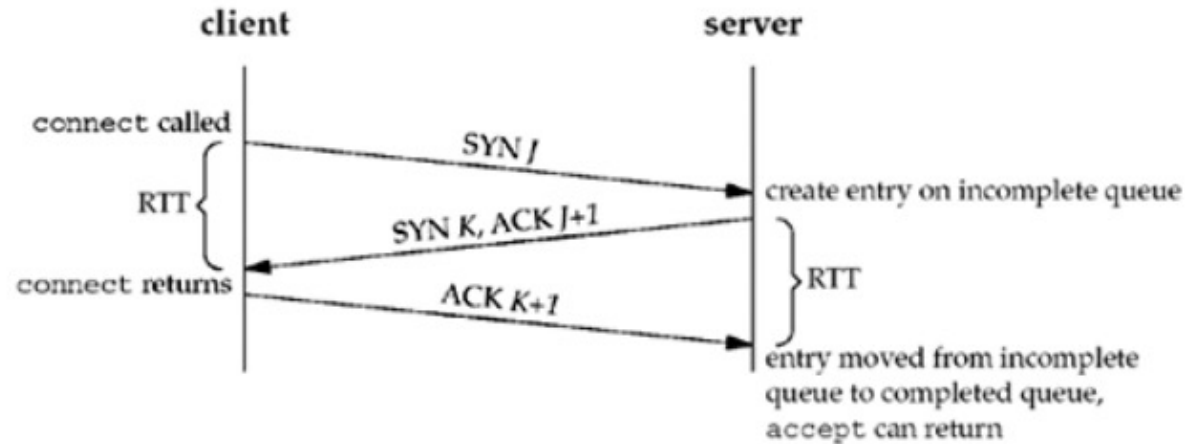

TCP three-way handshake and the two queues for a listening socket.

listen Function (4)

- Example:

```
if (listen(server_fd, 3) < 0) {  
    perror("Listen failed");  
    close(server_fd);  
    exit(EXIT_FAILURE);  
}
```

accept Function

- *accept* is called by a TCP server to return the next completed connection from the front of the completed connection queue.
- If the completed connection queue is empty, the process is put to sleep.

```
#include <sys/socket.h>
```

```
int accept (int sockfd, struct sockaddr *cliaddr,  
            socklen_t *addrlen);
```

- Returns: non-negative descriptor if OK, -1 on error
- The *cliaddr* and *addrlen* arguments are used to return the protocol address of the connected peer process (the client).
- *addrlen* is a value-result argument

accept Function

- Example

```
int new_socket;  
if ((new_socket = accept(server_fd, (struct  
sockaddr*)&address, (socklen_t*)&addrlen)) < 0) {  
    perror("Accept failed");  
    close(server_fd);  
    exit(EXIT_FAILURE);  
}
```

fork and *exec* Functions

```
#include <unistd.h>
```

```
pid_t fork(void);
```

- Returns: 0 in child, process ID of child in parent, -1 on error
- *fork* function (including the variants of it provided by some systems) is the only way in Unix to create a new process.
- It is called once but it returns twice.
- It returns once in the calling process (called the parent) with a return value that is the process ID of the newly created process (the child). It also returns once in the child, with a return value of 0.
- The reason *fork* returns 0 in the child, instead of the parent's process ID, is because a child has only one parent and it can always obtain the parent's process ID by calling *getppid*.



Chương trình ví dụ: **ex_fork.c**

Concurrent Servers

- TCP client-server connection
- The server is a concurrent multi-process server
- The server uses the `fork()` function to handle each client in a separate *child process*, allowing the *parent process* to continue accepting new client connections.




Chương trình ví dụ:

- `ccr_server.c`
- `ccr_client.c`


Status of client/server before call to *accept* returns.




Status of client/server after return from *accept*.

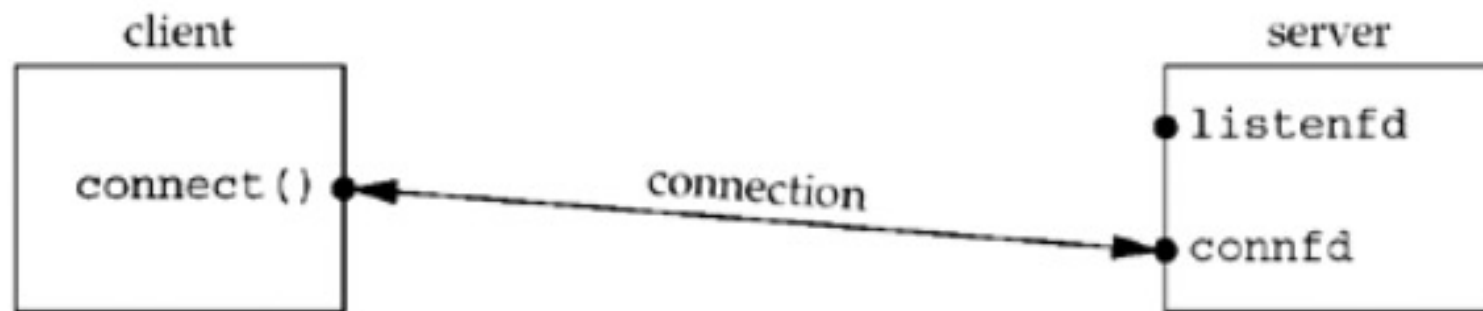

Status of client/server after fork returns.

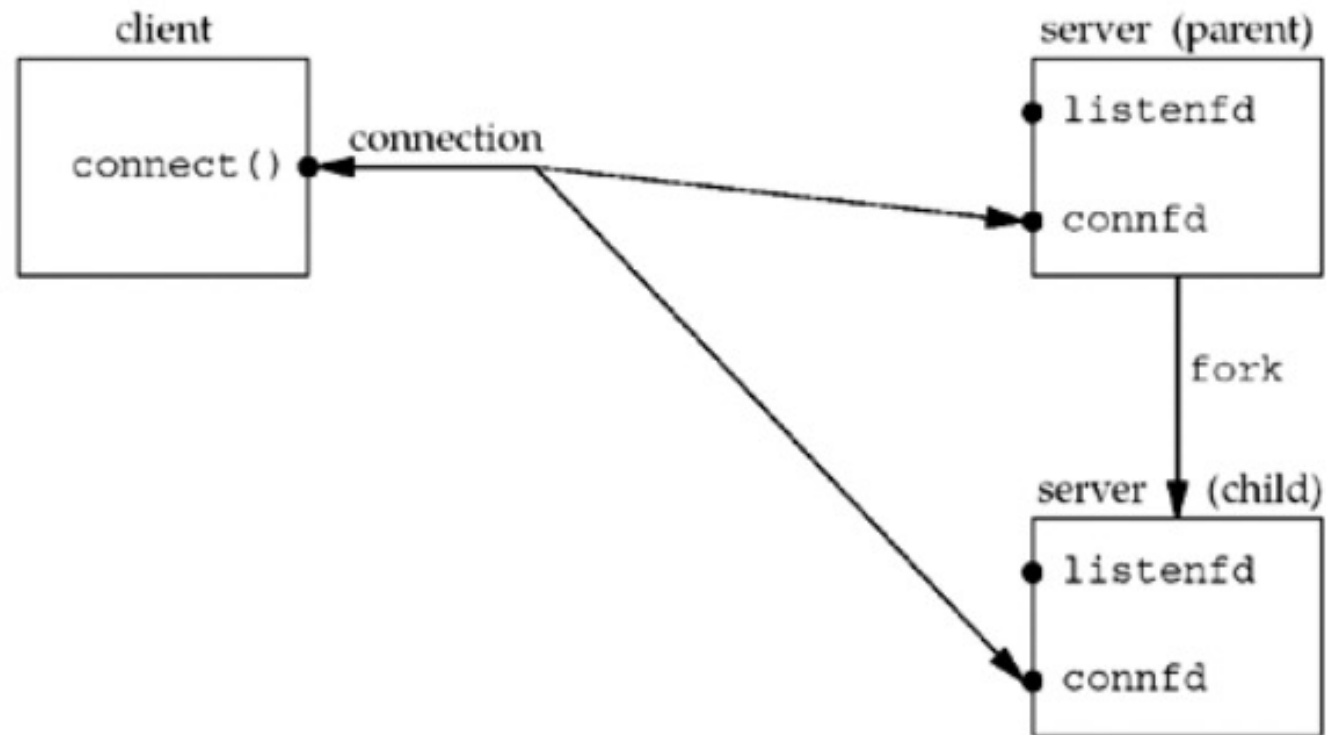

Status of client/server after parent and child close appropriate sockets.

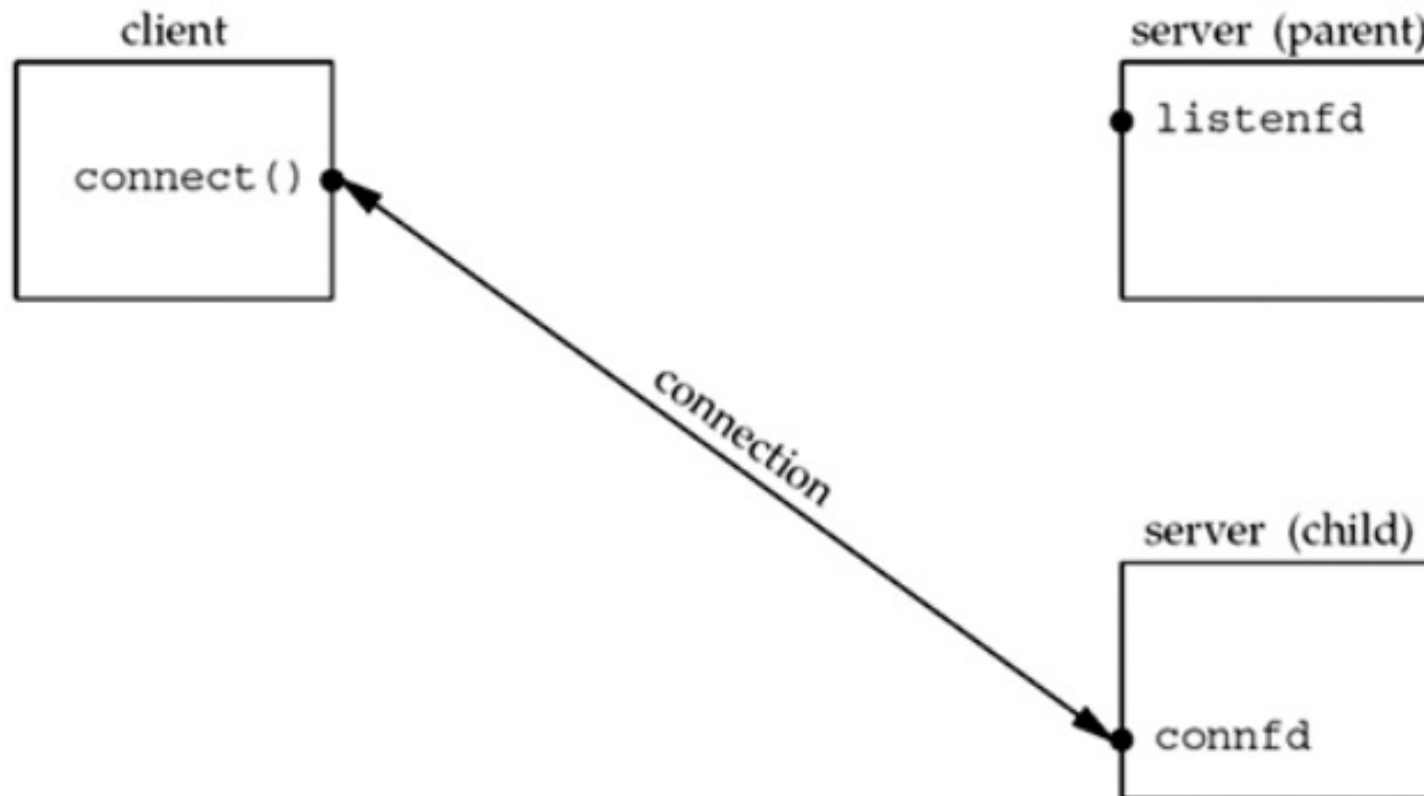

close Function

- The normal Unix close function is also used to close a socket and terminate a TCP connection.

```
#include <unistd.h>  
int close (int sockfd);
```

- Returns: 0 if OK, -1 on error
- If the parent doesn't close the socket, when the child closes the connected socket, its reference count will go from 2 to 1 and it will remain at 1 since the parent never closes the connected socket. This will prevent TCP's connection termination sequence from occurring, and the connection will remain open.


getsockname and *getpeername* Functions

```
#include <sys/socket.h>
```

```
int getsockname(int sockfd, struct sockaddr  
    *localaddr, socklen_t *addrlen);
```

```
int getpeername(int sockfd, struct sockaddr  
    *peeraddr, socklen_t *addrlen);
```

- Both return: 0 if OK, -1 on error

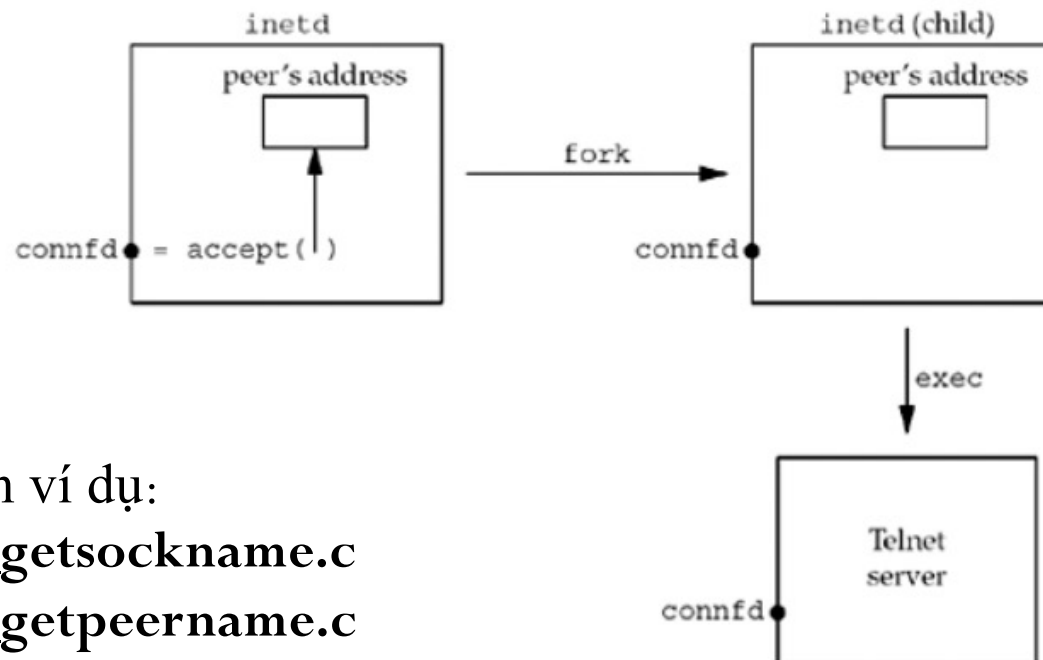

Chương trình ví dụ:

`ex_getsockname.c`

`ex_getpeername.c`