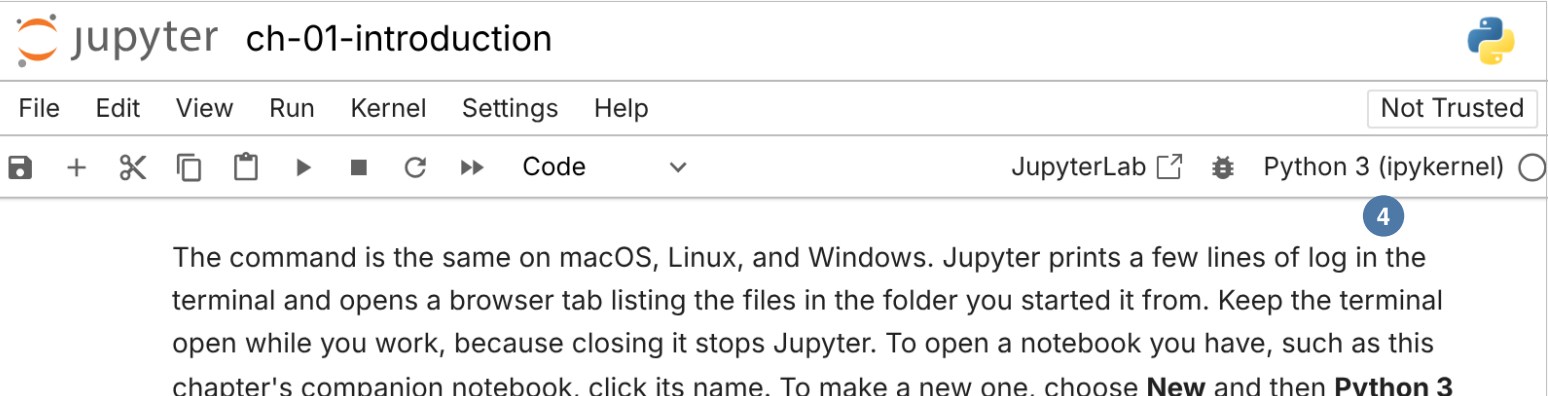

jupyter ch-01-introduction
File Edit View Run Kernel Settings Help
Not Trusted
Code
JupyterLab
Python 3 (ipykernel)
4
The command is the same on macOS, Linux, and Windows. Jupyter prints a few lines of log in the terminal and opens a browser tab listing the files in the folder you started it from. Keep the terminal open while you work, because closing it stops Jupyter. To open a notebook you have, such as this chapter's companion notebook, click its name. To make a new one, choose New and then Python 3 (ipykernel) (Figure 1.1): started from webdata, that kernel is that environment's Python.
A notebook consists of cells. Code cells contain Python that you can execute with Shift+Enter.
1
Markdown cells contain formatted text for documentation. The ability to interleave code with narrative explanation makes notebooks ideal for the kind of exploratory, iterative work that characterizes web data science.
2
[1]:
This is a code cell. When you run it, Python executes the code and displays any output
print("Hello, web data science!")
Output: Hello, web data science!
Hello, web data science!
3