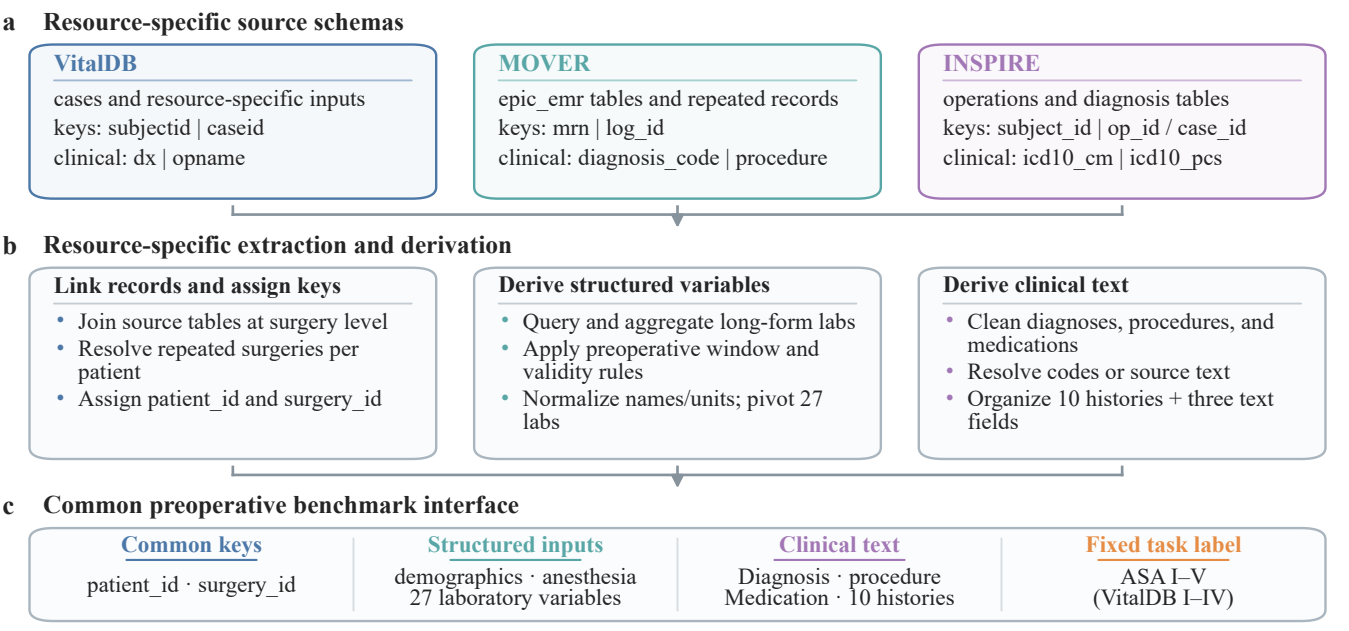

a Resource-specific source schemas
VitalDB
cases and resource-specific inputs
keys: subjectid | caseid
clinical: dx | opname
MOVER
epic_emr tables and repeated records
keys: mrn | log_id
clinical: diagnosis_code | procedure
INSPIRE
operations and diagnosis tables
keys: subject_id | op_id / case_id
clinical: icd10_cm | icd10_pcs
b Resource-specific extraction and derivation
Link records and assign keys
Join source tables at surgery level
Resolve repeated surgeries per patient
Assign patient_id and surgery_id
Derive structured variables
Query and aggregate long-form labs
Apply preoperative window and validity rules
Normalize names/units; pivot 27 labs
Derive clinical text
Clean diagnoses, procedures, and medications
Resolve codes or source text
Organize 10 histories + three text fields
c Common preoperative benchmark interface
Common keys
patient_id · surgery_id
Structured inputs
demographics · anesthesia
27 laboratory variables
Clinical text
Diagnosis · procedure
Medication · 10 histories
Fixed task label
ASA I–V
(VitalDB I–IV)