

Interrogating theoretical models of neural computation with deep inference  
Sean R. Bittner<sup>1</sup>, Agostina Palmigiano<sup>1</sup>, Alex T. Piet<sup>2,3</sup>, Chunyu A. Duan<sup>4</sup>, Carlos D. Brody<sup>2,3,5</sup>,  
Kenneth D. Miller<sup>1</sup>, and John P. Cunningham<sup>6</sup>.

<sup>1</sup>Department of Neuroscience, Columbia University,

<sup>2</sup>Princeton Neuroscience Institute,

<sup>3</sup>Princeton University,

<sup>4</sup>Institute of Neuroscience, Chinese Academy of Sciences,

<sup>5</sup>Howard Hughes Medical Institute,

<sup>6</sup>Department of Statistics, Columbia University

## <sup>1</sup> 1 Abstract

<sup>2</sup> A cornerstone of theoretical neuroscience is the circuit model: a system of equations that captures  
<sup>3</sup> a hypothesized neural mechanism. Such models are valuable when they give rise to an experimen-  
<sup>4</sup> tally observed phenomenon – whether behavioral or in terms of neural activity – and thus can  
<sup>5</sup> offer insights into neural computation. The operation of these circuits, like all models, critically  
<sup>6</sup> depends on the choices of model parameters. Historically, the gold standard has been to analyt-  
<sup>7</sup> ically derive the relationship between model parameters and computational properties. However,  
<sup>8</sup> this enterprise quickly becomes infeasible as biologically realistic constraints are included into the  
<sup>9</sup> model increasing its complexity, often resulting in *ad hoc* approaches to understanding the relation-  
<sup>10</sup> ship between model and computation. We bring recent machine learning techniques – the use of  
<sup>11</sup> deep generative models for probabilistic inference – to bear on this problem, learning distributions  
<sup>12</sup> of parameters that produce the specified properties of computation. Importantly, the techniques  
<sup>13</sup> we introduce offer a principled means to understand the implications of model parameter choices  
<sup>14</sup> on computational properties of interest. We motivate this methodology with a worked example  
<sup>15</sup> analyzing sensitivity in the stomatogastric ganglion. We then use it to go beyond linear theory  
<sup>16</sup> of neuron-type input-responsivity in a model of primary visual cortex, gain a mechanistic under-  
<sup>17</sup> standing of rapid task switching in superior colliculus models, and attribute error to connectivity  
<sup>18</sup> properties in recurrent neural networks solving a simple mathematical task. More generally, this  
<sup>19</sup> work suggests a departure from realism vs tractability considerations, towards the use of modern  
<sup>20</sup> machine learning for sophisticated interrogation of biologically relevant models.

## 21 2 Introduction

22 The fundamental practice of theoretical neuroscience is to use a mathematical model to understand  
23 neural computation, whether that computation enables perception, action, or some intermediate  
24 processing [1]. A neural computation is systematized with a set of equations – the model – and  
25 these equations are motivated by biophysics, neurophysiology, and other conceptual considerations.  
26 The function of this system is governed by the choice of model parameters, which when configured  
27 in a particular way, give rise to a measurable signature of a computation. The work of analyzing a  
28 model then requires solving the inverse problem: given a computation of interest, how can we reason  
29 about these particular parameter configurations? The inverse problem is crucial for reasoning about  
30 likely parameter values, uniquenesses and degeneracies, attractor states and phase transitions, and  
31 predictions made by the model.

32 Consider the idealized practice: one carefully designs a model and analytically derives how model  
33 parameters govern the computation. Seminal examples of this gold standard (which often adopt  
34 approaches from statistical physics) include our field’s understanding of memory capacity in asso-  
35 ciative neural networks [2], chaos and autocorrelation timescales in random neural networks [3],  
36 the paradoxical effect [4], and decision making [5]. Unfortunately, as circuit models include more  
37 biological realism, theory via analytical derivation becomes intractable. This creates an unfavor-  
38 able tradeoff. On the one hand, one may tractably analyze systems of equations with unrealistic  
39 assumptions (for example symmetry or gaussianity), mathematically formalizing how parameters  
40 affect computation in a too-simple model. On the other hand, one may choose a more biologically  
41 accurate, scientifically relevant model at the cost of *ad hoc* approaches to analysis (such as sim-  
42 ply examining simulated activity), potentially resulting in bad inference of parameters and thus  
43 erroneous scientific predictions or conclusions.

44 Of course, this same tradeoff has been confronted in many scientific fields characterized by the  
45 need to do inference in complex models. In response, the machine learning community has made  
46 remarkable progress in recent years, via the use of deep neural networks as a powerful inference  
47 engine: a flexible function family that can map observed phenomena (in this case the measurable  
48 signal of some computation) back to probability distributions quantifying the likely parameter  
49 configurations. One celebrated example of this approach from machine learning, of which we  
50 draw key inspiration for this work, is the variational autoencoder [6, 7], which uses a deep neural  
51 network to induce an (approximate) posterior distribution on hidden variables in a latent variable

model, given data. Indeed, these tools have been used to great success in neuroscience as well, in particular for interrogating parameters (sometimes treated as hidden states) in models of both cortical population activity [8, 9, 10, 11] and animal behavior [12, 13, 14]. These works have used deep neural networks to expand the expressivity and accuracy of statistical models of neural data [15].

However, these inference tools have not significantly influenced the study of theoretical neuroscience models, for at least three reasons. First, at a practical level, the nonlinearities and dynamics of many theoretical models are such that conventional inference tools typically produce a narrow set of insights into these models. Indeed, only in the last few years has deep learning research advanced to a point of relevance to this class of problem. Second, the object of interest from a theoretical model is not typically data itself, but rather a qualitative phenomenon – inspection of model behavior, or better, a measurable signature of some computation – an *emergent property* of the model. Third, because theoreticians work carefully to construct a model that has biological relevance, such a model as a result often does not fit cleanly into the framing of a statistical model. Technically, because many such models stipulate a noisy system of differential equations that can only be sampled or realized through forward simulation, they lack the explicit likelihood and priors central to the probabilistic modeling toolkit.

To address these three challenges, we developed an inference methodology – ‘emergent property inference’ – which learns a distribution over parameter configurations in a theoretical model. This distribution has two critical properties: (*i*) it is chosen such that draws from the distribution (parameter configurations) correspond to systems of equations that give rise to a specified emergent property (a set of constraints); and (*ii*) it is chosen to have maximum entropy given those constraints, such that we identify all likely parameters and can use the distribution to reason about parametric sensitivity and degeneracies [16]. First, we stipulate a bijective deep neural network that induces a flexible family of probability distributions over model parameterizations with a probability density we can calculate [17, 18, 19]. Second, we quantify the notion of emergent properties as a set of moment constraints on datasets generated by the model. Thus, an emergent property is not a single data realization, but a phenomenon or a feature of the model, which is ultimately the object of interest in theoretical neuroscience. Conditioning on an emergent property requires a variant of deep probabilistic inference methods, which we have previously introduced [20]. Third, because we cannot assume the theoretical model has explicit likelihood on data or the emergent property of interest, we use stochastic gradient techniques in the spirit of likelihood free variational inference

[21]. Taken together, emergent property inference (EPI) provides a methodology for inferring parameter configurations consistent with a particular emergent phenomena in theoretical models. We use a classic example of parametric degeneracy in a biological system, the stomatogastric ganglion [22], to motivate and clarify the technical details of EPI.

Equipped with this methodology, we then investigated three models of current importance in theoretical neuroscience. These models were chosen to demonstrate generality through ranges of biological realism (from conductance-based biophysics to recurrent neural networks), neural system function (from pattern generation to abstract cognitive function), and network scale (from four to infinite neurons). First, we use EPI to produce a set of verifiable hypotheses of input-responsivity in a four neuron-type dynamical model of primary visual cortex; we then validate these hypotheses in the model. Second, we demonstrated how the systematic application of EPI to levels of task performance can generate experimentally testable hypotheses regarding connectivity in superior colliculus. Third, we use EPI to uncover the sources of error in a low-rank recurrent neural network executing a simple mathematical task. The novel scientific insights offered by EPI contextualize and clarify the previous studies exploring these models [23, 24, 25, 26], and more generally, these results point to the value of deep inference for the interrogation of biologically relevant models.

We note that, during our preparation and early presentation of this work [27, 28], another work has arisen with broadly similar goals: bringing statistical inference to mechanistic models of neural circuits [29, 30]. We are encouraged by this general problem being recognized by others in the community, and we emphasize that these works offer complementary neuroscientific contributions (different theoretical models of focus) and use different technical methodologies (ours is built on our prior work [20], theirs similarly [31]). These distinct methodologies and scientific investigations emphasize the increased importance and timeliness of both works.

## 3 Results

### 3.1 Motivating emergent property inference of theoretical models

Consideration of the typical workflow of theoretical modeling clarifies the need for emergent property inference. First, one designs or chooses an existing model that, it is hypothesized, captures the computation of interest. To ground this process in a well-known example, consider the stomatogastric ganglion (STG) of crustaceans, a small neural circuit which generates multiple rhythmic muscle activation patterns for digestion [32]. Despite full knowledge of STG connectivity and a

114 precise characterization of its rhythmic pattern generation, biophysical models of the STG have  
 115 complicated relationships between circuit parameters and neural activity [22, 33]. A model of the  
 116 STG [23] is shown schematically in Figure 1A, and note that the behavior of this model will be crit-  
 117 ically dependent on its parameterization – the choices of conductance parameters  $z = [g_{el}, g_{synA}]$ .  
 118 Specifically, the two fast neurons ( $f_1$  and  $f_2$ ) mutually inhibit one another, and oscillate at a faster  
 119 frequency than the mutually inhibiting slow neurons ( $s_1$  and  $s_2$ ). The hub neuron (hub) couples  
 120 with either the fast or slow population or both.  
 121 Second, once the model is selected, one defines the emergent property, the measurable signal of  
 122 scientific interest. To continue our running STG example, one such emergent property is the  
 123 phenomenon of *network syncing* – in certain parameter regimes, the frequency of the hub neuron  
 124 matches that of the fast and slow populations at an intermediate frequency. This emergent property  
 125 is shown in Figure 1A at a frequency of 0.53Hz.  
 126 Third, qualitative parameter analysis ensues: since precise mathematical analysis is intractable in  
 127 this model, a brute force sweep of parameters is done [23]. Subsequently, a qualitative description  
 128 is formulated to describe the different parameter configurations that lead to the emergent property.  
 129 In this last step lies the opportunity for a precise quantification of the emergent property as a  
 130 statistical feature of the model. Once we have such a methodology, we can infer a probability  
 131 distribution over parameter configurations that produce this emergent property.  
 132 Before presenting technical details (in the following section), let us understand emergent property  
 133 inference schematically: EPI (Fig. 1A gray box) takes, as input, the model and the specified  
 134 emergent property, and as its output, produces the parameter distribution shown in Figure 1B.  
 135 This distribution – represented for clarity as samples from the distribution – is then a scientifically  
 136 meaningful and mathematically tractable object. In the STG model, this distribution can be  
 137 specifically queried to reveal the prototypical parameter configuration for network syncing (the  
 138 mode; Figure 1B yellow star), and how network syncing decays based on changes away from the  
 139 mode. The eigenvectors (of the Hessian of the distribution at the mode) quantitatively formalize  
 140 the robustness of network syncing (Fig. 1B solid ( $v_1$ ) and dashed ( $v_2$ ) black arrows). Indeed,  
 141 samples equidistant from the mode along these EPI-identified dimensions of sensitivity ( $v_1$ ) and  
 142 degeneracy ( $v_2$ ) agree with error contours (Fig. 1B, contours) and have diminished or preserved  
 143 network syncing, respectively (Figure 1B inset and activity traces) (see Section B.2.1).

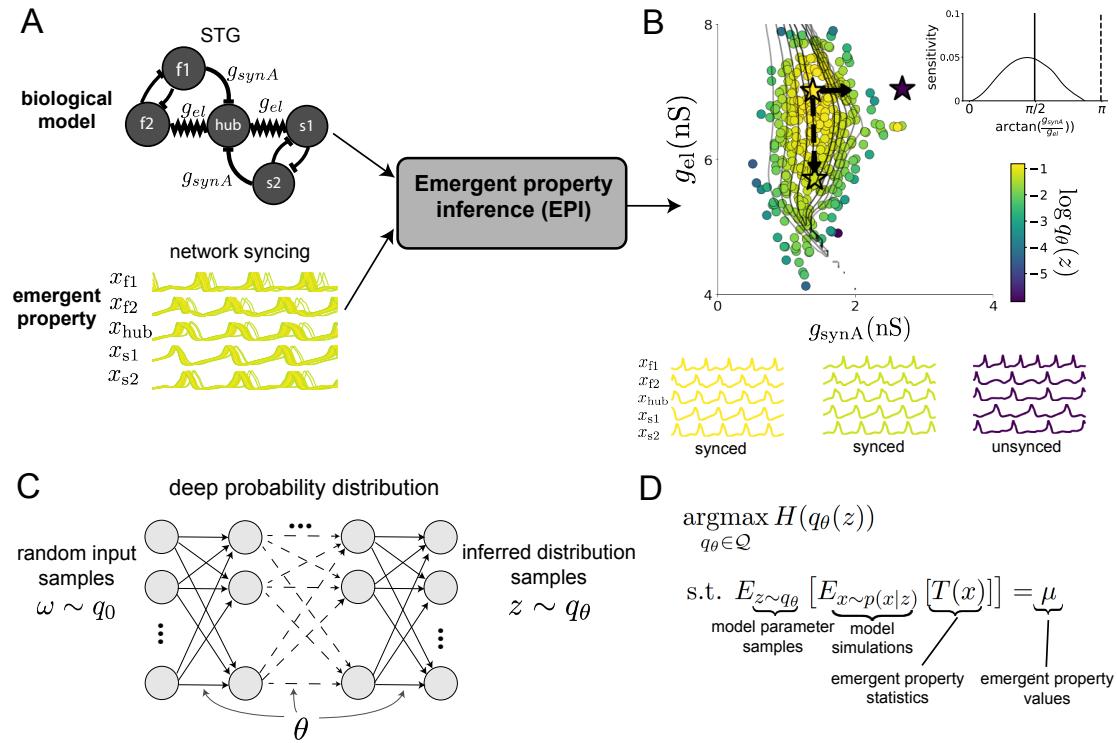


Figure 1: Emergent property inference (EPI) in the stomatogastric ganglion. A. For a choice of model (STG) and emergent property (network syncing), emergent property inference (EPI, gray box) learns a distribution of the model parameters  $z = [g_{el}, g_{synA}]$  producing network syncing. In the STG model, jagged connections indicate electrical coupling having electrical conductance  $g_{el}$ . Other connections in the diagram are inhibitory synaptic projections having strength  $g_{synA}$  onto the hub neuron, and  $g_{synB} = 5\text{nS}$  for mutual inhibitory connections. Network syncing traces are colored by log probability density of their generating parameters (stars) in the EPI-inferred distribution. B. The EPI distribution of STG model parameters producing network syncing. Samples are colored by log probability density. Distribution contours of emergent property value error are shown at levels of  $2.5 \times 10^{-5}$ ,  $5 \times 10^{-5}$ ,  $1 \times 10^{-4}$ ,  $2 \times 10^{-4}$ , and  $4 \times 10^{-4}$  (dark to light gray). Eigenvectors of the Hessian at the mode of the inferred distribution are indicated as  $v_1$  (solid) and  $v_2$  (dashed) with lengths scaled by the square root of the absolute value of their eigenvalues. Simulated activity is shown for three samples (stars). (Inset) Sensitivity of the system with respect to network syncing along all dimensions of parameter space away from the mode.  $v_1$  is sensitive to network syncing ( $p < 10^{-4}$ ), while  $v_2$  is not ( $p = 0.67$ ) (see Section B.2.1). C. Deep probability distributions map a latent random variable  $w$  through a deep neural network with weights and biases  $\theta$  to parameters  $z = f_\theta(w)$  distributed as  $q_\theta(z)$ . D. EPI optimization: To learn the EPI distribution  $q_\theta(z)$  of model parameters that produce an emergent property, the emergent property statistics  $T(x)$  are set in expectation over model parameter samples  $z \sim q_\theta(z)$  and model simulations  $x \sim p(x | z)$  to emergent property values  $\mu$ .

---

### 144 3.2 A deep generative modeling approach to emergent property inference

145 Emergent property inference (EPI) systematizes the three-step procedure of the previous section.  
 146 First, we consider the model as a coupled set of differential (and potentially stochastic) equations  
 147 [23]. In the running STG example, the model activity  $x = [x_{f1}, x_{f2}, x_{hub}, x_{s1}, x_{s2}]$  is the membrane  
 148 potential for each neuron, which evolves according to the biophysical conductance-based equation:

$$C_m \frac{dx}{dt} = -h(x; z) = -[h_{leak}(x; z) + h_{Ca}(x; z) + h_K(x; z) + h_{hyp}(x; z) + h_{elec}(x; z) + h_{syn}(x; z)] \quad (1)$$

149 where  $C_m = 1\text{nF}$ , and  $h_{leak}$ ,  $h_{Ca}$ ,  $h_K$ ,  $h_{hyp}$ ,  $h_{elec}$ , and  $h_{syn}$  are the leak, calcium, potassium, hyper-  
 150 polarization, electrical, and synaptic currents, all of which have their own complicated dependence  
 151 on  $x$  and  $z = [g_{el}, g_{synA}]$  (see Section B.2.1).

152 Second, we define the emergent property, which as above is network syncing: oscillation of the  
 153 entire population at an intermediate frequency of our choosing (Figure 1A bottom). Quantifying  
 154 this phenomenon is straightforward: we define network syncing to be that each neuron’s spiking  
 155 frequency – denoted  $\omega_{f1}(x)$ ,  $\omega_{f2}(x)$ , etc. – is close to an intermediate frequency of 0.53Hz. Math-  
 156 ematically, we achieve this via constraints on the mean and variance of  $\omega_\alpha(x)$  for each neuron  
 157  $\alpha \in \{f1, f2, hub, s1, s2\}$ :

$$\mathbb{E}[T(x)] \triangleq \mathbb{E} \begin{bmatrix} \omega_{f1}(x) \\ \vdots \\ (\omega_{f1}(x) - 0.53)^2 \\ \vdots \end{bmatrix} = \begin{bmatrix} 0.53 \\ \vdots \\ 0.025^2 \\ \vdots \end{bmatrix} \triangleq \mu, \quad (2)$$

158 which completes the quantification of the emergent property.

159 Third, we perform emergent property inference: we find a distribution over parameter configura-  
 160 tions  $z$ , and insist that samples from this distribution produce the emergent property; in other  
 161 words, they obey the constraints introduced in Equation 2. This distribution will be chosen from  
 162 a family of probability distributions  $\mathcal{Q} = \{q_\theta(z) : \theta \in \Theta\}$ , defined by a deep generative distribution  
 163 of the normalizing flow class [17, 18, 19] – neural networks which transform a simple distribution  
 164 into a suitably complicated distribution (as is needed here). This deep distribution is represented  
 165 in Figure 1C (see Section B.1). Then, mathematically, we must solve the following optimization  
 166 program:

$$\begin{aligned} & \underset{q_\theta \in \mathcal{Q}}{\operatorname{argmax}} H(q_\theta(z)) \\ & \text{s.t. } \mathbb{E}_{z \sim q_\theta} [\mathbb{E}_{x \sim p(x|z)} [T(x)]] = \mu, \end{aligned} \quad (3)$$

where  $T(x), \mu$  are defined as in Equation 2, and  $p(x|z)$  is the intractable distribution of data from the model,  $x$ , given that model's parameters  $z$  (we access samples from this distribution by running the model forward). The purpose of each element in this program is detailed in Figure 1D. Finally, we recognize that many distributions in  $\mathcal{Q}$  will respect the emergent property constraints, so we require a normative principle to select amongst them. This principle is captured in Equation 3 by the primal objective  $H$ . Here we chose Shannon entropy as a means to find parameter distributions with minimal assumptions beyond some chosen structure [34, 35, 20, 36], but we emphasize that the EPI methodology is unaffected by this choice (although the results of course depend on the primal objective chosen).

EPI optimizes the weights and biases  $\theta$  of the deep neural network (which induces the probability distribution) by iteratively solving Equation 3. The optimization is complete when the sampled models with parameters  $z \sim q_\theta$  produce activity consistent with the specified emergent property (Fig. S4). Such convergence is evaluated with a hypothesis test that the mean of each emergent property statistic is not different than its emergent property value (see Section B.1.2). Further validation of EPI is available in the supplementary materials, where we analyze a simpler model for which ground-truth statements can be made (Section B.1.1). In relation to broader methodology, inspection of the EPI objective reveals a natural relationship to posterior inference. Specifically, EPI executes variational inference in an exponential family model, the sufficient statistics and mean parameter of which are defined by the emergent property statistics and values, respectively (see Section B.1.4). Equipped with this method, we now prove out the value of EPI by using it to investigate and produce novel insights about three prominent models in neuroscience.

### 3.3 Comprehensive input-responsivity in a nonlinear sensory system

Dynamical models of excitatory (E) and inhibitory (I) populations with supralinear input-output function have succeeded in explaining a host of experimentally documented phenomena. In a regime characterized by inhibitory stabilization of strong recurrent excitation, these models give rise to paradoxical responses [4], selective amplification [37], surround suppression [38] and normalization [39]. Despite their strong predictive power, E-I circuit models rely on the assumption that inhibition can be studied as an indivisible unit. However, experimental evidence shows that inhibition is composed of distinct elements – parvalbumin (P), somatostatin (S), VIP (V) – composing 80% of GABAergic interneurons in V1 [40, 41, 42], and that these inhibitory cell types follow specific connectivity patterns (Fig. 2A) [43]. Recent theoretical advances [24, 44, 45], have only started

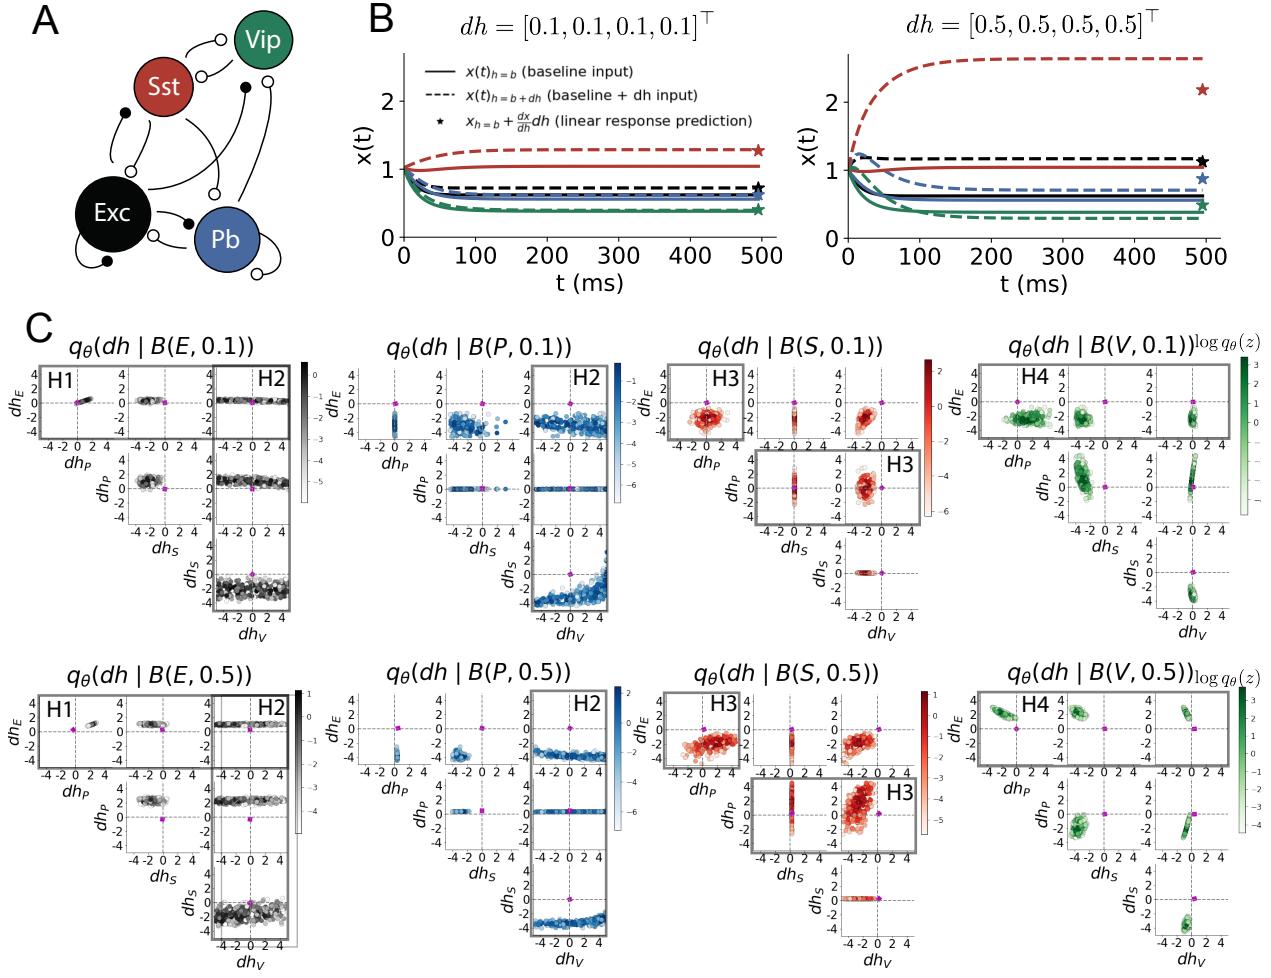


Figure 2: Hypothesis generation through EPI in a V1 model. A. Four-population model of primary visual cortex with excitatory (black), parvalbumin (blue), somatostatin (red), and VIP (green) neurons. Some neuron-types largely do not form synaptic projections to others (excitatory and inhibitory projections filled and unfilled, respectively). B. Linear response predictions become inaccurate with greater input strength. V1 model simulations for input (solid)  $h = b$  and (dashed)  $h = b + dh$ . Stars indicate the linear response prediction. C. EPI distributions on differential input  $dh$  conditioned on differential response  $\mathcal{B}(\alpha, y)$ . Supporting evidence for the four generated hypotheses are indicated by gray boxes with labels H1, H2, H3, and H4. The linear prediction from two standard deviations away from  $y$  (from negative to positive) is overlaid in magenta (very small, near origin).

198 to address the consequences of this multiplicity in the dynamics of V1, strongly relying on linear  
 199 theoretical tools. Here, we go beyond linear theory by systematically generating and evaluating hy-  
 200 potheses of circuit model function using EPI distributions of neuron-type inputs producing various  
 201 neuron-type population responses.

202 Specifically, we consider a four-dimensional circuit model with dynamical state given by the firing  
 203 rate  $x$  of each neuron-type population  $x = [x_E, x_P, x_S, x_V]^\top$ . Given a time constant of  $\tau = 20$  ms  
 204 and a power  $n = 2$ , the dynamics are driven by the rectified and exponentiated sum of recurrent  
 205 ( $Wx$ ) and external  $h$  inputs:

$$\tau \frac{dx}{dt} = -x + [Wx + h]_+^n. \quad (4)$$

206 The effective connectivity weights  $W$  were obtained from experimental recordings of publicly avail-  
 207 able datasets of mouse V1 [46, 47] (see Section B.2.2). The input  $h = b + dh$  is comprised of a  
 208 baseline input  $b = [b_E, b_P, b_S, b_V]^\top$  and a differential input  $dh = [dh_E, dh_P, dh_S, dh_V]^\top$  to each  
 209 neuron-type population. Throughout subsequent analyses, the baseline input is  $b = [1, 1, 1, 1]^\top$ .

210 With this model, we are interested in the differential responses of each neuron-type population to  
 211 changes in input  $dh$ . Initially, we studied the linearized response of the system to input  $\frac{dx_{ss}}{dh}$  at the  
 212 steady state response  $x_{ss}$ , i.e. a fixed point. All analyses of this model consider the steady state  
 213 response, so we drop the notation  $ss$  from here on. While this linearization accurately predicts  
 214 differential responses  $dx = [dx_E, dx_P, dx_S, dx_V]$  for small differential inputs to each population  
 215  $dh = [0.1, 0.1, 0.1, 0.1]$  (Fig 2B left), the linearization is a poor predictor in this nonlinear model  
 216 more generally (Fig. 2B right). Currently available approaches to deriving the steady state response  
 217 of the system are limited.

218 To get a more comprehensive picture of the input-responsivity of each neuron-type beyond linear  
 219 theory, we used EPI to learn a distribution of the differential inputs to each population  $dh$  that  
 220 produce an increase of  $y$  in the rate of each neuron-type population  $\alpha \in \{E, P, S, V\}$ . We want  
 221 to know the differential inputs  $dh$  that result in a differential steady state  $dx_\alpha$  (the change in  $x_\alpha$   
 222 when receiving input  $h = b + dh$  with respect to the baseline  $h = b$ ) of value  $y$  with some small,  
 223 arbitrarily chosen amount of variance  $0.01^2$ . These statements amount to the emergent property

$$\mathcal{B}(\alpha, y) \triangleq \mathbb{E} \begin{bmatrix} dx_\alpha \\ (dx_\alpha - y)^2 \end{bmatrix} = \begin{bmatrix} y \\ 0.01^2 \end{bmatrix}. \quad (5)$$

224 We maintain the notation  $\mathcal{B}(\cdot)$  throughout the rest of the study as short hand for emergent property,

which represents a different signature of computation in each application.

Using EPI, we inferred the distribution of  $dh$  shown in Figure 2C producing  $\mathcal{B}(\alpha, y)$ . Columns correspond to inferred distributions of excitatory ( $\alpha = E$ , red), parvalbumin ( $\alpha = P$ , blue), somatostatin ( $\alpha = S$ , red) and VIP ( $\alpha = V$ , green) neuron-type response increases, while each row corresponds to increase amounts of  $y \in \{0.1, 0.5\}$ . For each pair of parameters, we show the two-dimensional marginal distribution of samples colored by  $\log q_\theta(dh | \mathcal{B}(\alpha, y))$ . The inferred distributions immediately suggest four hypotheses:

232

- 233 H1: as is intuitive, each neuron-type's firing rate should be sensitive to that neuron-type's  
234 direct input (e.g. Fig. 2C H1 gray boxes indicate low variance in  $dh_E$  when  $\alpha = E$ . Same  
235 observation in all inferred distributions);
  - 236 H2: the E- and P-populations should be largely unaffected by input to the V-population (Fig.  
237 2C H2 gray boxes indicate high variance in  $dh_V$  when  $\alpha \in \{E, P\}$ );
  - 238 H3: the S-population should be largely unaffected by input to the P-population (Fig. 2C H3  
239 gray boxes indicate high variance in  $dh_P$  when  $\alpha = S$ );
  - 240 H4: there should be a nonmonotonic response of the V-population with input to the E-  
241 population (Fig. 2C H4 gray boxes indicate that negative  $dh_E$  should result in small  $dx_V$ ,  
242 but positive  $dh_E$  should elicit a larger  $dx_V$ );
- 243 We evaluate these hypotheses by taking perturbations in individual neuron-type input  $\delta h_\alpha$  away  
244 from the modes of the inferred distributions at  $y = 0.1$

$$dh^* = z^* = \underset{z}{\operatorname{argmax}} \log q_\theta(z | \mathcal{B}(\alpha, 0.1)). \quad (6)$$

245 Here  $\delta x_\alpha$  is the change in steady state response of the system with input  $h = b + dh^* + \delta h_\alpha \hat{u}_\alpha$   
246 compared to  $h = b + dh^*$ , where  $\hat{u}_\alpha$  is a unit vector in the dimension of  $\alpha$ . The EPI-generated  
247 hypotheses are confirmed (for details, see Section B.2.2):

- 248 H1: the neuron-type responses are sensitive to their direct inputs (Fig. 3A black, 3B blue,  
249 3C red, 3D green);
- 250 H2: the E- and P-populations are not affected by  $\delta h_V$  (Fig. 3A green, 3B green);
- 251 H3: the S-population is not affected by  $\delta h_P$  (Fig. 3C blue);
- 252 H4: the V-population exhibits a nonmonotonic response to  $\delta h_E$  (Fig. 3D black), and is in  
253 fact the only population to do so (Fig. 3A-C black).

254 These hypotheses were in stark contrast to what was available to us via traditional analytical

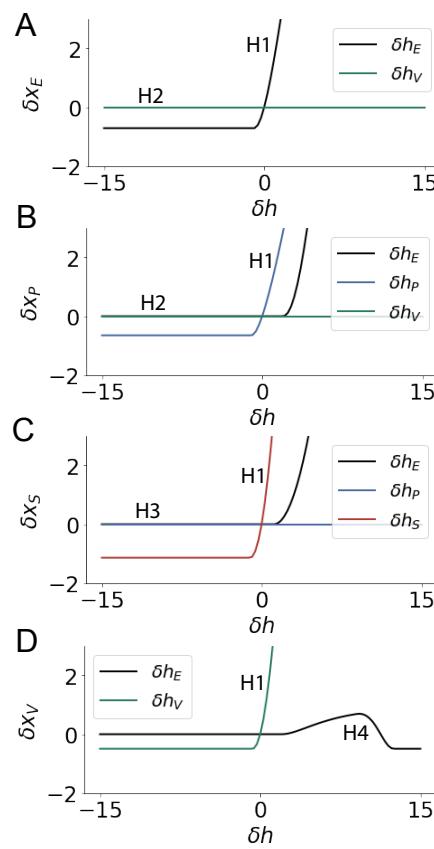


Figure 3: Confirming EPI generated hypotheses in V1. A. Differential responses  $\delta x_E$  by the E-population to changes in individual input  $\delta h_\alpha \hat{u}_\alpha$  away from the mode of the EPI distribution  $dh^*$ . B-D Same plots for the P-, S-, and V-populations. Labels H1, H2, H3, and H4 indicate which curves confirm which hypotheses.

255 linear prediction (Fig. 2C, magenta, see Section B.2.2). To this point, we have shown the utility of  
 256 EPI on relatively low-level emergent properties like network syncing and differential neuron-type  
 257 population responses. In the remainder of the study, we focus on using EPI to understand models  
 258 of more abstract cognitive function.

### 259 3.4 Identifying neural mechanisms of flexible task switching

260 In a rapid task switching experiment [48], rats were explicitly cued on each trial to either orient  
 261 towards a visual stimulus in the Pro (P) task or orient away from a visual stimulus in the Anti  
 262 (A) task (Fig. 4a). Neural recordings in the midbrain superior colliculus (SC) exhibited two  
 263 populations of neurons that simultaneously represented both task context (Pro or Anti) and motor  
 264 response (contralateral or ipsilateral to the recorded side): the Pro/Contra and Anti/Ipsi neurons  
 265 [25]. Duan et al. proposed a model of SC that, like the V1 model analyzed in the previous section, is  
 266 a four-population dynamical system. We analyzed this model, where the neuron-type populations  
 267 are functionally-defined as the Pro- and Anti-populations in each hemisphere (left (L) and right  
 268 (R)), their connectivity is parameterized geometrically (Fig. 4B). The input-output function of  
 269 this model is chosen such that the population responses  $x = [x_{LP}, x_{LA}, x_{RP}, x_{RA}]^\top$  are bounded

270 from 0 to 1 giving rise to high (1) or low (0) responses at the end of the trial:

$$x_\alpha = \left( \frac{1}{2} \tanh \left( \frac{u_\alpha - \epsilon}{\zeta} \right) + \frac{1}{2} \right) \quad (7)$$

271 where  $\epsilon = 0.05$  and  $\zeta = 0.5$ . The dynamics evolve with timescale  $\tau = 0.09$  via an internal variable  
272  $u$  governed by connectivity weights  $W$

$$\tau \frac{du}{dt} = -u + Wx + h + \sigma dB \quad (8)$$

273 with gaussian noise of variance  $\sigma^2 = 1$ . The input  $h$  is comprised of a cue-dependent input to the  
274 Pro or Anti populations, a stimulus orientation input to either the Left or Right populations, and  
275 a choice-period input to the entire network (see Section B.2.3). Here, we use EPI to determine the  
276 changes in network connectivity  $z = [sW_P, sW_A, vW_{PA}, vW_{AP}, dW_{PA}, dW_{AP}, hW_P, hW_A]$  resulting  
277 in greater levels of rapid task switching accuracy.

278 To quantify the emergent property of rapid task switching at various levels of accuracy, we consid-  
279 ered the requirements of this model in this behavioral paradigm. At the end of successful trials,  
280 the response of the Pro population in the hemisphere of the correct choice must have a value near  
281 1, while the Pro population in the opposite hemisphere must have a value near 0. Constraining a  
282 population response  $x_\alpha \in [0, 1]$  to be either 0 or 1 can be achieved by requiring that it has Bernoulli  
283 variance (see Section B.2.3). Thus, we can formulate rapid task switching at a level of accuracy  
284  $p \in [0, 1]$  in both tasks in terms of the average steady response of the Pro population  $\hat{p}$  of the  
285 correct choice, the error in Bernoulli variance of that Pro neuron  $\sigma_{err}^2$ , and the average difference  
286 in Pro neuron responses  $d$  in both Pro and Anti trials:

$$\mathcal{B}(p) \triangleq \mathbb{E} \begin{bmatrix} \hat{p}_P \\ \hat{p}_A \\ (\hat{p}_P - p)^2 \\ (\hat{p}_A - p)^2 \\ \sigma_{P,err}^2 \\ \sigma_{A,err}^2 \\ d_P \\ d_A \end{bmatrix} = \begin{bmatrix} p \\ p \\ 0.15^2 \\ 0.15^2 \\ 0 \\ 0 \\ 1 \\ 1 \end{bmatrix}. \quad (9)$$

287 Thus,  $\mathcal{B}(p)$  denotes Bernoulli, winner-take-all responses between Pro neurons in a model executing  
288 rapid task switching near accuracy level  $p$ .

289 We used EPI to learn distributions of the SC weight matrix parameters  $z$  conditioned on of various  
290 levels of rapid task switching accuracy  $\mathcal{B}(p)$  for  $p \in \{50\%, 60\%, 70\%, 80\%, 90\%\}$ . To make sense

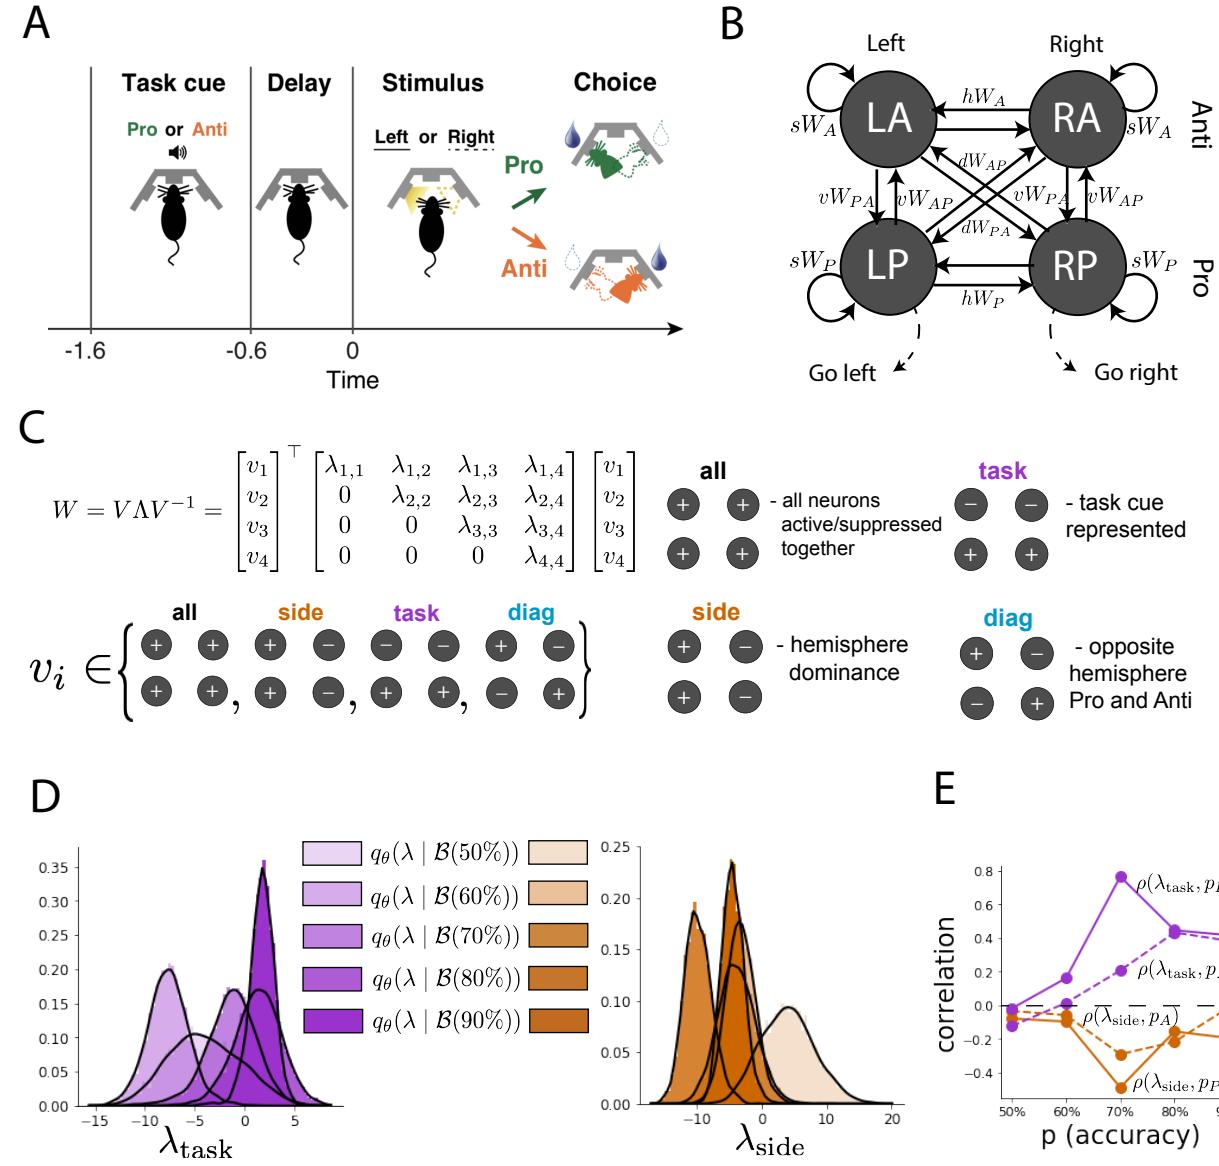


Figure 4: EPI reveals changes in SC [25] connectivity that control task accuracy. A. Rapid task switching behavioral paradigm (see text). B. Model of superior colliculus (SC). Neurons: LP - left pro, RP - right pro, LA - left anti, RA - right anti. Parameters:  $sW$  - self,  $hW$  - horizontal,  $vW$  - vertical,  $dW$  - diagonal weights. Subscripts  $P$  and  $A$  of connectivity weights indicate Pro or Anti populations, and e.g.  $vW_{PA}$  is a vertical weight from an Anti to a Pro population. C. The Schur decomposition of the weight matrix  $W = V \Lambda V^{-1}$  is a unique decomposition with orthogonal  $V$  and upper triangular  $\Lambda$ . Schur modes:  $v_{\text{all}}$ ,  $v_{\text{task}}$ ,  $v_{\text{side}}$ , and  $v_{\text{diag}}$ . D. The marginal EPI distributions of the Schur eigenvalues at each level of task accuracy. E. The correlation of Schur eigenvalue with task performance in each learned EPI distribution.

of these inferred distributions, we followed the approach of Duan et al. by decomposing the connectivity matrix  $W = V\Lambda V^{-1}$  in such a way (the Schur decomposition) that the basis vectors  $v_i$  are the same for all  $W$  (Fig. 4C). These basis vectors have intuitive roles in processing for this task, and are accordingly named the *all* mode - all neurons co-fluctuate, *side* mode - one side dominates the other, *task* mode - the Pro or Anti populations dominate the other, and *diag* mode - Pro- and Anti-populations of opposite hemispheres dominate the opposite pair. The corresponding eigenvalues (e.g.  $\lambda_{\text{task}}$ , which change according to  $W$ ) indicate the degree to which activity along that mode is increased or decreased by  $W$ .

We found that for greater task accuracies, the task mode eigenvalue increases, indicating the importance of  $W$  to the task representation (Fig. 4D, purple; adjacent distributions from 60% to 90% have  $p < 10^{-4}$ , Mann-Whitney test with 50 estimates and 100 samples). Stepping from random chance (50%) networks to marginally task-performing (60%) networks, there is a marked decrease of the side mode eigenvalues (Fig. 4D, orange;  $p < 10^{-4}$ ). Such side mode suppression relative to 50% remains in the models achieving greater accuracy, revealing its importance towards task performance. There were no interesting trends with task accuracy in the all or diag mode (hence not shown in Fig. 4). Importantly, we can conclude from our methodology that side mode suppression in  $W$  allows rapid task switching, and that greater task-mode representations in  $W$  increase accuracy. These hypotheses are confirmed by forward simulation of the SC model (Fig. 4E, see Section B.2.3) suggesting experimentally testable predictions: increase in rapid task switching performance should be correlated with changes in effective connectivity resulting in an increase in task mode and decrease in side mode eigenvalues.

### 3.5 Linking RNN connectivity to error

So far, each model we have studied was designed from fundamental biophysical principles, genetically- or functionally-defined neuron types. At a more abstract level of modeling, recurrent neural networks (RNNs) are high-dimensional dynamical models of computation that are becoming increasingly popular in neuroscience research [49]. In theoretical neuroscience, RNN dynamics usually follow the equation

$$\frac{dx}{dt} = -x + W\phi(x) + h, \quad (10)$$

where  $x$  is the network activity,  $W$  is the network connectivity,  $\phi(\cdot) = \tanh(\cdot)$ , and  $h$  is the input to the system. Such RNNs are trained to do a task from a systems neuroscience experiment, and then the unit activations of the trained RNN are compared to recorded neural activity. Fully-connected

321 RNNs with tens of thousands of parameters are challenging to characterize [50], especially making  
 322 statistical inferences about their parameterization. Alternatively, we considered a rank-1,  $N$ -neuron  
 323 RNN with connectivity consisting of the sum of a random and a structured component:

$$W = g\chi + \frac{1}{N}mn^\top. \quad (11)$$

324 The random component  $g\chi$  has strength  $g$ , and random component weights are Gaussian dis-  
 325 tributed  $\chi_{i,j} \sim \mathcal{N}(0, \frac{1}{N})$ . The structured component  $\frac{1}{N}mn^\top$  has entries of  $m$  and  $n$  drawn from  
 326 Gaussian distributions  $m_i \sim \mathcal{N}(M_m, 1)$  and  $n_i \sim \mathcal{N}(M_n, 1)$ . Recent theoretical work derives the  
 327 low-dimensional response properties of low-rank networks from statistical parameterizations of their  
 328 connectivity, such as  $z = [g, M_m, M_n]$  [26]. We used EPI to infer the parameterizations of rank-  
 329 1 RNNs solving an example task, enabling discovery of properties of connectivity that result in  
 330 different types of error in the computation.

331 The task we consider is Gaussian posterior conditioning: calculate the parameters of a posterior  
 332 distribution induced by a prior  $p(\mu_y) = \mathcal{N}(\mu_0 = 4, \sigma_0^2 = 1)$  and a likelihood  $p(y|\mu_y) = \mathcal{N}(\mu_y, \sigma_y^2 =$   
 333 1), given a single observation  $y$ . Conjugacy offers the result analytically;  $p(\mu_y|y) = \mathcal{N}(\mu_{post}, \sigma_{post}^2)$ ,

334 where:

$$\mu_{post} = \frac{\frac{\mu_0}{\sigma_0^2} + \frac{y}{\sigma_y^2}}{\frac{1}{\sigma_0^2} + \frac{1}{\sigma_y^2}} \quad \sigma_{post}^2 = \frac{1}{\frac{1}{\sigma_0^2} + \frac{1}{\sigma_y^2}}. \quad (12)$$

335 To solve this Gaussian posterior conditioning task, the RNN response to a constant input  $h =$   
 336  $yr + (n - M_n)$  must equal the posterior mean along readout vector  $r$ , where

$$\kappa_r = \frac{1}{N} \sum_{j=1}^N r_j \phi(x_j). \quad (13)$$

337 Additionally, the amount of chaotic variance  $\Delta_T$  must equal the posterior variance. Theory for  
 338 low-rank RNNs allows us to express  $\kappa_r$  and  $\Delta_T$  in terms of each other through a solvable system of  
 339 nonlinear equations (see Section B.2.4) [26]. This theory facilitates the mathematical formalization  
 340 of task execution into an emergent property, where the emergent property statistics of the RNN  
 341 activity are  $\kappa_r$  and  $\Delta_T$ , and the emergent property values are the ground truth posterior mean  
 342  $\mu_{post}$  and variance  $\sigma_{post}^2$ :

$$\mathbb{E} \begin{bmatrix} \kappa_r \\ \Delta_T \\ (\kappa_r - \mu_{post})^2 \\ (\Delta_T^2 - \sigma_{post}^2)^2 \end{bmatrix} = \begin{bmatrix} \mu_{post} \\ \sigma_{post}^2 \\ 0.1 \\ 0.1 \end{bmatrix}. \quad (14)$$

343 We chose a substantial amount of variance in these emergent property statistics, so that the inferred  
 344 distribution resulted in RNNs with a variety of errors in their solutions to the gaussian posterior  
 345 conditioning problem.

346 EPI was used to learn distributions of RNN connectivity properties  $z = [g, M_m, M_n]$  executing  
 347 Gaussian posterior conditioning given an input of  $y = 2$ , where the true posterior is  $\mu_{\text{post}} = 3$  and  
 348  $\sigma_{\text{post}} = 0.5$  (Fig. 5A). We examined the nature of the over- and under-estimation of the posterior  
 349 means (Fig. 5B left) and variances (Fig. 5B right) in the inferred distributions (300 samples).  
 350 The symmetry in the  $M_m$ - $M_n$  plane, suggests a degeneracy in the product of  $M_m$  and  $M_n$  (Fig.  
 351 5B). Indeed,  $M_m M_n$  strongly determines the posterior mean ( $r = 0.62, p < 10^{-4}$ ). Furthermore,  
 352 the random strength  $g$  strongly determines the chaotic variance ( $r = 0.56, p < 10^{-4}$ ). Neither of  
 353 these observations were obvious from what mathematical analysis is available in networks of this  
 354 type (see Section B.2.4). While the link between random strength  $g$  and chaotic variance  $\Delta_T$  (and  
 355 resultingly posterior variance in this problem) is well-known [3], the distribution admits a novel  
 356 hypothesis: the estimation of the posterior mean by the RNN increases with  $M_m M_n$ .

357 We tested this prediction by taking parameters  $z_1$  and  $z_2$  as representative samples from the positive  
 358 and negative  $M_m$ - $M_n$  quadrants, respectively. Instead of using the theoretical predictions shown in  
 359 Figure 5B, we simulated finite-size realizations of these networks with 2,000 neurons (e.g. Fig. 5C).  
 360 We perturbed these parameter choices by  $M_m M_n$  clarifying that the posterior mean can be directly  
 361 controlled in this way (Fig. 5D;  $p < 10^{-4}$ ), see Section B.2.4). Thus, EPI confers a clear picture  
 362 of error in this computation: the product of the low rank vector means  $M_m$  and  $M_n$  modulates  
 363 the estimated posterior mean while the random strength  $g$  modulates the estimated posterior  
 364 variance. This novel procedure of inference on reduced parameterizations of RNNs conditioned on  
 365 the emergent property of task execution is generalizable to other settings modeled in [26] like noisy  
 366 integration and context-dependent decision making (Fig. S5).

## 367 4 Discussion

### 368 4.1 EPI is a general tool for theoretical neuroscience

369 Biologically realistic models of neural circuits are comprised of complex nonlinear differential equa-  
 370 tions, making traditional theoretical analysis and statistical inference intractable. In contrast, EPI  
 371 is capable of learning distributions of parameters in such models producing measurable signatures  
 372 of computation. We have demonstrated its utility on biological models (STG), intermediate-level

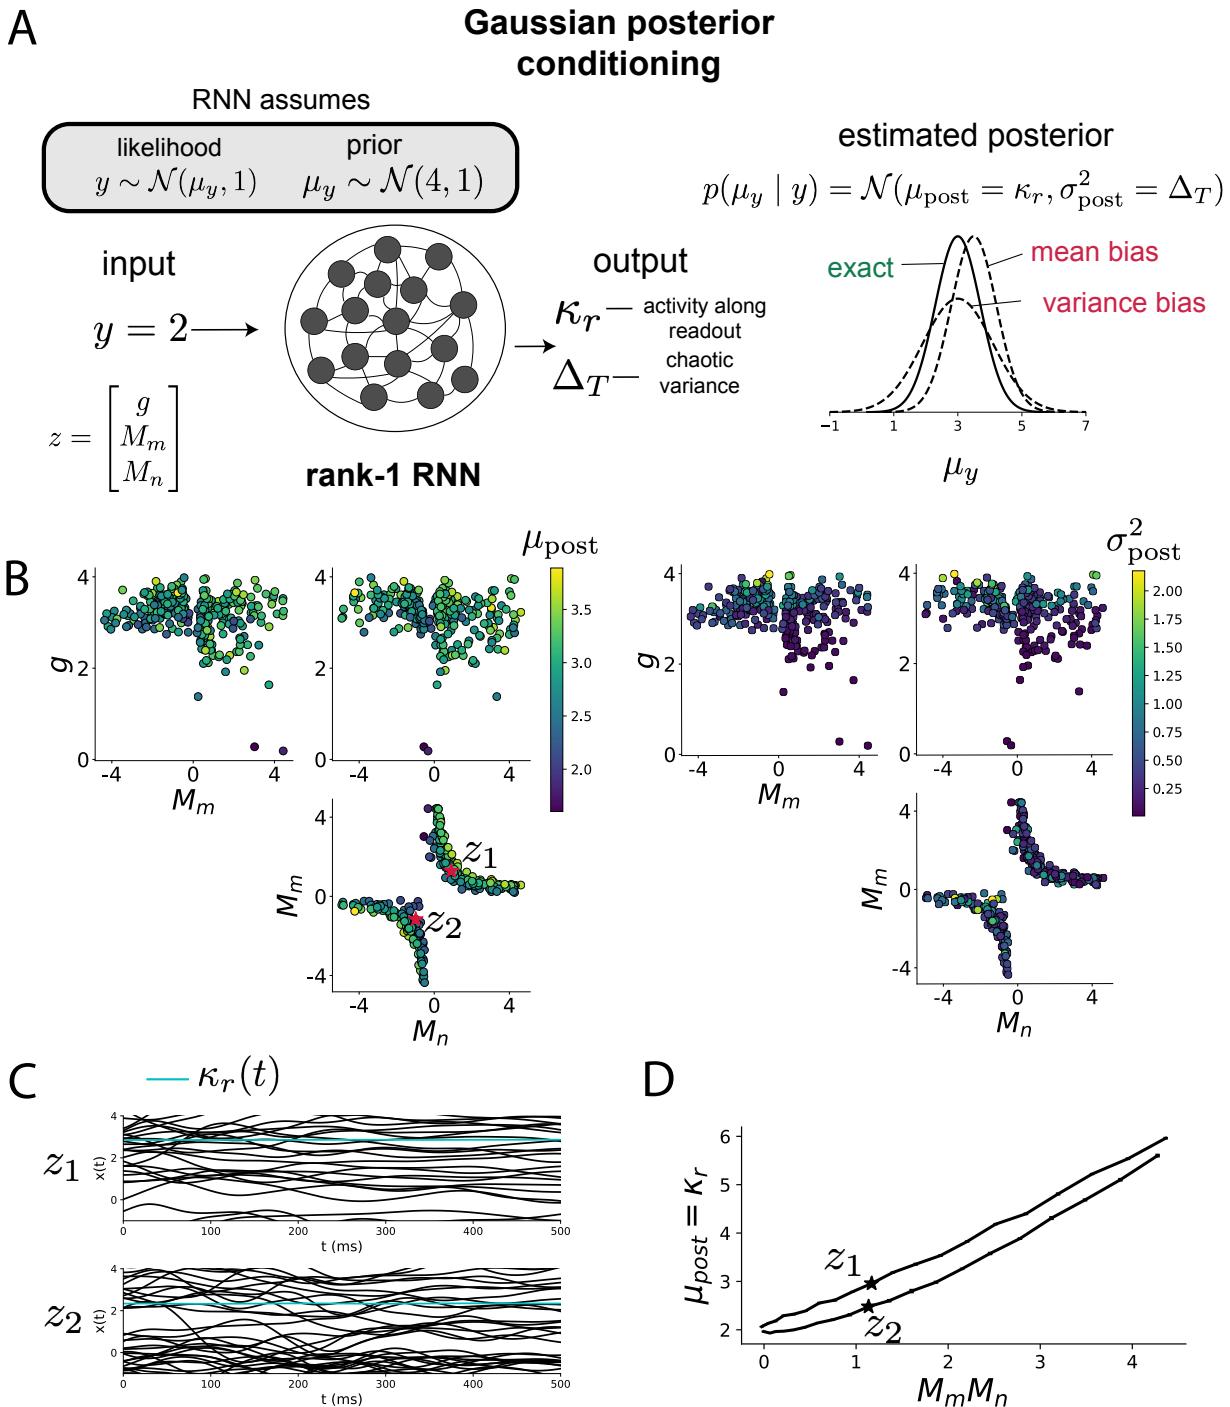


Figure 5: Sources of error in an RNN solving a simple task. A. (left) A rank-1 RNN executing a Gaussian posterior conditioning computation on  $\mu_y$ . (right) Error in this computation can come from over- or under-estimating the posterior mean or variance. B. EPI distribution of rank-1 RNNs executing Gaussian posterior conditioning. Samples are colored by (left) posterior mean  $\mu_{\text{post}} = \kappa_r$  and (right) posterior variance  $\sigma_{\text{post}}^2 = \Delta_T$ . C. Finite-size network simulations of 2,000 neurons with parameters  $z_1$  and  $z_2$  sampled from the inferred distribution. Activity along readout  $\kappa_r$  (cyan) is stable despite chaotic fluctuations. D. The posterior mean computed by RNNs parameterized by  $z_1$  and  $z_2$  perturbed in the dimension of the product of  $M_m$  and  $M_n$ . Means and standard errors are shown across 10 realizations of 2,000-neuron networks.

373 models of interacting genetically- and functionally-defined neuron-types (V1, SC), and the most  
374 abstract of models (RNNs). We are able to condition both deterministic and stochastic models on  
375 low-level emergent properties like spiking frequency of membrane potentials, as well as high-level  
376 cognitive function like posterior conditioning. Technically, EPI is tractable when the emergent  
377 property statistics are continuously differentiable with respect to the model parameters, which is  
378 very often the case; this emphasizes the general applicability of EPI.

379 In this study, we have focused on applying EPI to low dimensional parameter spaces of models  
380 with low dimensional dynamical states. These choices were made to present the reader with a  
381 series of interpretable conclusions, which is more challenging in high dimensional spaces. In fact,  
382 EPI should scale reasonably to high dimensional parameter spaces, as the underlying technology has  
383 produced state-of-the-art performance on high-dimensional tasks such as texture generation [20]. Of  
384 course, increasing the dimensionality of the dynamical state of the model makes optimization more  
385 expensive, and there is a practical limit there as with any machine learning approach. Although,  
386 theoretical approaches (e.g. [26]) can be used to reason about the wholistic activity of such high  
387 dimensional systems by introducing some degree of additional structure into the model.

388 There are additional technical considerations when assessing the suitability of EPI for a particu-  
389 lar modeling question. First and foremost, as in any optimization problem, the defined emergent  
390 property should always be appropriately conditioned (constraints should not have wildly different  
391 units). Furthermore, if the program is underconstrained (not enough constraints), the distribution  
392 grows (in entropy) unstably unless mapped to a finite support. If overconstrained, there is no pa-  
393 rameter set producing the emergent property, and EPI optimization will fail (appropriately). Next,  
394 one should consider the computational cost of the gradient calculations. In the best circumstance,  
395 there is a simple, closed form expression (e.g. Section B.1.1) for the emergent property statistic  
396 given the model parameters. On the other end of the spectrum, many forward simulation iterations  
397 may be required before a high quality measurement of the emergent property statistic is available  
398 (e.g. Section B.2.1). In such cases, optimization will be expensive.

399 **4.2 Novel hypotheses from EPI**

400 In neuroscience, machine learning has primarily been used to revealed structure in large-scale neural  
401 datasets [52, 53, 54, 55, 56, 57] (see review, [15]). Such careful inference procedures are developed  
402 for these statistical models allowing precise, quantitative reasoning, which clarifies the way data  
403 informs knowledge of the model parameters. However, these inferable statistical models lack re-

404 semblance to the underlying biology, making it unclear how to go from the structure revealed by  
405 these methods, to the neural mechanisms giving rise to it. In contrast, theoretical neuroscience has  
406 focused on careful mechanistic modeling and the production of emergent properties of computation.  
407 The careful steps of 1.) model design and 2.) emergent property definition, are followed by 3.)  
408 practical inference methods resulting in an opaque characterization of the way model parameters  
409 govern computation. In this work, we replaced this opaque procedure of parameter identification  
410 in theoretical neuroscience with emergent property inference, opening the door to careful inference  
411 in careful models of neural computation.

412 Biologically realistic models of neural circuits often prove formidable to analyze. Two main factors  
413 contribute to the difficulty of this endeavor. First, even in simple point-neuron circuit models,  
414 the number of parameters scales quadratically with the number of neurons, limiting the analytical  
415 dissection of its parameter space. Second, even in low dimensional circuits, the structure of the  
416 phase space itself is intricate and each parameter configuration can support multiple steady states  
417 [58] or non-trivial dynamics on strange attractors [59].

418 In Section 3.3, we advanced the tractability of low-dimensional neuronal circuit models by showing  
419 that EPI offers insights about cell-type specific input-responsivity that cannot be afforded through  
420 the available linear analytical methods [24, 44, 45]. By flexibly conditioning this V1 model on  
421 different emergent properties, we performed an exploratory analysis of a *model* rather than a  
422 dataset, generating a set of testable hypotheses, which were proved out. Furthermore, exploratory  
423 analyses can be directed towards formulating hypotheses of a specific form. For example, model  
424 parameter dependencies on behavioral performance can be assessed by using EPI to condition on  
425 various levels of task accuracy (See Section 3.4). This analysis identified experimentally testable  
426 predictions (proved out *in-silico*) of patterns of effective connectivity in SC that should be correlated  
427 with increased performance.

428 In our final analysis, we presented a novel procedure for doing statistical inference on interpretable  
429 parameterizations of RNNs executing simple tasks. Specifically, we analyzed RNNs solving a pos-  
430 terior conditioning problem in the spirit of [51]. This methodology relies on recently extended  
431 theory of responses in random neural networks with minimal structure [26]. While we focused on  
432 rank-1 RNNs, which were sufficient for solving this task, we can more generally use this approach  
433 to analyze rank-2 and greater RNNs. The ability to apply the probabilistic model selection toolkit  
434 to such black box models should prove invaluable as their use in neuroscience increases.

## 435 References

- [1] Larry F Abbott. Theoretical neuroscience rising. *Neuron*, 60(3):489–495, 2008.
- [2] John J Hopfield. Neural networks and physical systems with emergent collective computational abilities. *Proceedings of the national academy of sciences*, 79(8):2554–2558, 1982.
- [3] Haim Sompolinsky, Andrea Crisanti, and Hans-Jurgen Sommers. Chaos in random neural networks. *Physical review letters*, 61(3):259, 1988.
- [4] Misha V Tsodyks, William E Skaggs, Terrence J Sejnowski, and Bruce L McNaughton. Paradoxical effects of external modulation of inhibitory interneurons. *Journal of neuroscience*, 17(11):4382–4388, 1997.
- [5] Kong-Fatt Wong and Xiao-Jing Wang. A recurrent network mechanism of time integration in perceptual decisions. *Journal of Neuroscience*, 26(4):1314–1328, 2006.
- [6] Diederik P Kingma and Max Welling. Auto-encoding variational bayes. *International Conference on Learning Representations*, 2014.
- [7] Danilo Jimenez Rezende, Shakir Mohamed, and Daan Wierstra. Stochastic backpropagation and variational inference in deep latent gaussian models. *International Conference on Machine Learning*, 2014.
- [8] Yuanjun Gao, Evan W Archer, Liam Paninski, and John P Cunningham. Linear dynamical neural population models through nonlinear embeddings. In *Advances in neural information processing systems*, pages 163–171, 2016.
- [9] Yuan Zhao and Il Memming Park. Recursive variational bayesian dual estimation for nonlinear dynamics and non-gaussian observations. *stat*, 1050:27, 2017.
- [10] Gabriel Barello, Adam Charles, and Jonathan Pillow. Sparse-coding variational auto-encoders. *bioRxiv*, page 399246, 2018.
- [11] Chethan Pandarinath, Daniel J O’Shea, Jasmine Collins, Rafal Jozefowicz, Sergey D Stavisky, Jonathan C Kao, Eric M Trautmann, Matthew T Kaufman, Stephen I Ryu, Leigh R Hochberg, et al. Inferring single-trial neural population dynamics using sequential auto-encoders. *Nature methods*, page 1, 2018.

- [12] Alexander B Wiltschko, Matthew J Johnson, Giuliano Iurilli, Ralph E Peterson, Jesse M Katon, Stan L Pashkovski, Victoria E Abraira, Ryan P Adams, and Sandeep Robert Datta. Mapping sub-second structure in mouse behavior. *Neuron*, 88(6):1121–1135, 2015.
- [13] Matthew J Johnson, David K Duvenaud, Alex Wiltschko, Ryan P Adams, and Sandeep R Datta. Composing graphical models with neural networks for structured representations and fast inference. In *Advances in neural information processing systems*, pages 2946–2954, 2016.
- [14] Eleanor Batty, Matthew Whiteway, Shreya Saxena, Dan Biderman, Taiga Abe, Simon Musall, Winthrop Gillis, Jeffrey Markowitz, Anne Churchland, John Cunningham, et al. Behavenet: nonlinear embedding and bayesian neural decoding of behavioral videos. *Advances in Neural Information Processing Systems*, 2019.
- [15] Liam Paninski and John P Cunningham. Neural data science: accelerating the experiment-analysis-theory cycle in large-scale neuroscience. *Current opinion in neurobiology*, 50:232–241, 2018.
- [16] Mark K Transtrum, Benjamin B Machta, Kevin S Brown, Bryan C Daniels, Christopher R Myers, and James P Sethna. Perspective: Sloppiness and emergent theories in physics, biology, and beyond. *The Journal of chemical physics*, 143(1):07B201\_1, 2015.
- [17] Danilo Jimenez Rezende and Shakir Mohamed. Variational inference with normalizing flows. *International Conference on Machine Learning*, 2015.
- [18] Laurent Dinh, Jascha Sohl-Dickstein, and Samy Bengio. Density estimation using real nvp. *arXiv preprint arXiv:1605.08803*, 2016.
- [19] George Papamakarios, Theo Pavlakou, and Iain Murray. Masked autoregressive flow for density estimation. In *Advances in Neural Information Processing Systems*, pages 2338–2347, 2017.
- [20] Gabriel Loaiza-Ganem, Yuanjun Gao, and John P Cunningham. Maximum entropy flow networks. *International Conference on Learning Representations*, 2017.
- [21] Dustin Tran, Rajesh Ranganath, and David Blei. Hierarchical implicit models and likelihood-free variational inference. In *Advances in Neural Information Processing Systems*, pages 5523–5533, 2017.
- [22] Mark S Goldman, Jorge Golowasch, Eve Marder, and LF Abbott. Global structure, robustness, and modulation of neuronal models. *Journal of Neuroscience*, 21(14):5229–5238, 2001.

- [491] [23] Gabrielle J Gutierrez, Timothy O’Leary, and Eve Marder. Multiple mechanisms switch an  
[492] electrically coupled, synaptically inhibited neuron between competing rhythmic oscillators.  
[493] *Neuron*, 77(5):845–858, 2013.
- [494] [24] Ashok Litwin-Kumar, Robert Rosenbaum, and Brent Doiron. Inhibitory stabilization and vi-  
[495] sual coding in cortical circuits with multiple interneuron subtypes. *Journal of neurophysiology*,  
[496] 115(3):1399–1409, 2016.
- [497] [25] Chunyu A Duan, Marino Pagan, Alex T Piet, Charles D Kopec, Athena Akrami, Alexander J  
[498] Riordan, Jeffrey C Erlich, and Carlos D Brody. Collicular circuits for flexible sensorimotor  
[499] routing. *bioRxiv*, page 245613, 2018.
- [500] [26] Francesca Mastrogiovanni and Srdjan Ostojic. Linking connectivity, dynamics, and computa-  
[501] tions in low-rank recurrent neural networks. *Neuron*, 99(3):609–623, 2018.
- [502] [27] Sean R Bittner, Agostina Palmigiano, Kenneth D Miller, and John P Cunningham. Degener-  
[503] ate solution networks for theoretical neuroscience. *Computational and Systems Neuroscience  
[504] Meeting (COSYNE), Lisbon, Portugal*, 2019.
- [505] [28] Sean R Bittner, Alex T Piet, Chunyu A Duan, Agostina Palmigiano, Kenneth D Miller,  
[506] Carlos D Brody, and John P Cunningham. Examining models in theoretical neuroscience with  
[507] degenerate solution networks. *Bernstein Conference 2019, Berlin, Germany*, 2019.
- [508] [29] Marcel Nonnenmacher, Pedro J Goncalves, Giacomo Bassetto, Jan-Matthis Lueckmann, and  
[509] Jakob H Macke. Robust statistical inference for simulation-based models in neuroscience. In  
[510] *Bernstein Conference 2018, Berlin, Germany*, 2018.
- [511] [30] Deistler Michael, , Pedro J Goncalves, Kaan Oecal, and Jakob H Macke. Statistical inference for  
[512] analyzing sloppiness in neuroscience models. In *Bernstein Conference 2019, Berlin, Germany*,  
[513] 2019.
- [514] [31] Jan-Matthis Lueckmann, Pedro J Goncalves, Giacomo Bassetto, Kaan Öcal, Marcel Nonnen-  
[515] macher, and Jakob H Macke. Flexible statistical inference for mechanistic models of neural  
[516] dynamics. In *Advances in Neural Information Processing Systems*, pages 1289–1299, 2017.
- [517] [32] Eve Marder and Vatsala Thirumalai. Cellular, synaptic and network effects of neuromodula-  
[518] tion. *Neural Networks*, 15(4-6):479–493, 2002.

- 519 [33] Astrid A Prinz, Dirk Bucher, and Eve Marder. Similar network activity from disparate circuit  
520 parameters. *Nature neuroscience*, 7(12):1345, 2004.
- 521 [34] Edwin T Jaynes. Information theory and statistical mechanics. *Physical review*, 106(4):620,  
522 1957.
- 523 [35] Gamaleldin F Elsayed and John P Cunningham. Structure in neural population recordings:  
524 an expected byproduct of simpler phenomena? *Nature neuroscience*, 20(9):1310, 2017.
- 525 [36] Cristina Savin and Gašper Tkačik. Maximum entropy models as a tool for building precise  
526 neural controls. *Current opinion in neurobiology*, 46:120–126, 2017.
- 527 [37] Brendan K Murphy and Kenneth D Miller. Balanced amplification: a new mechanism of  
528 selective amplification of neural activity patterns. *Neuron*, 61(4):635–648, 2009.
- 529 [38] Hirofumi Ozeki, Ian M Finn, Evan S Schaffer, Kenneth D Miller, and David Ferster. Inhibitory  
530 stabilization of the cortical network underlies visual surround suppression. *Neuron*, 62(4):578–  
531 592, 2009.
- 532 [39] Daniel B Rubin, Stephen D Van Hooser, and Kenneth D Miller. The stabilized supralinear  
533 network: a unifying circuit motif underlying multi-input integration in sensory cortex. *Neuron*,  
534 85(2):402–417, 2015.
- 535 [40] Henry Markram, Maria Toledo-Rodriguez, Yun Wang, Anirudh Gupta, Gilad Silberberg, and  
536 Caizhi Wu. Interneurons of the neocortical inhibitory system. *Nature reviews neuroscience*,  
537 5(10):793, 2004.
- 538 [41] Bernardo Rudy, Gordon Fishell, SooHyun Lee, and Jens Hjerling-Leffler. Three groups of  
539 interneurons account for nearly 100% of neocortical gabaergic neurons. *Developmental neuro-*  
540 *biology*, 71(1):45–61, 2011.
- 541 [42] Robin Tremblay, Soohyun Lee, and Bernardo Rudy. GABAergic Interneurons in the Neocortex:  
542 From Cellular Properties to Circuits. *Neuron*, 91(2):260–292, 2016.
- 543 [43] Carsten K Pfeffer, Mingshan Xue, Miao He, Z Josh Huang, and Massimo Scanziani. Inhi-  
544 bition of inhibition in visual cortex: the logic of connections between molecularly distinct  
545 interneurons. *Nature Neuroscience*, 16(8):1068, 2013.

- 546 [44] Luis Carlos Garcia Del Molino, Guangyu Robert Yang, Jorge F. Mejias, and Xiao Jing Wang.  
547 Paradoxical response reversal of top- down modulation in cortical circuits with three interneu-  
548 ron types. *Elife*, 6:1–15, 2017.
- 549 [45] Guang Chen, Carl Van Vreeswijk, David Hansel, and David Hansel. Mechanisms underlying  
550 the response of mouse cortical networks to optogenetic manipulation. 2019.
- 551 [46] (2018) Allen Institute for Brain Science. Layer 4 model of v1. available from:  
552 <https://portal.brain-map.org/explore/models/l4-mv1>.
- 553 [47] Yazan N Billeh, Binghuang Cai, Sergey L Gratiy, Kael Dai, Ramakrishnan Iyer, Nathan W  
554 Gouwens, Reza Abbasi-Asl, Xiaoxuan Jia, Joshua H Siegle, Shawn R Olsen, et al. Systematic  
555 integration of structural and functional data into multi-scale models of mouse primary visual  
556 cortex. *bioRxiv*, page 662189, 2019.
- 557 [48] Chunyu A Duan, Jeffrey C Erlich, and Carlos D Brody. Requirement of prefrontal and midbrain  
558 regions for rapid executive control of behavior in the rat. *Neuron*, 86(6):1491–1503, 2015.
- 559 [49] Omri Barak. Recurrent neural networks as versatile tools of neuroscience research. *Current*  
560 *opinion in neurobiology*, 46:1–6, 2017.
- 561 [50] David Sussillo and Omri Barak. Opening the black box: low-dimensional dynamics in high-  
562 dimensional recurrent neural networks. *Neural computation*, 25(3):626–649, 2013.
- 563 [51] Rodrigo Echeveste, Laurence Aitchison, Guillaume Hennequin, and Máté Lengyel. Cortical-like  
564 dynamics in recurrent circuits optimized for sampling-based probabilistic inference. *bioRxiv*,  
565 page 696088, 2019.
- 566 [52] Robert E Kass and Valérie Ventura. A spike-train probability model. *Neural computation*,  
567 13(8):1713–1720, 2001.
- 568 [53] Emery N Brown, Loren M Frank, Dengda Tang, Michael C Quirk, and Matthew A Wilson.  
569 A statistical paradigm for neural spike train decoding applied to position prediction from  
570 ensemble firing patterns of rat hippocampal place cells. *Journal of Neuroscience*, 18(18):7411–  
571 7425, 1998.
- 572 [54] Liam Paninski. Maximum likelihood estimation of cascade point-process neural encoding  
573 models. *Network: Computation in Neural Systems*, 15(4):243–262, 2004.

- 574 [55] M Yu Byron, John P Cunningham, Gopal Santhanam, Stephen I Ryu, Krishna V Shenoy, and  
575 Maneesh Sahani. Gaussian-process factor analysis for low-dimensional single-trial analysis  
576 of neural population activity. In *Advances in neural information processing systems*, pages  
577 1881–1888, 2009.
- 578 [56] Kenneth W Latimer, Jacob L Yates, Miriam LR Meister, Alexander C Huk, and Jonathan W  
579 Pillow. Single-trial spike trains in parietal cortex reveal discrete steps during decision-making.  
580 *Science*, 349(6244):184–187, 2015.
- 581 [57] Lea Duncker, Gergo Bohner, Julien Boussard, and Maneesh Sahani. Learning interpretable  
582 continuous-time models of latent stochastic dynamical systems. *Proceedings of the 36th Inter-*  
583 *national Conference on Machine Learning*, 2019.
- 584 [58] Nataliya Kraynyukova and Tatjana Tchumatchenko. Stabilized supralinear network can give  
585 rise to bistable, oscillatory, and persistent activity. *Proceedings of the National Academy of*  
586 *Sciences*, 115(13):3464–3469, 2018.
- 587 [59] Katherine Morrison, Anda Degeratu, Vladimir Itskov, and Carina Curto. Diversity of emerg-  
588 ent dynamics in competitive threshold-linear networks: a preliminary report. *arXiv preprint*  
589 *arXiv:1605.04463*, 2016.
- 590 [60] Rajesh Ranganath, Sean Gerrish, and David Blei. Black box variational inference. In *Artificial*  
591 *Intelligence and Statistics*, pages 814–822, 2014.
- 592 [61] Martin J Wainwright, Michael I Jordan, et al. Graphical models, exponential families, and  
593 variational inference. *Foundations and Trends® in Machine Learning*, 1(1–2):1–305, 2008.
- 594 [62] Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *International*  
595 *Conference on Learning Representations*, 2015.
- 596 [63] Laurent Dinh, Jascha Sohl-Dickstein, and Samy Bengio. Density estimation using real nvp.  
597 *Proceedings of the 5th International Conference on Learning Representations*, 2017.
- 598 [64] David M Blei, Alp Kucukelbir, and Jon D McAuliffe. Variational inference: A review for  
599 statisticians. *Journal of the American Statistical Association*, 112(518):859–877, 2017.

---

## 600 A Acknowledgements

601 This work was funded by NSF Graduate Research Fellowship, DGE-1644869, McKnight Endow-  
 602 ment Fund, NIH NINDS 5R01NS100066, Simons Foundation 542963, NSF NeuroNex Award, DBI-  
 603 1707398, The Gatsby Charitable Foundation, Simons Collaboration on the Global Brain Postdoc-  
 604 toral Fellowship, Chinese Postdoctoral Science Foundation, and International Exchange Program  
 605 Fellowship. Helpful conversations were had with Francesca Mastrogiuseppe, Srdjan Ostojic, James  
 606 Fitzgerald, Stephen Baccus, Dhruva Raman, Mehrdad Jazayeri, Liam Paninski, and Larry Abbott.

## 607 B Methods

### 608 B.1 Emergent property inference (EPI)

609 Emergent property inference (EPI) learns distributions of theoretical model parameters that pro-  
 610 duce emergent properties of interest by combining ideas from maximum entropy flow networks  
 611 (MEFNs) [20] and likelihood-free variational inference (LFVI) [21]. Consider model parameteri-  
 612 zation  $z$  and data  $x$  which has an intractable likelihood  $p(x | z)$  defined by a model simulator of  
 613 which samples are available  $x \sim p(x | z)$ . EPI optimizes a distribution  $q_\theta(z)$  (itself parameterized  
 614 by  $\theta$ ) of model parameters  $z$  to produce an emergent property of interest  $\mathcal{B}$ ,

$$\mathcal{B} \triangleq \mathbb{E}_{z \sim q_\theta} [\mathbb{E}_{x \sim p(x|z)} [T(x)]] = \mu. \quad (15)$$

615 Precisely, the emergent property statistics  $T(x)$  must equal the emergent property values  $\mu$ , in  
 616 expectation over the EPI distribution of parameters  $q_\theta(z)$  and the distribution of simulated activity  
 617  $p(x | z)$ . This is a viable way to represent emergent properties in theoretical models, as we have  
 618 demonstrated in the main text, and enables the EPI optimization.

619 With EPI, we use deep probability distributions to learn flexible approximations to model parameter  
 620 distributions  $q_\theta(z)$ . In deep probability distributions, a simple random variable  $w \sim q_0(w)$  is  
 621 mapped deterministically via a sequence of deep neural network layers ( $f_1, \dots, f_l$ ) parameterized by  
 622 weights and biases  $\theta$  to the support of the distribution of interest:

$$z = f_\theta(\omega) = f_l(\dots f_1(w)). \quad (16)$$

623 Given a simulator defined by a theoretical model  $x \sim p(x | z)$  and some emergent property of  
 624 interest  $\mathcal{B}$ ,  $q_\theta(z)$  is optimized via the neural network parameters  $\theta$  to find a maximally entropic

625 distribution  $q_\theta^*$  within the deep variational family  $\mathcal{Q}$  producing the emergent property:

$$\begin{aligned} q_\theta^*(z) &= \operatorname{argmax}_{q_\theta \in \mathcal{Q}} H(q_\theta(z)) \\ \text{s.t. } \mathbb{E}_{z \sim q_\theta} [\mathbb{E}_{x \sim p(x|z)} [T(x)]] &= \mu. \end{aligned} \quad (17)$$

626 Since we are optimizing parameters  $\theta$  of our deep probability distribution with respect to the  
 627 entropy  $H(q_\theta(z))$ , we must take gradients with respect to the log probability density of samples  
 628 from the deep probability distribution. Entropy of  $q_\theta(z)$  can be expressed as an expectation of  
 629 the negative log density of parameter samples  $z$  over the randomness in the parameterless initial  
 630 distribution  $q_0$ :

$$H(q_\theta(z)) = \int -q_\theta(z) \log(q_\theta(z)) dz = \mathbb{E}_{z \sim q_\theta} [-\log(q_\theta(z))] = \mathbb{E}_{w \sim q_0} [-\log(q_\theta(f_\theta(w)))]. \quad (18)$$

631 Thus, the gradient of the entropy of the deep probability distribution can be estimated as an  
 632 average of gradients of the log density of samples  $z$ :

$$\nabla_\theta H(q_\theta(z)) = \mathbb{E}_{w \sim q_0} [-\nabla_\theta \log(q_\theta(f_\theta(w)))]. \quad (19)$$

633 In EPI, MEFNs are purposed towards variational learning of model parameter distributions. A  
 634 closely related methodology, variational inference, uses optimization to approximate posterior dis-  
 635 tributions [64]. Standard methods like stochastic gradient variational Bayes [6] or black box varia-  
 636 tional inference [60] simply do not work for inference in theoretical models of neural circuits, since  
 637 they require tractable likelihoods  $p(x | z)$ . Work on likelihood-free variational inference (LFVI) [21],  
 638 which like EPI seeks to do inference in models with intractable likelihoods, employs an addtional  
 639 deep neural network as a ratio estimator, enabling an estimation of the optimization objective for  
 640 variational inference. Like LFVI, EPI can be framed as variational inference (see Section B.1.4).  
 641 But, unlike LFVI, EPI uses a single deep network to learn a distribution and is optimized to pro-  
 642 duce an emergent property, rather than condition on data points. Optimizing the EPI objective is  
 643 a technological challenge, the details of which we elaborate in Section B.1.2. Before going through  
 644 those details, we ground this optimization in a toy example.

#### 645 B.1.1 Example: 2D LDS

646 To gain intuition for EPI, consider a two-dimensional linear dynamical system (2D LDS) model  
 647 (Fig. S1A):

$$\tau \frac{dx}{dt} = Ax \quad (20)$$

648 with

$$A = \begin{bmatrix} a_1 & a_2 \\ a_3 & a_4 \end{bmatrix}. \quad (21)$$

649 To run EPI with the dynamics matrix elements as the free parameters  $z = [a_1, a_2, a_3, a_4]$  (fixing  
 650  $\tau = 1$ ), the emergent property statistics  $T(x)$  were chosen to contain the first and second moments  
 651 of the oscillatory frequency,  $2\pi\text{imag}(\lambda_1)$ , and the growth/decay factor,  $\text{real}(\lambda_1)$ , of the oscillating  
 652 system.  $\lambda_1$  is the eigenvalue of greatest real part when the imaginary component is zero, and  
 653 alternatively of positive imaginary component when the eigenvalues are complex conjugate pairs.  
 654 To learn the distribution of real entries of  $A$  that produce a band of oscillating systems around  
 655 1Hz, we formalized this emergent property as  $\text{real}(\lambda_1)$  having mean zero with variance 0.25<sup>2</sup>, and  
 656 the oscillation frequency  $2\pi\text{imag}(\lambda_1)$  having mean  $\omega = 1$  Hz with variance (0.1Hz)<sup>2</sup>:

$$\mathbb{E}[T(x)] \triangleq \mathbb{E} \begin{bmatrix} \text{real}(\lambda_1) \\ \text{imag}(\lambda_1) \\ (\text{real}(\lambda_1) - 0)^2 \\ (\text{imag}(\lambda_1) - 2\pi\omega)^2 \end{bmatrix} = \begin{bmatrix} 0.0 \\ 2\pi\omega \\ 0.25^2 \\ (2\pi 0.1)^2 \end{bmatrix} \triangleq \mu. \quad (22)$$

657

658 Unlike the models we presented in the main text, this model admits an analytical form for the  
 659 mean emergent property statistics given parameter  $z$ , since the eigenvalues can be calculated using  
 660 the quadratic formula:

$$\lambda = \frac{\left(\frac{a_1+a_4}{\tau}\right) \pm \sqrt{\left(\frac{a_1+a_4}{\tau}\right)^2 + 4\left(\frac{a_2a_3-a_1a_4}{\tau}\right)}}{2}. \quad (23)$$

661 Importantly, even though  $\mathbb{E}_{x \sim p(x|z)}[T(x)]$  is calculable directly via a closed form function and  
 662 does not require simulation, we cannot derive the distribution  $q_\theta^*$  directly. This fact is due to the  
 663 formally hard problem of the backward mapping: finding the natural parameters  $\eta$  from the mean  
 664 parameters  $\mu$  of an exponential family distribution [61]. Instead, we used EPI to approximate this  
 665 distribution (Fig. S1B). We used a real-NVP normalizing flow architecture with four masks, two  
 666 neural network layers of 15 units per mask, with batch normalization momentum 0.99, mapped  
 667 onto a support of  $z_i \in [-10, 10]$ . (see Section B.1.3).

668 Even this relatively simple system has nontrivial (though intuitively sensible) structure in the  
 669 parameter distribution. To validate our method, we analytically derived the contours of the prob-  
 670 ability density from the emergent property statistics and values. In the  $a_1$ - $a_4$  plane, the black  
 671 line at  $\text{real}(\lambda_1) = \frac{a_1+a_4}{2} = 0$ , dotted black line at the standard deviation  $\text{real}(\lambda_1) = \frac{a_1+a_4}{2} \pm 0.25$ ,  
 672 and the dotted gray line at twice the standard deviation  $\text{real}(\lambda_1) = \frac{a_1+a_4}{2} \pm 0.5$  follow the contour

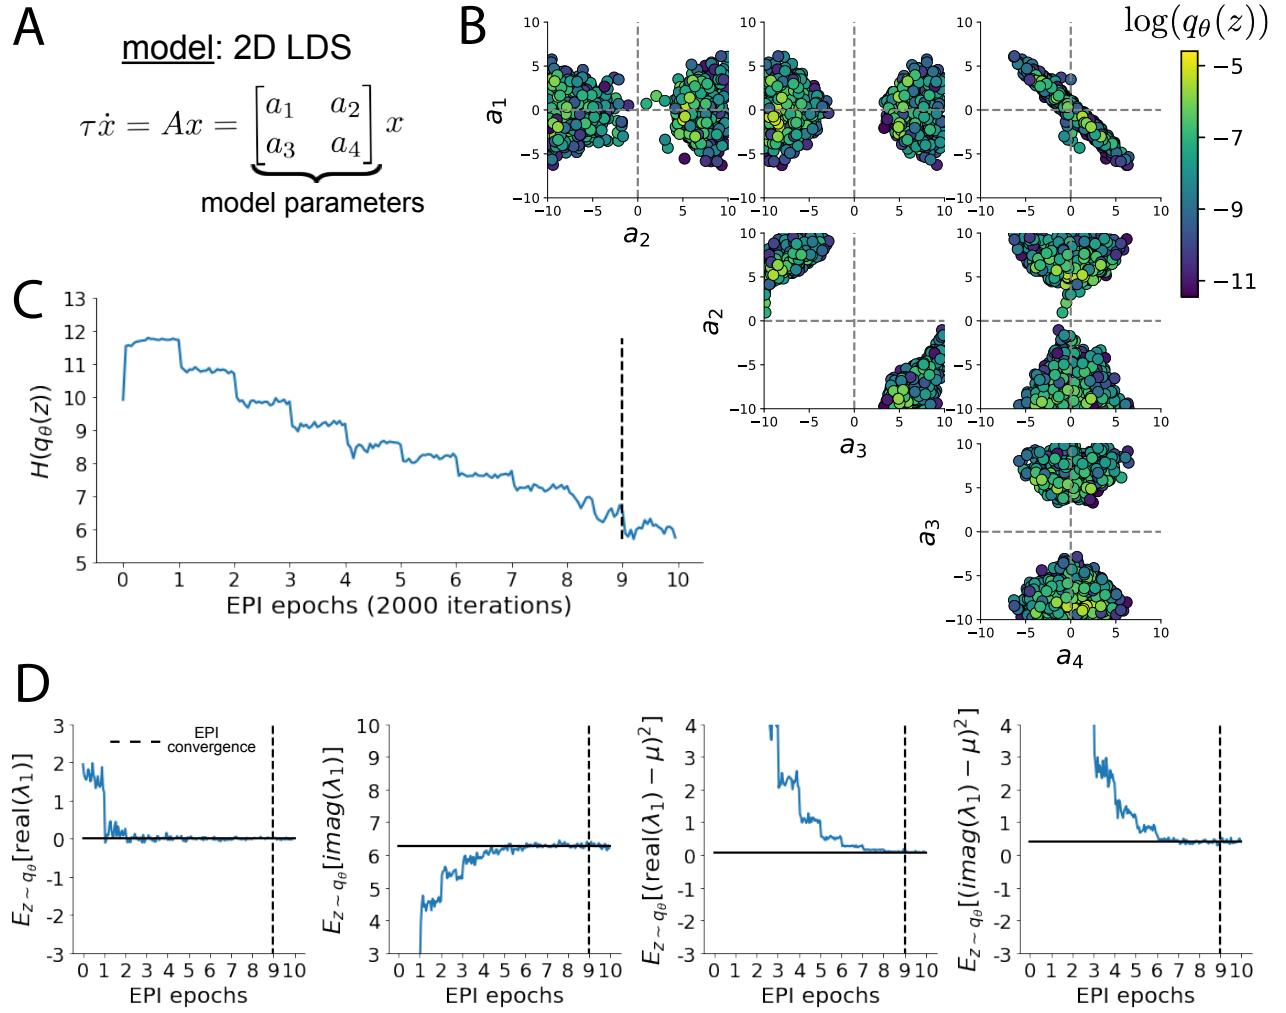


Fig. S1: A. Two-dimensional linear dynamical system model, where real entries of the dynamics matrix  $A$  are the parameters. B. The EPI distribution for a two-dimensional linear dynamical system with  $\tau = 1$  that produces an average of 1Hz oscillations with some small amount of variance. Dashed lines indicate the parameter axes. C. Entropy throughout the optimization. At the beginning of each augmented Lagrangian epoch (2,000 iterations), the entropy dipped due to the shifted optimization manifold where emergent property constraint satisfaction is increasingly weighted. D. Emergent property moments throughout optimization. At the beginning of each augmented Lagrangian epoch, the emergent property moments adjust closer to their constraints.

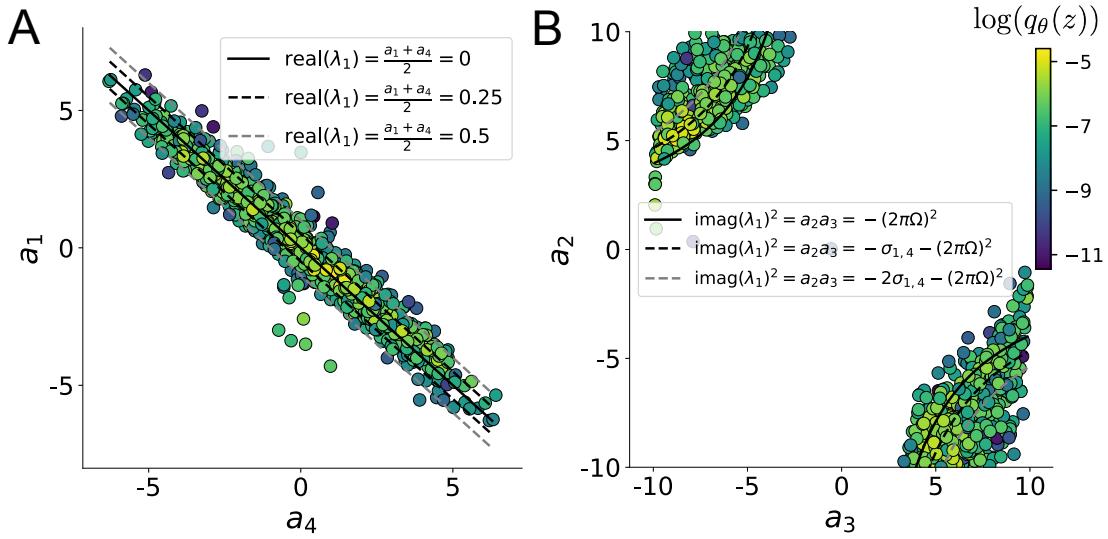


Fig. S2: A. Probability contours in the  $a_1$ - $a_4$  plane were derived from the relationship to emergent property statistic of growth/decay factor  $\text{real}(\lambda_1)$ . B. Probability contours in the  $a_2$ - $a_3$  plane were derived from the emergent property statistic of oscillation frequency  $2\pi\text{imag}(\lambda_1)$ .

673 of probability density of the samples (Fig. S2A). The distribution precisely reflects the desired  
 674 statistical constraints and model degeneracy in the sum of  $a_1$  and  $a_4$ . Intuitively, the parameters  
 675 equivalent with respect to emergent property statistic  $\text{real}(\lambda_1)$  have similar log densities.

676 To explain the bimodality of the EPI distribution, we examined the imaginary component of  $\lambda_1$ .  
 677 When  $\text{real}(\lambda_1) = \frac{a_1 + a_4}{2} = 0$ , we have

$$\text{imag}(\lambda_1) = \begin{cases} \sqrt{\frac{a_1 a_4 - a_2 a_3}{\tau}}, & \text{if } a_1 a_4 < a_2 a_3 \\ 0 & \text{otherwise} \end{cases}. \quad (24)$$

678 When  $\tau = 1$  and  $a_1 a_4 > a_2 a_3$  (center of distribution above), we have the following equation for the  
 679 other two dimensions:

$$\text{imag}(\lambda_1)^2 = a_1 a_4 - a_2 a_3 \quad (25)$$

680 Since we constrained  $\mathbb{E}_{z \sim q_\theta} [\text{imag}(\lambda)] = 2\pi$  (with  $\omega = 1$ ), we can plot contours of the equation  
 681  $\text{imag}(\lambda_1)^2 = a_1 a_4 - a_2 a_3 = (2\pi)^2$  for various  $a_1 a_4$  (Fig. S2B). With  $\sigma_{1,4} = \mathbb{E}_{z \sim q_\theta} (|a_1 a_4 - E_{q_\theta}[a_1 a_4]|)$ ,  
 682 we show the contours as  $a_1 a_4 = 0$  (black),  $a_1 a_4 = -\sigma_{1,4}$  (black dotted), and  $a_1 a_4 = -2\sigma_{1,4}$  (grey  
 683 dotted). This validates the curved structure of the inferred distribution learned through EPI. We  
 684 took steps in negative standard deviation of  $a_1 a_4$  (dotted and gray lines), since there are few positive  
 685 values  $a_1 a_4$  in the learned distribution. Subtler combinations of model and emergent property will

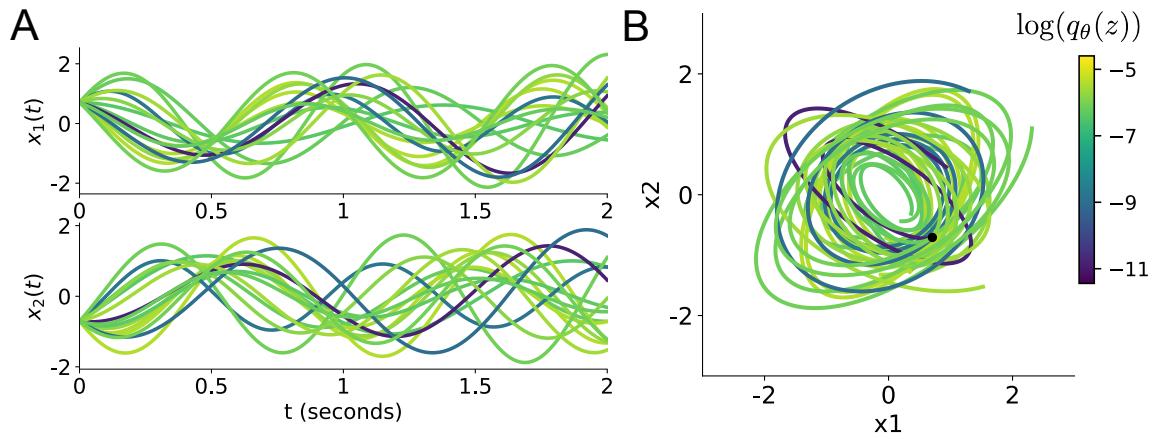


Fig. S3: Sampled dynamical systems  $z \sim q_\theta(z)$  and their simulated activity from  $x(0) = [\frac{\sqrt{2}}{2}, -\frac{\sqrt{2}}{2}]$  colored by log probability. A. Each dimension of the simulated trajectories throughout time. B The simulated trajectories in phase space.

686 have more complexity, further motivating the use of EPI for understanding these systems. As we  
 687 expect, the distribution results in samples of two-dimensional linear systems oscillating near 1Hz  
 688 (Fig. S3).

### 689 B.1.2 Augmented Lagrangian optimization

690 To optimize  $q_\theta(z)$  in Equation 17, the constrained optimization is executed using the augmented  
 691 Lagrangian method. The following objective is minimized:

$$L(\theta; \eta, c) = -H(q_\theta) + \eta^\top R(\theta) + \frac{c}{2} \|R(\theta)\|^2 \quad (26)$$

692 where  $R(\theta) = \mathbb{E}_{z \sim q_\theta} [\mathbb{E}_{x \sim p(x|z)} [T(x) - \mu]]$ ,  $\eta \in \mathbb{R}^m$  are the Lagrange multipliers where  $m = |\mu| = |T(x)|$ , and  $c$  is the penalty coefficient. These Lagrange multipliers are closely related to the natural  
 693 parameters of exponential families (see Section B.1.4). Deep neural network weights and biases  $\theta$  of  
 694 the deep probability distribution are optimized according to Equation 26 using the Adam optimizer  
 695 with its standard parameterization [62].  $\eta$  is initialized to the zero vector and adapted following  
 696 each augmented Lagrangian epoch, which is a period of optimization with fixed  $(\eta, c)$  for a given  
 697 number of stochastic optimization iterations. A low value of  $c$  is used initially, and conditionally  
 698 increased after each epoch based on constraint error reduction. For example, the initial value of  
 699  $c$  was  $c_0 = 10^{-3}$  during EPI with the oscillating 2D LDS (Fig. S1C). The penalty coefficient is  
 700 updated based on the result of a hypothesis test regarding the reduction in constraint violation. The

702 p-value of  $\mathbb{E}[|R(\theta_{k+1})|] > \gamma \mathbb{E}[|R(\theta_k)|]$  is computed, and  $c_{k+1}$  is updated to  $\beta c_k$  with probability  
 703  $1 - p$ . The other update rule is  $\eta_{k+1} = \eta_k + c_k \frac{1}{n} \sum_{i=1}^n (T(x^{(i)}) - \mu)$  given a batch size  $n$ . Throughout  
 704 the study,  $\beta = 4.0$ ,  $\gamma = 0.25$ , and the batch size was a hyperparameter, which varied according to  
 705 the application of EPI.

706 The intention is that  $c$  and  $\eta$  start at values encouraging entropic growth early in optimization.  
 707 With each training epoch in which the update rule for  $c$  is invoked by unsatisfactory constraint  
 708 error reduction, the constraint satisfaction terms are increasingly weighted, resulting in a decreased  
 709 entropy. This encourages the discovery of suitable regions of parameter space, and the subsequent  
 710 refinement of the distribution to produce the emergent property. In the oscillating 2D LDS example,  
 711 each augmented Lagrangian epoch ran for 2,000 iterations (Fig. S1C-D). Notice the initial entropic  
 712 growth, and subsequent reduction upon each update of  $\eta$  and  $c$ . The momentum parameters of the  
 713 Adam optimizer were reset at the end of each augmented Lagrangian epoch.

714 Rather than starting optimization from some  $\theta$  drawn from a randomized distribution, we found  
 715 that initializing  $q_\theta(z)$  to approximate an isotropic Gaussian distribution conferred more stable, con-  
 716 sistent optimization. The parameters of the Gaussian initialization were chosen on an applica-  
 717 tion-specific basis. Throughout the study, we chose isotropic Gaussian initializations with mean  $\mu_{\text{init}}$  at  
 718 the center of the distribution support and some standard deviation  $\sigma_{\text{init}}$ , except for one case, where  
 719 an initialization informed by random search was used (see Section B.2.2).

720 To assess whether EPI distribution  $q_\theta(z)$  produces the emergent property, we defined a hypothesis  
 721 testing convergence criteria. The algorithm has converged when a null hypothesis test of constraint  
 722 violations  $R(\theta)_i$  being zero is accepted for all constraints  $i \in \{1, \dots, m\}$  at a significance threshold  
 723  $\alpha = 0.05$ . This significance threshold is adjusted through Bonferroni correction according to the  
 724 number of constraints  $m$ . The p-values for each constraint are calculated according to a two-tailed  
 725 nonparametric test, where 200 estimations of the sample mean  $R(\theta)^i$  are made from  $k$  resamplings  
 726 of  $z$  from a finite sample of size  $n$  taken at the end of the augmented Lagrangian epoch.  $k$  is  
 727 determined by a fraction of the batch size  $\nu$ , which varies according to the application. In the  
 728 linear two-dimensional system example, we used a batch size of  $n = 1000$  and set  $\nu = 0.1$  resulting  
 729 in convergence after the ninth epoch of optimization. (Fig. S1C-D black dotted line).

730 **B.1.3 Normalizing flows**

731 Deep probability models typically consist of several layers of fully connected neural networks.  
 732 When each neural network layer is restricted to be a bijective function, the sample density can be  
 733 calculated using the change of variables formula at each layer of the network. For  $z' = f(z)$ ,

$$q(z') = q(f^{-1}(z')) \left| \det \frac{\partial f^{-1}(z')}{\partial z'} \right| = q(z) \left| \det \frac{\partial f(z)}{\partial z} \right|^{-1}. \quad (27)$$

734 However, this computation has cubic complexity in dimensionality for fully connected layers. By  
 735 restricting our layers to normalizing flows [17] – bijective functions with fast log determinant Ja-  
 736 cobian computations, we can tractably optimize deep generative models with objectives that are a  
 737 function of sample density, like entropy. Most of our analyses use either a planar flow [17] or real  
 738 NVP [63], which have proven effective in our architecture searches. Planar flow architectures are  
 739 specified by the number of planar bijection layers used, while real NVP architectures are specified  
 740 by the number of masks, neural network layers per mask, units per layer, and batch normalization  
 741 momentum parameter.

742 **B.1.4 Emergent property inference as variational inference in an exponential family**

743 Now that we have fully described the EPI method, we consider its broader contextualization as a  
 744 statistical method and its relation to Bayesian inference. In Bayesian inference a prior belief about  
 745 model parameters  $z$  is formalized into a prior distribution  $p(z)$ , and the statistical model capturing  
 746 the effect of  $z$  on observed data points  $x$  is formalized in the likelihood distribution  $p(x | z)$ . In  
 747 Bayesian inference, we obtain a posterior distribution  $p(z | x)$ , which captures how the data inform  
 748 our knowledge of model parameters using Bayes’ rule:

$$p(z | x) = \frac{p(x | z)p(z)}{p(x)}. \quad (28)$$

749 The posterior distribution is analytically available when the prior is conjugate with the likelihood.  
 750 However, conjugacy is rare in practice, and alternative methods, such as variational inference [64],  
 751 are utilized.

752 As we compare EPI to variational inference, it is important to consider that EPI is a maximum  
 753 entropy method, and that maximum entropy methods have a fundamental relationship with expo-

754 nential family distributions. A maximum entropy distribution of form:

$$\begin{aligned} p^*(z) &= \operatorname{argmax}_{p \in \mathcal{P}} H(p(z)) \\ \text{s.t. } \mathbb{E}_{z \sim p}[T(z)] &= \mu. \end{aligned} \quad (29)$$

755 will have probability density in the exponential family:

$$p^*(z) \propto \exp(\eta^\top T(z)). \quad (30)$$

756 The mappings between the mean parameterization  $\mu$  and the natural parameterization  $\eta$  are for-  
757 mally hard to identify [61].

758 Now, consider the goal of doing variational inference with an exponential family posterior dis-  
759 tribution  $p(z | x)$ . We use the following abbreviated notation to collect the base measure  $b(z)$   
760 and sufficient statistics  $T(z)$  into  $\tilde{T}(z)$  and likewise concatenate a 1 onto the end of the natural  
761 parameter  $\tilde{\eta}(x)$ . The log normalizing constant  $A(\eta(x))$  remains unchanged:

$$\begin{aligned} p(z | x) &= b(z) \exp\left(\eta(x)^\top T(z) - A(\eta(x))\right) = \exp\left(\begin{bmatrix} \eta(x) \\ 1 \end{bmatrix}^\top \begin{bmatrix} T(z) \\ b(z) \end{bmatrix} - A(\eta(x))\right) \\ &= \exp\left(\tilde{\eta}(x)^\top \tilde{T}(z) - A(\eta(x))\right) \end{aligned} \quad (31)$$

762 Variational inference with an exponential family posterior distribution uses optimization to mini-  
763 mize the following divergence [64]:

$$q_\theta^* = \operatorname{argmin}_{q_\theta \in Q} KL(q_\theta || p(z | x)). \quad (32)$$

764  $q_\theta(z)$  is the variational approximation to the posterior with variational parameters  $\theta$ . We can write  
765 this KL divergence in terms of entropy of the variational approximation:

$$KL(q_\theta || p(z | x)) = \mathbb{E}_{z \sim q_\theta} [\log(q_\theta(z))] - \mathbb{E}_{z \sim q_\theta} [\log(p(z | x))] \quad (33)$$

$$\begin{aligned} &= -H(q_\theta) - \mathbb{E}_{z \sim q_\theta} [\tilde{\eta}(x)^\top \tilde{T}(z) - A(\eta(x))]. \end{aligned} \quad (34)$$

766 As far as the variational optimization is concerned, the log normalizing constant is independent of  
767  $q_\theta(z)$ , so it can be dropped

$$\operatorname{argmin}_{q_\theta \in Q} KL(q_\theta || p(z | x)) = \operatorname{argmin}_{q_\theta \in Q} -H(q_\theta) - \mathbb{E}_{z \sim q_\theta} [\tilde{\eta}(x)^\top \tilde{T}(z)]. \quad (35)$$

768 Further, we can write the objective in terms of the first moment of the sufficient statistics  $\mu =$   
769  $\mathbb{E}_{z \sim p(z|x)} [T(z)]$ :

$$= \operatorname{argmin}_{q_\theta \in Q} -H(q_\theta) - \mathbb{E}_{z \sim q_\theta} [\tilde{\eta}(x)^\top (\tilde{T}(z) - \mu)] + \tilde{\eta}(x)^\top \mu, \quad (36)$$

771 which simplifies to

$$= \underset{q_\theta \in Q}{\operatorname{argmin}} -H(q_\theta) - \mathbb{E}_{z \sim q_\theta} \left[ \tilde{\eta}(x)^\top (\tilde{T}(z) - \mu) \right]. \quad (37)$$

772 .

773 In comparison, in emergent property inference (EPI), we solve the following problem:

$$q_\theta^*(z) = \underset{q_\theta \in Q}{\operatorname{argmax}} H(q_\theta(z)), \text{ s.t. } \mathbb{E}_{z \sim q_\theta} [\mathbb{E}_{x \sim p(x|z)} [T(x)]] = \mu. \quad (38)$$

774 The Lagrangian objective (without augmentation) is

$$q_\theta^* = \underset{q_\theta \in Q}{\operatorname{argmin}} -H(q_\theta) + \eta_{\text{opt}}^\top \left( \mathbb{E}_{z \sim q_\theta} [\tilde{T}(z)] - \mu \right). \quad (39)$$

775 Thus, as the optimization proceeds,  $\eta_{\text{opt}}^\top$  should converge to the natural parameter  $\tilde{\eta}(x)$  through  
776 its adaptations in each epoch (see Section B.1.2).

777 We have shown that there is indeed a clear relationship between Bayesian inference and EPI.  
778 Specifically, EPI is executing variational inference in an exponential family posterior, whose suffi-  
779 cient statistics are the emergent property statistics and mean parameterization are the emergent  
780 property values. However, in EPI we have not specified a prior distribution, or collected data,  
781 which can inform us about model parameters. Instead we have a mathematical specification of  
782 an emergent property, which the model must produce, and a maximum entropy selection princi-  
783 ple. Accordingly, we replace the notation of  $p(z | x)$  with  $p(z | \mathcal{B})$  conceptualizing an inferred  
784 distribution that obeys emergent property  $\mathcal{B}$  (see Section B.1).

## 785 B.2 Theoretical models

786 In this study, we used emergent property inference to examine several models relevant to theoretical  
787 neuroscience. Here, we provide the details of each model and the related analyses.

### 788 B.2.1 Stomatogastric ganglion

789 We analyze how the parameters  $z = [g_{el}, g_{synA}]$  govern the emergent phenomena of network syncing  
790 in a model of the stomatogastric ganglion (STG) [23] shown in Figure 1A with activity  $x =$   
791  $[x_{f1}, x_{f2}, x_{hub}, x_{s1}, x_{s2}]$ , using the same hyperparameter choices as Gutierrez et al. Each neuron's  
792 membrane potential  $x_\alpha(t)$  for  $\alpha \in \{f1, f2, hub, s1, s2\}$  is the solution of the following differential  
793 equation:

$$C_m \frac{dx_\alpha}{dt} = -[h_{leak}(x; z) + h_{Ca}(x; z) + h_K(x; z) + h_{hyp}(x; z) + h_{elec}(x; z) + h_{syn}(x; z)]. \quad (40)$$

794 The membrane potential of each neuron is affected by the leak, calcium, potassium, hyperpolariza-  
 795 tion, electrical and synaptic currents, respectively, which are functions of all membrane potentials  
 796 and the conductance parameters  $z$ . The capacitance of the cell membrane was set to  $C_m = 1nF$ .  
 797 Specifically, the currents are the difference in the neuron's membrane potential and that current  
 798 type's reversal potential multiplied by a conductance:

$$h_{leak}(x; z) = g_{leak}(x_\alpha - V_{leak}) \quad (41)$$

799

$$h_{elec}(x; z) = g_{el}(x_\alpha^{post} - x_\alpha^{pre}) \quad (42)$$

800

$$h_{syn}(x; z) = g_{syn}S_\infty^{pre}(x_\alpha^{post} - V_{syn}) \quad (43)$$

801

$$h_{Ca}(x; z) = g_{Ca}M_\infty(x_\alpha - V_{Ca}) \quad (44)$$

802

$$h_K(x; z) = g_KN(x_\alpha - V_K) \quad (45)$$

803

$$h_{hyp}(x; z) = g_hH(x_\alpha - V_{hyp}). \quad (46)$$

804 The reversal potentials were set to  $V_{leak} = -40mV$ ,  $V_{Ca} = 100mV$ ,  $V_K = -80mV$ ,  $V_{hyp} = -20mV$ ,  
 805 and  $V_{syn} = -75mV$ . The other conductance parameters were fixed to  $g_{leak} = 1 \times 10^{-4}\mu S$ ,  $g_{Ca}$ ,  
 806  $g_K$ , and  $g_{hyp}$  had different values based on fast, intermediate (hub) or slow neuron. The fast  
 807 conductances had values  $g_{Ca} = 1.9 \times 10^{-2}$ ,  $g_K = 3.9 \times 10^{-2}$ , and  $g_{hyp} = 2.5 \times 10^{-2}$ . The intermediate  
 808 conductances had values  $g_{Ca} = 1.7 \times 10^{-2}$ ,  $g_K = 1.9 \times 10^{-2}$ , and  $g_{hyp} = 8.0 \times 10^{-3}$ . Finally, the  
 809 slow conductances had values  $g_{Ca} = 8.5 \times 10^{-3}$ ,  $g_K = 1.5 \times 10^{-2}$ , and  $g_{hyp} = 1.0 \times 10^{-2}$ .

810 Furthermore, the Calcium, Potassium, and hyperpolarization channels have time-dependent gating  
 811 dynamics dependent on steady-state gating variables  $M_\infty$ ,  $N_\infty$  and  $H_\infty$ , respectively:

$$M_\infty = 0.5 \left( 1 + \tanh \left( \frac{x_\alpha - v_1}{v_2} \right) \right) \quad (47)$$

812

$$\frac{dN}{dt} = \lambda_N(N_\infty - N) \quad (48)$$

813

$$N_\infty = 0.5 \left( 1 + \tanh \left( \frac{x_\alpha - v_3}{v_4} \right) \right) \quad (49)$$

814

$$\lambda_N = \phi_N \cosh \left( \frac{x_\alpha - v_3}{2v_4} \right) \quad (50)$$

815

$$\frac{dH}{dt} = \frac{(H_\infty - H)}{\tau_h} \quad (51)$$

816

$$H_\infty = \frac{1}{1 + \exp \left( \frac{x_\alpha + v_5}{v_6} \right)} \quad (52)$$

817

$$\tau_h = 272 - \left( \frac{-1499}{1 + \exp\left(\frac{-x_\alpha + v_7}{v_8}\right)} \right). \quad (53)$$

818 where we set  $v_1 = 0mV$ ,  $v_2 = 20mV$ ,  $v_3 = 0mV$ ,  $v_4 = 15mV$ ,  $v_5 = 78.3mV$ ,  $v_6 = 10.5mV$ ,  
 819  $v_7 = -42.2mV$ ,  $v_8 = 87.3mV$ ,  $v_9 = 5mV$ , and  $v_{th} = -25mV$ .

820 Finally, there is a synaptic gating variable as well:

$$S_\infty = \frac{1}{1 + \exp\left(\frac{v_{th} - x_\alpha}{v_9}\right)}. \quad (54)$$

821 When the dynamic gating variables are considered, this is actually a 15-dimensional nonlinear  
 822 dynamical system.

823 In order to measure the frequency of the hub neuron during EPI, the STG model was simulated  
 824 for  $T = 200$  time steps of  $dt = 25ms$ . In EPI, since gradients are taken through the simulation  
 825 process, the number of time steps are kept modest if possible. The chosen  $dt$  and  $T$  were the  
 826 most computationally convenient choices yielding accurate frequency measurement. Poor resolution  
 827 afforded by the discrete Fourier transform motivated the use of an alternative basis of complex  
 828 exponentials to measure spiking frequency. Instead, we used a basis of complex exponentials with  
 829 frequencies from 0.0-1.0 Hz at 0.01Hz resolution,  $\Phi = [0.0, 0.01, \dots, 1.0]^\top$

830 Another consideration was that the frequency spectra of the neuron membrane potentials had sev-  
 831 eral peaks. High-frequency sub-threshold activity obscured the maximum frequency measurement  
 832 in the complex exponential basis. Accordingly, subthreshold activity was set to zero, and the  
 833 whole signal was low-pass filtered with a moving average window of length 20. The signal was  
 834 subsequently mean centered. After this preprocessing, the maximum frequency in the filter bank  
 835 accurately reflected the firing frequency.

836 Finally, to differentiate through the maximum frequency identification, we used a sum-of-powers  
 837 normalization. Let  $\mathcal{X}_\alpha \in \mathcal{C}^{|\Phi|}$  be the complex exponential filter bank dot products with the signal  
 838  $x_\alpha \in \mathbb{R}^N$ , where  $\alpha \in \{f1, f2, \text{hub}, s1, s2\}$ . The “frequency identification” vector is

$$v_\alpha = \frac{|\mathcal{X}_\alpha|^\beta}{\sum_{k=1}^N |\mathcal{X}_\alpha(k)|^\beta}. \quad (55)$$

839 The frequency is then calculated as  $\omega_\alpha = v_\alpha^\top \Phi$  with  $\beta = 100$ .

840 Network syncing, like all other emergent properties in this work, are defined by the emergent  
 841 property statistics and values. The emergent property statistics are the first and second moments

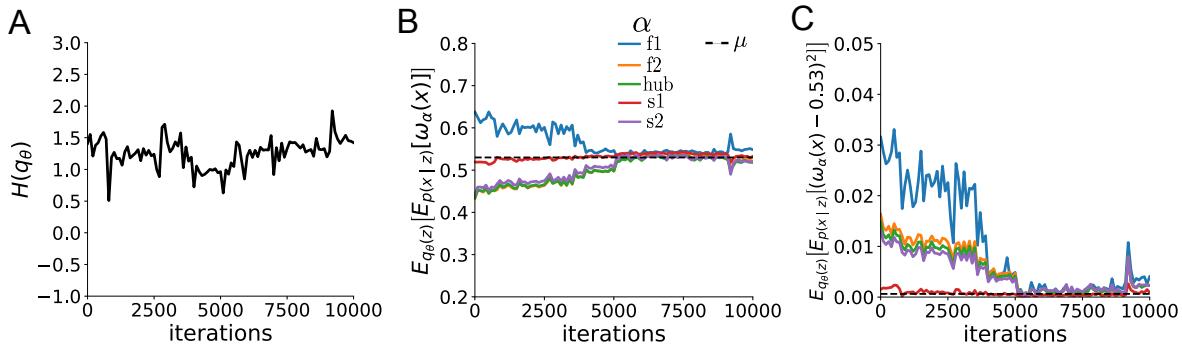


Fig. S4: EPI optimization of the STG model producing network syncing. A. Entropy throughout optimization. B. The first moment emergent property statistics converge to the emergent property values at 10,000 iterations, following the fourth augmented Lagrangian epoch of 2,500 iterations. Since  $q_\theta(z)$  failed to produce enough samples yielding  $\omega_{f1}(x)$  less than 0.53Hz, the convergence criteria were not satisfied after the third epoch at 7,500 iterations. C. The second moment emergent property statistics converge to the emergent property values.

842 of the firing frequencies. The first moments were set to 0.53Hz, and the second moments were set  
 843 to 0.025Hz<sup>2</sup>:

$$E \begin{bmatrix} \omega_{f1} \\ \omega_{f2} \\ \omega_{hub} \\ \omega_{s1} \\ \omega_{s2} \\ (\omega_{f1} - 0.53)^2 \\ (\omega_{f2} - 0.53)^2 \\ (\omega_{hub} - 0.53)^2 \\ (\omega_{s1} - 0.53)^2 \\ (\omega_{s2} - 0.53)^2 \end{bmatrix} = \begin{bmatrix} 0.53 \\ 0.53 \\ 0.53 \\ 0.53 \\ 0.53 \\ 0.025^2 \\ 0.025^2 \\ 0.025^2 \\ 0.025^2 \\ 0.025^2 \end{bmatrix} \quad (56)$$

844 for the EPI distribution shown in Fig. 1B. Throughout optimization, the augmented Lagrangian  
 845 parameters  $\eta$  and  $c$ , were updated after each epoch of 2,500 iterations (see Section B.1.2). The  
 846 optimization converged after four epochs (Fig. S4).

847 For EPI in Fig 2C, we used a real NVP architecture with four masks and two layers of 10 units  
 848 per mask, and batch normalization momentum of 0.99 mapped onto a support of  $z \in [[4, 0], [8, 4]]$ .

849 We used an augmented Lagrangian coefficient of  $c_0 = 10^2$ , a batch size  $n = 300$ , set  $\nu = 0.1$ , and

850 initialized  $q_\theta(z)$  to produce an isotropic Gaussian with mean  $\mu_{\text{init}} = [6, 2]$  with standard deviation  
 851  $\sigma_{\text{init}} = 0.5$ .

852 We calculated the Hessian at the mode of the inferred EPI distribution. The Hessian of a probability  
 853 model is the second order gradient of the log probability density  $\log q_\theta(z)$  with respect to the  
 854 parameters  $z$ :  $\frac{\partial^2 \log q_\theta(z)}{\partial z \partial z^\top}$ . With EPI, we can examine the Hessian, which is analytically available  
 855 throughout distribution, to indicate the dimensions of parameter space that are sensitive (high  
 856 magnitude eigenvalue), and which are degenerate (low magnitude eigenvalue) with respect to the  
 857 emergent property produced. In Figure 1B, the eigenvectors of the Hessian  $v_1$  and  $v_2$  are shown  
 858 evaluated at the mode of the distribution. The length of the arrows is inversely proportional to the  
 859 square root of absolute value of their eigenvalues  $\lambda_1 = -10.8$  and  $\lambda_2 = -2.27$ . We quantitatively  
 860 measured the sensitivity of the model with respect to network syncing along the eigenvectors of the  
 861 Hessian (Fig. 1B, inset). Sensitivity was measured as the slope coefficient of linear regression fit  
 862 to network syncing error (the sum of squared differences of each neuron's frequency from 0.53Hz)  
 863 as a function of parametric perturbation magnitude (maximum 0.25) away from the mode along  
 864 both orientations indicated by the eigenvector with 100 equally spaced samples. The sensitivity  
 865 slope coefficient of eigenvector  $v_1$  with respect to network syncing was significant ( $\beta = 4.82 \times 10^{-2}$ ,  
 866  $p < 10^{-4}$ ). In contrast, eigenvector  $v_2$  did not identify a dimension of parameter space significantly  
 867 sensitive to network syncing ( $\beta = 8.65 \times 10^{-4}$  with  $p = .67$ ). These sensitivities were compared to  
 868 all other dimensions of parameter space (100 equally spaced angles from 0 to  $\pi$ ), revealing that the  
 869 Hessian eigenvectors indeed identified the directions of greatest sensitivity and degeneracy (Fig.  
 870 1B, inset). The contours of Figure 1 were calculated as error in  $T(x)$  from  $\mu$  in both the first and  
 871 second moment emergent property statistics.

872 **B.2.2 Primary visual cortex**

873 The dynamics of each neural populations average rate  $x = [x_E, x_P, x_S, x_V]^\top$  are given by:

$$\tau \frac{dx}{dt} = -x + [Wx + h]_+^n. \quad (57)$$

874 By consolidating information from many experimental datasets, Billeh et al. [47] produce estimates

875 of the synaptic strength (in mV)

$$M = \begin{bmatrix} 0.36 & 0.48 & 0.31 & 0.28 \\ 1.49 & 0.68 & 0.50 & 0.18 \\ 0.86 & 0.42 & 0.15 & 0.32 \\ 1.31 & 0.41 & 0.52 & 0.37 \end{bmatrix} \quad (58)$$

876 and connection probability

$$C = \begin{bmatrix} 0.16 & 0.411 & 0.424 & 0.087 \\ 0.395 & .451 & 0.857 & 0.02 \\ 0.182 & 0.03 & 0.082 & 0.625 \\ 0.105 & 0.22 & 0.77 & 0.028 \end{bmatrix}. \quad (59)$$

877 Multiplying these connection probabilities and synaptic efficacies gives us an effective connectivity

878 matrix:

$$W_{\text{full}} = C \odot M = \begin{bmatrix} 0.16 & 0.411 & 0.424 & 0.087 \\ 0.395 & .451 & 0.857 & 0.02 \\ 0.182 & 0.03 & 0.082 & 0.625 \\ 0.105 & 0.22 & 0.77 & 0.028 \end{bmatrix}. \quad (60)$$

879 Theoretical work on these systems considers a subset of the effective connectivities [24, 44, 45]

$$W = \begin{bmatrix} W_{EE} & W_{EP} & W_{ES} & 0 \\ W_{PE} & W_{PP} & W_{PS} & 0 \\ W_{SE} & 0 & 0 & W_{SV} \\ W_{VE} & W_{VP} & W_{VS} & 0 \end{bmatrix}. \quad (61)$$

880 In coherence with this work, we only keep the entries of  $W_{\text{full}}$  corresponding to parameters in  
881 Equation 61.

882 We look at how this four-dimensional nonlinear dynamical model of V1 responds to different inputs,  
883 and compare the predictions of the linear response to the approximate posteriors obtained through  
884 EPI. The input to the system is the sum of a baseline input  $b = [1, 1, 1, 1]^\top$  and a differential input  
885  $dh$ :

$$h = b + dh. \quad (62)$$

886 All simulations of this system had  $T = 100$  time points, a time step  $dt = 5\text{ms}$ , and time constant  
887  $\tau = 20\text{ms}$ . The system was initialized to a random draw  $x(0)_i \sim \mathcal{N}(1, 0.01)$ .

888 We can describe the dynamics of this system more generally by

$$\dot{x}_i = -x_i + f(u_i) \quad (63)$$

889 where the input to each neuron is

$$u_i = \sum_j W_{ij} x_j + h_i. \quad (64)$$

890 Let  $F_{ij} = \gamma_i \delta(i, j)$ , where  $\gamma_i = f'(u_i)$ . Then, the linear response is

$$\frac{dx_{ss}}{dh} = F(W \frac{dx_{ss}}{dh} + I) \quad (65)$$

891 which is calculable by

$$\frac{dx_{ss}}{dh} = (F^{-1} - W)^{-1}. \quad (66)$$

892 This calculation is used to produce the magenta lines in Figure 2C, which show the linearly predicted  
893 inputs that generate a response from two standard deviations (of  $\mathcal{B}$ ) below and above  $y$ .

894 The emergent property we considered was the first and second moments of the change in steady  
895 state rate  $dx_{ss}$  between the baseline input  $h = b$  and  $h = b + dh$ . We use the following notation to  
896 indicate that the emergent property statistics were set to the following values:

$$\mathcal{B}(\alpha, y) \triangleq \mathbb{E} \begin{bmatrix} dx_{\alpha,ss} \\ (dx_{\alpha,ss} - y)^2 \end{bmatrix} = \begin{bmatrix} y \\ 0.01^2 \end{bmatrix}. \quad (67)$$

897 In the final analysis for this model, we sweep the input one neuron at a time away from the mode  
898 of each inferred distributions  $dh^* = z^* = \text{argmax}_z \log q_\theta(z | \mathcal{B}(\alpha, 0.1))$ . The differential responses  
899  $\delta x_{\alpha,ss}$  are examined at perturbed inputs  $h = b + dh^* + \delta h_\alpha \hat{u}_\alpha$  where  $\hat{u}_\alpha$  is a unit vector in the  
900 dimension of  $\alpha$  and  $\delta x$  is evaluated at 101 equally spaced samples of  $\delta h_\alpha$  from -15 to 15.

901 We measured the linear regression slope between neuron-types of  $\delta x$  and  $\delta h$  to confirm the hy-  
902 potheses H1-H3 (H4 is simply observing the nonmonotonicity) and report the p values for tests of  
903 non-zero slope.

904 H1: the neuron-type responses are sensitive to their direct inputs. E-population:  $\beta = 1.62$ ,  
905  $p < 10^{-4}$  (Fig. 3A black), P-population:  $\beta = 1.06$ ,  $p < 10^{-4}$  (Fig. 3B blue), S-population:  
906  $\beta = 6.80$ ,  $p < 10^{-4}$  (Fig. 3C red), V-population:  $\beta = 6.41$ ,  $p < 10^{-4}$  (Fig. 3D green).

907 H2: the E-population ( $\beta = 0$ ,  $p = 1$ ) and P-populations ( $\beta = 0$ ,  $p = 1$ ) are not affected by  
908  $\delta h_V$  (Fig. 3A green, 3B green);

909 H3: the S-population is not affected by  $\delta h_P$  ( $\beta = 0$ ,  $p = 1$ ) (Fig. 3C blue);

910

911 For each  $\mathcal{B}(\alpha, y)$  with  $\alpha \in \{E, P, S, V\}$  and  $y \in \{0.1, 0.5\}$ , we ran EPI using a real NVP architecture  
 912 of four masks layers with two hidden layers of 10 units, mapped to a support of  $z_i \in [-5, 5]$  with  
 913 no batch normalization. We used an augmented Lagrangian coefficient of  $c_0 = 10^5$ , a batch size  
 914  $n = 1000$ , set  $\nu = 0.5$ . The EPI distributions shown in Fig. 2 are the converged distributions with  
 915 maximum entropy across random seeds.

916 We set the parameters of the Gaussian initialization  $\mu_{\text{init}}$  and  $\Sigma_{\text{init}}$  to the mean and covariance of  
 917 random samples  $z^{(i)} \sim \mathcal{U}(-5, 5)$  that produced emergent property statistic  $dx_{\alpha,ss}$  within a bound  
 918  $\epsilon$  of the emergent property value  $y$ .  $\epsilon = 0.01$  was set to be one standard deviation of the emergent  
 919 property value according to the emergent property value  $0.01^2$  of the variance emergent property  
 920 statistic.

### 921 B.2.3 Superior colliculus

922 In the model of Duan et al [25], there are four total units: two in each hemisphere corresponding to  
 923 the Pro/Contra and Anti/Ipsi populations. They are denoted as left Pro (LP), left Anti (LA), right  
 924 Pro (RP) and right Anti (RA). Each unit has an activity ( $x_\alpha$ ) and internal variable ( $u_\alpha$ ) related  
 925 by

$$x_\alpha = \left( \frac{1}{2} \tanh \left( \frac{u_\alpha - \epsilon}{\zeta} \right) + \frac{1}{2} \right) \quad (68)$$

926 where  $\alpha \in \{LP, LA, RA, RP\}$   $\epsilon = 0.05$  and  $\zeta = 0.5$  control the position and shape of the nonlin-  
 927 earity, respectively.

928 We order the elements of  $x$  and  $u$  in the following manner

$$x = \begin{bmatrix} x_{LP} \\ x_{LA} \\ x_{RP} \\ x_{RA} \end{bmatrix} \quad u = \begin{bmatrix} u_{LP} \\ u_{LA} \\ u_{RP} \\ u_{RA} \end{bmatrix}. \quad (69)$$

929 The internal variables follow dynamics:

$$\tau \frac{du}{dt} = -u + Wx + h + \sigma dB \quad (70)$$

930 with time constant  $\tau = 0.09s$  and Gaussian noise  $\sigma dB$  controlled by the magnitude of  $\sigma = 1.0$ . The  
 931 weight matrix has 8 parameters  $sW_P$ ,  $sW_A$ ,  $vW_{PA}$ ,  $vW_{AP}$ ,  $hW_P$ ,  $hW_A$ ,  $dW_{PA}$ , and  $dW_{AP}$  (Fig.

932 4B):

$$W = \begin{bmatrix} sW_P & vW_{PA} & hW_P & dW_{PA} \\ vW_{AP} & sW_A & dW_{AP} & hW_A \\ hW_P & dW_{PA} & sW_P & vW_{PA} \\ dW_{AP} & hW_A & vW_{AP} & sW_A \end{bmatrix}. \quad (71)$$

933 The system receives five inputs throughout each trial, which has a total length of 1.8s.

$$h = h_{\text{rule}} + h_{\text{choice-period}} + h_{\text{light}}. \quad (72)$$

934 There are rule-based inputs depending on the condition,

$$h_{P,\text{rule}}(t) = \begin{cases} I_{P,\text{rule}}[1, 0, 0, 1]^\top, & \text{if } t \leq 1.2s \\ 0, & \text{otherwise} \end{cases} \quad (73)$$

935

$$h_{A,\text{rule}}(t) = \begin{cases} I_{A,\text{rule}}[0, 1, 1, 0]^\top, & \text{if } t \leq 1.2s \\ 0, & \text{otherwise} \end{cases} \quad (74)$$

936 a choice-period input,

$$h_{\text{choice}}(t) = \begin{cases} I_{\text{choice}}[1, 1, 1, 1]^\top, & \text{if } t > 1.2s \\ 0, & \text{otherwise} \end{cases} \quad (75)$$

937 and an input to the right or left-side depending on where the light stimulus is delivered.

$$h_{\text{light}}(t) = \begin{cases} I_{\text{light}}[1, 1, 0, 0]^\top, & \text{if } t > 1.2s \text{ and Left} \\ I_{\text{light}}[0, 0, 1, 1]^\top, & \text{if } t > 1.2s \text{ and Right} \\ 0, & t \leq 1.2s \end{cases} \quad (76)$$

938 The input parameterization was fixed to  $I_{P,\text{rule}} = 10$ ,  $I_{A,\text{rule}} = 10$ ,  $I_{\text{choice}} = 2$ , and  $I_{\text{light}} = 1$ .

939 To produce a Bernoulli rate of  $p_{LP}$  in the Left, Pro condition, let  $\hat{p}_i$  be the empirical average steady  
940 state (ss) response (final  $x_{LP}$  at end of task) over M=500 Gaussian noise draws for a given SC  
941 model parameterization  $z_i$ :

$$\hat{p}_i = \mathbb{E}_{\sigma dB} [x_{LP} | s = L, c = P, z = z_i] = \frac{1}{M} \sum_{j=1}^M x_{LP}(s = L, c = P, z = z_i, \sigma dB_j) \quad (77)$$

942 where from here on  $x_\alpha$  denotes the steady state activity at the end of the trial. For the first  
943 emergent property statistic, the average over EPI samples (from  $q_\theta(z)$ ) is set to the desired value  
944  $p_{LP}$ :

$$\mathbb{E}_{z_i \sim q_\phi} [\mathbb{E}_{\sigma dB} [x_{LP,ss} | s = L, c = P, z = z_i]] = \mathbb{E}_{z_i \sim q_\phi} [\hat{p}_i] = p_{LP}. \quad (78)$$

945 For the next emergent property statistic, we ask that the variance of the steady state responses  
 946 across Gaussian draws, is the Bernoulli variance for the empirical rate  $\hat{p}_i$ :

$$\mathbb{E}_{z \sim q\phi} [\sigma_{err}^2] = 0 \quad (79)$$

947

$$\sigma_{err}^2 = Var_{\sigma dB} [x_{LP} | s = L, c = P, z = z_i] - \hat{p}_i(1 - \hat{p}_i). \quad (80)$$

948 We have an additional constraint that the Pro neuron on the opposite hemisphere should have the  
 949 opposite value (0 and 1). We can enforce this with a final constraint:

$$\mathbb{E}_{z \sim q\phi} [d_P] = \mathbb{E}_{\sigma dB} [(x_{LP} - x_{RP})^2 | s = L, c = P, z = z_i] = 1. \quad (81)$$

950 Since the maximum variance of a random variable bounded from 0 to 1 is the Bernoulli variance  
 951  $\hat{p}(1 - \hat{p})$ , and the maximum squared difference between two variables bounded from 0 to 1 is 1, we  
 952 do not need to control the second moment of these test statistics. In practice, these variables are  
 953 dynamical system states and can only exponentially decay (or saturate) to 0 (or 1), so the Bernoulli  
 954 variance error and squared difference constraints can only be undershot. This is important to be  
 955 mindful of when evaluating the convergence criteria. Instead of using our usual hypothesis testing  
 956 criteria for convergence to the emergent property, we set a slack variable threshold only for these  
 957 technically infeasible emergent property values to 0.05.

958 Training DSNs to learn distributions of dynamical system parameterizations that produce Bernoulli  
 959 responses at a given rate (with small variance around that rate) was harder to do than expected.  
 960 There is a pathology in this optimization setup, where the learned distribution of weights is bimodal  
 961 attributing a fraction  $p$  of the samples to an expansive mode (which always sends  $x_{LP}$  to 1), and a  
 962 fraction  $1 - p$  to a decaying mode (which always sends  $x_{LP}$  to 0). This pathology was avoided using  
 963 an inequality constraint prohibiting parameter samples that resulted in low variance of responses  
 964 across noise.

965 In total, the emergent property of rapid task switching at accuracy level  $p$  was defined as

$$\mathcal{B}(p) \triangleq \mathbb{E} \begin{bmatrix} \hat{p}_P \\ \hat{p}_A \\ (\hat{p}_P - p)^2 \\ (\hat{p}_A - p)^2 \\ \sigma_{P,err}^2 \\ \sigma_{A,err}^2 \\ d_P \\ d_A \end{bmatrix} = \begin{bmatrix} p \\ p \\ 0.15^2 \\ 0.15^2 \\ 0 \\ 0 \\ 1 \\ 1 \end{bmatrix}. \quad (82)$$

966 For each accuracy level  $p$ , we ran EPI for 10 different random seeds using an architecture of 10  
 967 planar flows with a support of  $z \in \mathbb{R}^8$ . We used an augmented Lagrangian coefficient of  $c_0 = 10^2$ , a  
 968 batch size  $n = 300$ , and set  $\nu = 0.5$ , and initialized  $q_\theta(z)$  to produce an isotropic Gaussian of zero  
 969 mean with standard deviation  $\sigma_{\text{init}} = 1$ . The EPI distributions shown in Fig. 4 are the converged  
 970 distributions with maximum entropy across random seeds.

971 We report significant correlations  $r$  and their p-values from Figure 4E in Table 1. Correlations were  
 972 measured from 5,000 samples of  $q_\theta(z | \mathcal{B}(p))$  and p-values are reported for one-tailed tests, since  
 973 we hypothesized a positive correlation between task accuracies  $p_P$  or  $p_A$  and  $\lambda_{\text{task}}$ , and a negative  
 974 correlation between task accuracies  $p_P$  and  $p_A$  and  $\lambda_{\text{side}}$ .

#### 975 B.2.4 Rank-1 RNN

976 Recent work establishes a link between RNN connectivity weights and the resulting dynamical  
 977 responses of the network, using dynamic mean field theory (DMFT) [26]. Specifically, DMFT  
 978 describes the properties of activity in infinite-size neural networks given a distribution on the  
 979 connectivity weights. In such a model, the connectivity of a rank-1 RNN (which was sufficient for  
 980 the Gaussian posterior conditioning task), has weight matrix  $W$ , which is the sum of a random  
 981 component with strength determined by  $g$  and a structured component determined by the outer  
 982 product of vectors  $m$  and  $n$ :

$$W = g\chi + \frac{1}{N}mn^\top, \quad (83)$$

983 where  $\chi_{ij} \sim \mathcal{N}(0, \frac{1}{N})$ , and the entries of  $m$  and  $n$  are drawn from Gaussian distributions  $m_i \sim$   
 984  $\mathcal{N}(M_m, 1)$  and  $n_i \sim \mathcal{N}(M_n, 1)$ . From such a parameterization, this theory produces consistency  
 985 equations for the dynamic mean field variables in terms of parameters like  $g$ ,  $M_m$ , and  $M_n$ , which we

$\lambda$	$\hat{p}$	$q_\theta(z)$	$r$	p-value
$\lambda_{\text{task}}$	$\hat{p}_P$	$q(z   \mathcal{B}(60\%))$	$1.24 \times 10^{-01}$	$p < 10^{-4}$
$\lambda_{\text{task}}$	$\hat{p}_P$	$q(z   \mathcal{B}(70\%))$	$7.56 \times 10^{-01}$	$p < 10^{-4}$
$\lambda_{\text{task}}$	$\hat{p}_P$	$q(z   \mathcal{B}(80\%))$	$4.59 \times 10^{-01}$	$p < 10^{-4}$
$\lambda_{\text{task}}$	$\hat{p}_P$	$q(z   \mathcal{B}(90\%))$	$3.76 \times 10^{-01}$	$p < 10^{-4}$
$\lambda_{\text{task}}$	$\hat{p}_A$	$q(z   \mathcal{B}(60\%))$	$4.80 \times 10^{-02}$	$p < .01$
$\lambda_{\text{task}}$	$\hat{p}_A$	$q(z   \mathcal{B}(70\%))$	$2.08 \times 10^{-01}$	$p < 10^{-4}$
$\lambda_{\text{task}}$	$\hat{p}_A$	$q(z   \mathcal{B}(80\%))$	$4.84 \times 10^{-01}$	$p < 10^{-4}$
$\lambda_{\text{task}}$	$\hat{p}_A$	$q(z   \mathcal{B}(90\%))$	$4.25 \times 10^{-01}$	$p < 10^{-4}$
$\lambda_{\text{side}}$	$\hat{p}_P$	$q(z   \mathcal{B}(50\%))$	$-7.57 \times 10^{-02}$	$p < 10^{-4}$
$\lambda_{\text{side}}$	$\hat{p}_P$	$q(z   \mathcal{B}(60\%))$	$-6.73 \times 10^{-02}$	$p < 10^{-4}$
$\lambda_{\text{side}}$	$\hat{p}_P$	$q(z   \mathcal{B}(70\%))$	$-4.86 \times 10^{-01}$	$p < 10^{-4}$
$\lambda_{\text{side}}$	$\hat{p}_P$	$q(z   \mathcal{B}(80\%))$	$-1.43 \times 10^{-01}$	$p < 10^{-4}$
$\lambda_{\text{side}}$	$\hat{p}_P$	$q(z   \mathcal{B}(90\%))$	$-1.93 \times 10^{-01}$	$p < 10^{-4}$
$\lambda_{\text{side}}$	$\hat{p}_A$	$q(z   \mathcal{B}(60\%))$	$-7.60 \times 10^{-02}$	$p < 10^{-4}$
$\lambda_{\text{side}}$	$\hat{p}_A$	$q(z   \mathcal{B}(70\%))$	$-2.73 \times 10^{-01}$	$p < 10^{-4}$
$\lambda_{\text{side}}$	$\hat{p}_A$	$q(z   \mathcal{B}(80\%))$	$-2.74 \times 10^{-01}$	$p < 10^{-4}$

Table 1: Table of significant correlation values from Fig. 4E.

study in Section 3.5. That is the dynamic mean field variables (e.g. the activity along a vector  $\kappa_v$ , the total variance  $\Delta_0$ , structured variance  $\Delta_\infty$ , and the chaotic variance  $\Delta_T$ ) are written as functions of one another in terms of connectivity parameters. The values of these variables can be used obtained using a nonlinear system of equations solver. These dynamic mean field variables are then cast as task-relevant variables with respect to the context of the provided inputs. Mastrogiovisepp et al. designed low-rank RNN connectivities via minimalist connectivity parameters to solve canonical tasks from behavioral neuroscience.

We consider the DMFT equation solver as a black box that takes in a low-rank parameterization  $z$  (e.g.  $z = [g, M_m, M_n]$ ) and outputs the values of the dynamic mean field variables, of which we cast  $\kappa_r$  and  $\Delta_T$  as task-relevant variables  $\mu_{\text{post}}$  and  $\sigma_{\text{post}}^2$  in the Gaussian posterior conditioning toy example. Importantly, the solution produced by the solver is differentiable with respect to the input parameters, allowing us to use DMFT to calculate the emergent property statistics in EPI to learn distributions on such connectivity parameters of RNNs that execute tasks.

999 Specifically, we solve for the mean field variables  $\kappa_r$ ,  $\kappa_n$ ,  $\Delta_0$  and  $\Delta_\infty$ , where the readout is nominally  
1000 chosen to point in the unit orthant  $r = [1, \dots, 1]^\top$ . The consistency equations for these variables in  
1001 the presence of a constant input  $h = y - (n - M_n)$  can be derived following [26] are

$$\begin{aligned} \kappa_r &= G_1(\kappa_r, \kappa_n, \Delta_0, \Delta_\infty) = M_m \kappa_n + y \\ \kappa_n &= G_2(\kappa_r, \kappa_n, \Delta_0, \Delta_\infty) = M_n \langle [\phi_i] \rangle + \langle [\phi'_i] \rangle \\ \frac{\Delta_0^2 - \Delta_\infty^2}{2} &= G_3(\kappa_r, \kappa_n, \Delta_0, \Delta_\infty) = g^2 \left( \int \mathcal{D}z \Phi^2(\kappa_r + \sqrt{\Delta_0} z) - \int \mathcal{D}z \int \mathcal{D}x \Phi(\kappa_r + \sqrt{\Delta_0 - \Delta_\infty} x + \sqrt{\Delta_\infty} z) \right) \\ &\quad + (\kappa_n^2 + 1)(\Delta_0 - \Delta_\infty) \\ \Delta_\infty &= G_4(\kappa_r, \kappa_n, \Delta_0, \Delta_\infty) = g^2 \int \mathcal{D}z \left[ \int \mathcal{D}x \phi(\kappa_r + \sqrt{\Delta_0 - \Delta_\infty} x + \sqrt{\Delta_\infty} z) \right]^2 + \kappa_n^2 + 1 \end{aligned} \quad (84)$$

1002 where here  $z$  is a gaussian integration variable. We can solve these equations by simulating the  
1003 following Langevin dynamical system to a steady state:

$$\begin{aligned} l(t) &= \frac{\Delta_0(t)^2 - \Delta_\infty(t)^2}{2} \\ \Delta_0(t) &= \sqrt{2x(t) + \Delta_\infty(t)^2} \\ \frac{d\kappa_r(t)}{dt} &= -\kappa_r(t) + F(\kappa_r(t), \kappa_n(t), \Delta_0(t), \Delta_\infty(t)) \\ \frac{d\kappa_n(t)}{dt} &= -\kappa_n + G(\kappa_r(t), \kappa_n(t), \Delta_0(t), \Delta_\infty(t)) \\ \frac{dl(t)}{dt} &= -l(t) + H(\kappa_r(t), \kappa_n(t), \Delta_0(t), \Delta_\infty(t)) \\ \frac{d\Delta_\infty(t)}{dt} &= -\Delta_\infty(t) + L(\kappa_r(t), \kappa_n(t), \Delta_0(t), \Delta_\infty(t)) \end{aligned} \quad (85)$$

1004 Then, the chaotic variance, which is necessary for the Gaussian posterior conditioning example, is  
1005 simply calculated via

$$\Delta_T = \Delta_0 - \Delta_\infty. \quad (86)$$

1006 We ran EPI using a real NVP architecture of two masks and two layers per mask with 10 units  
1007 mapped to a support of  $z \in [[0, -5, -5], [5, 5, 5]]$  with no batch normalization. We used an aug-  
1008 mented Lagrangian coefficient of  $c_0 = 1$ , a batch size  $n = 300$ , set  $\nu = 0.15$ , and initialized  $q_\theta(z)$   
1009 to produce an isotropic Gaussian with mean  $\mu_{\text{init}} = [2.5, 0, 0]$  with standard deviation  $\sigma_{\text{init}} = 2.0$ .  
1010 The EPI distribution shown in Fig. 5 is the converged distributions with maximum entropy across  
1011 five random seeds.

1012 To examine the effect of product  $M_m M_n$  on the posterior mean,  $\mu_{\text{post}}$  we took perturbations in  
1013  $M_m M_n$  away from two representative parameters  $z_1$  and  $z_2$  in 21 equally space increments from

-1 to 1. For each perturbation, we sampled 10 2,000-neuron RNNs and measure the calculated posterior means. In Fig. 5D, we plot the product of  $M_m M_n$  in the perturbation versus the average posterior mean across 10 network realizations with standard error bars. The correlation between perturbation product  $M_m M_n$  and  $\mu_{\text{post}}$  was measured over all simulations. For perturbations away from  $z_1$  the correlation was 0.995 with  $p < 10^{-4}$ , and for perturbations away from  $z_2$  the correlation was 0.983 with  $p < 10^{-4}$ .

In addition to the Gaussian posterior conditioning example in Section 3.5, we modeled two tasks from Mastrogiuseppe et al.: noisy detection and context-dependent discrimination. We used the same theoretical equations and task setups described in their study.

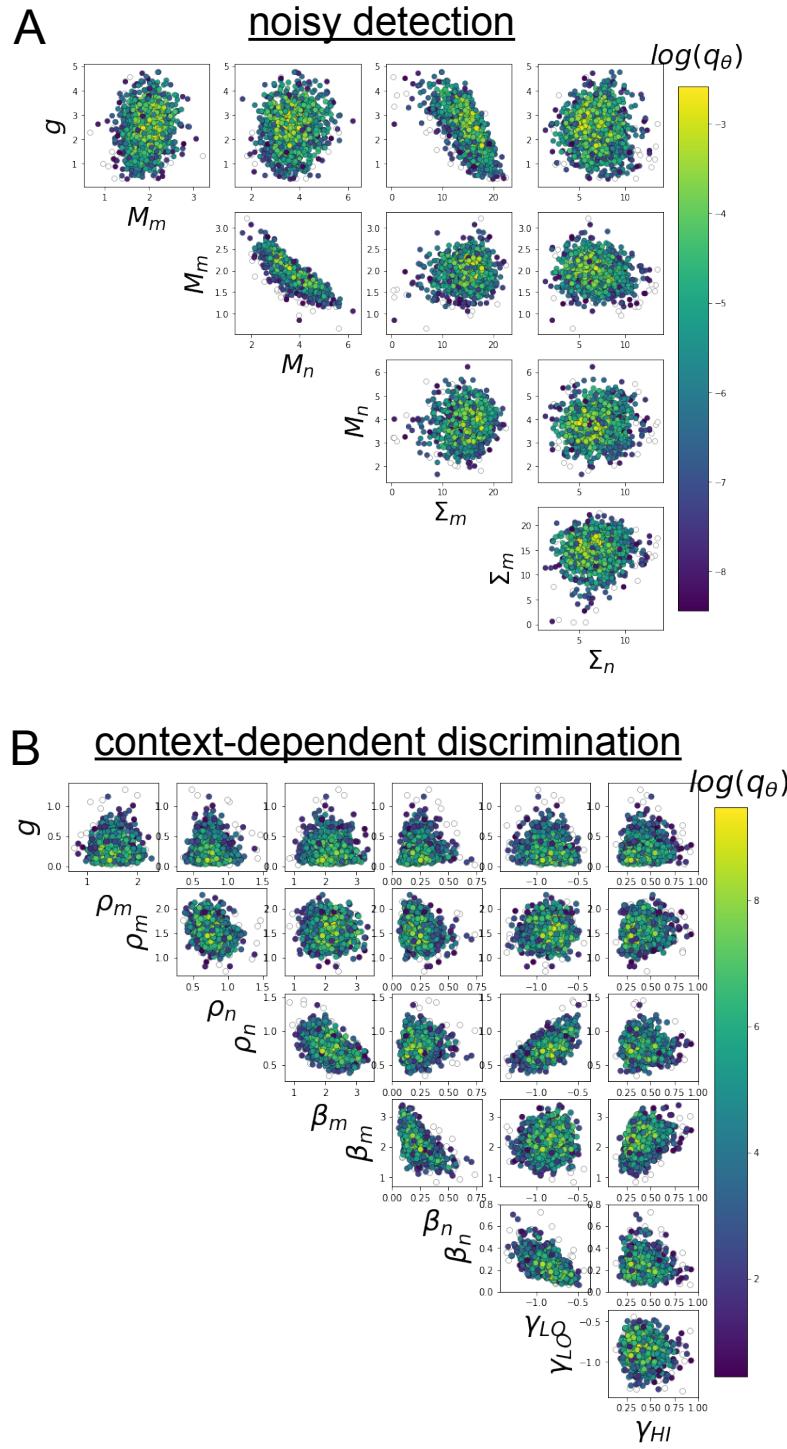


Fig. S5: A. EPI for rank-1 networks doing noisy discrimination. B. EPI for rank-2 networks doing context-dependent discrimination. See [26] for theoretical equations and task description.