

Interrogating theoretical models of neural computation with deep inference

Sean R. Bittner, Agostina Palmigiano, Alex T. Piet, Chunyu A. Duan, Carlos D. Brody,
Kenneth D. Miller, and John P. Cunningham.

¹ 1 Abstract

² A cornerstone of theoretical neuroscience is the circuit model: a system of equations that captures
³ a hypothesized neural mechanism. Such models are valuable when they give rise to an experimen-
⁴ tally observed phenomenon – whether behavioral or in terms of neural activity – and thus can offer
⁵ insights into neural computation. The operation of these circuits, like all models, critically depends
⁶ on the choices of model parameters. Historically, the gold standard has been to analytically derive
⁷ the relationship between model parameters and computational properties. However, this enterprise
⁸ quickly becomes infeasible as biologically realistic constraints are included into the model increas-
⁹ ing its complexity, often resulting in *ad hoc* approaches to understanding the relationship between
¹⁰ model and computation. We bring recent machine learning techniques – the use of deep generative
¹¹ models for probabilistic inference – to bear on this problem, learning distributions of parameters
¹² that produce the specified properties of computation. Importantly, the techniques we introduce
¹³ offer a principled means to understand the implications of model parameter choices on compu-
¹⁴ tational properties of interest. We motivate this methodology with a worked example analyzing
¹⁵ sensitivity in the stomatogastric ganglion. We then use it to generate insights into neuron-type
¹⁶ input-responsivity in a model of primary visual cortex, a new understanding of rapid task switch-
¹⁷ ing in superior colliculus models, and attribution of error in recurrent neural networks solving a
¹⁸ simple mathematical task. More generally, this work suggests a departure from realism vs tractabil-
¹⁹ ity considerations, towards the use of modern machine learning for sophisticated interrogation of
²⁰ biologically relevant models.

²¹ 2 Introduction

²² The fundamental practice of theoretical neuroscience is to use a mathematical model to understand
²³ neural computation, whether that computation enables perception, action, or some intermediate
²⁴ processing [1]. A neural computation is systematized with a set of equations – the model – and
²⁵ these equations are motivated by biophysics, neurophysiology, and other conceptual considerations.
²⁶ The function of this system is governed by the choice of model parameters, which when configured

27 in a particular way, give rise to a measurable signature of a computation. The work of analyzing a
28 model then requires solving the inverse problem: given a computation of interest, how can we reason
29 about these particular parameter configurations? The inverse problem is crucial for reasoning about
30 likely parameter values, uniquenesses and degeneracies, attractor states and phase transitions, and
31 predictions made by the model.

32 Consider the idealized practice: one carefully designs a model and analytically derives how model
33 parameters govern the computation. Seminal examples of this gold standard (which often adopt
34 approaches from statistical physics) include our field’s understanding of memory capacity in asso-
35 ciative neural networks [2], chaos and autocorrelation timescales in random neural networks [3],
36 the paradoxical effect [4], and decision making in rate models [5]. Unfortunately, as circuit models
37 include more biological realism, theory via analytic derivation becomes intractable. This creates an
38 unfavorable tradeoff. On the one hand, one may tractably analyze systems of equations with un-
39 realistic assumptions (for example symmetry or gaussianity), producing accurate inferences about
40 parameters of a too-simple model. On the other hand, one may choose a more biologically accurate,
41 scientifically relevant model at the cost of *ad hoc* approaches to analysis (such as simply examining
42 simulated activity), potentially resulting in bad inferences and thus erroneous scientific predictions
43 or conclusions.

44 Of course, this same tradeoff has been confronted in many scientific fields characterized by the
45 need to do inference in complex models. In response, the machine learning community has made
46 remarkable progress in recent years, via the use of deep neural networks as a powerful inference
47 engine: a flexible function family that can map observed phenomena (in this case the measurable
48 signal of some computation) back to probability distributions quantifying the likely parameter
49 configurations. One celebrated example of this approach from machine learning, of which we
50 draw key inspiration for this work, is the variational autoencoder [6, 7], which uses a deep neural
51 network to induce an (approximate) posterior distribution on hidden variables in a latent variable
52 model, given data. Indeed, these tools have been used to great success in neuroscience as well,
53 in particular for interrogating parameters (sometimes treated as hidden states) in models of both
54 cortical population activity [8, 9, 10, 11] and animal behavior [12, 13, 14]. These works have used
55 deep neural networks to expand the expressivity and accuracy of statistical models of neural data
56 [15].

57 However, these inference tools have not significantly influenced the study of theoretical neuroscience
58 models, for at least three reasons. First, at a practical level, the nonlinearities and dynamics of

many theoretical models are such that conventional inference tools typically produce a narrow set of insights into these models. Indeed, only in the last few years has deep learning research advanced to a point of relevance to this class of problem. Second, the object of interest from a theoretical model is not typically data itself, but rather a qualitative phenomenon – inspection of model behavior, or better, a measurable signature of some computation – an *emergent property* of the model. Third, because theoreticians work carefully to construct a model that has biological relevance, such a model as a result often does not fit cleanly into the framing of a statistical model. Technically, because many such models stipulate a noisy system of differential equations that can only be sampled or realized through forward simulation, they lack the explicit likelihood and priors central to the probabilistic modeling toolkit.

To address these three challenges, we developed an inference methodology – ‘emergent property inference’ – which learns a distribution over parameter configurations in a theoretical model. This distribution has two critical properties: (*i*) it is chosen such that draws from the distribution (parameter configurations) correspond to systems of equations that give rise to a specified emergent property (a set of constraints); and (*ii*) it is chosen to have maximum entropy given those constraints, such that we identify all likely parameters and can use the distribution to reason about parametric sensitivity and degeneracies [16]. First, we stipulate a bijective deep neural network that induces a flexible family of probability distributions over model parameterizations with a probability density we can calculate [17, 18, 19]. Second, we quantify the notion of emergent properties as a set of moment constraints on datasets generated by the model. Thus, an emergent property is not a single data realization, but a phenomenon or a feature of the model, which is ultimately the object of interest in theoretical neuroscience. Conditioning on an emergent property requires a variant of deep probabilistic inference methods, which we have previously introduced [20]. Third, because we cannot assume the theoretical model has explicit likelihood on data or the emergent property of interest, we use stochastic gradient techniques in the spirit of likelihood free variational inference [21]. Taken together, emergent property inference (EPI) provides a methodology for inferring parameter configurations consistent with a particular emergent phenomena in theoretical models. We use a classic example of parametric degeneracy in a biological system, the stomatogastric ganglion [22], to motivate and clarify the technical details of EPI.

Equipped with this methodology, we then investigated three models of current importance in theoretical neuroscience. These models were chosen to demonstrate generality through ranges of biological realism (from conductance-based biophysics to recurrent neural networks), neural sys-

tem function (from pattern generation to abstract cognitive function), and network scale (from four to infinite neurons). First, we use EPI to produce a set of verifiable hypotheses of input-responsivity in a four neuron-type dynamical model of primary visual cortex; we then validate these hypotheses in the model. Second, we demonstrated how the systematic application of EPI to levels of task performance can generate experimentally testable hypotheses regarding connectivity in superior colliculus. Third, we use EPI to uncover the sources of error in a low-rank recurrent neural network executing a simple mathematical task. The novel scientific insights offered by EPI contextualize and clarify the previous studies exploring these models [23, 24, 25, 26] and more generally, suggests a departure from realism vs tractability considerations towards the use of modern machine learning for sophisticated interrogation of biologically relevant models.

We note that, during our preparation and early presentation of this work [27, 28], another work has arisen with broadly similar goals: bringing statistical inference to mechanistic models of neural circuits [29]. We are encouraged by this general problem being recognized by others in the community, and we emphasize that these works offer complementary neuroscientific contributions (different theoretical models of focus) and use different technical methodologies (ours is built on our prior work [20], theirs similarly [30]). These distinct methodologies and scientific investigations emphasize the increased importance and timeliness of both works.

3 Results

3.1 Motivating emergent property inference of theoretical models

Consideration of the typical workflow of theoretical modeling clarifies the need for emergent property inference. First, one designs or chooses an existing model that, it is hypothesized, captures the computation of interest. To ground this process in a well-known example, consider the stomatogastric ganglion (STG) of crustaceans, a small neural circuit which generates multiple rhythmic muscle activation patterns for digestion [31]. Despite full knowledge of STG connectivity and a precise characterization of its rhythmic pattern generation, biophysical models of the STG have complicated relationships between circuit parameters and neural activity [22, 32]. A model of the STG [23] is shown schematically in Figure 1A, and note that the behavior of this model will be critically dependent on its parameterization – the choices of conductance parameters $z = [g_{el}, g_{synA}]$. Specifically, the two fast neurons ($f1$ and $f2$) mutually inhibit one another, and oscillate at a faster frequency than the mutually inhibiting slow neurons ($s1$ and $s2$), and the hub neuron (hub) couples



Figure 1: Emergent property inference (EPI) in the stomatogastric ganglion. A. For a choice of model (STG) and emergent property (network syncing), emergent property inference (EPI, gray box) learns a distribution of the model parameters $z = [g_{el}, g_{synA}]$ producing network syncing. In the STG model, jagged connections indicate electrical coupling having electrical conductance g_{el} . Other connections in the diagram are inhibitory synaptic projections having strength g_{synA} onto the hub neuron, and $g_{synB} = 5\text{nS}$ for mutual inhibitory connections. Network syncing traces are colored by log probability of their generating parameters (stars) in the EPI-inferred distribution. B. An EPI distribution of STG model parameters producing network syncing. Samples are colored by log probability density. Distribution contours of emergent property value error are shown at levels of 2×10^{-6} , 2×10^{-5} , and 2×10^{-4} (dark to light gray). Eigenvectors of the Hessian at the mode of the inferred distribution are indicated as v_1 and v_2 . Simulated activity is shown for three samples (stars). (Inset) Sensitivity of the system with respect to network syncing along all dimensions of parameter space away from the mode. (see Section A.2.1). C. Deep probability distributions map a latent random variable w through a deep neural network with weights and biases θ to parameters $z = f_\theta(w)$ distributed as $q_\theta(z)$. D. EPI optimization: To learn the EPI distribution $q_\theta(z)$ of model parameters that produce an emergent property, the emergent property statistics $T(x)$ are set in expectation over model parameter samples $z \sim q_\theta(z)$ and model simulations $x \sim p(x | z)$ to emergent property values μ . The maximum entropy distribution producing the emergent property.

121 with the fast or slow population or both.

122 Second, once the model is selected, one defines the emergent property, the measurable signal of
 123 scientific interest. To continue our running STG example, one such emergent property is the
 124 phenomenon of *network syncing* – in certain parameter regimes, the frequency of the hub neuron
 125 matches that of the fast and slow populations at an intermediate frequency. This emergent property
 126 is shown in Figure 1A at a frequency of 0.54Hz.

127 Third, qualitative parameter analysis ensues: since precise mathematical analysis is intractable in
 128 this model, a brute force sweep of parameters is done [23]. Subsequently, a qualitative description
 129 is formulated to describe the different parameter configurations that lead to the emergent property.
 130 In this last step lies the opportunity for a precise quantification of the emergent property as a
 131 statistical feature of the model. Once we have such a methodology, we can infer a probability
 132 distribution over parameter configurations that produce this emergent property.

133 Before presenting technical details (in the following section), let us understand emergent property
 134 inference schematically: EPI (Fig. 1A gray box) takes, as input, the model and the specified
 135 emergent property, and as its output, produces the parameter distribution shown in Figure 1B.
 136 This distribution – represented for clarity as samples from the distribution – is then a scientifically
 137 meaningful and mathematically tractable object. In the STG model, this distribution can be
 138 specifically queried to reveal the prototypical parameter configuration for network syncing (the
 139 mode; Figure 1B yellow star), and how network syncing decays based on changes away from the
 140 mode. Intuitively, the probability density of the samples is in agreement with the emergent property
 141 value error (Fig. 1B contours). Furthermore, the eigenvectors of the distribution Hessian at the
 142 mode can be queried to quantitatively formalize the robustness of network syncing (Fig. 1B v_1 and
 143 v_2). Indeed, samples equidistant from the mode along these EPI-identified dimensions of sensitivity
 144 (v_1) and degeneracy (v_2) have diminished or preserved network syncing, respectively (Figure 1B
 145 inset and activity traces). Further validation of EPI is available in the supplementary materials,
 146 where we analyze a simpler model for which ground-truth statements can be made (Section A.1.1).

147 3.2 A deep generative modeling approach to emergent property inference

148 Emergent property inference (EPI) systematizes the three-step procedure of the previous section.
 149 First, we consider the model as a coupled set of differential (and potentially stochastic) equations
 150 [23]. In the running STG example, its activity $x = [x_{f1}, x_{f2}, x_{hub}, x_{s1}, x_{s2}]$ is the membrane potential

151 for each neuron, which evolves according to the biophysical conductance-based equation:

$$C_m \frac{dx}{dt} = -h(x; z) = -[h_{leak}(x; z) + h_{Ca}(x; z) + h_K(x; z) + h_{hyp}(x; z) + h_{elec}(x; z) + h_{syn}(x; z)] \quad (1)$$

152 where $C_m = 1\text{nF}$, and h_{leak} , h_{Ca} , h_K , h_{hyp} , h_{elec} , h_{syn} are the leak, calcium, potassium, hyperpolarization, electrical, and synaptic currents, all of which have their own complicated dependence on x and $z = [g_{el}, g_{synA}]$ (see Section A.2.1).

155 Second, we define the emergent property, which as above is network syncing: oscillation of the
 156 entire population at an intermediate frequency of our choosing (Figure 1A bottom). Quantifying
 157 this phenomenon is straightforward: we define network syncing to be that each neuron’s spiking
 158 frequency – denoted $\omega_{f1}(x)$, $\omega_{f2}(x)$, etc. – is close to an intermediate frequency of 0.542Hz. Mathematically, we achieve this via constraints on the mean and variance of $\omega_\alpha(x)$ for each neuron
 160 $\alpha \in \{f1, f2, \text{hub}, s1, s2\}$, and thus:

$$\mathbb{E}[T(x)] \triangleq \mathbb{E} \begin{bmatrix} \omega_{f1}(x) \\ \vdots \\ (\omega_{f1}(x) - 0.542)^2 \\ \vdots \end{bmatrix} = \begin{bmatrix} 0.542 \\ \vdots \\ 0.025^2 \\ \vdots \end{bmatrix} \triangleq \mu, \quad (2)$$

161 which completes the quantification of the emergent property.

162 Third, we perform emergent property inference: we find a distribution over parameter configura-
 163 tions z , and insist that samples from this distribution produce the emergent property; in other
 164 words, they obey the constraints introduced in Equation 2. This distribution will be chosen from
 165 a family of probability distributions $\mathcal{Q} = \{q_\theta(z) : \theta \in \Theta\}$, defined by a deep generative distribution
 166 of the normalizing flow class [17, 18, 19] – neural networks which transform a simple distribution
 167 into a suitably complicated distribution (as is needed here). This deep distribution is represented
 168 in Figure 1C (see Section A.1). Then, mathematically, we must solve the following optimization
 169 program:

$$\begin{aligned} & \underset{q_\theta \in \mathcal{Q}}{\operatorname{argmax}} H(q_\theta(z)) \\ & \text{s.t. } \mathbb{E}_{z \sim q_\theta} [\mathbb{E}_{x \sim p(x|z)} [T(x)]] = \mu, \end{aligned} \quad (3)$$

170 where $T(x), \mu$ are defined as in Equation 2, and $p(x|z)$ is the intractable distribution of data from
 171 the model, x , given that model’s parameters z (we access samples from this distribution by running
 172 the model forward). The purpose of each element in this program is detailed in Figure 1D. Finally,

we recognize that many distributions in \mathcal{Q} will respect the emergent property constraints, so we require a normative principle to select amongst them. This principle is captured in Equation 3 by the primal objective H . Here we chose Shannon entropy as a means to find parameter distributions with minimal assumptions beyond some chosen structure [33, 34, 20, 35], but we emphasize that the EPI method is unaffected by this choice (but the results of course will depend on the primal objective chosen).

EPI optimizes the weights and biases θ of the deep neural network (which induces the probability distribution) by iteratively solving Equation 3. The optimization is complete when the sampled models with parameters $z \sim q_\theta$ produce activity consistent with the specified emergent property. Such convergence is evaluated with a hypothesis test that the mean of each emergent property statistic is not different than its emergent property value (see Section A.1.2). In relation to broader methodology, inspection of the EPI objective reveals a natural relationship to posterior inference. Specifically, EPI executes variational inference in an exponential family model, the sufficient statistics and mean parameter of which are defined by the emergent property statistics and values, respectively (see Section A.1.4). Equipped with this method, we now prove out the value of EPI by using it to investigate and produce novel insights about three prominent models in neuroscience.

3.3 Comprehensive input-responsivity in a nonlinear sensory system

Dynamical models of excitatory (E) and inhibitory (I) populations with supralinear input-output function have succeeded in explaining a host of experimentally documented phenomena. In a regime characterized by inhibitory stabilization of strong recurrent excitation, these models give rise to paradoxical responses [4], selective amplification [36], surround suppression [37] and normalization [38]. Despite their strong predictive power, E-I circuit models rely on the assumption that inhibition can be studied as an indivisible unit. Instead, experimental evidence shows that inhibition is composed of distinct elements (parvalbumin (P), somatostatin(S), VIP (V)) composing 80% of GABAergic interneurons in V1 [39, 40, 41] and that these inhibitory cell types follow specific connectivity patterns (Fig. 2A) [42]. Recent theoretical advances [24, 43, 44], have only started to address the consequences of this multiplicity in the dynamics of V1, strongly relying on linear theoretical tools. Here, we go beyond linear theory by systematically generating and evaluating hypotheses of circuit model function using EPI distributions of neuron-type inputs producing various neuron-type population responses.

Specifically, we consider a four-dimensional circuit model with dynamical state given by the firing



Figure 2: Hypothesis generation through EPI in a V1 model. A. Four-population model of primary visual cortex with excitatory (black), parvalbumin (blue), somatostatin (red), and VIP (green) neurons. Some neuron-types largely do not form synaptic projections to others (excitatory and inhibitory projections filled and unfilled, respectively). B. V1 model simulations for input (solid) $h = b$ and (dashed) $h = b + dh$. Stars indicate the linear response prediction. C. EPI distributions on differential input dh conditioned on differential response $B(\alpha, y)$. Supporting evidence for the four generated hypotheses are indicated by gray boxes with labels H1, H2, H3, and H4. The linear prediction from two standard deviations away from y (from negative to positive) is overlaid in magenta (very small, near origin).

rate x of each neuron-type population $x = [x_E, x_P, x_S, x_V]^\top$. Given a time constant of $\tau = 20$ ms and a power $n = 2$, the dynamics are driven by the rectified ($\|\cdot\|_+$) and exponentiated sum of recurrent (Wx) and external h inputs:

$$\tau \frac{dx}{dt} = -x + [Wx + h]_+^n \quad (4)$$

The effective connectivity weights W were obtained from experimental recordings of publicly available datasets of mouse V1 [45, 46] (see Section A.2.2). The input $h = b + dh$ is comprised of a baseline input $b = [b_E, b_P, b_S, b_V]^\top$ and a differential input $dh = [dh_E, dh_P, dh_S, dh_V]^\top$ to each neuron-type population. Throughout subsequent analyses, the baseline input is $b = [1, 1, 1, 1]^\top$.

With this model, we are interested in the differential responses of each neuron-type population to changes in input dh . Initially, we studied the linearized response of the system to input $\frac{dx_{ss}}{dh}$ at the steady state response x_{ss} , i.e. a fixed point. All analyses of this model consider the steady state response, so we drop the notation ss from here on. While this linearization accurately predicts differential responses $dx = [dx_E, dx_P, dx_S, dx_V]$ for small differential inputs to each population $dh = [0.1, 0.1, 0.1, 0.1]$ (Fig 2B left), the linearization is a poor predictor in this nonlinear model more generally (Fig. 2B right). Currently available approaches to deriving the steady state response of the system are limited.

To get a more comprehensive picture of the input-responsivity of each neuron-type beyond linear theory, we used EPI to learn a distribution of the differential inputs to each population dh that produce an increase of $y \in \{0.1, 0.5\}$ in the rate of each neuron-type population $\alpha \in \{E, P, S, V\}$. We want to know the differential inputs dh that result in a differential steady state dx_α (the change in x_α when receiving input $h = b + dh$ with respect to the baseline $h = b$) of value y with some small, arbitrarily chosen amount of variance 0.01². These statements amount to the emergent property

$$\mathcal{B}(\alpha, y) \triangleq \mathbb{E} \begin{bmatrix} dx_\alpha \\ (dx_\alpha - y)^2 \end{bmatrix} = \begin{bmatrix} y \\ 0.01^2 \end{bmatrix} \quad (5)$$

We maintain the notation $\mathcal{B}(\cdot)$ throughout the rest of the study as short hand for emergent property, which represents a different signature of computation in each application. In each column of Figure 2C visualizes the inferred distribution, available through EPI, of dh corresponding to an excitatory (red), parvalbumin (blue), somatostatin (red) and VIP (green) neuron-type increase, while each row corresponds to amounts of increase 0.1 and 0.5. For each pair of parameters, we show the two-dimensional marginal distribution of samples colored by $\log q_\theta(dh \mid \mathcal{B}(\alpha, y))$. The

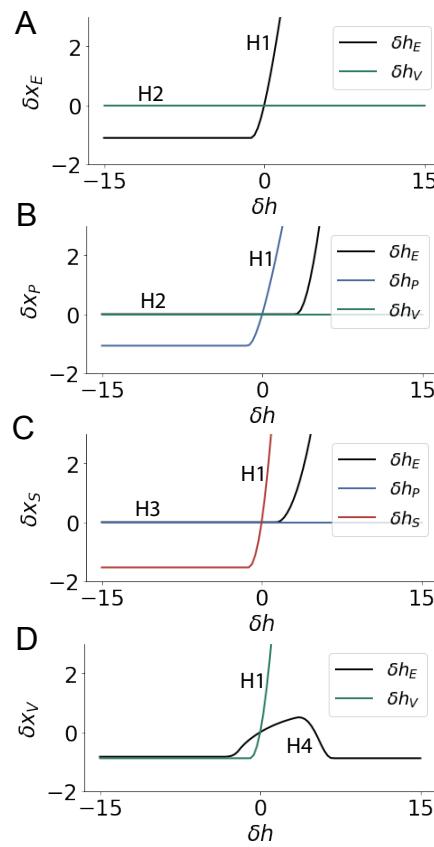


Figure 3: Confirming EPI generated hypotheses in V1. A. Differential responses by the E-population to changes in individual input $\delta h_\alpha \hat{u}_\alpha$ away from the mode of the EPI distribution dh^* . B-D Same plots for the P-, S-, and V-populations. Labels H1, H2, H3, and H4 indicate which curves confirm which hypotheses.

231 inferred distributions immediately suggest four hypotheses:

232

233 H1: as is intuitive, each neuron-type's firing rate should be sensitive to that neuron-type's
 234 direct input (e.g. Fig. 2C H1 gray boxes indicate low variance in dh_E when $\alpha = E$. Same
 235 observation in all inferred distributions);

236 H2: the E- and P-populations should be largely unaffected by input to the V-population (Fig.
 237 2C H2 gray boxes indicate high variance in dh_V when $\alpha \in \{E, P\}$);

238 H3: the S-population should be largely unaffected by input to the P-population (Fig. 2C H3
 239 gray boxes indicate high variance in dh_P when $\alpha = S$);

240 H4: there should be a nonmonotonic response of the V-population with input to the E-
 241 population (Fig. 2C H4 gray boxes indicate that negative dh_E should result in small dx_V ,
 242 but positive dh_E should elicit a larger dx_V);

243 We evaluate these hypotheses by taking steps in individual neuron-type input δh_α away from the
 244 modes of the inferred distributions at $y = 0.1$.

$$dh^* = z^* = \operatorname{argmax}_z \log q_\theta(z | \mathcal{B}(\alpha, 0.1)) \quad (6)$$

²⁴⁵ δx_α is the change in steady state response to the system with input $h = b + dh^* + \delta h_\alpha \hat{u}_\alpha$ compared
²⁴⁶ to $h = b + dh^*$, where \hat{u}_α is a unit vector in the dimension of α . The EPI-generated hypotheses are
²⁴⁷ confirmed.

²⁴⁸ H1: the neuron-type responses are sensitive to their direct inputs (Fig. 3A black, 3B blue,
²⁴⁹ 3C red, 3D green);

²⁵⁰ H2: the E- and P-populations are not affected by δh_V (Fig. 3A green, 3B green);

²⁵¹ H3: the S-population is not affected by δh_P (Fig. 3C blue);

²⁵² H4: the V-population exhibits a nonmonotonic response to δh_E (Fig. 3D black), and is in
²⁵³ fact the on population to do so (Fig. 3A-C black).

²⁵⁴ These hypotheses were in stark contrast to what was available to us via traditional analytical linear
²⁵⁵ prediction (Fig. 2C, magenta). To this point, we have shown the utility of EPI on relatively low-
²⁵⁶ level emergent properties like network syncing and differential neuron-type population responses.
²⁵⁷ In the remainder of the study, we focus on using EPI to understand models of more abstract
²⁵⁸ cognitive function.

²⁵⁹ 3.4 Identifying neural mechanisms of behavioral learning

²⁶⁰ In a rapid task switching experiment [47], rats were explicitly cued on each trial to either orient
²⁶¹ towards a visual stimulus in the Pro (P) task or orient away from a visual stimulus in the Anti (A)
²⁶² task (Fig. 4a). Neural recordings in the midbrain superior colliculus (SC) exhibited two populations
²⁶³ of neurons that simultaneously represented both task context (Pro or Anti) and motor response
²⁶⁴ (contralateral or ipsilateral to the recorded side): the Pro/Contra and Anti/Ipsi neurons [25]. Duan
²⁶⁵ et al. proposed a model of SC that, like the V1 model analyzed in the previous section, is a four-
²⁶⁶ population dynamical system. Here, the neuron-type populations are functionally-defined as the
²⁶⁷ Pro- and Anti-populations in each hemisphere (left (L) and right (R)). The Pro- or Anti-populations
²⁶⁸ receive an input determined by the cue, and then the left and right populations receive an input
²⁶⁹ based on the side of the light stimulus. Activities were bounded between 0 and 1, so that a high
²⁷⁰ output of the Pro population in a given hemisphere corresponds to the contralateral response. An
²⁷¹ additional stipulation is that when one Pro population responds with a high-output, the opposite
²⁷² Pro population must respond with a low output. Finally, this circuit operates in the presence of
²⁷³ Gaussian noise resulting in trial-to-trial variability (see Section A.2.3). The connectivity matrix is
²⁷⁴ parameterized by the geometry of the population arrangement (Fig. 4B).

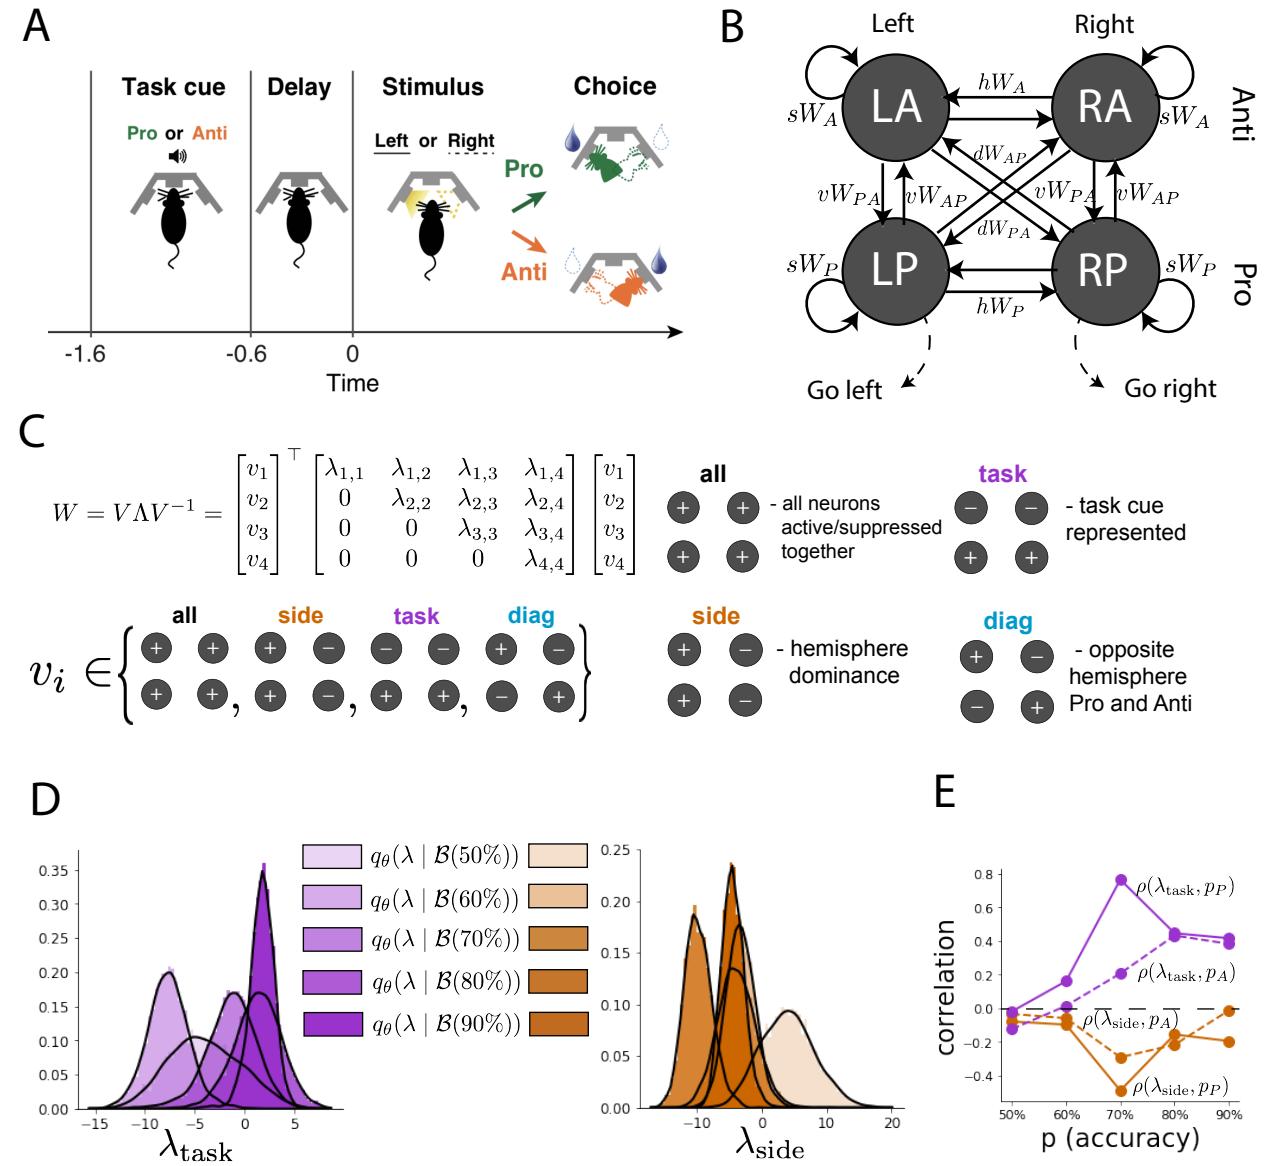


Figure 4: EPI reveals changes in SC [25] connectivity that control task accuracy. A. Rapid task switching behavioral paradigm (see text). B. Model of superior colliculus (SC). Neurons: LP - left pro, RP - right pro, LA - left anti, RA - right anti. Parameters: sW - self, hW - horizontal, vW - vertical, dW - diagonal weights. C. The Schur decomposition of the weight matrix $W = V \Lambda V^{-1}$ is a unique decomposition with orthogonal V and upper triangular Λ . Schur modes: v_{all} , v_{task} , v_{side} , and v_{diag} . D. The marginal EPI distributions of the Schur eigenvalues at each level of task accuracy. E. The correlation of Schur eigenvalue with task performance in each learned EPI distribution.

275 Here, we used EPI to learn distributions of the SC weight matrix parameters $z = W$ conditioned
 276 on of various levels of rapid task switching accuracy $\mathcal{B}(p)$ for $p \in \{50\%, 60\%, 70\%, 80\%, 90\%\}$ (see
 277 Section A.2.3). Following the approach in Duan et al., we decomposed the connectivity matrix
 278 $W = V\Lambda V^{-1}$ in such a way (the Schur decomposition) that the basis vectors v_i are the same for all
 279 W (Fig. 4C). These basis vectors have intuitive roles in processing for this task, and are accordingly
 280 named the *all* mode - all neurons co-fluctuate, *side* mode - one side dominates the other, *task* mode
 281 - the Pro or Anti populations dominate the other, and *diag* mode - Pro- and Anti-populations of
 282 opposite hemispheres dominate the opposite pair. The corresponding eigenvalues (e.g. λ_{task} , which
 283 change according to W) indicate the degree to which activity along that mode is increased or
 284 decreased by W .

285 EPI demonstrates that, for greater task accuracies, the task mode eigenvalue increases, indicating
 286 the importance of W to the task representation (Fig. 4D, purple). Stepping from random chance
 287 (50%) networks to marginally task-performing (60%) networks, there is a marked decrease of the
 288 side mode eigenvalues (Fig. 4D, orange). Such side mode suppression remains in the models
 289 achieving greater accuracy, revealing its importance towards task performance. There were no
 290 interesting trends with learning in the all or diag mode (hence not shown in Fig. 4). Importantly,
 291 we can conclude from our methodology that side mode suppression in W allows rapid task switching,
 292 and that greater task-mode representations in W increase accuracy. These hypotheses are confirmed
 293 by forward simulation of the SC model (Fig. 4E). Thus, EPI produces novel, experimentally testable
 294 predictions: increase in rapid task switching performance should be correlated with changes in
 295 effective connectivity resulting in an increase in task mode and decrease in side mode eigenvalues.

296 3.5 Linking RNN connectivity to error

297 So far, each model we have studied was designed from fundamental biophysical principles, genetically-
 298 or functionally-defined neuron types. At a more abstract level of modeling, recurrent neural net-
 299 works (RNNs) are high-dimensional dynamical models of computation that are becoming increas-
 300 ingly popular in neuroscience research [48]. In theoretical neuroscience, RNN dynamics usually
 301 follow the equation

$$\frac{dx(t)}{dt} = -x(t) + W\phi(x(t)) + h(t), \quad (7)$$

302 where $x(t)$ is the network activity, W is the network connectivity, $\phi(\cdot) = \tanh(\cdot)$, and $h(t)$ is the
 303 input to the system. Such RNNs are trained to do a task from a systems neuroscience experiment,
 304 and then the unit activations of the trained RNN are compared to recorded neural activity. Fully-

305 connected RNNs with tens of thousands of parameters are challenging to characterize [49], especially
 306 making statistical inferences about their parameterization. Alternatively, we considered a rank-1,
 307 N -neuron RNN with connectivity

$$W = g\chi + \frac{1}{N}mn^\top, \quad (8)$$

308 where $\chi_{i,j} \sim \mathcal{N}(0, \frac{1}{N})$, g is the random strength, and the entries of m and n are drawn from Gaussian
 309 distributions $m_i \sim \mathcal{N}(M_m, 1)$ and $n_i \sim \mathcal{N}(M_n, 1)$. We used EPI to infer the parameterizations of
 310 rank-1 RNNs solving an example task, enabling discovery of properties of connectivity that result
 311 in different types of error in the computation.

312 The task we consider is Gaussian posterior conditioning: calculate the parameters of a posterior
 313 distribution induced by a prior $p(\mu_y) = \mathcal{N}(\mu_0 = 4, \sigma_0^2 = 1)$ and a likelihood $p(y|\mu_y) = \mathcal{N}(\mu_y, \sigma_y^2 =$
 314 1), given a single observation y . Conjugacy offers the result analytically; $p(\mu_y|y) = \mathcal{N}(\mu_{post}, \sigma_{post}^2)$,
 315 where:

$$\mu_{post} = \frac{\frac{\mu_0}{\sigma_0^2} + \frac{y}{\sigma_y^2}}{\frac{1}{\sigma_0^2} + \frac{1}{\sigma_y^2}} \quad \sigma_{post}^2 = \frac{1}{\frac{1}{\sigma_0^2} + \frac{1}{\sigma_y^2}}. \quad (9)$$

316 The RNN is trained to solve this task by producing readout activity that is on average the posterior
 317 mean μ_{post} , and activity whose variability is the posterior variance σ_{post}^2 (Fig. 5A, a setup inspired
 318 by [50]). To solve this Gaussian posterior conditioning task, the RNN response to a constant input
 319 $h(t) = yw + (n - M_n)$ must equal the posterior mean along readout vector r , where

$$\kappa_r = \frac{1}{N} \sum_{j=1}^N r_j \phi(x_j) \quad (10)$$

320 Additionally, the amount of chaotic variance Δ_T must equal the posterior variance. Theory for
 321 low-rank RNNs allows us to express κ_r and Δ_T in terms of each other through a solvable system
 322 of nonlinear equations (see Section A.2.4) [26]. This allows us to mathematically formalize the
 323 execution of this task into an emergent property, where the emergent property statistics of the
 324 RNN activity are κ_r and Δ_T and the emergent property values are the ground truth posterior
 325 mean μ_{post} and variance σ_{post}^2 :

$$E \begin{bmatrix} \kappa_r \\ \Delta_T \\ (\kappa_r - \mu_{post})^2 \\ (\Delta_T^2 - \sigma_{post}^2)^2 \end{bmatrix} = \begin{bmatrix} \mu_{post} \\ \sigma_{post}^2 \\ 0.1 \\ 0.1 \end{bmatrix} \quad (11)$$

326 We specify a substantial amount of variance in these emergent property statistics, so that the
 327 inferred distribution results in RNNs with a variety errors in their solutions to the gaussian posterior
 328 conditioning problem.

329 We used EPI to learn distributions of RNN connectivity properties $z = [g \ M_m \ M_n]$ executing
 330 Gaussian posterior conditioning given an input of $y = 2$ (see Section A.2.4) (Fig. 5B). The true
 331 Gaussian conditioning posterior for an input of $y = 2$ is $\mu_{\text{post}} = 3$ and $\sigma_{\text{post}} = 0.5$. We examined the
 332 nature of the over- and under-estimation of the posterior means (Fig. 5B, left) and variances (Fig.
 333 5B, right) in the inferred distributions. There is rough symmetry in the M_m - M_n plane, suggesting
 334 a degeneracy in the product of M_m and M_n (Fig. 5B). The product of M_m and M_n strongly
 335 determines the posterior mean (Fig. 5B, left), and the random strength g is the most influential
 336 variable on the chaotic variance (Fig. 5B, right). Neither of these observations were obvious from
 337 what mathematical analysis is available in networks of this type (see Section A.2.4). While the
 338 relationship of the random strength to chaotic variance (and resultingly posterior variance in this
 339 problem) is well-known [3], the distribution admits a hypothesis: the estimation of the posterior
 340 mean by the RNN increases with the product of M_m and M_n .

341 We tested this prediction by taking parameters z_1 and z_2 as representative samples from the
 342 positive and negative M_m - M_n quadrants, respectively. Instead of using the theoretical predictions
 343 shown in Figure 5B, we simulated finite-size realizations of these networks with 2,000 neurons
 344 (e.g. Fig. 5C). We perturbed these parameter choices by the product $M_m M_n$ clarifying that the
 345 posterior mean can be directly controlled in this way (Fig. 5D). Thus, EPI confers a clear picture
 346 of error in this computation: the product of the low rank vector means M_m and M_n modulates
 347 the estimated posterior mean while the random strength g modulates the chaotic variance. This
 348 novel procedure of inference on reduced parameterizations of RNNs conditioned on the emergent
 349 property of task execution is generalizable to other settings modeled in [26] like noisy integration
 350 and context-dependent decision making (Fig. S4).

351 4 Discussion

352 4.1 EPI is a general tool for theoretical neuroscience

353 Biologically realistic models of neural circuits are comprised of complex nonlinear differential equa-
 354 tions, making traditional theoretical analysis and statistical inference intractable. In contrast, EPI
 355 is capable of learning distributions of parameters in such models producing measurable signatures
 356 of computation. We have demonstrated its utility on biological models (STG), intermediate-level
 357 models of interacting genetically- and functionally-defined neuron-types (V1, SC), and the most
 358 abstract of models (RNNs). We are able to condition both deterministic and stochastic models on

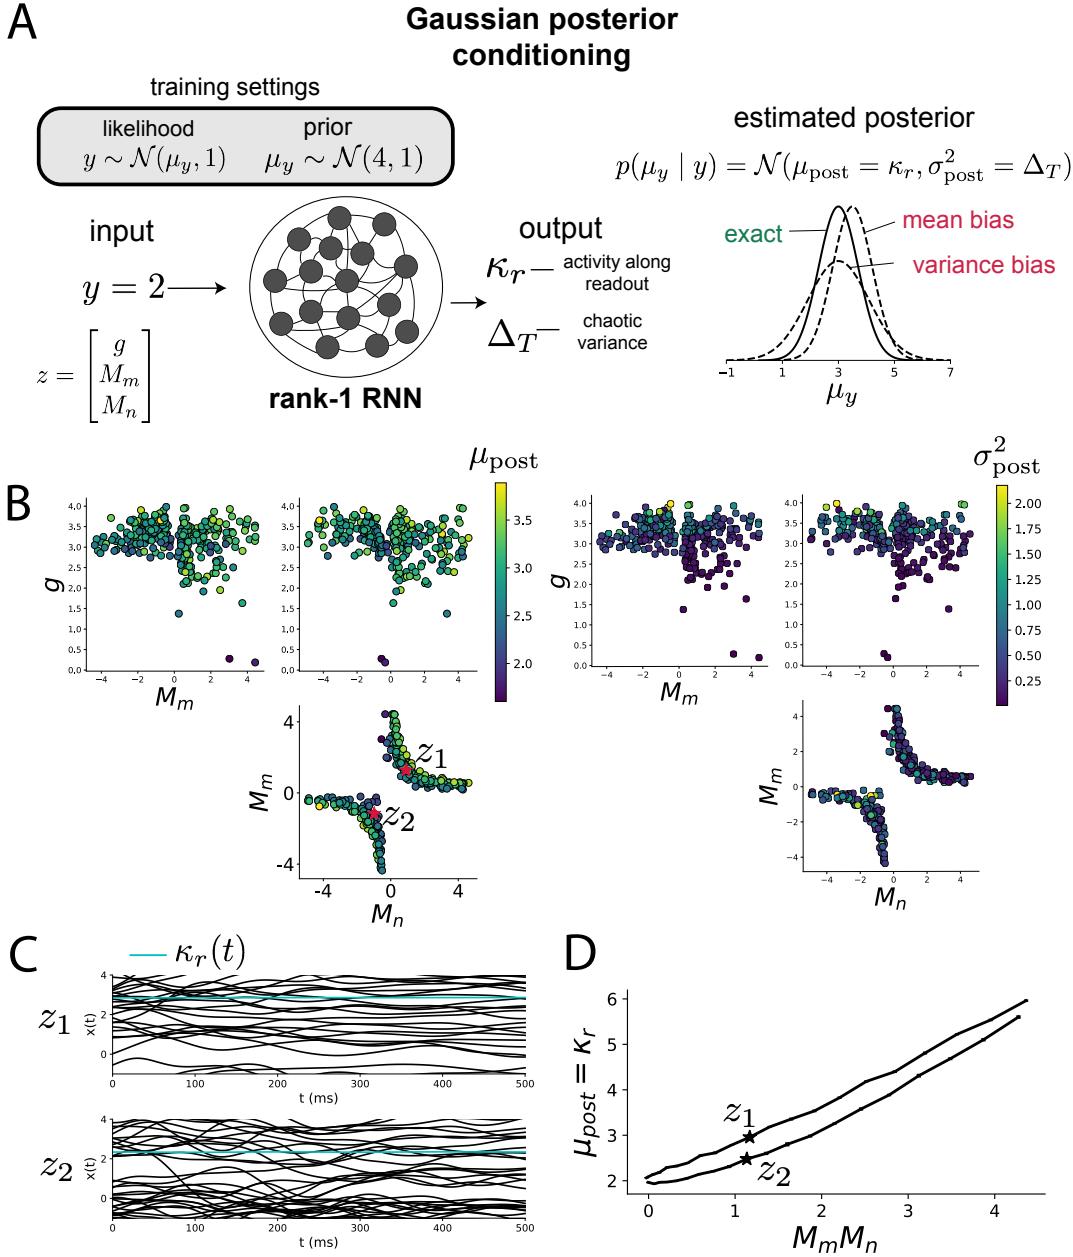


Figure 5: Sources of error in an RNN solving a simple task. A. (left) A rank-1 RNN executing a Gaussian posterior conditioning computation on μ_y . (right) Error in this computation can come from over- or under-estimating the posterior mean or variance. B. EPI distribution of rank-1 RNNs executing Gaussian posterior conditioning. Samples are colored by (left) posterior mean $\mu_{\text{post}} = \kappa_r$ and (right) posterior variance $\sigma_{\text{post}}^2 = \Delta_T$. C. Finite-size network simulations of 2,000 neurons with parameters z_1 and z_2 sampled from the inferred distribution. Activity along readout κ_r (cyan) is stable despite chaotic fluctuations. D. The posterior mean computed by RNNs parameterized by z_1 and z_2 pertrubed in the dimension of the product of M_m and M_n . Means and standard errors are shown across 10 realizations of 2,000-neuron networks.

359 low-level emergent properties like spiking frequency of membrane potentials, as well as high-level
360 cognitive function like posterior conditioning. Technically, EPI is tractable when the emergent
361 property statistics are continuously differentiable with respect to the model parameters, which is
362 very often the case; this emphasizes the general applicability of EPI.

363 In this study, we have focused on applying EPI to low dimensional parameter spaces of models
364 with low dimensional dynamical states. These choices were made to present the reader with a
365 series of interpretable conclusions, which is more challenging in high dimensional spaces. In fact,
366 EPI should scale reasonably to high dimensional parameter spaces, as the underlying technology has
367 produced state-of-the-art performance on high-dimensional tasks such as texture generation [20]. Of
368 course, increasing the dimensionality of the dynamical state of the model makes optimization more
369 expensive, and there is a practical limit there as with any machine learning approach. Although,
370 theoretical approaches (e.g. [26]) can be used to reason about the wholistic activity of such high
371 dimensional systems by introducing some degree of additional structure into the model.

372 There are additional technical considerations when assessing the suitability of EPI for a particu-
373 lar modeling question. First and foremost, as in any optimization problem, the defined emergent
374 property should always be appropriately conditioned (constraints should not have wildly different
375 units). Furthermore, if the program is underconstrained (not enough constraints), the distribution
376 grows (in entropy) unstably unless mapped to a finite support. If overconstrained, there is no pa-
377 rameter set producing the emergent property, and EPI optimization will fail (appropriately). Next,
378 one should consider the computational cost of the gradient calculations. In the best circumstance,
379 there is a simple, closed form expression (e.g. Section A.1.1) for the emergent property statistic
380 given the model parameters. On the other end of the spectrum, many forward simulation iterations
381 may be required before a high quality measurement of the emergent property statistic is available
382 (e.g. Section A.2.1). In such cases, optimization will be expensive.

383 **4.2 Novel hypotheses from EPI**

384 In neuroscience, machine learning has primarily been used to revealed structure in large-scale neural
385 datasets [51, 52, 53, 54, 55, 56] (see review, [15]). Such careful inference procedures are developed
386 for these statistical models allowing precise, quantitative reasoning, which clarifies the way data
387 informs knowledge of the model parameters. However, these inferable statistical models lack re-
388 semblance to the underlying biology, making it unclear how to go from the structure revealed by
389 these methods, to the neural mechanisms giving rise to it. In contrast, theoretical neuroscience has

390 focused on careful mechanistic modeling and the production of emergent properties of computation.
391 The careful steps of 1.) model design and 2.) emergent property definition, are followed by 3.)
392 practical inference methods resulting in an opaque characterization of the way model parameters
393 govern computation. In this work, we replaced this opaque procedure of parameter identification
394 in theoretical neuroscience with emergent property inference, opening the door to careful inference
395 in careful models of neural computation.

396 Biologically realistic models of neural circuits often prove formidable to analyze. For example,
397 consider the fact that we do not fully understand the (only) four-dimensional models of V1 [24]
398 and SC [25]. Because analytical approaches to studying nonlinear dynamical systems become
399 increasingly complicated when stepping from two-dimensional to three- or four-dimensional systems
400 in the absence of restrictive simplifying assumptions [57], it is unsurprising that these models pose
401 a challenge. In Section 3.3, we showed that EPI was far more informative about neuron-type
402 input-responsivity than the predictions afforded through the available linear analytic methods. By
403 flexibly conditioning this V1 model on different emergent properties, we performed an exploratory
404 analysis of a *model* rather than a dataset, which generated a set of testable hypotheses, which
405 were proved out. Of course, exploratory analyses can be directed towards formulating hypotheses
406 of a specific form. For example, when interested in model parameter changes with behavioral
407 performance, one can use EPI to condition on various levels of task accuracy as we did in Section
408 3.4. This analysis identified experimentally testable predictions (proved out *in-silico*) of patterns
409 of effective connectivity in SC that should be correlated with increased performance.

410 In our final analysis, we presented a novel procedure for doing statistical inference on interpretable
411 parameterizations of RNNs executing simple tasks. Specifically, we analyzed RNNs solving a pos-
412 terior conditioning problem in the spirit of [50]. This methodology relies on recently extended
413 theory of responses in random neural networks with minimal structure [26]. While we focused on
414 rank-1 RNNs, which were sufficient for solving this task, we can more generally use this approach
415 to analyze rank-2 and greater RNNs. The ability to apply the probabilistic model selection toolkit
416 to such black box models should prove invaluable as their use in neuroscience increases.

417 **References**

- 418 [1] Larry F Abbott. Theoretical neuroscience rising. *Neuron*, 60(3):489–495, 2008.

- 419 [2] John J Hopfield. Neural networks and physical systems with emergent collective computational
420 abilities. *Proceedings of the national academy of sciences*, 79(8):2554–2558, 1982.
- 421 [3] Haim Sompolinsky, Andrea Crisanti, and Hans-Jurgen Sommers. Chaos in random neural
422 networks. *Physical review letters*, 61(3):259, 1988.
- 423 [4] Misha V Tsodyks, William E Skaggs, Terrence J Sejnowski, and Bruce L McNaughton. Para-
424 doxical effects of external modulation of inhibitory interneurons. *Journal of neuroscience*,
425 17(11):4382–4388, 1997.
- 426 [5] Kong-Fatt Wong and Xiao-Jing Wang. A recurrent network mechanism of time integration in
427 perceptual decisions. *Journal of Neuroscience*, 26(4):1314–1328, 2006.
- 428 [6] Diederik P Kingma and Max Welling. Auto-encoding variational bayes. *International Confer-
429 ence on Learning Representations*, 2014.
- 430 [7] Danilo Jimenez Rezende, Shakir Mohamed, and Daan Wierstra. Stochastic backpropagation
431 and variational inference in deep latent gaussian models. *International Conference on Machine
432 Learning*, 2014.
- 433 [8] Yuanjun Gao, Evan W Archer, Liam Paninski, and John P Cunningham. Linear dynamical
434 neural population models through nonlinear embeddings. In *Advances in neural information
435 processing systems*, pages 163–171, 2016.
- 436 [9] Yuan Zhao and Il Memming Park. Recursive variational bayesian dual estimation for nonlinear
437 dynamics and non-gaussian observations. *stat*, 1050:27, 2017.
- 438 [10] Gabriel Barello, Adam Charles, and Jonathan Pillow. Sparse-coding variational auto-encoders.
439 *bioRxiv*, page 399246, 2018.
- 440 [11] Chethan Pandarinath, Daniel J O’Shea, Jasmine Collins, Rafal Jozefowicz, Sergey D Stavisky,
441 Jonathan C Kao, Eric M Trautmann, Matthew T Kaufman, Stephen I Ryu, Leigh R Hochberg,
442 et al. Inferring single-trial neural population dynamics using sequential auto-encoders. *Nature
443 methods*, page 1, 2018.
- 444 [12] Alexander B Wiltschko, Matthew J Johnson, Giuliano Iurilli, Ralph E Peterson, Jesse M
445 Katon, Stan L Pashkovski, Victoria E Abraira, Ryan P Adams, and Sandeep Robert Datta.
446 Mapping sub-second structure in mouse behavior. *Neuron*, 88(6):1121–1135, 2015.

- [447] [13] Matthew J Johnson, David K Duvenaud, Alex Wiltschko, Ryan P Adams, and Sandeep R Datta. Composing graphical models with neural networks for structured representations and fast inference. In *Advances in neural information processing systems*, pages 2946–2954, 2016.
- [450] [14] Eleanor Batty, Matthew Whiteway, Shreya Saxena, Dan Biderman, Taiga Abe, Simon Musall, Winthrop Gillis, Jeffrey Markowitz, Anne Churchland, John Cunningham, et al. Behavenet: nonlinear embedding and bayesian neural decoding of behavioral videos. *Advances in Neural Information Processing Systems*, 2019.
- [454] [15] Liam Paninski and John P Cunningham. Neural data science: accelerating the experiment-analysis-theory cycle in large-scale neuroscience. *Current opinion in neurobiology*, 50:232–241, 2018.
- [457] [16] Mark K Transtrum, Benjamin B Machta, Kevin S Brown, Bryan C Daniels, Christopher R Myers, and James P Sethna. Perspective: Sloppiness and emergent theories in physics, biology, and beyond. *The Journal of chemical physics*, 143(1):07B201_1, 2015.
- [460] [17] Danilo Jimenez Rezende and Shakir Mohamed. Variational inference with normalizing flows. *International Conference on Machine Learning*, 2015.
- [462] [18] Laurent Dinh, Jascha Sohl-Dickstein, and Samy Bengio. Density estimation using real nvp. *arXiv preprint arXiv:1605.08803*, 2016.
- [464] [19] George Papamakarios, Theo Pavlakou, and Iain Murray. Masked autoregressive flow for density estimation. In *Advances in Neural Information Processing Systems*, pages 2338–2347, 2017.
- [466] [20] Gabriel Loaiza-Ganem, Yuanjun Gao, and John P Cunningham. Maximum entropy flow networks. *International Conference on Learning Representations*, 2017.
- [468] [21] Dustin Tran, Rajesh Ranganath, and David Blei. Hierarchical implicit models and likelihood-free variational inference. In *Advances in Neural Information Processing Systems*, pages 5523–5533, 2017.
- [471] [22] Mark S Goldman, Jorge Golowasch, Eve Marder, and LF Abbott. Global structure, robustness, and modulation of neuronal models. *Journal of Neuroscience*, 21(14):5229–5238, 2001.
- [473] [23] Gabrielle J Gutierrez, Timothy O’Leary, and Eve Marder. Multiple mechanisms switch an electrically coupled, synaptically inhibited neuron between competing rhythmic oscillators. *Neuron*, 77(5):845–858, 2013.

- 476 [24] Ashok Litwin-Kumar, Robert Rosenbaum, and Brent Doiron. Inhibitory stabilization and vi-
477 sual coding in cortical circuits with multiple interneuron subtypes. *Journal of neurophysiology*,
478 115(3):1399–1409, 2016.
- 479 [25] Chunyu A Duan, Marino Pagan, Alex T Piet, Charles D Kopec, Athena Akrami, Alexander J
480 Riordan, Jeffrey C Erlich, and Carlos D Brody. Collicular circuits for flexible sensorimotor
481 routing. *bioRxiv*, page 245613, 2018.
- 482 [26] Francesca Mastrogiovanni and Srdjan Ostožić. Linking connectivity, dynamics, and computa-
483 tions in low-rank recurrent neural networks. *Neuron*, 99(3):609–623, 2018.
- 484 [27] Sean R Bittner, Agostina Palmigiano, Kenneth D Miller, and John P Cunningham. Degener-
485 ate solution networks for theoretical neuroscience. *Computational and Systems Neuroscience
486 Meeting (COSYNE), Lisbon, Portugal*, 2019.
- 487 [28] Sean R Bittner, Alex T Piet, Chunyu A Duan, Agostina Palmigiano, Kenneth D Miller,
488 Carlos D Brody, and John P Cunningham. Examining models in theoretical neuroscience with
489 degenerate solution networks. *Bernstein Conference*, 2019.
- 490 [29] Jan-Matthis Lueckmann, Pedro Goncalves, Chaitanya Chintaluri, William F Podlaski, Gia-
491 como Bassetto, Tim P Vogels, and Jakob H Macke. Amortised inference for mechanistic models
492 of neural dynamics. In *Computational and Systems Neuroscience Meeting (COSYNE), Lisbon,
493 Portugal*, 2019.
- 494 [30] Jan-Matthis Lueckmann, Pedro J Goncalves, Giacomo Bassetto, Kaan Öcal, Marcel Nonnen-
495 macher, and Jakob H Macke. Flexible statistical inference for mechanistic models of neural
496 dynamics. In *Advances in Neural Information Processing Systems*, pages 1289–1299, 2017.
- 497 [31] Eve Marder and Vatsala Thirumalai. Cellular, synaptic and network effects of neuromodula-
498 tion. *Neural Networks*, 15(4-6):479–493, 2002.
- 499 [32] Astrid A Prinz, Dirk Bucher, and Eve Marder. Similar network activity from disparate circuit
500 parameters. *Nature neuroscience*, 7(12):1345, 2004.
- 501 [33] Edwin T Jaynes. Information theory and statistical mechanics. *Physical review*, 106(4):620,
502 1957.
- 503 [34] Gamaleldin F Elsayed and John P Cunningham. Structure in neural population recordings:
504 an expected byproduct of simpler phenomena? *Nature neuroscience*, 20(9):1310, 2017.

- 505 [35] Cristina Savin and Gašper Tkačik. Maximum entropy models as a tool for building precise
506 neural controls. *Current opinion in neurobiology*, 46:120–126, 2017.
- 507 [36] Brendan K Murphy and Kenneth D Miller. Balanced amplification: a new mechanism of
508 selective amplification of neural activity patterns. *Neuron*, 61(4):635–648, 2009.
- 509 [37] Hirofumi Ozeki, Ian M Finn, Evan S Schaffer, Kenneth D Miller, and David Ferster. Inhibitory
510 stabilization of the cortical network underlies visual surround suppression. *Neuron*, 62(4):578–
511 592, 2009.
- 512 [38] Daniel B Rubin, Stephen D Van Hooser, and Kenneth D Miller. The stabilized supralinear
513 network: a unifying circuit motif underlying multi-input integration in sensory cortex. *Neuron*,
514 85(2):402–417, 2015.
- 515 [39] Henry Markram, Maria Toledo-Rodriguez, Yun Wang, Anirudh Gupta, Gilad Silberberg, and
516 Caizhi Wu. Interneurons of the neocortical inhibitory system. *Nature reviews neuroscience*,
517 5(10):793, 2004.
- 518 [40] Bernardo Rudy, Gordon Fishell, SooHyun Lee, and Jens Hjerling-Leffler. Three groups of
519 interneurons account for nearly 100% of neocortical gabaergic neurons. *Developmental neuro-*
520 *biology*, 71(1):45–61, 2011.
- 521 [41] Robin Tremblay, Soohyun Lee, and Bernardo Rudy. GABAergic Interneurons in the Neocortex:
522 From Cellular Properties to Circuits. *Neuron*, 91(2):260–292, 2016.
- 523 [42] Carsten K Pfeffer, Mingshan Xue, Miao He, Z Josh Huang, and Massimo Scanziani. Inhi-
524 bition of inhibition in visual cortex: the logic of connections between molecularly distinct
525 interneurons. *Nature Neuroscience*, 16(8):1068, 2013.
- 526 [43] Luis Carlos Garcia Del Molino, Guangyu Robert Yang, Jorge F. Mejias, and Xiao Jing Wang.
527 Paradoxical response reversal of top- down modulation in cortical circuits with three interneu-
528 ron types. *Elife*, 6:1–15, 2017.
- 529 [44] Guang Chen, Carl Van Vreeswijk, David Hansel, and David Hansel. Mechanisms underlying
530 the response of mouse cortical networks to optogenetic manipulation. 2019.
- 531 [45] (2018) Allen Institute for Brain Science. Layer 4 model of v1. available from:
532 <https://portal.brain-map.org/explore/models/l4-mv1>.

- 533 [46] Yazan N Billeh, Binghuang Cai, Sergey L Gratiy, Kael Dai, Ramakrishnan Iyer, Nathan W
534 Gouwens, Reza Abbasi-Asl, Xiaoxuan Jia, Joshua H Siegle, Shawn R Olsen, et al. Systematic
535 integration of structural and functional data into multi-scale models of mouse primary visual
536 cortex. *bioRxiv*, page 662189, 2019.
- 537 [47] Chunyu A Duan, Jeffrey C Erlich, and Carlos D Brody. Requirement of prefrontal and midbrain
538 regions for rapid executive control of behavior in the rat. *Neuron*, 86(6):1491–1503, 2015.
- 539 [48] Omri Barak. Recurrent neural networks as versatile tools of neuroscience research. *Current*
540 *opinion in neurobiology*, 46:1–6, 2017.
- 541 [49] David Sussillo and Omri Barak. Opening the black box: low-dimensional dynamics in high-
542 dimensional recurrent neural networks. *Neural computation*, 25(3):626–649, 2013.
- 543 [50] Rodrigo Echeveste, Laurence Aitchison, Guillaume Hennequin, and Máté Lengyel. Cortical-like
544 dynamics in recurrent circuits optimized for sampling-based probabilistic inference. *bioRxiv*,
545 page 696088, 2019.
- 546 [51] Robert E Kass and Valérie Ventura. A spike-train probability model. *Neural computation*,
547 13(8):1713–1720, 2001.
- 548 [52] Emery N Brown, Loren M Frank, Dengda Tang, Michael C Quirk, and Matthew A Wilson.
549 A statistical paradigm for neural spike train decoding applied to position prediction from
550 ensemble firing patterns of rat hippocampal place cells. *Journal of Neuroscience*, 18(18):7411–
551 7425, 1998.
- 552 [53] Liam Paninski. Maximum likelihood estimation of cascade point-process neural encoding
553 models. *Network: Computation in Neural Systems*, 15(4):243–262, 2004.
- 554 [54] M Yu Byron, John P Cunningham, Gopal Santhanam, Stephen I Ryu, Krishna V Shenoy, and
555 Maneesh Sahani. Gaussian-process factor analysis for low-dimensional single-trial analysis
556 of neural population activity. In *Advances in neural information processing systems*, pages
557 1881–1888, 2009.
- 558 [55] Kenneth W Latimer, Jacob L Yates, Miriam LR Meister, Alexander C Huk, and Jonathan W
559 Pillow. Single-trial spike trains in parietal cortex reveal discrete steps during decision-making.
560 *Science*, 349(6244):184–187, 2015.

- 561 [56] Lea Duncker, Gergo Bohner, Julien Boussard, and Maneesh Sahani. Learning interpretable
 562 continuous-time models of latent stochastic dynamical systems. *Proceedings of the 36th Interna-*
 563 *tional Conference on Machine Learning*, 2019.
- 564 [57] Steven H Strogatz. Nonlinear dynamics and chaos: with applications to physics. *Biology,*
 565 *Chemistry, and Engineering (Studies in Nonlinearity)*, Perseus, Cambridge, UK, 1994.
- 566 [58] Rajesh Ranganath, Sean Gerrish, and David Blei. Black box variational inference. In *Artificial*
 567 *Intelligence and Statistics*, pages 814–822, 2014.
- 568 [59] Martin J Wainwright, Michael I Jordan, et al. Graphical models, exponential families, and
 569 variational inference. *Foundations and Trends® in Machine Learning*, 1(1–2):1–305, 2008.
- 570 [60] Laurent Dinh, Jascha Sohl-Dickstein, and Samy Bengio. Density estimation using real nvp.
 571 *Proceedings of the 5th International Conference on Learning Representations*, 2017.
- 572 [61] David M Blei, Alp Kucukelbir, and Jon D McAuliffe. Variational inference: A review for
 573 statisticians. *Journal of the American Statistical Association*, 112(518):859–877, 2017.

574 **A Methods**

575 **A.1 Emergent property inference (EPI)**

576 Emergent property inference (EPI) learns distributions of theoretical model parameters that pro-
 577 duce emergent properties of interest by combining ideas from maximum entropy flow networks
 578 (MEFNs) [20] and likelihood-free variational inference (LFVI) [21]. Consider model parameteri-
 579 zation z and data x which has an intractable likelihood $p(x | z)$ defined by a model simulator of
 580 which samples are available $x \sim p(x | z)$. EPI optimizes a distribution $q_\theta(z)$ (itself parameterized
 581 by θ) of model parameters z to produce an emergent property of interest \mathcal{B} ,

$$\mathcal{B} \triangleq \mathbb{E}_{z \sim q_\theta} [\mathbb{E}_{x \sim p(x|z)} [T(x)]] = \mu \quad (12)$$

582 Precisely, over the EPI distribution of parameters $q_\theta(z)$ and distribution of simulated activity
 583 $p(x | z)$, the emergent property statistics $T(x)$ must equal the emergent property values μ on
 584 average. This is a viable way to represent emergent properties in theoretical models, as we have
 585 demonstrated in the main text, and enables the EPI optimization.

586 With EPI, we use deep probability distributions to learn flexible approximations to model parameter
 587 distributions $q_\theta(z)$. In deep probability distributions, a simple random variable $w \sim q_0(w)$ is
 588 mapped deterministically via a sequence of deep neural network layers (f_1, \dots, f_l) parameterized by
 589 weights and biases θ to the support of the distribution of interest:

$$z = f_\theta(\omega) = f_l(\dots f_1(w)) \quad (13)$$

590 Given a simulator defined by a theoretical model $x \sim p(x | z)$ and some emergent property of
 591 interest \mathcal{B} , $q_\theta(z)$ is optimized via the neural network parameters θ to find an optimally entropic
 592 distribution q_θ^* within the deep variational family \mathcal{Q} producing the emergent property:

$$\begin{aligned} q_\theta^*(z) &= \operatorname{argmax}_{q_\theta \in \mathcal{Q}} H(q_\theta(z)) \\ \text{s.t. } \mathbb{E}_{z \sim q_\theta} [\mathbb{E}_{x \sim p(x|z)} [T(x)]] &= \mu \end{aligned} \quad (14)$$

593 Since we are optimizing parameters θ of our deep probability distribution with respect to the entropy
 594 $H(q_\theta(z))$, we will need to take gradients with respect to the log probability density of samples from
 595 the deep probability distribution.

$$H(q_\theta(z)) = \int -q_\theta(z) \log(q_\theta(z)) dz = \mathbb{E}_{z \sim q_\theta} [-\log(q_\theta(z))] = \mathbb{E}_{w \sim q_0} [-\log(q_\theta(f_\theta(w)))] \quad (15)$$

596

$$\nabla_\theta H(q_\theta(z)) = \mathbb{E}_{w \sim q_0} [-\nabla_\theta \log(q_\theta(f_\theta(w)))] \quad (16)$$

597 This optimization is done using the approach of MEFN [20], using architectures for deep proba-
 598 bility distributions, called normalizing flows (see Section A.1.3), conferring a tractable calculation
 599 of sample probability. In EPI, this methodology for learning maximum entropy distributions is
 600 repurposed toward variational learning of model parameter distributions. Similar to LFVI [21], we
 601 are motivated to do variational learning in models with intractable likelihood functions, in which
 602 standard methods like stochastic gradient variational Bayes [6] or black box variational inference[58]
 603 are not tractable. Furthermore, EPI focuses on setting mathematically defined emergent property
 604 statistics to emergent property values of interest, whereas LFVI is focused on learning directly from
 605 datasets. Optimizing this objective is a technological challenge, the details of which we elaborate
 606 in Section A.1.2. Before going through those details, we ground this optimization in a toy example.

607 **A.1.1 Example: 2D LDS**

608 To gain intuition for EPI, consider a two-dimensional linear dynamical system model

$$\tau \frac{dx}{dt} = Ax \quad (17)$$

609 with

$$A = \begin{bmatrix} a_1 & a_2 \\ a_3 & a_4 \end{bmatrix} \quad (18)$$

610 To do EPI with the dynamics matrix elements as the free parameters $z = [a_1 \ a_2 \ a_3 \ a_4]$ (fixing
 611 $\tau = 1$), the emergent property statistics $T(x)$ were chosen to contain the first- and second-moments
 612 of the oscillatory frequency ω and the growth/decay factor d of the oscillating system. To learn the
 613 distribution of real entries of A that yield a distribution of d with mean zero with variance 0.25^2 ,
 614 and oscillation frequency ω with mean 1 Hz with variance $(0.1\text{Hz})^2$, we selected the real part of
 615 the eigenvalue $\text{real}(\lambda_1) = d$ and imaginary component of $\text{imag}(\lambda_1) = 2\pi\omega$ as the emergent property
 616 statistics. λ_1 is the eigenvalue of greatest real part when there is zero imaginary component, and
 617 alternatively of positive imaginary component, when the eigenvalues are complex conjugate pairs.
 618 Those emergent property statistics were then constrained to

$$\mu = \mathbb{E} \begin{bmatrix} \text{real}(\lambda_1) \\ \text{imag}(\lambda_1) \\ (\text{real}(\lambda_1) - 0)^2 \\ (\text{imag}(\lambda_1) - 2\pi\omega)^2 \end{bmatrix} = \begin{bmatrix} 0.0 \\ 2\pi\omega \\ 0.25^2 \\ (2\pi 0.1)^2 \end{bmatrix} \quad (19)$$

619 where $\omega = 1\text{Hz}$. Unlike the models we presented in the main text, which calculate $\mathbb{E}_{x \sim p(x|z)} [T(x)]$
 620 via forward simulation, we have a closed form for λ_1 of the dynamics matrix. The eigenvalues can
 621 be calculated using the quadratic formula:

$$\lambda = \frac{\left(\frac{a_1+a_4}{\tau}\right) \pm \sqrt{\left(\frac{a_1+a_4}{\tau}\right)^2 + 4\left(\frac{a_2a_3-a_1a_4}{\tau}\right)}}{2} \quad (20)$$

622 where λ_1 is the eigenvalue of $\frac{1}{\tau}A$ with greatest real part.

623 Importantly, even though $\mathbb{E}_{x \sim p(x|z)} [T(x)]$ is calculable directly via a closed form function and does
 624 not require simulation, we cannot derive the distribution q_θ^* directly. This is due to the formally hard
 625 problem of the backward mapping: finding the natural parameters η from the mean parameters
 626 μ of an exponential family distribution [59]. Instead, we can use EPI to learn the linear system
 627 parameters producing such a band of oscillations (Fig. S1B).

628 Even this relatively simple system has nontrivial (though intuitively sensible) structure in the
 629 parameter distribution. To validate our method (further than that of the underlying technology on
 630 a ground truth solution [20]) we analytically derived the contours of the probability density from the
 631 emergent property statistics and values (Fig. S2). In the $a_1 - a_4$ plane, the black line at $\text{real}(\lambda_1) =$
 632 $\frac{a_1+a_4}{2} = 0$, and the dotted black line at the standard deviation $\text{real}(\lambda_1) = \frac{a_1+a_4}{2} \pm 0.25$, and the grey

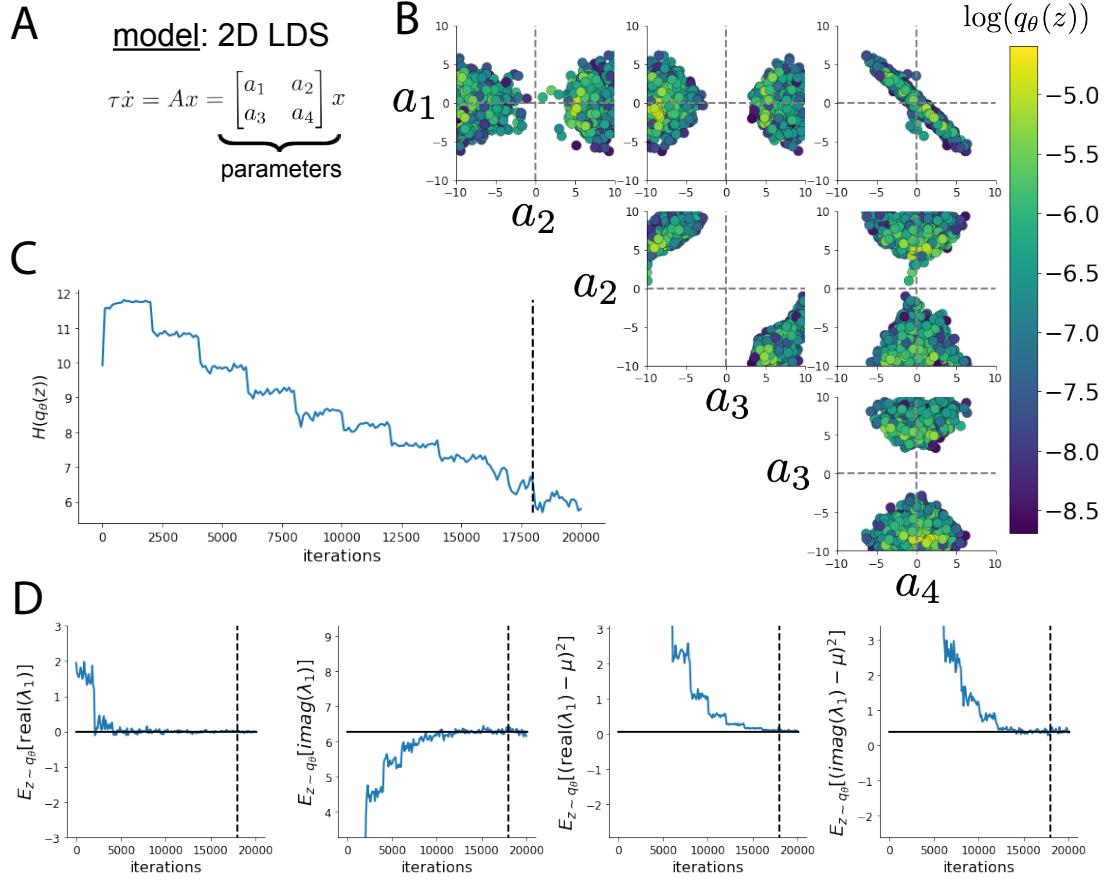


Fig. S1: A. Two-dimensional linear dynamical system model, where real entries of the dynamics matrix A are the parameters. B. The DSN distribution for a two-dimensional linear dynamical system with $\tau = 1$ that produces an average of 1Hz oscillations with some small amount of variance. C. Entropy throughout the optimization. At the beginning of each augmented Lagrangian epoch (5,000 iterations), the entropy dipped due to the shifted optimization manifold where emergent property constraint satisfaction is increasingly weighted. D. Emergent property moments throughout optimization. At the beginning of each augmented Lagrangian epoch, the emergent property moments move closer to their constraints.

line at twice the standard deviation $\text{real}(\lambda_1) = \frac{a_1+a_4}{2} \pm 0.5$ follow the contour of probability density of the samples. (Fig. 2A). The distribution precisely reflects the desired statistical constraints and model degeneracy in the sum of a_1 and a_4 . Intuitively, the parameters equivalent with respect to emergent property statistic $\text{real}(\lambda_1)$ have similar log densities.

To explain the structure in the bimodality of the EPI distribution, we examined the imaginary component of λ_1 . When $\text{real}(\lambda_1) = \frac{a_1+a_4}{2} = 0$, we have

$$\text{imag}(\lambda_1) = \begin{cases} \sqrt{\frac{a_1a_4 - a_2a_3}{\tau}}, & \text{if } a_1a_4 < a_2a_3 \\ 0 & \text{otherwise} \end{cases} \quad (21)$$

When $\tau = 1$ and $a_1a_4 > a_2a_3$ (center of distribution above), we have the following equation for the other two dimensions:

$$\text{imag}(\lambda_1)^2 = a_1a_4 - a_2a_3 \quad (22)$$

Since we constrained $\mathbb{E}_{z \sim q_\theta} [\text{imag}(\lambda)] = 2\pi$ (with $\omega = 1$), we can plot contours of the equation $\text{imag}(\lambda_1)^2 = a_1a_4 - a_2a_3 = (2\pi)^2$ for various a_1a_4 (Fig. S2A). If $\sigma_{1,4} = \mathbb{E}_{z \sim q_\theta} [|a_1a_4 - E_{q_\theta}[a_1a_4]|]$, then we plot the contours as $a_1a_4 = 0$ (black), $a_1a_4 = -\sigma_{1,4}$ (black dotted), and $a_1a_4 = -2\sigma_{1,4}$ (grey dotted) (Fig. S2B). This validates the curved structure of the inferred distribution learned through EPI. We take steps in negative standard deviation of a_1a_4 (dotted and gray lines), since there are few positive values a_1a_4 in the learned distribution. Subtler model-emergent property combinations will have even more complexity, further motivating the use of EPI for understanding these systems. As we expect, the distribution results in samples of two-dimensional linear systems oscillating near 1Hz (Fig. S3).

A.1.2 Augmented Lagrangian optimization

To optimize $q_\theta(z)$ in Equation 14, the constrained optimization is performed using the augmented Lagrangian method. The following objective is minimized:

$$L(\theta; \eta, c) = -H(q_\theta) + \eta^\top R(\theta) + \frac{c}{2} \|R(\theta)\|^2 \quad (23)$$

where $R(\theta) = \mathbb{E}_{z \sim q_\theta} [\mathbb{E}_{x \sim p(x|z)} [T(x) - \mu]]$, $\eta \in \mathbb{R}^m$ are the Lagrange multipliers (which are closely related to the natural parameters of exponential families (see Section A.1.4)) and c is the penalty coefficient. For a fixed (η, c) , θ is optimized with stochastic gradient descent. A low value of c is used initially, and increased during each augmented Lagrangian epoch, which is a period of optimization with fixed η and c for a given number of stochastic optimization iterations. Similarly,

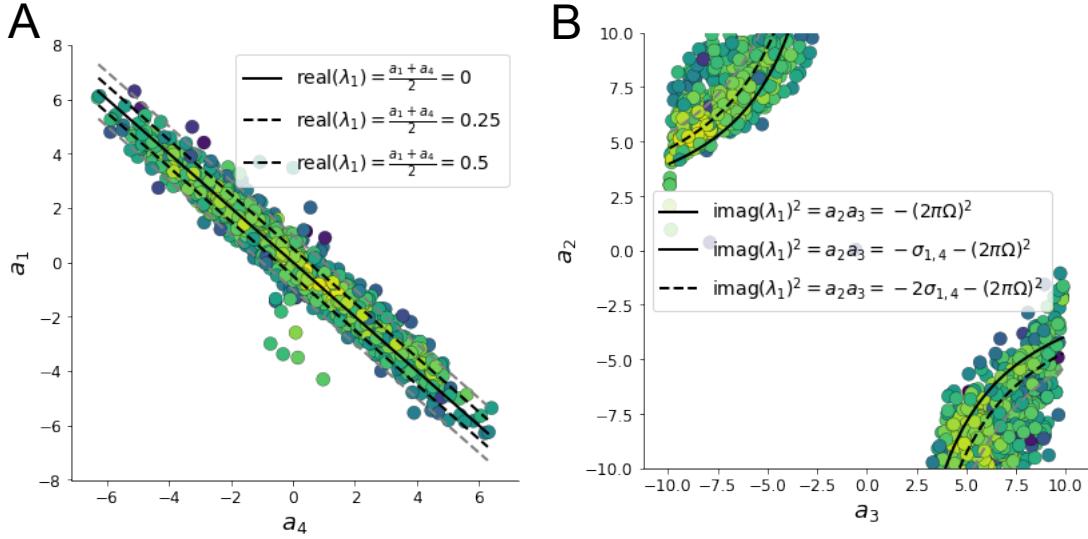


Fig. S2: A. Probability contours in the $a_1 - a_4$ plane can be derived from the relationship to emergent property statistic of growth/decay factor. B. Probability contours in the $a_2 - a_3$ plane can be derived from relationship to the emergent property statistic of oscillation frequency.

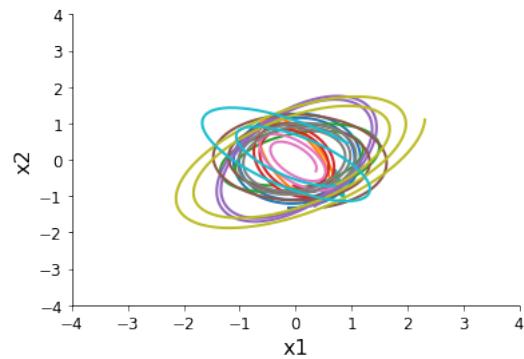


Fig. S3: Sampled dynamical system trajectories from the EPI distribution. Each trajectory is initialized at $x(0) = \begin{bmatrix} \frac{\sqrt{2}}{2} & -\frac{\sqrt{2}}{2} \end{bmatrix}$.

658 η is tuned each epoch based on the constraint violations. For the linear two-dimensional system
659 (Fig. S1C), optimization hyperparameters are initialized to $c_1 = 10^{-4}$ and $\eta_1 = \mathbf{0}$. The penalty
660 coefficient is updated based on the result of a hypothesis test regarding the reduction in constraint
661 violation. The p-value of $E[||R(\theta_{k+1})||] > \gamma \mathbb{E}[||R(\theta_k)||]$ is computed, and c_{k+1} is updated to βc_k
662 with probability $1 - p$. Throughout the study, $\beta = 4.0$ and $\gamma = 0.25$ were used. The other update
663 rule is $\eta_{k+1} = \eta_k + c_k \frac{1}{n} \sum_{i=1}^n (T(x^{(i)}) - \mu)$. In this example, each augmented Lagrangian epoch ran
664 for 2,000 iterations. We consider the optimization to have converged when a null hypothesis test of
665 constraint violations being zero is accepted for all constraints at a significance threshold 0.05. This
666 is the dotted line on the plots below depicting the optimization cutoff of EPI for the 2-dimensional
667 linear system.

668 The intention is that c and η start at values encouraging entropic growth early in optimization.
669 Then, as they increase in magnitude with each training epoch, the constraint satisfaction terms
670 are increasingly weighted, resulting in a decrease in entropy. If the optimization is left to continue
671 running, and structural pathologies in the distribution may be introduced.

672 A.1.3 Normalizing flows

673 Deep probability models typically consist of several layers of fully connected neural networks.
674 When each neural network layer is restricted to be a bijective function, the sample density can be
675 calculated using the change of variables formula at each layer of the network. For $z' = f(z)$,

$$q(z') = q(f^{-1}(z')) \left| \det \frac{\partial f^{-1}(z')}{\partial z'} \right| = q(z) \left| \det \frac{\partial f(z)}{\partial z} \right|^{-1} \quad (24)$$

676 However, this computation has cubic complexity in dimensionality for fully connected layers. By
677 restricting our layers to normalizing flows [17] – bijective functions with fast log determinant Ja-
678 cobian computations, we can tractably optimize deep generative models with objectives that are a
679 function of sample density, like entropy. Most of our analyses use real NVP [60], which have proven
680 effective in our architecture searches, and have the advantageous features of fast sampling and fast
681 probability density evaluation.

682 A.1.4 Emergent property inference as variational inference in an exponential family

683 Consider the goal of doing variational inference with an exponential family posterior distribution
684 $p(z | x)$. We use the following abbreviated notation to collect the base measure $b(z)$ and sufficient

- 685 statistics $T(z)$ into $\tilde{T}(z)$ and likewise concatenate a 1 onto the end of the natural parameter $\tilde{\eta}(x)$.
 686 The log normalizing constant $A(\eta(x))$ remains unchanged.

$$\begin{aligned} p(z | x) &= b(z) \exp \left(\eta(x)^\top T(z) - A(\eta(x)) \right) = \exp \left(\begin{bmatrix} \eta(x) \\ 1 \end{bmatrix}^\top \begin{bmatrix} T(z) \\ b(z) \end{bmatrix} - A(\eta(x)) \right) \\ &= \exp \left(\tilde{\eta}(x)^\top \tilde{T}(z) - A(\eta(x)) \right) \end{aligned} \quad (25)$$

- 687 Variational inference with an exponential family posterior distribution uses optimization to mini-
 688 mize the following divergence [61]:

$$q_\theta^* = \underset{q_\theta \in Q}{\operatorname{argmin}} KL(q_\theta || p(z | x)) \quad (26)$$

- 689 $q_\theta(z)$ is the variational approximation to the posterior with variational parameters θ . We can write
 690 this KL divergence in terms of entropy of the variational approximation.

$$KL(q_\theta || p(z | x)) = \mathbb{E}_{z \sim q_\theta} [\log(q_\theta(z))] - \mathbb{E}_{z \sim q_\theta} [\log(p(z | x))] \quad (27)$$

691

$$= -H(q_\theta) - \mathbb{E}_{z \sim q_\theta} [\tilde{\eta}(x)^\top \tilde{T}(z) - A(\eta(x))] \quad (28)$$

- 692 As far as the variational optimization is concerned, the log normalizing constant is independent of
 693 $q_\theta(z)$, so it can be dropped.

$$\underset{q_\theta \in Q}{\operatorname{argmin}} KL(q_\theta || p(z | x)) = \underset{q_\theta \in Q}{\operatorname{argmin}} -H(q_\theta) - \mathbb{E}_{z \sim q_\theta} [\tilde{\eta}(x)^\top \tilde{T}(z)] \quad (29)$$

- 694 Further, we can write the objective in terms of the first moment of the sufficient statistics $\mu =$
 695 $\mathbb{E}_{z \sim p(z|x)} [T(z)]$.

$$= \underset{q_\theta \in Q}{\operatorname{argmin}} -H(q_\theta) - \mathbb{E}_{z \sim q_\theta} [\tilde{\eta}(x)^\top (\tilde{T}(z) - \mu)] + \tilde{\eta}(x)^\top \mu \quad (30)$$

696

$$= \underset{q_\theta \in Q}{\operatorname{argmin}} -H(q_\theta) - \mathbb{E}_{z \sim q_\theta} [\tilde{\eta}(x)^\top (\tilde{T}(z) - \mu)] \quad (31)$$

- 697 In comparison, in emergent property inference (EPI), we're solving the following problem.

$$q_\theta^*(z) = \underset{q_\theta \in Q}{\operatorname{argmax}} H(q_\theta(z)), \text{ s.t. } \mathbb{E}_{z \sim q_\theta} [\mathbb{E}_{x \sim p(x|z)} [T(x)]] = \mu \quad (32)$$

- 698 The Lagrangian objective (without the augmentation) is

$$q_\theta^* = \underset{q_\theta \in Q}{\operatorname{argmin}} -H(q_\theta) + \eta_{\text{opt}}^\top (\mathbb{E}_{z \sim q_\theta} [\tilde{T}(z)] - \mu) \quad (33)$$

- 699 As the optimization proceeds, η_{opt}^\top should converge to the natural parameter $\tilde{\eta}(x)$ through its
 700 adaptations in each epoch (see Section A.1.2).

701 The derivation of the natural parameter $\tilde{\eta}(x)$ of an exponential family distribution from its mean
 702 parameter μ is referred to as the backward mapping and is formally hard to identify [59]. Since
 703 this backward mapping is deterministic, we can replace the notation of $p(z | x)$ with $p(z | \mathcal{B})$
 704 conceptualizing an inferred distribution that obeys emergent property \mathcal{B} (see Section A.1).

705 **A.2 Theoretical models**

706 In this study, we used emergent property inference to examine several models relevant to theoretical
 707 neuroscience. Here, we provide the details of each model and the related analyses.

708 **A.2.1 Stomatogastric ganglion**

709 Each neuron's membrane potential $x_m(t)$ is the solution of the following differential equation.

$$C_m \frac{dx_m}{dt} = -[h_{leak}(x; z) + h_{Ca}(x; z) + h_K(x; z) + h_{hyp}(x; z) + h_{elec}(x; z) + h_{syn}(x; z)] \quad (34)$$

710 The membrane potential of each neuron is affected by the leak, calcium, potassium, hyperpolariza-
 711 tion, electrical and synaptic currents, respectively. The capacitance of the cell membrane was set to
 712 $C_m = 1nF$. Each current is a function of the neuron's membrane potential x_m and the parameters
 713 of the circuit such as g_{el} and g_{syn} , whose effect on the circuit is considered in the motivational
 714 example of EPI in Fig. 1. Specifically, the currents are the difference in the neuron's membrane
 715 potential and that current type's reversal potential multiplied by a conductance:

$$h_{leak}(x; z) = g_{leak}(x_m - V_{leak}) \quad (35)$$

$$h_{elec}(x; z) = g_{el}(x_m^{post} - x_m^{pre}) \quad (36)$$

$$h_{syn}(x; z) = g_{syn}S_\infty^{pre}(x_m^{post} - V_{syn}) \quad (37)$$

$$h_{Ca}(x; z) = g_{Ca}M_\infty(x_m - V_{Ca}) \quad (38)$$

$$h_K(x; z) = g_KN(x_m - V_K) \quad (39)$$

$$h_{hyp}(x; z) = g_hH(x_m - V_{hyp}) \quad (40)$$

721 The reversal potentials were set to $V_{leak} = -40mV$, $V_{Ca} = 100mV$, $V_K = -80mV$, $V_{hyp} = -20mV$,
 722 and $V_{syn} = -75mV$. The other conductance parameters were fixed to $g_{leak} = 1 \times 10^{-4}\mu S$. g_{Ca} ,
 723 g_K , and g_{hyp} had different values based on fast, intermediate (hub) or slow neuron. Fast: $g_{Ca} =$

⁷²⁴ 1.9×10^{-2} , $g_K = 3.9 \times 10^{-2}$, and $g_{hyp} = 2.5 \times 10^{-2}$. Intermediate: $g_{Ca} = 1.7 \times 10^{-2}$,
⁷²⁵ and $g_{hyp} = 8.0 \times 10^{-3}$. Intermediate: $g_{Ca} = 8.5 \times 10^{-3}$, $g_K = 1.5 \times 10^{-2}$, and $g_{hyp} = 1.0 \times 10^{-2}$.

⁷²⁶ Furthermore, the Calcium, Potassium, and hyperpolarization channels have time-dependent gating
⁷²⁷ dynamics dependent on steady-state gating variables M_∞ , N_∞ and H_∞ , respectively.

$$M_\infty = 0.5 \left(1 + \tanh \left(\frac{x_m - v_1}{v_2} \right) \right) \quad (41)$$

$$\frac{dN}{dt} = \lambda_N (N_\infty - N) \quad (42)$$

$$N_\infty = 0.5 \left(1 + \tanh \left(\frac{x_m - v_3}{v_4} \right) \right) \quad (43)$$

$$\lambda_N = \phi_N \cosh \left(\frac{x_m - v_3}{2v_4} \right) \quad (44)$$

$$\frac{dH}{dt} = \frac{(H_\infty - H)}{\tau_h} \quad (45)$$

$$H_\infty = \frac{1}{1 + \exp \left(\frac{x_m + v_5}{v_6} \right)} \quad (46)$$

$$\tau_h = 272 - \left(\frac{-1499}{1 + \exp \left(\frac{-x_m + v_7}{v_8} \right)} \right) \quad (47)$$

⁷³⁴ where we set $v_1 = 0mV$, $v_2 = 20mV$, $v_3 = 0mV$, $v_4 = 15mV$, $v_5 = 78.3mV$, $v_6 = 10.5mV$,
⁷³⁵ $v_7 = -42.2mV$, $v_8 = 87.3mV$, $v_9 = 5mV$, and $v_{th} = -25mV$. These are the same parameter
⁷³⁶ values used in [23].

⁷³⁷ Finally, there is a synaptic gating variable as well:

$$S_\infty = \frac{1}{1 + \exp \left(\frac{v_{th} - x_m}{v_9} \right)} \quad (48)$$

⁷³⁸ When the dynamic gating variables are considered, this is actually a 15-dimensional nonlinear
⁷³⁹ dynamical system.

⁷⁴⁰ In order to measure the frequency of the hub neuron during EPI, the STG model was simulated
⁷⁴¹ for $T = 500$ time steps of $dt = 25ms$. In EPI, since gradients are taken through the simulation
⁷⁴² process, the number of time steps are kept modest if possible. The chosen dt and T were the most
⁷⁴³ computationally convenient choices yielding accurate frequency measurement.

⁷⁴⁴ Poor resolution afforded by the discrete Fourier transform motivated the use of an alternative
⁷⁴⁵ basis of complex exponentials to measure spiking frequency. Instead, we used a basis of complex
⁷⁴⁶ exponentials with frequencies from 0.0-1.0 Hz at 0.01Hz resolution, $\Phi = [0.0, 0.01, \dots, 1.0]^\top$

747 Another consideration was that the frequency spectra of the neurons had several peaks. This was
 748 due to high-frequency sub-threshold activity. The maximum frequency was often not the firing
 749 frequency. Accordingly, subthreshold activity was set to zero, and the whole signal was low-pass
 750 filtered with a moving average window of length 20. The signal was subsequently mean centered.
 751 After this pre-processing, the maximum frequency in the filter bank accurately reflected the firing
 752 frequency.

753 Finally, to differentiate through the maximum frequency identification, we used a sum-of-powers
 754 normalization. Let $\mathcal{X}_i \in \mathcal{C}^{|\Phi|}$ be the complex exponential filter bank dot products with the signal
 755 $x_i \in \mathbb{R}^N$, where $i \in \{f1, f2, \text{hub}, s1, s2\}$. The “frequency identification” vector is

$$v_i = \frac{|\mathcal{X}_i|^\beta}{\sum_{k=1}^N |\mathcal{X}_i(k)|^\beta} \quad (49)$$

756 The frequency is then calculated as $\omega = v_i^\top \Phi$ with $\alpha = 100$.

757 Network syncing, like all other emergent properties in this work, are defined by the emergent
 758 property statistics and values. The emergent property statistics are the first- and second-moments
 759 of the firing frequencies. The first moments are set to 0.542Hz, while the second moments are set
 760 to 0.025Hz².

$$E \begin{bmatrix} \omega_{f1} \\ \omega_{f2} \\ \omega_{\text{hub}} \\ \omega_{s1} \\ \omega_{s2} \\ (\omega_{f1} - 0.542)^2 \\ (\omega_{f2} - 0.542)^2 \\ (\omega_{\text{hub}} - 0.542)^2 \\ (\omega_{s1} - 0.542)^2 \\ (\omega_{s2} - 0.542)^2 \end{bmatrix} = \begin{bmatrix} 0.542 \\ 0.542 \\ 0.542 \\ 0.542 \\ 0.542 \\ 0.025^2 \\ 0.025^2 \\ 0.025^2 \\ 0.025^2 \\ 0.025^2 \end{bmatrix} \quad (50)$$

761 For EPI in Fig 2C, we used a real NVP architecture with two coupling layers. Each coupling layer
 762 had two hidden layers of 10 units each, and we mapped onto a support of $z \in \left[\begin{bmatrix} 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 10 \\ 8 \end{bmatrix} \right]$ (the
 763 same considered in [23]). We have shown the EPI optimization that converged with maximum
 764 entropy across 5 random seeds and augmented Lagrangian coefficient initializations of $c_0 \in \{5, 10\}$.

765 **A.2.2 Primary visual cortex**

766 The dynamics of each neural populations average rate $x = [x_E \ x_P \ x_S \ x_V]^\top$ are given by:

$$\tau \frac{dx}{dt} = -x + [Wx + h]_+^n \quad (51)$$

767 Some neuron-types largely lack synaptic projections to other neuron-types [42], and it is popular
 768 to only consider a subset of the effective connectivities [24, 43, 44].

$$W = \begin{bmatrix} W_{EE} & W_{EP} & W_{ES} & 0 \\ W_{PE} & W_{PP} & W_{PS} & 0 \\ W_{SE} & 0 & 0 & W_{SV} \\ W_{VE} & W_{VP} & W_{VS} & 0 \end{bmatrix} \quad (52)$$

769 By consolidating information from many experimental datasets, Billeh et al. [46] produce estimates
 770 of the synaptic strength (in mV)

$$M = \begin{bmatrix} 0.36 & 0.48 & 0.31 & 0.28 \\ 1.49 & 0.68 & 0.50 & 0.18 \\ 0.86 & 0.42 & 0.15 & 0.32 \\ 1.31 & 0.41 & 0.52 & 0.37 \end{bmatrix} \quad (53)$$

771 and connection probability

$$C = \begin{bmatrix} 0.16 & 0.411 & 0.424 & 0.087 \\ 0.395 & .451 & 0.857 & 0.02 \\ 0.182 & 0.03 & 0.082 & 0.625 \\ 0.105 & 0.22 & 0.77 & 0.028 \end{bmatrix} \quad (54)$$

772 Multiplying these connection probabilities and synaptic efficacies gives us an effective connectivity
 773 matrix:

$$W_{\text{full}} = C \odot M = \begin{bmatrix} 0.16 & 0.411 & 0.424 & 0.087 \\ 0.395 & .451 & 0.857 & 0.02 \\ 0.182 & 0.03 & 0.082 & 0.625 \\ 0.105 & 0.22 & 0.77 & 0.028 \end{bmatrix} \quad (55)$$

774 We used the entries of this full effective connectivity matrix that are not considered to be ineffectual
 775 (Equation 52).

776 We look at how this four-dimensional nonlinear dynamical model of V1 responds to different inputs,
 777 and compare the predictions of the linear response to the approximate posteriors obtained through

⁷⁷⁸ EPI. The input to the system is the sum of a baseline input $b = [1 \ 1 \ 1 \ 1]^\top$ and a differential
⁷⁷⁹ input dh :

$$h = b + dh \quad (56)$$

⁷⁸⁰ All simulations of this system had $T = 100$ time points, a time step $dt = 5\text{ms}$, and time constant
⁷⁸¹ $\tau = 20\text{ms}$. And the system was initialized to a random draw $x(0)_i \sim \mathcal{N}(1, 0.01)$.

⁷⁸² We can describe the dynamics of this system more generally by

$$\dot{x}_i = -x_i + f(u_i) \quad (57)$$

⁷⁸³ where the input to each neuron is

$$u_i = \sum_j W_{ij}x_j + h_i \quad (58)$$

⁷⁸⁴ Let $F_{ij} = \gamma_i \delta(i, j)$, where $\gamma_i = f'(u_i)$. Then, the linear response is

$$\frac{dx_{ss}}{dh} = F(W \frac{dx_{ss}}{dh} + I) \quad (59)$$

⁷⁸⁵ which is calculable by

$$\frac{dx_{ss}}{dh} = (F^{-1} - W)^{-1} \quad (60)$$

⁷⁸⁶ This calculation is used to produce the magenta lines in Figure 2C, which show the linearly predicted
⁷⁸⁷ inputs that generate a response from two standard deviations (of \mathcal{B}) below and above y .

⁷⁸⁸ The emergent property we considered was the first and second moments of the change in steady
⁷⁸⁹ state rate dx_{ss} between the baseline input $h = b$ and $h = b + dh$. We use the following notation to
⁷⁹⁰ indicate that the emergent property statistics were set to the following values:

$$\mathcal{B}(\alpha, y) \triangleq \mathbb{E} \begin{bmatrix} dx_{\alpha,ss} \\ (dx_{\alpha,ss} - y)^2 \end{bmatrix} = \begin{bmatrix} y \\ 0.01^2 \end{bmatrix} \quad (61)$$

⁷⁹¹ In the final analysis for this model, we sweep the input one neuron at a time away from the mode
⁷⁹² of each inferred distributions $dh^* = z^* = \text{argmax}_z \log q_\theta(z \mid \mathcal{B}(\alpha, 0.1))$. The differential responses
⁷⁹³ $\delta x_{\alpha,ss}$ are examined at perturbed inputs $h = b + dh^* + \delta h_\alpha \hat{u}_\alpha$ where \hat{u}_α is a unit vector in the
⁷⁹⁴ dimension of α and $\delta h_\alpha \in [-15, 15]$.

⁷⁹⁵ For each $\mathcal{B}(\alpha, y)$ with $\alpha \in \{E, P, S, V\}$ and $y \in \{0.1, 0.5\}$, we ran EPI with five different random
⁷⁹⁶ initial seeds using an architecture of four coupling layers, each with two hidden layers of 10 units.
⁷⁹⁷ We set $c_0 = 10^5$. The support of the learned distribution was restricted to $z_i \in [-5, 5]$.

798 **A.2.3 Superior colliculus**

799 In the model of Duan et al [25], there are four total units: two in each hemisphere corresponding to
 800 the Pro/Contra and Anti/Ipsi populations. They are denoted as left Pro (LP), left Anti (LA), right
 801 Pro (RP) and right Anti (RA). Each unit has an activity (x_α) and internal variable (u_α) related
 802 by

$$x_\alpha(t) = \left(\frac{1}{2} \tanh \left(\frac{u_\alpha(t) - \epsilon}{\zeta} \right) + \frac{1}{2} \right) \quad (62)$$

803 where $\alpha \in \{LP, LA, RA, RP\}$ $\epsilon = 0.05$ and $\zeta = 0.5$ control the position and shape of the nonlin-
 804 earity, repsectively.

805 We order the elements of x and u in the following manner

$$x = \begin{bmatrix} x_{LP} \\ x_{LA} \\ x_{RP} \\ x_{RA} \end{bmatrix} \quad u = \begin{bmatrix} u_{LP} \\ u_{LA} \\ u_{RP} \\ u_{RA} \end{bmatrix} \quad (63)$$

806 The internal variables follow dynamics:

$$\tau \frac{dv}{dt} = -u + Wx + h + \sigma dB \quad (64)$$

807 with time constant $\tau = 0.09s$ and Gaussian noise σdB controlled by the magnitude of $\sigma = 1.0$. The
 808 weight matrix has 8 parameters sW_P , sW_A , vW_{PA} , vW_{AP} , hW_P , hW_A , dW_{PA} , and dW_{AP} (Fig.
 809 4B).

$$W = \begin{bmatrix} sW_P & vW_{PA} & hW_P & dW_{PA} \\ vW_{AP} & sW_A & dW_{AP} & hW_A \\ hW_P & dW_{PA} & sW_P & vW_{PA} \\ dW_{AP} & hW_A & vW_{AP} & sW_A \end{bmatrix} \quad (65)$$

810 The system receives five inputs throughout each trial, which has a total length of 1.8s.

$$h = h_{\text{rule}} + h_{\text{choice-period}} + h_{\text{light}} \quad (66)$$

811 There are rule-based inputs depending on the condition,

$$h_{P,\text{rule}}(t) = \begin{cases} I_{P,\text{rule}} \begin{bmatrix} 1 & 0 & 0 & 1 \end{bmatrix}^\top, & \text{if } t \leq 1.2s \\ 0, & \text{otherwise} \end{cases} \quad (67)$$

812

$$h_{A,\text{rule}}(t) = \begin{cases} I_{A,\text{rule}} \begin{bmatrix} 0 & 1 & 1 & 0 \end{bmatrix}^\top, & \text{if } t \leq 1.2s \\ 0, & \text{otherwise} \end{cases} \quad (68)$$

813 a choice-period input,

$$h_{\text{choice}}(t) = \begin{cases} I_{\text{choice}} \begin{bmatrix} 1 & 1 & 1 & 1 \end{bmatrix}^\top, & \text{if } t > 1.2s \\ 0, & \text{otherwise} \end{cases} \quad (69)$$

814 and an input to the right or left-side depending on where the light stimulus is delivered.

$$h_{\text{light}}(t) = \begin{cases} I_{\text{light}} \begin{bmatrix} 1 & 1 & 0 & 0 \end{bmatrix}^\top, & \text{if } t > 1.2s \text{ and Left} \\ I_{\text{light}} \begin{bmatrix} 0 & 0 & 1 & 1 \end{bmatrix}^\top, & \text{if } t > 1.2s \text{ and Right} \\ 0, & t \leq 1.2s \end{cases} \quad (70)$$

815 The input parameterization was fixed to $I_{P,\text{rule}} = 10$, $I_{A,\text{rule}} = 10$, $I_{\text{choice}} = 2$, and $I_{\text{light}} = 1$ 816 To produce a Bernoulli rate of p_{LP} in the Left, Pro condition, let \hat{p}_i be the empirical average steady
817 state (ss) response (final x_{LP} at end of task) over M=500 Gaussian noise draws for a given SC
818 model parameterization z_i :

$$\hat{p}_i = \mathbb{E}_{\sigma dB} [x_{LP} | s = L, c = P, z_i] = \frac{1}{M} \sum_{j=1}^M x_{LP}(s = L, c = P, z_i, \sigma dB_j) \quad (71)$$

819 where here x_α denotes the steady state activity at the end of the trial. For the first constraint, the
820 average over posterior samples (from $q_\theta(z)$) to be p_{LP} :

$$\mathbb{E}_{z_i \sim q_\phi} [\mathbb{E}_{\sigma dB} [x_{LP,ss} | s = L, c = P, z_i]] = \mathbb{E}_{z_i \sim q_\phi} [\hat{p}_i] = p_{LP} \quad (72)$$

821 We can then ask that the variance of the steady state responses across Gaussian draws, is the
822 Bernoulli variance for the empirical rate \hat{p}_i .

$$\mathbb{E}_{z \sim q_\phi} [\sigma_{err}^2] = 0 \quad (73)$$

823

$$\sigma_{err}^2 = Var_{\sigma dB} [x_{LP} | s = L, c = P, z_i] - \hat{p}_i(1 - \hat{p}_i) \quad (74)$$

824 We have an additional constraint that the Pro neuron on the opposite hemisphere should have the
825 opposite value. We can enforce this with a final constraint:

$$\mathbb{E}_{z \sim q_\phi} [d_P] = 1 \quad (75)$$

826

$$\mathbb{E}_{\sigma dB} [(x_{LP} - x_{RP})^2 \mid s = L, c = P, z_i] \quad (76)$$

827 We refer to networks obeying these constraints as Bernoulli, winner-take-all networks. Since the
 828 maximum variance of a random variable bounded from 0 to 1 is the Bernoulli variance ($\hat{p}(1 - \hat{p})$),
 829 and the maximum squared difference between two variables bounded from 0 to 1 is 1, we do not
 830 need to control the second moment of these test statistics. In reality, these variables are dynamical
 831 system states and can only exponentially decay (or saturate) to 0 (or 1), so the Bernoulli variance
 832 error and squared difference constraints can only be undershot. This is important to be mindful
 833 of when evaluating the convergence criteria. Instead of using our usual hypothesis testing criteria
 834 for convergence to the emergent property, we set a slack variable threshold for these technically
 835 infeasible constraints to 0.05.

836 Training DSNs to learn distributions of dynamical system parameterizations that produce Bernoulli
 837 responses at a given rate (with small variance around that rate) was harder to do than expected.
 838 There is a pathology in this optimization setup, where the learned distribution of weights is bimodal
 839 attributing a fraction p of the samples to an expansive mode (which always sends x_{LP} to 1), and a
 840 fraction $1 - p$ to a decaying mode (which always sends x_{LP} to 0). This pathology was avoided using
 841 an inequality constraint prohibiting parameter samples that resulted in low variance of responses
 842 across noise.

843 In total, the emergent property of rapid task switching accuracy at level p was defined as

$$\mathcal{B}(p) \triangleq \begin{bmatrix} \hat{p}_P \\ \hat{p}_A \\ (\hat{p}_P - p)^2 \\ (\hat{p}_A - p)^2 \\ \sigma_{P,err}^2 \\ \sigma_{A,err}^2 \\ d_P \\ d_A \end{bmatrix} = \begin{bmatrix} p \\ p \\ 0.15^2 \\ 0.15^2 \\ 0 \\ 0 \\ 1 \\ 1 \end{bmatrix} \quad (77)$$

844 For each accuracy level p , we ran EPI for 10 different random seeds and selected the maximum
 845 entropy solution using an architecture of 10 planar flows with $c_0 = 2$. The support of z was \mathbb{R}^8 . s

846 **A.2.4 Rank-1 RNN**

847 Recent work establishes a link between RNN connectivity weights and the resulting dynamical
 848 responses of the network, using dynamic mean field theory (DMFT) [26]. Specifically, DMFT
 849 describes the properties of activity in infinite-size neural networks given a distribution on the
 850 connectivity weights. In such a model, the connectivity of a rank-1 RNN (which was sufficient for
 851 our task), has weight matrix W , which is the sum of a random component with strength determined
 852 by g and a structured component determined by the outer product of vectors m and n :

$$W = g\chi + \frac{1}{N}mn^\top, \quad (78)$$

853 where the activity x evolves as $\dot{x} = I(t)$ and $I(t)$ is some input, ϕ is the tanh nonlinearity, and $\chi_{ij} \sim \mathcal{N}(0, \frac{1}{N})$.
 854 The entries of m and n are drawn from Gaussian distributions $m_i \sim \mathcal{N}(M_m, 1)$ and $n_i \sim \mathcal{N}(M_n, 1)$.
 855 From such a parameterization, this theory produces consistency equations for the dynamic mean
 856 field variables in terms of parameters like g , M_m , and M_n , which we study in Section 3.5. That
 857 is the dynamic mean field variables (e.g. the activity along a vector κ_v , the total variance
 858 Δ_0 , structured variance Δ_∞ , and the chaotic variance Δ_T) are written as functions of one another
 859 in terms of connectivity parameters. The values of these variables can be obtained using a
 860 nonlinear system of equations solver. These dynamic mean field variables are then cast as task-
 861 relevant variables with respect to the context of the provided inputs. Mastrogiuseppe et al. designed
 862 low-rank RNN connectivities via minimalist connectivity parameters to solve canonical tasks from
 863 behavioral neuroscience.

864 We consider the DMFT equation solver as a black box that takes in a low-rank parameterization
 865 z (e.g. $z = [g \ M_m \ M_n]$) and outputs the values of the dynamic mean field variables, of which
 866 we cast κ_r and Δ_T as task-relevant variables μ_{post} and σ_{post}^2 in the Gaussian posterior conditioning
 867 toy example. Importantly, the solution produced by the solver is differentiable with respect to the
 868 input parameters, allowing us to use DMFT to calculate the emergent property statistics in EPI
 869 to learn distributions on such connectivity parameters of RNNs that execute tasks.

870 Specifically, we solve for the mean field variables κ_r , κ_n , Δ_0 and Δ_∞ , where the readout is nominally
 871 chosen to point in the unit orthant $r = [1 \ \dots \ 1]^\top$. The consistency equations for these variables

872 in the presence of a constant input $h(t) = y - (n - M_n)$ can be derived following [26] are

$$\begin{aligned}\kappa_r &= G_1(\kappa_r, \kappa_n, \Delta_0, \Delta_\infty) = M_m \kappa_n + y \\ \kappa_n &= G_2(\kappa_r, \kappa_n, \Delta_0, \Delta_\infty) = M_n \langle [\phi_i] \rangle + \langle [\phi'_i] \rangle \\ \frac{\Delta_0^2 - \Delta_\infty^2}{2} &= G_3(\kappa_r, \kappa_n, \Delta_0, \Delta_\infty) = g^2 \left(\int \mathcal{D}z \Phi^2 (\kappa_r + \sqrt{\Delta_0} z) - \int \mathcal{D}z \int \mathcal{D}x \Phi (\kappa_r + \sqrt{\Delta_0 - \Delta_\infty} x + \sqrt{\Delta_\infty} z) \right) \\ &\quad + (\kappa_n^2 + 1)(\Delta_0 - \Delta_\infty) \\ \Delta_\infty &= G_4(\kappa_r, \kappa_n, \Delta_0, \Delta_\infty) = g^2 \int \mathcal{D}z \left[\int \mathcal{D}x \phi (\kappa_r + \sqrt{\Delta_0 - \Delta_\infty} x + \sqrt{\Delta_\infty} z) \right]^2 + \kappa_n^2 + 1\end{aligned}\tag{79}$$

873 where z here is a gaussian integration variable. We can solve these equations by simulating the
874 following Langevin dynamical system to a steady state.

$$\begin{aligned}l(t) &= \frac{\Delta_0(t)^2 - \Delta_\infty(t)^2}{2} \\ \Delta_0(t) &= \sqrt{2x(t) + \Delta_\infty(t)^2} \\ \frac{d\kappa_r(t)}{dt} &= -\kappa_r(t) + F(\kappa_r(t), \kappa_n(t), \Delta_0(t), \Delta_\infty(t)) \\ \frac{d\kappa_n(t)}{dt} &= -\kappa_n + G(\kappa_r(t), \kappa_n(t), \Delta_0(t), \Delta_\infty(t)) \\ \frac{dI(t)}{dt} &= -l(t) + H(\kappa_r(t), \kappa_n(t), \Delta_0(t), \Delta_\infty(t)) \\ \frac{d\Delta_\infty(t)}{dt} &= -\Delta_\infty(t) + L(\kappa_r(t), \kappa_n(t), \Delta_0(t), \Delta_\infty(t))\end{aligned}\tag{80}$$

875 Then, the chaotic variance, which is necessary for the Gaussian posterior conditioning example, is
876 simply calculated via

$$\Delta_T = \Delta_0 - \Delta_\infty\tag{81}$$

877 A.3 Supplementary Figures

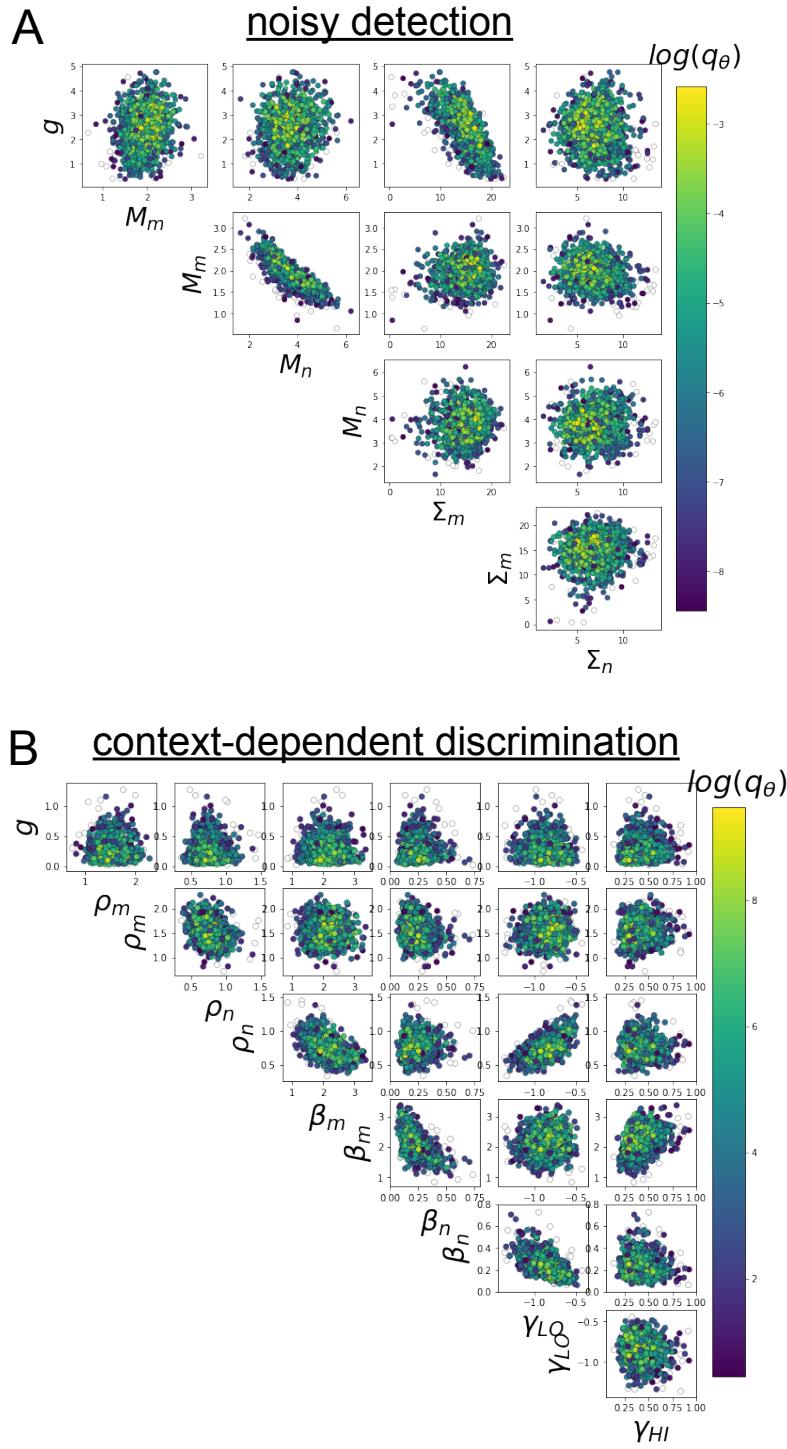


Fig. S4: A. EPI for rank-1 networks doing discrimination. B. EPI for rank-2 networks doing context-dependent discrimination. See [26].