

Interrogating theoretical models of neural computation with deep inference
Sean R. Bittner¹, Agostina Palmigiano¹, Alex T. Piet^{2,3,4}, Chunyu A. Duan⁵, Carlos D. Brody^{2,3,6},
Kenneth D. Miller¹, and John P. Cunningham⁷.

¹Department of Neuroscience, Columbia University,

²Princeton Neuroscience Institute,

³Princeton University,

⁴Allen Institute for Brain Science,

⁵Institute of Neuroscience, Chinese Academy of Sciences,

⁶Howard Hughes Medical Institute,

⁷Department of Statistics, Columbia University

¹ 1 Abstract

² A cornerstone of theoretical neuroscience is the circuit model: a system of equations that captures
³ a hypothesized neural mechanism. Such models are valuable when they give rise to an experi-
⁴ mentally observed phenomenon – whether behavioral or a pattern of neural activity – and thus
⁵ can offer insights into neural computation. The operation of these mechanistic circuits, like all
⁶ models, critically depends on the choices of model parameters. A key process in circuit modeling
⁷ is then to identify the model parameters consistent with observed phenomena: to solve the inverse
⁸ problem. To solve challenging inverse problems modeling neural datasets, neuroscientists have used
⁹ statistical inference techniques to much success. However, most research in theoretical neuroscience
¹⁰ focuses on how computation emerges in biologically interpretable circuit models, and how the model
¹¹ parameters govern computation; it is not focused on the latent structure of empirical models of
¹² noisy experimental datasets. In this work, we present a novel technique that brings the power
¹³ and versatility of the probabilistic modeling toolkit to theoretical inverse problems. Our method
¹⁴ uses deep neural networks to learn parameter distributions with rich structure that have specific
¹⁵ computational properties in biologically relevant models. This methodology is explained through
¹⁶ a motivational example inferring conductance parameters in an STG subcircuit model. Then, with
¹⁷ RNNs of increasing size, we show that only EPI allows precise control over the behavior of inferred
¹⁸ parameters, and that EPI scales better in parameter dimension than alternative techniques. In the
¹⁹ remainder of this work, we explain novel theoretical insights through the examination of intricate
²⁰ parametric structure in complex circuit models. In a model of primary visual cortex with multiple

21 neuron-types, where analysis becomes untenable with each additional neuron-type, we discovered
22 how noise distributed across neuron-types governs the excitatory population. Finally, in a model
23 of superior colliculus, we identified and characterized two distinct regimes of connectivity that
24 facilitate switching between opposite tasks amidst interleaved trials. We also found that all task-
25 switching connectivities in this model reproduce behaviors from inactivation experiments, further
26 establishing this hypothesized circuit model. Beyond its scientific contribution, this work illustrates
27 the variety of analyses possible once deep learning is harnessed towards solving theoretical inverse
28 problems.

29 2 Introduction

30 The fundamental practice of theoretical neuroscience is to use a mathematical model to understand
31 neural computation, whether that computation enables perception, action, or some intermediate
32 processing. A neural circuit is systematized with a set of equations – the mechanistic model – and
33 these equations are motivated by biophysics, neurophysiology, and other conceptual considerations
34 [1–4]. The function of this system is governed by the choice of model *parameters*, which when
35 configured in a particular way, give rise to a measurable signature of a computation. The work
36 of analyzing a model then requires solving the inverse problem: given a computation of interest,
37 how can we reason about particular parameter configurations? The inverse problem is crucial for
38 reasoning about likely parameter values, uniquenesses and degeneracies, and predictions made by
39 the model [5, 6].

40 Consider the idealized practice: one carefully designs a model and analytically derives how compu-
41 tational properties determine model parameters. Seminal examples of this gold standard include
42 our field’s understanding of memory capacity in associative neural networks [7], chaos and au-
43 tocorrelation timescales in random neural networks [8], the paradoxical effect [9], and decision
44 making [10]. Unfortunately, as circuit models include more biological realism, theory via analytical
45 derivation becomes intractable. Still, we can gain insight into these complex models by identifying
46 the distribution of parameters that produce computations. By solving the inverse problem in this
47 way, scientific analysis of biologically realistic models is made possible [6, 11–14].

48 While theoretical neuroscience is concerned with how model parameters govern computational
49 properties, existing methodology for statistical inference in neuroscience [15–36] (see review, [37])
50 requires that parameters be conditioned on an explicit dataset. The scientific insight for a model

51 of computation is then limited by the quantity and quality of available neural data. Even with a
52 vast amount of high-quality recordings, neural data often reflect uninstructed behaviors [38–40],
53 and thus may only reflect the computation of interest amidst a sea of task-irrelevant factors. A
54 common alternative is to synthesize an explicit dataset that is exemplary of that computation, so
55 that the framework of statistical inference can be applied for parameter identification. In this case,
56 well-defined computational properties are being shoehorned into artificial datasets for the purpose
57 of methodological compatibility.

58 Another key challenge is that as models of computation become more complex, statistical inference
59 becomes intractable. Such mechanistic models in theoretical neuroscience are noisy systems of
60 differential equations that can only be sampled or realized through forward simulation [41, 42];
61 they lack a tractable likelihood function, which is necessary for statistical inference. Therefore, the
62 most popular approaches to parameter inference in mechanistic models have been simulation-based
63 inference methods [43, 44], in which reasonable parameters are obtained via simulation and rejection.
64 A new class of techniques [45–47] use deep learning to improve upon traditional simulation-based
65 inference approaches. However, to use these methods in theoretical neuroscience, we must represent
66 computation with an explicit dataset in some way. Theorists are therefore barred from using the
67 probabilistic modeling toolkit for science with circuit models, unless they reformulate their inverse
68 problem into a framework for observational datasets.

69 To address the methodological incongruity between explicit datasets and emergent properties, we
70 present a statistical inference method for conditioning parameters of neural circuit models directly
71 on computation. In this work, we define computation by an emergent property, which is a statistical
72 description of the phenomena to be produced by the neural circuit model. In emergent property
73 inference (EPI), we infer the distribution of model parameters that produce this emergent property.
74 With EPI, parameters are conditioned directly on an implicit dataset defined by the computation
75 of interest. By using recent optimization techniques [48], EPI uses deep learning to make rich,
76 flexible approximations to the parameter distributions [49], the structure of which reveals scientific
77 insight about how parameters govern the emergent property.

78 Equipped with this method, we prove out the potential of EPI by demonstrating its capabilities and
79 presenting novel theoretical findings borne from its analysis. First, we show EPI’s ability to handle
80 mechanistic models using a classic model of parametric degeneracy in biology: the stomatogastric
81 ganglion [50, 51]. Then, we show EPI’s scalability to high dimensional parameter distributions by
82 inferring connectivities of recurrent neural networks (RNNs) that exhibit stable, yet amplified re-

sponses – a hallmark of neural responses throughout the brain [52–54]. In a model of primary visual cortex (V1) [55, 56] with different neuron-types, we show that the equation for excitatory variability become analytically intractable as more populations are added. Strikingly, the way in which noisy inputs across neuron-types governs excitatory variability is salient in the visualized structure of the EPI inferred parameter distribution. Finally, we investigated the possible connectivities of superior colliculus (SC) that allow execution of different tasks on interleaved trials [57]. EPI discovered a rich distribution containing two connectivity regimes with different solution classes. We queried the deep probability distribution learned by EPI to produce a mechanistic understanding of cortical responses in each regime. Intriguingly, all inferred connectivities reproduced results from optogenetic inactivation experiments in this behavioral paradigm – emergent phenomena that EPI was not conditioned upon. These theoretical insights afforded by EPI illustrate the value of deep inference for the interrogation of neural circuit models.

3 Results

3.1 Motivating emergent property inference of theoretical models

Consideration of the typical workflow of theoretical modeling clarifies the need for emergent property inference. First, one designs or chooses an existing model that, it is hypothesized, captures the computation of interest. To ground this process in a well-known example, consider the stomatogastric ganglion (STG) of crustaceans, a small neural circuit which generates multiple rhythmic muscle activation patterns for digestion [58]. Despite full knowledge of STG connectivity and a precise characterization of its rhythmic pattern generation, biophysical models of the STG have complicated relationships between circuit parameters and computation [12, 50]. A subcircuit model of the STG [51] is shown schematically in Figure 1A. The jagged connections indicate electrical coupling having electrical conductance g_{el} , smooth connections in the diagram are inhibitory synaptic projections having strength g_{synA} onto the hub neuron, and $g_{synB} = 5nS$ for mutual inhibitory connections. Note that the behavior of this model will be critically dependent on its parameterization – the choices of conductance parameters $\mathbf{z} = [g_{el}, g_{synA}]$. Specifically, the two fast neurons ($f1$ and $f2$) mutually inhibit one another, and oscillate at a faster frequency than the mutually inhibiting slow neurons ($s1$ and $s2$). The hub neuron (hub) couples with either the fast or slow population, or both.

Second, once the model is selected, one must specify what the model should produce. In this STG

model, we are concerned with neural spiking frequency, which emerges from the dynamics of the circuit model 1B. An emergent property studied by Gutierrez et al. of this stochastic model is the hub neuron firing at an intermediate frequency between the intrinsic spiking rates of the fast and slow populations. This emergent property is shown in Figure 1C at an average frequency of 0.55Hz. Our notion of intermediate hub frequency is not strictly 0.55Hz, but also moderate deviations of this frequency between the fast (.35Hz) and slow (.68Hz) frequencies, which are quantified in the emergent property with variance 0.025^2Hz^2 .

Third, the model parameters producing these outputs are inferred. To infer the STG parameters of intermediate hub frequency with existing methodology, we need an explicit dataset: experimentally recorded or synthesized. By precisely quantifying the emergent property of interest as a statistical feature of the model, we use EPI to condition directly on this emergent property. EPI learns a probability distribution of model parameters constrained to produce the emergent property. In this last step lies the opportunity for a shift away from a dataset-oriented representation of model output towards that of an implicit dataset, where the only structure is the emergent property of interest.

Before presenting technical details (in the following section), let us understand emergent property inference schematically. EPI (Fig. 1D) takes, as input, the model and the specified emergent property, and as its output, produces the parameter distribution EPI (Fig. 1E). This distribution – represented for clarity as samples from the distribution – is a parameter distribution that produces the emergent property.

3.2 A deep generative modeling approach to emergent property inference

Emergent property inference (EPI) formalizes the three-step procedure of the previous section with deep probability distributions. First, as is typical, we consider the model as a coupled set of differential equations. In this STG example, the model activity $\mathbf{x} = [x_{f1}, x_{f2}, x_{hub}, x_{s1}, x_{s2}]$ is the membrane potential for each neuron, which evolves according to the biophysical conductance-based equation:

$$C_m \frac{d\mathbf{x}(t)}{dt} = -h(\mathbf{x}(t); \mathbf{z}) + d\mathbf{B} \quad (1)$$

where $C_m=1\text{nF}$, and \mathbf{h} is a sum of the leak, calcium, potassium, hyperpolarization, electrical, and synaptic currents, all of which have their own complicated dependence on activity \mathbf{x} and parameters $\mathbf{z} = [g_{el}, g_{synA}]$, and $d\mathbf{B}$ is white gaussian noise [51, 59] (see Section 5.2.1 for more detail).



Figure 1: Emergent property inference (EPI) in the stomatogastric ganglion. **A.** Conductance-based biophysical model of the STG subcircuit. **B.** Spiking frequency $\omega(\mathbf{x}; \mathbf{z})$ is an emergent property statistic. Simulated at $g_{el} = 4.5\text{nS}$ and $g_{synA} = 3\text{nS}$. **C.** The emergent property of intermediate hub frequency. Simulated activity traces are colored by $\log q_\theta(\mathbf{z} | \mathcal{X})$ of generating parameters. (Panel E). **D.** For a choice of model and emergent property, emergent property inference (EPI) learns a deep probability distribution of parameters \mathbf{z} . **E.** The EPI distribution producing intermediate hub frequency. Samples are colored by log probability density. Contours of hub neuron frequency error are shown at levels of .525, .53,575 Hz (dark to light gray away from mean). Dimension of sensitivity \mathbf{v}_1 (solid) and degeneracy \mathbf{v}_2 (dashed). **F** (Top) The predictive distribution of EPI. The black and gray dashed lines show the mean and two standard deviations according the emergent property. (Bottom) Simulations at the starred parameter values.

142 Second, we stipulate that our model should produce the emergent property of “intermediate hub
 143 frequency” (Figure 1C). We stipulate that the hub neuron’s spiking frequency – denoted $\omega_{\text{hub}}(\mathbf{x})$
 144 is close to a frequency of 0.55Hz, between that of the slow and fast frequencies. Mathematically,
 145 we define this emergent property with two statistical constraints: that the mean hub frequency is
 146 0.55Hz,

$$\mathbb{E}_{\mathbf{z}, \mathbf{x}} [\omega_{\text{hub}}(\mathbf{x}; \mathbf{z})] = 0.55 \quad (2)$$

147 and that the variance of the hub frequency is moderate

$$\text{Var}_{\mathbf{z}, \mathbf{x}} [\omega_{\text{hub}}(\mathbf{x}; \mathbf{z})] = 0.025^2. \quad (3)$$

148 The hub neuron frequency is constrained over the distribution of parameters \mathbf{z} and the distribution
 149 of the data \mathbf{x} that those parameters produce. Formally, the emergent property is the collection of
 150 these two constraints

$$\mathcal{X} : \mathbb{E}_{\mathbf{z}, \mathbf{x}} [\omega_{\text{hub}}(\mathbf{x}; \mathbf{z})] = 0.55, \quad \text{Var}_{\mathbf{z}, \mathbf{x}} [\omega_{\text{hub}}(\mathbf{x}; \mathbf{z})] = 0.025^2. \quad (4)$$

151 In general, an emergent property is a collection of first-, second- and higher moments of statistics
 152 that together define the phenomena.

153 Third, we perform emergent property inference: we find a distribution over parameter configura-
 154 tions \mathbf{z} that produces the emergent property; in other words, they obey the constraints intro-
 155 duced in Equation 4. This distribution will be chosen from a family of probability distributions
 156 $\mathcal{Q} = \{q_{\boldsymbol{\theta}}(\mathbf{z}) : \boldsymbol{\theta} \in \Theta\}$, defined by a deep neural network [49, 60, 61] (Figure 1D, EPI box). Deep
 157 probability distributions map a simple random variable \mathbf{z}_0 through a deep neural network with
 158 weights and biases $\boldsymbol{\theta}$ to parameters $\mathbf{z} = g_{\boldsymbol{\theta}}(\mathbf{z}_0)$ to a suitably complicated distribution (see Section
 159 5.1.2 for more details). Many distributions in \mathcal{Q} will respect the emergent property constraints,
 160 so we select the most random (highest entropy) distribution, which is the same choice made in
 161 Bayesian posterior inference (see Section 5.1.6). In EPI optimization, stochastic gradient steps in
 162 $\boldsymbol{\theta}$ are taken such that entropy is maximized, and the emergent property \mathcal{X} is produced (see Section
 163 5.1) The inferred EPI distribution is denoted $q_{\boldsymbol{\theta}}(\mathbf{z} \mid \mathcal{X})$, since it is conditioned upon emergent
 164 property \mathcal{X} . This is meant to share the same notation as a posterior distribution $q_{\boldsymbol{\theta}}(\mathbf{z} \mid \mathbf{x})$ that is
 165 conditioned upon an explicit dataset.

166 EPI produces parameter distributions that can be queried for scientific insight. The modes of
 167 $q_{\boldsymbol{\theta}}(\mathbf{z} \mid \mathcal{X})$ indicate parameter choices exemplary of the emergent property (Fig. 1E yellow star). As
 168 probability in the EPI inferred distribution decreases, the emergent property deteriorates. Perturb-
 169 ing \mathbf{z} along a dimension in which $q_{\boldsymbol{\theta}}(\mathbf{z} \mid \mathcal{X})$ does not change will not disturb the emergent property,

making this parameter combination *degenerate* with respect to the emergent property. In contrast, if \mathbf{z} is perturbed along a dimension that strongly decreases $q_{\theta}(\mathbf{z} \mid \mathcal{X})$, we call that parameter combination *sensitive*. By querying the second order derivative (Hessian) of $\log q_{\theta}(\mathbf{z} \mid \mathcal{X})$ at a mode, we can quantitatively identify how sensitive (or robust) each eigenvector is by its eigenvalue; the more negative the eigenvalue, the more sensitive. Indeed, samples equidistant from the mode along these EPI-identified dimensions of sensitivity (v_1 , smaller eigenvalue) and robustness (v_2 , greater eigenvalue) (Fig. 1E, arrows) agree with error contours (Fig. 1E contours) and have diminished or preserved hub frequency, respectively (Fig. 1F activity traces). Once an EPI distribution has been inferred, this Hessian calculation requires trivial computation (when the correct architecture class is chosen, see Section 5.1.2).

In the following sections, we demonstrate EPI on three neural circuit models across ranges of biological realism, neural system function, and network scale. First, we demonstrate the superior scalability of EPI compared to alternative techniques by inferring high-dimensional distributions of recurrent neural network (RNN) connectivities that exhibit amplified, yet stable responses. Also in this RNN example, we emphasize that EPI is the only technique that controls the predictions made by the inferred parameter distribution. Next, in a model of primary visual cortex [55,56], we show how EPI captures a curved manifold of parametric degeneracy, revealing how input variability across neuron types affects the excitatory population. Finally, in a model of superior colliculus [57], we used EPI to capture multiple parametric regimes of task switching, and queried the dimensions of sensitivity ($\mathbf{v}_1(\mathbf{z})$) to mechanistically characterize each regime.

3.3 Scaling inference of RNN connectivity with EPI

Transient amplification is a hallmark of neural activity throughout cortex, and is often thought to be intrinsically generated by recurrent connectivity in the responding cortical area [52–54]. It has been shown that to generate such amplified, yet stabilized responses, the connectivity of RNNs must be non-normal [52,62], and satisfy additional constraints [63]. In theoretical neuroscience, RNNs are optimized and then examined to show how dynamical systems could execute a given computation [64,65], but such biologically realistic constraints on connectivity are ignored during optimization for practical reasons. In general, access to distributions of connectivity adhering to theoretical criteria like stable amplification, chaotic fluctuations [8], or low tangling [66] would add scientific value and context to existing research with RNNs. Here, we use EPI to learn RNN connectivities producing stable amplification, and demonstrate the superior scalability and efficiency of EPI to

201 alternative approaches.

202 We consider a rank-2 RNN with N neurons having connectivity $W = UV^\top$ and dynamics

$$\tau \dot{\mathbf{x}} = -\mathbf{x} + W\mathbf{x}, \quad (5)$$

203 where $U = [\mathbf{u}_1 \ \mathbf{u}_2] + g\chi^{(U)}$, $V = [\mathbf{v}_1 \ \mathbf{v}_2] + g\chi^{(V)}$, $\mathbf{u}_1, \mathbf{u}_2, \mathbf{v}_1, \mathbf{v}_2 \in [-1, 1]^N$, and $\chi_{i,j}^{(U)}, \chi_{i,j}^{(V)} \sim$
204 $\mathcal{N}(0, 1)$. We infer connectivity parameterizations $\mathbf{z} = [\mathbf{u}_1^\top, \mathbf{u}_2^\top, \mathbf{v}_1^\top, \mathbf{v}_2^\top]^\top$ that produce stable amplification.
205 Two conditions are necessary and sufficient for RNNs to exhibit stable amplification [63]:
206 $\text{real}(\lambda_1) < 1$ and $\lambda_1^s > 1$, where λ_1 is the eigenvalue of W with greatest real part and λ^s is the maximum eigenvalue of $W^s = \frac{W+W^\top}{2}$. RNNs with $\text{real}(\lambda_1) = 0.5 \pm 0.5$ and $\lambda_1^s = 1.5 \pm 0.5$ will be stable
207 with modest decay rate ($\text{real}(\lambda_1)$ close to its upper bound of 1) and exhibit modest amplification
208 (λ_1^s close to its lower bound of 1). EPI can naturally condition on this emergent property
209

$$\begin{aligned} \mathcal{X} : \mathbb{E}_{\mathbf{z}, \mathbf{x}} \begin{bmatrix} \text{real}(\lambda_1) \\ \lambda_1^s \end{bmatrix} &= \begin{bmatrix} 0.5 \\ 1.5 \end{bmatrix} \\ \text{Var}_{\mathbf{z}, \mathbf{x}} \begin{bmatrix} \text{real}(\lambda_1) \\ \lambda_1^s \end{bmatrix} &= \begin{bmatrix} 0.25^2 \\ 0.25^2 \end{bmatrix}, \end{aligned} \quad (6)$$

210 under the notion that variance constraints with standard deviation 0.25 predicate that the vast
211 majority of samples (those within two standard deviations) are within the specified ranges.

212 For comparison, we infer the parameters \mathbf{z} likely to produce stable amplification using two al-
213 ternative simulation-based inference approaches. We ran sequential Monte Carlo approximate
214 Bayesian computation (SMC-ABC) [43] and sequential neural posterior estimation (SNPE) [45]
215 with observation $\mathbf{x}_0 = \boldsymbol{\mu}$. SMC-ABC is a rejection sampling approach that SMC techniques to
216 improve efficiency, and SNPE approximates posteriors with deep probability distributions using
217 a two-network architecture (see Section 5.1.1). Unlike EPI, these statistical inference techniques
218 do not constrain the statistics of the predictive distribution, and these predictions of the inferred
219 posteriors are typically affected by model characteristics (e.g. N and g , Fig. 11). To compare the
220 efficiency of these different techniques, we measured the time and number of simulations necessary
221 for the distance of the predictive mean to be less than 0.5 from $\boldsymbol{\mu} = \mathbf{x}_0$ (see Section 5.2.2).

222 As the number of neurons N in the RNN is scaled, and thus the dimension of the parameter
223 space $\mathbf{z} \in [-1, 1]^{4N}$, we see that EPI converges at greater speed and at greater dimension than
224 SMC-ABC and SNPE (Fig. 2A). It also becomes most efficient to use EPI in terms of simulation
225 count at $N = 50$ (Fig. 2B). It is well known that ABC techniques struggle in dimensions greater
226 than about 30 [67], yet we were careful to assess the scalability of the more comparable approach



Figure 2: **A.** Wall time of EPI (blue), SNPE (orange), and SMC-ABC (green) to converge on RNN connectivities producing stable amplification. Each dot shows convergence time for an individual random seed. For reference, the mean wall time for EPI to achieve its full constraint convergence (means and variances) is shown (blue line). **B.** Simulation count of each algorithm to achieve convergence. Same conventions as A. **C.** The predictive distributions of connectivities inferred by EPI (blue), SNPE (orange), and SMC-ABC (green), with reference to $\mathbf{x}_0 = \mu$ (gray star). **D.** Simulations of networks inferred by each method ($\tau = 100ms$). Each trace (15 per algorithm) corresponds to simulation of one z . (Below) Ratio of obtained samples producing stable amplification, monotonic decay, and instability.

227 SNPE. Between EPI and SNPE, we closely controlled the number of parameters in deep probability
228 distributions by dimensionality (Fig. 10), and tested more aggressive SNPE hyperparameterizations
229 when SNPE failed to converge (Fig. 12). From this analysis, we see that deep inference techniques
230 EPI and SNPE are far more amenable to inference of high dimensional parameter distributions than
231 rejection sampling techniques like SMC-ABC, and that EPI outperforms SNPE in both criteria in
232 high dimensions.

233 No matter the number of neurons, EPI always produces connectivity distributions with mean and
234 variance of $\text{real}(\lambda_1)$ and λ_1^s according to \mathcal{X} (Fig. 2C, blue). For the dimensionalities in which
235 SMC-ABC is tractable, the inferred parameters are concentrated and offset from \mathbf{x}_0 (Fig. 2C,
236 green). When using SNPE the predictions of the inferred parameters are highly concentrated at
237 some RNN sizes and widely varied in others (Fig. 2C, orange). We see these properties reflected in
238 simulations from the inferred distributions: EPI produces a consistent variety of stable, amplified
239 activity norms $|r(t)|$, SMC-ABC produces a limited variety of responses, and the changing variety
240 of responses from SNPE emphasizes the control of EPI on parameter predictions.

241 EPI outperforms SNPE in high dimensions by using gradient information (from $\nabla_{\mathbf{z}} f(\mathbf{x}; \mathbf{z}) =$
242 $\nabla_{\mathbf{z}} [\text{real}(\lambda_1), \lambda_1^s]^{\top}$) on each iteration of optimization. This agrees with recent speculation that such
243 gradient information could improve the efficiency of simulation-based inference techniques [68].
244 Since gradients of the emergent property statistics are necessary in EPI optimization, gradient
245 tractability is a key criteria when determining the suitability of a simulation-based inference tech-
246 nique. Evidenced by this analysis, EPI is a clear choice for inferring high dimensional parameter
247 distributions when the emergent property gradient is efficiently calculated. This can be invaluable
248 for understanding how RNNs produce complex emergent phenomena. Even with a high degree
249 of biophysical realism and expensive emergent property gradients, EPI was run successfully on
250 intermediate hub frequency in a 5-neuron subcircuit model of the STG (Section 3.1). However,
251 conditioning on the pyloric rhythm [69] in a model of the pyloric subnetwork model [12] proved to
252 be prohibitive with EPI. The pyloric subnetwork requires many time steps for simulation and many
253 key emergent property statistics (e.g. burst duration and phase gap) are not calculable or easily
254 approximated with differentiable functions. In such cases, gradient-free approaches like SNPE have
255 proved to be a powerful option [45]. In the next two sections, we use EPI for novel scientific insight
256 by examining the structure of inferred distributions.

257 **3.4 EPI reveals how noisy input across neuron-types governs excitatory vari-
258 ability in a V1 model**

259 Dynamical models of excitatory (E) and inhibitory (I) populations with supralinear input-output
260 function have succeeded in explaining a host of experimentally documented phenomena. In a regime
261 characterized by inhibitory stabilization of strong recurrent excitation, these models give rise to
262 paradoxical responses [9], selective amplification [52, 62], surround suppression [70] and normaliza-
263 tion [71]. Despite their strong predictive power, E-I circuit models rely on the assumption that
264 inhibition can be studied as an indivisible unit. However, experimental evidence shows that inhibi-
265 tion is composed of distinct elements – parvalbumin (P), somatostatin (S), VIP (V) – composing
266 80% of GABAergic interneurons in V1 [72–74], and that these inhibitory cell types follow specific
267 connectivity patterns (Fig. 3A) [75]. While research has shown that V1 only shares specific dimen-
268 sions of neuronal variability with downstream areas [76], the role played by recurrent dynamics and
269 the connectivity across neuron-type populations is not understood. Here, in a model of V1 with
270 biologically realistic connectivity, we use EPI to show how the structure of input across neuron
271 types affects the variability of the excitatory population – the population largely responsible for
272 projecting to other brain areas [77].

273 We considered response variability of a nonlinear dynamical V1 circuit model (Fig. 3A) with a
274 state comprised of each neuron-type population’s rate $\mathbf{x} = [x_E, x_P, x_S, x_V]^\top$. Each population
275 receives recurrent input $W\mathbf{x}$, where W is the effective connectivity estimated from post-synaptic
276 potential and connectivity rate measurements (see Section 5.2.3). Each population also experiences
277 an external input \mathbf{h} , which determines population rate via supralinear nonlinearity $\phi(\cdot) = [\cdot]_+^2$.
278 There is also an additive noisy input ϵ parameterized by variances for each neuron type population
279 $\sigma^2 = [\sigma_E^2, \sigma_P^2, \sigma_S^2, \sigma_V^2]$. This noise has a slower dynamical timescale $\tau_{\text{noise}} > \tau$ than the population
280 rate, allowing fluctuations around a stimulus-dependent steady-state (Fig. 3B). This model is the
281 stochastic stabilized supralinear network (SSSN) [78]

$$\tau \frac{d\mathbf{x}}{dt} = -\mathbf{x} + \phi(W\mathbf{x} + \mathbf{h} + \epsilon). \quad (7)$$

282 generalized to have multiple inhibitory neuron types, and introduces stochasticity to previous four
283 neuron-type models of V1 [55]. Stochasticity and inhibitory multiplicity introduce substantial
284 complexity to mathematical derivations (see Section 5.2.4) motivating the treatment of this model
285 with EPI. Here, we consider fixed weights W and input \mathbf{h} [56], and study the effect of input
286 variability $\mathbf{z} = [\sigma_E, \sigma_P, \sigma_S, \sigma_V]^\top$ on excitatory variability.

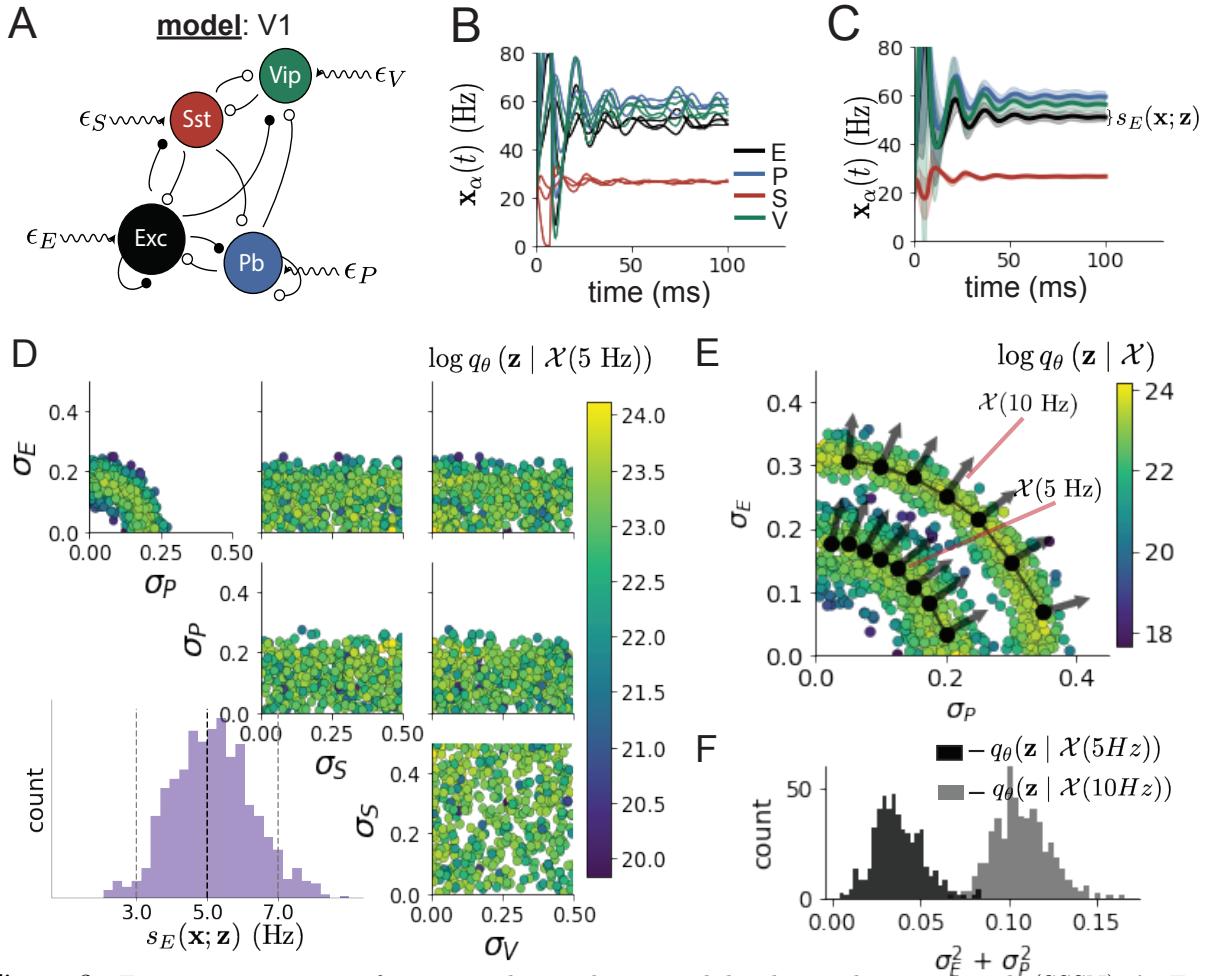


Figure 3: Emergent property inference in the stochastic stabilized supralinear network (SSSN). **A.** Four-population model of primary visual cortex with excitatory (black), parvalbumin (blue), somatostatin (red), and VIP (green) neurons (excitatory and inhibitory projections filled and unfilled, respectively). Some neuron-types largely do not form synaptic projections to others ($|W_{\alpha_1, \alpha_2}| < 0.025$). Each neural population receives a baseline input \mathbf{h}_b , and the E- and P-populations also receive a contrast-dependent input \mathbf{h}_c . Additionally, each neural population receives a slow noisy input ϵ . **B.** Transient network responses of the SSSN model. Traces are independent trials with varying initialization $\mathbf{x}(0)$ and noise ϵ . **C.** Mean (solid line) and standard deviation $s_E(\mathbf{x}; \mathbf{z})$ (shading) across 100 trials. **D.** EPI distribution of noise parameters \mathbf{z} conditioned on E-population variability. The EPI predictive distribution of $s_E(\mathbf{x}; \mathbf{z})$ is shown on the bottom-left. **E.** (Top) Enlarged visualization of the σ_E - σ_P marginal distribution of EPI $q_\theta(\mathbf{z} | \mathcal{X}(5 \text{ Hz}))$ and $q_\theta(\mathbf{z} | \mathcal{X}(10 \text{ Hz}))$. Each black dot shows the mode at each σ_P . The arrows show the most sensitive dimensions of the Hessian evaluated at these modes. **F.** The predictive distributions of $\sigma_E^2 + \sigma_P^2$ of each inferred distribution $q_\theta(\mathbf{z} | \mathcal{X}(5 \text{ Hz}))$ and $q_\theta(\mathbf{z} | \mathcal{X}(10 \text{ Hz}))$.

287 We quantify levels y of E-population variability with the emergent property

$$\begin{aligned}\mathcal{X}(y) &: \mathbb{E}_{\mathbf{z}} [s_E(\mathbf{x}; \mathbf{z})] = y \\ \text{Var}_{\mathbf{z}} [s_E(\mathbf{x}; \mathbf{z})] &= 1\text{Hz}^2,\end{aligned}\tag{8}$$

288 where $s_E(\mathbf{x}; \mathbf{z})$ is the standard deviation of the stochastic E -population response about its steady
289 state (Fig. 3C). In the following analyses, we compare levels of 5Hz and 10Hz, and select 1 Hz²
290 variance such that the two emergent properties do not overlap in $s_E(\mathbf{z}; \mathbf{x})$.

291 First, we ran EPI to obtain parameter distribution $q_{\theta}(\mathbf{z} | \mathcal{X}(5 \text{ Hz}))$ producing E-population vari-
292 ability around 5 Hz (Fig. 3D). From the marginal distribution of σ_E and σ_P (Fig. 3D, top-left), we
293 can see that $s_E(\mathbf{x}; \mathbf{z})$ is sensitive to various combinations of σ_E and σ_P . Alternatively, both σ_S and
294 σ_V are degenerate with respect to $s_E(\mathbf{x}; \mathbf{z})$ evidenced by the high variability in those dimensions
295 (Fig. 3D, bottom-right). Together, these observations imply a curved path with respect to $s_E(\mathbf{x}; \mathbf{z})$
296 of 5 Hz, which is indicated by the modes along σ_P (Fig. 3E).

297 Figure 3E suggests a quadratic relationship in E-population fluctuations and the standard deviation
298 of E- and P-population input; as the square of either σ_E or σ_P increases, the other compensatorily
299 decreases to preserve the level of $s_E(\mathbf{x}; \mathbf{z})$. This quadratic relationship is preserved at greater level
300 of E-population variability $\mathcal{X}(10 \text{ Hz})$ (Fig. 3E). Indeed, the sum of squares of σ_E and σ_P is larger
301 in $q_{\theta}(\mathbf{z} | \mathcal{X}(10 \text{ Hz}))$ than $q_{\theta}(\mathbf{z} | \mathcal{X}(5 \text{ Hz}))$ (Fig 3F, $p < 1 \times 10^{-10}$), while the sum of squares of
302 σ_S and σ_V are not significantly different in the two EPI distributions (Fig. 15, $p = .40$), in which
303 parameters were bounded from 0 to 0.5. The strong interactive influence of E- and P-population
304 input variability on excitatory variability is intriguing, since this circuit exhibits a paradoxical effect
305 in the P-population (and no other inhibitory types) (Fig. 15), meaning that the E-population is
306 P-stabilized. Future research may uncover a link between the population of network stabilization
307 and compensatory interactions governing excitatory variability.

308 EPI revealed the quadratic dependence of excitatory variability on input variability to the E- and
309 P-populations, as well as its independence to input from the other two inhibitory populations. We
310 show that with each neuron-type population added to this E-I model, calculations of excitatory
311 variability with respect to noise parameters become unruly and challenging to work with (see
312 Section 5.2.4). This emphasizes the value of streamlined methods for gaining understanding about
313 theoretical models when mathematical analysis becomes onerous or impractical. While EPI can
314 be used to investigate fundamental aspects of sensory processing, in the next section, we use the
315 probabilistic tools of EPI to identify and characterize two distinct parametric regimes of a neural
316 circuit executing a computation, and then relate these insights to behavioral experiments.

317 **3.5 EPI identifies two regimes of rapid task switching**

318 It has been shown that rats can learn to switch from one behavioral task to the next on randomly
 319 interleaved trials [79], and an important question is what types of neural connectivity allow this
 320 ability. In this experimental setup, rats were explicitly cued on each trial to either orient towards
 321 a visual stimulus in the Pro (P) task or orient away from a visual stimulus in the Anti (A) task
 322 (Fig. 4A). Neural recordings in superior colliculus (SC) exhibited two populations of neurons that
 323 represented task context (Pro or Anti). Furthermore, Pro/Anti neurons in each hemisphere were
 324 strongly correlated with the animal’s decision [57]. These results motivated a model of SC that
 325 is a four-population dynamical system with functionally-defined neuron-types. Here, our goal is
 326 to understand how connectivity in this circuit model governs the ability to perform rapid task
 327 switching: to respond with satisfactory accuracy in both tasks on randomly interleaved trials.

328 In this SC model, there are Pro- and Anti-populations in each hemisphere (left (L) and right
 329 (R)) with activity variables $\mathbf{x} = [x_{LP}, x_{LA}, x_{RP}, x_{RA}]^\top$. The connectivity of these populations is
 330 parameterized by self sW , vertical vW , diagonal dW and horizontal hW connections (Fig. 4B). The
 331 input \mathbf{h} is comprised of a positive cue-dependent signal to the Pro or Anti populations, a positive
 332 stimulus-dependent input to either the Left or Right populations, and a choice-period input to the
 333 entire network (see Section 5.2.5). Model responses are bounded from 0 to 1 as a function ϕ of an
 334 internal variable \mathbf{u}

$$\begin{aligned} \tau \frac{d\mathbf{u}}{dt} &= -\mathbf{u} + W\mathbf{x} + \mathbf{h} + d\mathbf{B} \\ \mathbf{x} &= \phi(\mathbf{u}). \end{aligned} \tag{9}$$

335 The model responds to the side with greater Pro neuron activation; e.g. the response is left if
 336 $x_{LP} > x_{RP}$ at the end of the trial. Here, we use EPI to determine the network connectivity
 337 $\mathbf{z} = [sW, vW, dW, hW]^\top$ that produces rapid task switching.

338 Rapid task switching is formalized mathematically as an emergent property with two statistics:
 339 accuracy in the Pro task $p_P(\mathbf{x}; \mathbf{z})$ and Anti task $p_A(\mathbf{x}; \mathbf{z})$. We stipulate that accuracy be on average
 340 .75 in each task with variance $.075^2$

$$\begin{aligned} \mathcal{X} : \mathbb{E}_{\mathbf{z}} \begin{bmatrix} p_P(\mathbf{x}; \mathbf{z}) \\ p_A(\mathbf{x}; \mathbf{z}) \end{bmatrix} &= \begin{bmatrix} .75 \\ .75 \end{bmatrix} \\ \text{Var}_{\mathbf{z}} \begin{bmatrix} p_P(\mathbf{x}; \mathbf{z}) \\ p_A(\mathbf{x}; \mathbf{z}) \end{bmatrix} &= \begin{bmatrix} .075^2 \\ .075^2 \end{bmatrix}. \end{aligned} \tag{10}$$



Figure 4: **A.** Rapid task switching behavioral paradigm (see text). **B.** Model of superior colliculus (SC). Neurons: LP - left pro, RP - right pro, LA - left anti, RA - right anti. Parameters: sW - self, hW - horizontal, vW - vertical, dW - diagonal weights. **C.** The EPI inferred distribution of rapid task switching networks. Red and purple stars indicate modes \mathbf{z}^* of each connectivity regime. Sensitivity vectors $\mathbf{v}_1(\mathbf{z}^*)$ are shown by arrows. (Bottom-left) EPI predictive distribution of task accuracies. **D.** The connectivity regimes have different responses to perturbation. (Top) Mean and standard error ($N_{\text{test}} = 25$) of accuracy with respect to perturbation along the sensitivity dimension of each mode \mathbf{z}^* . (Middle) Same with perturbation in the dimension of increasing λ_{task} (\mathbf{v}_{task}). (Bottom) Same with perturbation in the dimension of increasing λ_{diag} (\mathbf{v}_{diag}).

341 75% accuracy is a realistic level of performance in each task, and with the chosen variance, inferred
342 models will not exhibit fully random responses (50%), nor perfect performance (100%).

343 The EPI inferred distribution (Fig. 4C) produces Pro and Anti task accuracies (Fig. 4C, middle-
344 left) consistent with rapid task switching (Equation 10). This parameter distribution has intricate
345 structure, that is not captured well by simple linear correlations (Fig. 17). Specifically, the shape
346 of the EPI distribution changes dramatically on different sides of parameter space. This is most
347 saliently pointed out in the marginal distribution of $sW-hW$ (Fig. 4C top-right), where anticorre-
348 lation between sW and hW switches to correlation with decreasing sW . The two regimes produce
349 different types of responses in the Pro and Anti tasks (Fig. SC2). Not only has EPI captured this
350 complicated distribution of connectivities producing rapid task switching, we can query the EPI
351 distribution $q_{\theta}(\mathbf{z} | \mathcal{X})$ to understand these two parametric regimes of SC connectivity.

352 To distinguish these two regimes, we use the EPI distribution to identify two sets of modes. By
353 fixing hW to different values and doing gradient ascent on $\log q_{\theta}(\mathbf{z} | \mathcal{X})$, we arrive at two solutions
354 $\mathbf{z}^*(hW_{\text{fixed}}, r)$ where regime $r \in [1, 2]$, and regime 1 is that of greater sW (see Section 5.2.5). As
355 hW_{fixed} increases, the modes coalesce to intermediate parameters reflecting a transition between
356 the two sets of modes (Fig. 20 top). By using EPI to connect these two regimes through this
357 transitional region of parameter space, we can explore what distinguishes the two regimes by
358 stepping from the prototypical connectivity of regime 1 to that of regime 2.

359 While the connectivities gradually coalesce to the transitional part of parameter space, the sensi-
360 tivity dimensions $\mathbf{v}_1(\mathbf{z})$ are categorically different across regimes (Fig. 20 bottom). The sensitivity
361 dimension identifies the parameter combination which causes the emergent property to diminish
362 with the shortest perturbation. Since the two regimes have different $\mathbf{v}_1(\mathbf{z})$, this suggests they have
363 different pathologies in their connectivity. By perturbing connectivity in each regime along the
364 sensitivity dimension, we can get a sense of the differing nature of these pathologies.

365 When perturbing connectivity along the sensitivity dimension, Pro accuracy monotonically in-
366 creases in both regimes (Fig. 4D, top-left). However, there is a stark difference between regimes in
367 Anti accuracy. Anti accuracy falls in either direction of \mathbf{v}_1 in regime 1, yet monotonically increases
368 along with Pro accuracy in regime 2 (Fig. 4D, top-right). These distinct pathologies of rapid task
369 switching are caused by distinct connectivity changes ($\mathbf{v}_1(\mathbf{z}^*(r=1))$ vs $\mathbf{v}_1(\mathbf{z}^*(r=2))$) and explain
370 the sharp change in local structure of the EPI distribution.

371 To further examine the two regimes, we can perturb \mathbf{z} in the same way along dimensions that inde-
372 pendently change the eigenvalues of the connectivity matrix (which has constant eigenvectors with

respect to \mathbf{z}). These eigenvalues λ_{all} , λ_{side} , λ_{task} , and λ_{diag} correspond to connectivity eigenmodes with intuitive roles in processing in this task (Fig. 19A). For example, greater λ_{task} will strengthen internal representations of task, while greater λ_{diag} will amplify dominance of Pro and Anti pairs in opposite hemispheres (Section 5.2.5). Perturbation analyses reveal that decreasing λ_{task} has close to the same effect on Anti accuracy as perturbations along the sensitivity dimension (Fig. 4D, middle). This suggests that there is a carefully tuned strength of task representation in regime 1, which if disturbed results in random Anti trial responses. Finally, we recognize that increasing λ_{diag} has opposite effects on Anti accuracy in each regime (Fig. 4D, bottom). In the next section, we build on these mechanistic characterizations of each regime by examining their resilience to optogenetic silencing.

3.6 EPI inferred SC connectivities reproduce results from optogenetic inactivation experiments

During the delay period of this task, the circuit must prepare to execute the correct task based on the cue input. Experimental results from Duan et al. found that optogenetic inactivation of SC during the delay period consistently decreased performance in the Anti task, but had no effect on the Pro task (Fig. 5A). This suggests that SC maintains a representation of task throughout the delay period, which is important for correct execution of the Anti task. Network connectivities inferred by EPI exhibited this same effect in simulation at high optogenetic strength $\gamma \in [0, 1]$ (Fig. 5B) (see Section 5.2.5). To emphasize, EPI inferred connectivities were only conditioned upon the emergent property of rapid task switching, not on Anti task failure during delay period silencing.

The mean increase in Anti error is closest to the experimentally measured value of 7% at $\gamma = 0.675$ (Fig. 5B, black dot). At this level of optogenetic strength, only regime 1 exhibits an increase in Anti error with delay period silencing (Fig. 5C, left). The connectivities in regime 2 are thus more resilient in the Anti task to delay period silencing than regime 1. In regime 1, greater λ_{task} and λ_{diag} decrease Anti error (Fig. 5C, right). In other words, these anticorrelations show that stronger task representations and diagonal amplification make the SC model more resilient to delay period silencing in the Anti task. All correlations of connectivity eigenvalue with Anti error degrade in regime 2, where there is no effect of delay period silencing on Anti error (Fig. 5C, right).

At about $\gamma = 0.85$ (Fig. 5B, gray dot), the Anti error saturates, while Pro error remains at zero. Following delay period inactivation at this optogenetic strength, there are strong similarities in the responses of Pro and Anti trials during the choice period (Fig. 5D, left). We interpreted

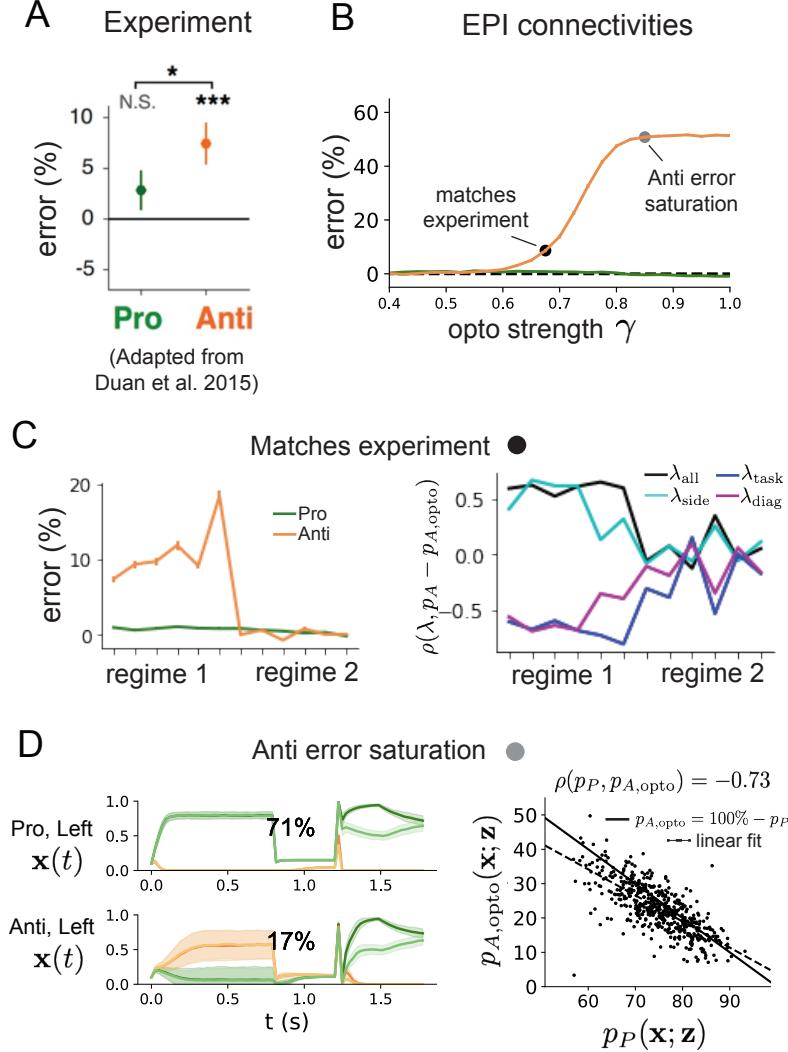


Figure 5: **A.** Experimental effect of delay period silencing on Pro and Anti task accuracy in rats. **B.** Mean and standard error (bars) across EPI distribution of Pro and Anti error induced by delay period inactivation of varying optogenetic strength. **C.** (Left) Mean and standard error of Pro and Anti error from regime 1 to regime 2 at $\gamma = 0.675$. (Right) Correlations of connectivity eigenvalues with Anti error from regime 1 to regime 2 at $\gamma = 0.675$. **D.** (Left) Responses of the SC model at the mode of the EPI distribution to delay period inactivation at $\gamma = 0.85$. (Right) Anti accuracy following delay period inactivation at $\gamma = 0.85$ versus accuracy in the Pro task across connectivities in the EPI distribution.

404 these similarities to suggest that delay period inactivation at this saturated level flips the internal
405 representation of task (from Anti to Pro) in the model. This would explain why the Anti error
406 saturates at 50%: the average Anti accuracy in EPI inferred connectivities is 75%, but is 25% when
407 the internal representation is flipped during delay period silencing. This hypothesis prescribes a
408 model of Anti accuracy during delay period silencing of $p_{A,\text{opto}} = 100\% - p_P$, which is fit closely
409 across both regimes of the EPI inferred connectivities (Fig. 5D, right). Similarities between Pro
410 and Anti trial responses were not present at the experiment-matching level of $\gamma = 0.675$ (Fig. 22
411 left) and neither was anti-correlation in p_P and $p_{A,\text{opto}}$ (Fig. 22 right).

412 In summary, the connectivity inferred by EPI to perform rapid task switching replicated results
413 from optogenetic silencing experiments. We found that at levels of optogenetic strength matching
414 experimental levels of Anti error, only one regime actually exhibited the effect. This suggests that
415 one regime is less resilient to optogenetic perturbation, and perhaps more biologically realistic.
416 Finally, we mechanistically characterized the pathology in Anti error that occurs in both regimes
417 when optogenetic strength is increased to high levels. This insight was made possible by using the
418 probabilistic tools afforded by EPI: we identified two regimes and the continuum of connectivities
419 between them, and we obtained many parameter samples at each step along the continuum (X
420 times faster than brute force methods, see Section 5.2.5).

421 4 Discussion

422 In neuroscience, machine learning has primarily been used to reveal structure in neural datasets [37].
423 Careful inference procedures are developed for these statistical models allowing precise, quantita-
424 tive reasoning, which clarifies the way data informs beliefs about the model parameters. However,
425 these statistical models often lack resemblance to the underlying biology, making it unclear how
426 to go from the structure revealed by these methods, to the neural mechanisms giving rise to it. In
427 contrast, theoretical neuroscience has focused on careful mechanistic modeling and the production
428 of emergent properties of computation, rather than measuring structure in some noisy observed
429 dataset. In this work, we improve upon parameter inference techniques in theoretical neuroscience
430 with emergent property inference, harnessing deep learning towards parameter inference with re-
431 spect to emergent phenomena in interpretable models of neural computation (see Section 5.1.1).
432 Methodology for statistical inference in mechanistic models of neural circuits has evolved consider-
433 ably in recent years. Early work used rejection sampling techniques [43, 80, 81], but more recently

434 developed methodology employs deep learning to improve efficiency or provide flexible distribution
435 approximations. SNPE [45] and other sequential techniques for inference in mechanistic models
436 developed along with EPI (see Section 5.1.1) have been used for posterior inference with noisy
437 experimental datasets. On the other hand, EPI is a deep inference technique designed to condition
438 directly on emergent properties, such that the parameter distribution only produces the computa-
439 tion of interest. EPI is thus ideally suited for questions in theoretical neuroscience, and we show
440 that it has superior scaling properties to these other inference techniques (see Section 3.3).

441 **Acknowledgements:**

442 This work was funded by NSF Graduate Research Fellowship, DGE-1644869, McKnight Endow-
443 ment Fund, NIH NINDS 5R01NS100066, Simons Foundation 542963, NSF NeuroNex Award, DBI-
444 1707398, The Gatsby Charitable Foundation, Simons Collaboration on the Global Brain Postdoc-
445 toral Fellowship, Chinese Postdoctoral Science Foundation, and International Exchange Program
446 Fellowship. Helpful conversations were had with Francesca Mastrogiuseppe, Srdjan Ostojic, James
447 Fitzgerald, Stephen Baccus, Dhruva Raman, Liam Paninski, and Larry Abbott.

448 **Data availability statement:**

449 The datasets generated during and/or analyzed during the current study are available from the
450 corresponding author upon reasonable request.

451 **Code availability statement:**

452 All software written for the current study is available at <https://github.com/cunningham-lab/epi>.

453 **References**

- 454 [1] Nancy Kopell and G Bard Ermentrout. Coupled oscillators and the design of central pattern
455 generators. *Mathematical biosciences*, 90(1-2):87–109, 1988.
- 456 [2] Eve Marder. From biophysics to models of network function. *Annual review of neuroscience*,
457 21(1):25–45, 1998.
- 458 [3] Larry F Abbott. Theoretical neuroscience rising. *Neuron*, 60(3):489–495, 2008.
- 459 [4] Xiao-Jing Wang. Neurophysiological and computational principles of cortical rhythms in
460 cognition. *Physiological reviews*, 90(3):1195–1268, 2010.

- 461 [5] Ryan N Gutenkunst, Joshua J Waterfall, Fergal P Casey, Kevin S Brown, Christopher R
462 Myers, and James P Sethna. Universally sloppy parameter sensitivities in systems biology
463 models. *PLoS Comput Biol*, 3(10):e189, 2007.
- 464 [6] Timothy O’Leary, Alex H Williams, Alessio Franci, and Eve Marder. Cell types, network
465 homeostasis, and pathological compensation from a biologically plausible ion channel expres-
466 sion model. *Neuron*, 82(4):809–821, 2014.
- 467 [7] John J Hopfield. Neural networks and physical systems with emergent collective computa-
468 tional abilities. *Proceedings of the national academy of sciences*, 79(8):2554–2558, 1982.
- 469 [8] Haim Sompolinsky, Andrea Crisanti, and Hans-Jurgen Sommers. Chaos in random neural
470 networks. *Physical review letters*, 61(3):259, 1988.
- 471 [9] Misha V Tsodyks, William E Skaggs, Terrence J Sejnowski, and Bruce L McNaughton. Para-
472 doxical effects of external modulation of inhibitory interneurons. *Journal of neuroscience*,
473 17(11):4382–4388, 1997.
- 474 [10] Kong-Fatt Wong and Xiao-Jing Wang. A recurrent network mechanism of time integration
475 in perceptual decisions. *Journal of Neuroscience*, 26(4):1314–1328, 2006.
- 476 [11] WR Foster, LH Ungar, and JS Schwaber. Significance of conductances in hodgkin-huxley
477 models. *Journal of neurophysiology*, 70(6):2502–2518, 1993.
- 478 [12] Astrid A Prinz, Dirk Bucher, and Eve Marder. Similar network activity from disparate circuit
479 parameters. *Nature neuroscience*, 7(12):1345–1352, 2004.
- 480 [13] Pablo Achard and Erik De Schutter. Complex parameter landscape for a complex neuron
481 model. *PLoS computational biology*, 2(7):e94, 2006.
- 482 [14] Leandro M Alonso and Eve Marder. Visualization of currents in neural models with similar
483 behavior and different conductance densities. *Elife*, 8:e42722, 2019.
- 484 [15] Robert E Kass and Valérie Ventura. A spike-train probability model. *Neural computation*,
485 13(8):1713–1720, 2001.
- 486 [16] Emery N Brown, Loren M Frank, Dengda Tang, Michael C Quirk, and Matthew A Wilson.
487 A statistical paradigm for neural spike train decoding applied to position prediction from
488 ensemble firing patterns of rat hippocampal place cells. *Journal of Neuroscience*, 18(18):7411–
489 7425, 1998.

- 490 [17] Liam Paninski. Maximum likelihood estimation of cascade point-process neural encoding
491 models. *Network: Computation in Neural Systems*, 15(4):243–262, 2004.
- 492 [18] Wilson Truccolo, Uri T Eden, Matthew R Fellows, John P Donoghue, and Emery N Brown.
493 A point process framework for relating neural spiking activity to spiking history, neural
494 ensemble, and extrinsic covariate effects. *Journal of neurophysiology*, 93(2):1074–1089, 2005.
- 495 [19] Elad Schneidman, Michael J Berry, Ronen Segev, and William Bialek. Weak pairwise correlations
496 imply strongly correlated network states in a neural population. *Nature*, 440(7087):1007–
497 1012, 2006.
- 498 [20] Shaul Druckmann, Yoav Banitt, Albert A Gidon, Felix Schürmann, Henry Markram, and Idan
499 Segev. A novel multiple objective optimization framework for constraining conductance-based
500 neuron models by experimental data. *Frontiers in neuroscience*, 1:1, 2007.
- 501 [21] Richard Turner and Maneesh Sahani. A maximum-likelihood interpretation for slow feature
502 analysis. *Neural computation*, 19(4):1022–1038, 2007.
- 503 [22] M Yu Byron, John P Cunningham, Gopal Santhanam, Stephen I Ryu, Krishna V Shenoy, and
504 Maneesh Sahani. Gaussian-process factor analysis for low-dimensional single-trial analysis of
505 neural population activity. In *Advances in neural information processing systems*, pages
506 1881–1888, 2009.
- 507 [23] Jakob H Macke, Lars Buesing, John P Cunningham, Byron M Yu, Krishna V Shenoy, and
508 Maneesh Sahani. Empirical models of spiking in neural populations. *Advances in neural
509 information processing systems*, 24:1350–1358, 2011.
- 510 [24] Il Memming Park and Jonathan W Pillow. Bayesian spike-triggered covariance analysis. In
511 *Advances in neural information processing systems*, pages 1692–1700, 2011.
- 512 [25] Einat Granot-Atedgi, Gašper Tkačik, Ronen Segev, and Elad Schneidman. Stimulus-
513 dependent maximum entropy models of neural population codes. *PLoS Comput Biol*,
514 9(3):e1002922, 2013.
- 515 [26] Kenneth W Latimer, Jacob L Yates, Miriam LR Meister, Alexander C Huk, and Jonathan W
516 Pillow. Single-trial spike trains in parietal cortex reveal discrete steps during decision-making.
517 *Science*, 349(6244):184–187, 2015.

- 518 [27] Kaushik J Lakshminarasimhan, Marina Petsalis, Hyeshin Park, Gregory C DeAngelis, Xaq
519 Pitkow, and Dora E Angelaki. A dynamic bayesian observer model reveals origins of bias in
520 visual path integration. *Neuron*, 99(1):194–206, 2018.
- 521 [28] Lea Duncker, Gergo Bohner, Julien Boussard, and Maneesh Sahani. Learning interpretable
522 continuous-time models of latent stochastic dynamical systems. *Proceedings of the 36th In-*
523 *ternational Conference on Machine Learning*, 2019.
- 524 [29] Josef Ladenbauer, Sam McKenzie, Daniel Fine English, Olivier Hagens, and Srdjan Ostojic.
525 Inferring and validating mechanistic models of neural microcircuits based on spike-train data.
526 *Nature Communications*, 10(4933), 2019.
- 527 [30] Yuanjun Gao, Evan W Archer, Liam Paninski, and John P Cunningham. Linear dynamical
528 neural population models through nonlinear embeddings. In *Advances in neural information*
529 *processing systems*, pages 163–171, 2016.
- 530 [31] Yuan Zhao and Il Memming Park. Recursive variational bayesian dual estimation for non-
531 linear dynamics and non-gaussian observations. *stat*, 1050:27, 2017.
- 532 [32] Gabriel Barello, Adam Charles, and Jonathan Pillow. Sparse-coding variational auto-
533 encoders. *bioRxiv*, page 399246, 2018.
- 534 [33] Chethan Pandarinath, Daniel J O’Shea, Jasmine Collins, Rafal Jozefowicz, Sergey D Stavisky,
535 Jonathan C Kao, Eric M Trautmann, Matthew T Kaufman, Stephen I Ryu, Leigh R
536 Hochberg, et al. Inferring single-trial neural population dynamics using sequential auto-
537 encoders. *Nature methods*, page 1, 2018.
- 538 [34] Alexander B Wiltschko, Matthew J Johnson, Giuliano Iurilli, Ralph E Peterson, Jesse M
539 Katon, Stan L Pashkovski, Victoria E Abraira, Ryan P Adams, and Sandeep Robert Datta.
540 Mapping sub-second structure in mouse behavior. *Neuron*, 88(6):1121–1135, 2015.
- 541 [35] Matthew J Johnson, David K Duvenaud, Alex Wiltschko, Ryan P Adams, and Sandeep R
542 Datta. Composing graphical models with neural networks for structured representations and
543 fast inference. In *Advances in neural information processing systems*, pages 2946–2954, 2016.
- 544 [36] Eleanor Batty, Matthew Whiteway, Shreya Saxena, Dan Biderman, Taiga Abe, Simon Musall,
545 Winthrop Gillis, Jeffrey Markowitz, Anne Churchland, John Cunningham, et al. Behavenet:
546 nonlinear embedding and bayesian neural decoding of behavioral videos. *Advances in Neural*
547 *Information Processing Systems*, 2019.

- 548 [37] Liam Paninski and John P Cunningham. Neural data science: accelerating the experiment-
549 analysis-theory cycle in large-scale neuroscience. *Current opinion in neurobiology*, 50:232–241,
550 2018.
- 551 [38] Christopher M Niell and Michael P Stryker. Modulation of visual responses by behavioral
552 state in mouse visual cortex. *Neuron*, 65(4):472–479, 2010.
- 553 [39] Aman B Saleem, Aslı Ayaz, Kathryn J Jeffery, Kenneth D Harris, and Matteo Carandini.
554 Integration of visual motion and locomotion in mouse visual cortex. *Nature neuroscience*,
555 16(12):1864–1869, 2013.
- 556 [40] Simon Musall, Matthew T Kaufman, Ashley L Juavinett, Steven Gluf, and Anne K Church-
557 land. Single-trial neural dynamics are dominated by richly varied movements. *Nature neuro-
558 science*, 22(10):1677–1686, 2019.
- 559 [41] Peter Dayan, Laurence F Abbott, et al. Theoretical neuroscience: computational and mathe-
560 matical modeling of neural systems. *Journal of Cognitive Neuroscience*, 15(1):154–155, 2003.
- 561 [42] Eugene M Izhikevich. *Dynamical systems in neuroscience*. MIT press, 2007.
- 562 [43] Scott A Sisson, Yanan Fan, and Mark M Tanaka. Sequential monte carlo without likelihoods.
563 *Proceedings of the National Academy of Sciences*, 104(6):1760–1765, 2007.
- 564 [44] Juliane Liepe, Paul Kirk, Sarah Filippi, Tina Toni, Chris P Barnes, and Michael PH Stumpf.
565 A framework for parameter estimation and model selection from experimental data in systems
566 biology using approximate bayesian computation. *Nature protocols*, 9(2):439–456, 2014.
- 567 [45] Pedro J Gonçalves, Jan-Matthis Lueckmann, Michael Deistler, Marcel Nonnenmacher, Kaan
568 Öcal, Giacomo Bassetto, Chaitanya Chintaluri, William F Podlaski, Sara A Haddad, Tim P
569 Vogels, et al. Training deep neural density estimators to identify mechanistic models of neural
570 dynamics. *bioRxiv*, page 838383, 2019.
- 571 [46] George Papamakarios, David Sterratt, and Iain Murray. Sequential neural likelihood: Fast
572 likelihood-free inference with autoregressive flows. In *The 22nd International Conference on
573 Artificial Intelligence and Statistics*, pages 837–848. PMLR, 2019.
- 574 [47] Joeri Hermans, Volodimir Begy, and Gilles Louppe. Likelihood-free mcmc with amortized
575 approximate ratio estimators. In *International Conference on Machine Learning*, pages 4239–
576 4248. PMLR, 2020.

- 577 [48] Gabriel Loaiza-Ganem, Yuanjun Gao, and John P Cunningham. Maximum entropy flow
578 networks. *International Conference on Learning Representations*, 2017.
- 579 [49] Danilo Jimenez Rezende and Shakir Mohamed. Variational inference with normalizing flows.
580 *International Conference on Machine Learning*, 2015.
- 581 [50] Mark S Goldman, Jorge Golowasch, Eve Marder, and LF Abbott. Global structure, ro-
582 bustness, and modulation of neuronal models. *Journal of Neuroscience*, 21(14):5229–5238,
583 2001.
- 584 [51] Gabrielle J Gutierrez, Timothy O’Leary, and Eve Marder. Multiple mechanisms switch an
585 electrically coupled, synaptically inhibited neuron between competing rhythmic oscillators.
586 *Neuron*, 77(5):845–858, 2013.
- 587 [52] Brendan K Murphy and Kenneth D Miller. Balanced amplification: a new mechanism of
588 selective amplification of neural activity patterns. *Neuron*, 61(4):635–648, 2009.
- 589 [53] Guillaume Hennequin, Tim P Vogels, and Wulfram Gerstner. Optimal control of transient dy-
590 namics in balanced networks supports generation of complex movements. *Neuron*, 82(6):1394–
591 1406, 2014.
- 592 [54] Giulio Bondanelli, Thomas Deneux, Brice Bathellier, and Srdjan Ostojic. Population coding
593 and network dynamics during off responses in auditory cortex. *BioRxiv*, page 810655, 2019.
- 594 [55] Ashok Litwin-Kumar, Robert Rosenbaum, and Brent Doiron. Inhibitory stabilization and
595 visual coding in cortical circuits with multiple interneuron subtypes. *Journal of neurophysi-
596 ology*, 115(3):1399–1409, 2016.
- 597 [56] Agostina Palmigiano, Francesco Fumarola, Daniel P Mossing, Nataliya Kraynyukova, Hillel
598 Adesnik, and Kenneth Miller. Structure and variability of optogenetic responses identify the
599 operating regime of cortex. *bioRxiv*, 2020.
- 600 [57] Chunyu A Duan, Marino Pagan, Alex T Piet, Charles D Kopec, Athena Akrami, Alexander J
601 Riordan, Jeffrey C Erlich, and Carlos D Brody. Collicular circuits for flexible sensorimotor
602 routing. *bioRxiv*, page 245613, 2018.
- 603 [58] Eve Marder and Vatsala Thirumalai. Cellular, synaptic and network effects of neuromodula-
604 tion. *Neural Networks*, 15(4-6):479–493, 2002.

- 605 [59] Catherine Morris and Harold Lecar. Voltage oscillations in the barnacle giant muscle fiber.
606 *Biophysical journal*, 35(1):193–213, 1981.
- 607 [60] Laurent Dinh, Jascha Sohl-Dickstein, and Samy Bengio. Density estimation using real nvp.
608 *Proceedings of the 5th International Conference on Learning Representations*, 2017.
- 609 [61] George Papamakarios, Theo Pavlakou, and Iain Murray. Masked autoregressive flow for
610 density estimation. In *Advances in Neural Information Processing Systems*, pages 2338–2347,
611 2017.
- 612 [62] Mark S Goldman. Memory without feedback in a neural network. *Neuron*, 61(4):621–634,
613 2009.
- 614 [63] Giulio Bondanelli and Srdjan Ostojic. Coding with transient trajectories in recurrent neural
615 networks. *PLoS computational biology*, 16(2):e1007655, 2020.
- 616 [64] David Sussillo. Neural circuits as computational dynamical systems. *Current opinion in
617 neurobiology*, 25:156–163, 2014.
- 618 [65] Omri Barak. Recurrent neural networks as versatile tools of neuroscience research. *Current
619 opinion in neurobiology*, 46:1–6, 2017.
- 620 [66] Abigail A Russo, Sean R Bittner, Sean M Perkins, Jeffrey S Seely, Brian M London, Antonio H
621 Lara, Andrew Miri, Najja J Marshall, Adam Kohn, Thomas M Jessell, et al. Motor cortex
622 embeds muscle-like commands in an untangled population response. *Neuron*, 97(4):953–966,
623 2018.
- 624 [67] Scott A Sisson, Yanan Fan, and Mark Beaumont. *Handbook of approximate Bayesian com-
625 putation*. CRC Press, 2018.
- 626 [68] Kyle Cranmer, Johann Brehmer, and Gilles Louppe. The frontier of simulation-based infer-
627 ence. *Proceedings of the National Academy of Sciences*, 2020.
- 628 [69] Eve Marder and Allen I Selverston. *Dynamic biological networks: the stomatogastric nervous
629 system*. MIT press, 1992.
- 630 [70] Hirofumi Ozeki, Ian M Finn, Evan S Schaffer, Kenneth D Miller, and David Ferster. Inhibitory
631 stabilization of the cortical network underlies visual surround suppression. *Neuron*, 62(4):578–
632 592, 2009.

- 633 [71] Daniel B Rubin, Stephen D Van Hooser, and Kenneth D Miller. The stabilized supralinear
634 network: a unifying circuit motif underlying multi-input integration in sensory cortex.
635 *Neuron*, 85(2):402–417, 2015.
- 636 [72] Henry Markram, Maria Toledo-Rodriguez, Yun Wang, Anirudh Gupta, Gilad Silberberg, and
637 Caizhi Wu. Interneurons of the neocortical inhibitory system. *Nature reviews neuroscience*,
638 5(10):793, 2004.
- 639 [73] Bernardo Rudy, Gordon Fishell, SooHyun Lee, and Jens Hjerling-Leffler. Three groups of
640 interneurons account for nearly 100% of neocortical gabaergic neurons. *Developmental neu-*
641 *robiology*, 71(1):45–61, 2011.
- 642 [74] Robin Tremblay, Soohyun Lee, and Bernardo Rudy. GABAergic Interneurons in the Neocor-
643 tex: From Cellular Properties to Circuits. *Neuron*, 91(2):260–292, 2016.
- 644 [75] Carsten K Pfeffer, Mingshan Xue, Miao He, Z Josh Huang, and Massimo Scanziani. Inhi-
645 bition of inhibition in visual cortex: the logic of connections between molecularly distinct
646 interneurons. *Nature Neuroscience*, 16(8):1068, 2013.
- 647 [76] João D Semedo, Amin Zandvakili, Christian K Machens, M Yu Byron, and Adam Kohn.
648 Cortical areas interact through a communication subspace. *Neuron*, 102(1):249–259, 2019.
- 649 [77] Daniel J Felleman and David C Van Essen. Distributed hierarchical processing in the primate
650 cerebral cortex. *Cerebral cortex (New York, NY: 1991)*, 1(1):1–47, 1991.
- 651 [78] Guillaume Hennequin, Yashar Ahmadian, Daniel B Rubin, Máté Lengyel, and Kenneth D
652 Miller. The dynamical regime of sensory cortex: stable dynamics around a single stimulus-
653 tuned attractor account for patterns of noise variability. *Neuron*, 98(4):846–860, 2018.
- 654 [79] Chunyu A Duan, Jeffrey C Erlich, and Carlos D Brody. Requirement of prefrontal and
655 midbrain regions for rapid executive control of behavior in the rat. *Neuron*, 86(6):1491–1503,
656 2015.
- 657 [80] Mark A Beaumont, Wenyang Zhang, and David J Balding. Approximate bayesian computa-
658 tion in population genetics. *Genetics*, 162(4):2025–2035, 2002.
- 659 [81] Paul Marjoram, John Molitor, Vincent Plagnol, and Simon Tavaré. Markov chain monte carlo
660 without likelihoods. *Proceedings of the National Academy of Sciences*, 100(26):15324–15328,
661 2003.

- 662 [82] Lawrence Saul and Michael Jordan. A mean field learning algorithm for unsupervised neural
663 networks. In *Learning in graphical models*, pages 541–554. Springer, 1998.
- 664 [83] Nicholas Metropolis, Arianna W Rosenbluth, Marshall N Rosenbluth, Augusta H Teller, and
665 Edward Teller. Equation of state calculations by fast computing machines. *The journal of
666 chemical physics*, 21(6):1087–1092, 1953.
- 667 [84] W Keith Hastings. Monte carlo sampling methods using markov chains and their applications.
668 1970.
- 669 [85] Mark Girolami and Ben Calderhead. Riemann manifold langevin and hamiltonian monte
670 carlo methods. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*,
671 73(2):123–214, 2011.
- 672 [86] Andrew Golightly and Darren J Wilkinson. Bayesian parameter inference for stochastic bio-
673 chemical network models using particle markov chain monte carlo. *Interface focus*, 1(6):807–
674 820, 2011.
- 675 [87] Dustin Tran, Rajesh Ranganath, and David Blei. Hierarchical implicit models and likelihood-
676 free variational inference. In *Advances in Neural Information Processing Systems*, pages
677 5523–5533, 2017.
- 678 [88] Sean R Bittner, Agostina Palmigiano, Kenneth D Miller, and John P Cunningham. Degener-
679 ate solution networks for theoretical neuroscience. *Computational and Systems Neuroscience
680 Meeting (COSYNE), Lisbon, Portugal*, 2019.
- 681 [89] Sean R Bittner, Alex T Piet, Chunyu A Duan, Agostina Palmigiano, Kenneth D Miller,
682 Carlos D Brody, and John P Cunningham. Examining models in theoretical neuroscience
683 with degenerate solution networks. *Bernstein Conference 2019, Berlin, Germany*, 2019.
- 684 [90] Marcel Nonnenmacher, Pedro J Goncalves, Giacomo Bassetto, Jan-Matthis Lueckmann, and
685 Jakob H Macke. Robust statistical inference for simulation-based models in neuroscience. In
686 *Bernstein Conference 2018, Berlin, Germany*, 2018.
- 687 [91] Deistler Michael, , Pedro J Goncalves, Kaan Oecal, and Jakob H Macke. Statistical infer-
688 ence for analyzing sloppiness in neuroscience models. In *Bernstein Conference 2019, Berlin,
689 Germany*, 2019.

- 690 [92] Jan-Matthis Lueckmann, Pedro J Goncalves, Giacomo Bassetto, Kaan Öcal, Marcel Nonnen-
691 macher, and Jakob H Macke. Flexible statistical inference for mechanistic models of neural
692 dynamics. In *Advances in Neural Information Processing Systems*, pages 1289–1299, 2017.
- 693 [93] Martin J Wainwright, Michael I Jordan, et al. Graphical models, exponential families, and
694 variational inference. *Foundations and Trends® in Machine Learning*, 1(1–2):1–305, 2008.
- 695 [94] Sean R Bittner and John P Cunningham. Approximating exponential family models (not
696 single distributions) with a two-network architecture. *arXiv preprint arXiv:1903.07515*, 2019.
- 697 [95] Johan Karlsson, Milena Anguelova, and Mats Jirstrand. An efficient method for structural
698 identifiability analysis of large dynamic systems. *IFAC Proceedings Volumes*, 45(16):941–946,
699 2012.
- 700 [96] Ricky TQ Chen, Yulia Rubanova, Jesse Bettencourt, and David K Duvenaud. Neural ordinary
701 differential equations. In *Advances in neural information processing systems*, pages 6571–6583,
702 2018.
- 703 [97] Xuechen Li, Ting-Kam Leonard Wong, Ricky TQ Chen, and David Duvenaud. Scalable
704 gradients for stochastic differential equations. *arXiv preprint arXiv:2001.01328*, 2020.
- 705 [98] Andreas Raue, Clemens Kreutz, Thomas Maiwald, Julie Bachmann, Marcel Schilling, Ursula
706 Klingmüller, and Jens Timmer. Structural and practical identifiability analysis of partially
707 observed dynamical models by exploiting the profile likelihood. *Bioinformatics*, 25(15):1923–
708 1929, 2009.
- 709 [99] Dhruva V Raman, James Anderson, and Antonis Papachristodoulou. Delineating parameter
710 unidentifiabilities in complex models. *Physical Review E*, 95(3):032314, 2017.
- 711 [100] Maria Pia Saccomani, Stefania Audoly, and Leontina D’Angiò. Parameter identifiability of
712 nonlinear systems: the role of initial conditions. *Automatica*, 39(4):619–632, 2003.
- 713 [101] George Papamakarios, Eric Nalisnick, Danilo Jimenez Rezende, Shakir Mohamed, and Bal-
714 aji Lakshminarayanan. Normalizing flows for probabilistic modeling and inference. *arXiv
715 preprint arXiv:1912.02762*, 2019.
- 716 [102] Durk P Kingma and Prafulla Dhariwal. Glow: Generative flow with invertible 1x1 convolu-
717 tions. In *Advances in neural information processing systems*, pages 10215–10224, 2018.

- 718 [103] Durk P Kingma, Tim Salimans, Rafal Jozefowicz, Xi Chen, Ilya Sutskever, and Max Welling.
719 Improved variational inference with inverse autoregressive flow. *Advances in neural informa-*
720 *tion processing systems*, 29:4743–4751, 2016.
- 721 [104] Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *Internation-*
722 *al Conference on Learning Representations*, 2015.
- 723 [105] Emmanuel Klinger, Dennis Rickert, and Jan Hasenauer. pyabc: distributed, likelihood-free
724 inference. *Bioinformatics*, 34(20):3591–3593, 2018.
- 725 [106] David S Greenberg, Marcel Nonnenmacher, and Jakob H Macke. Automatic posterior trans-
726 formation for likelihood-free inference. *International Conference on Machine Learning*, 2019.

727 **5 Methods**

728 **5.1 Emergent property inference (EPI)**

729 Determining the combinations of model parameters that can produce observed data or a desired
730 output is a key part of scientific practice. Solving inverse problems is especially important in
731 neuroscience, since we require complex models to describe the complex phenomena of neural com-
732 putations. While much machine learning research has focused on how to find latent structure
733 in large-scale neural datasets, less has focused on inverting theoretical circuit models conditioned
734 upon the emergent phenomena they produce. Here, we introduce a novel method for statistical
735 inference, which finds distributions of parameter solutions that only produce the desired emer-
736 gent property. This method seamlessly handles neural circuit models with stochastic nonlinear
737 dynamical generative processes, which are predominant in theoretical neuroscience.

738 Consider model parameterization \mathbf{z} , which is a collection of scientifically interesting variables that
739 govern the complex simulation of data \mathbf{x} . For example (see Section 3.1), \mathbf{z} may be the electrical
740 conductance parameters of an STG subcircuit, and \mathbf{x} the evolving membrane potentials of the five
741 neurons. In terms of statistical modeling, this circuit model has an intractable likelihood $p(\mathbf{x} | \mathbf{z})$,
742 which is predicated by the stochastic differential equations that define the model. Even so, we do
743 not scientifically reason about how \mathbf{z} governs all of \mathbf{x} , but rather specific phenomena that are a
744 function of the data $f(\mathbf{x}; \mathbf{z})$. In the STG example, $f(\mathbf{x}; \mathbf{z})$ measures hub neuron frequency from the
745 evolution of \mathbf{x} governed by \mathbf{z} . With EPI, we learn distributions of \mathbf{z} that results in an average and
746 variance of $f(\mathbf{x}; \mathbf{z})$, denoted $\boldsymbol{\mu}$ and σ^2 . We refer to the collection of these statistical moments as an
747 emergent property. Such emergent properties \mathcal{X} are defined through choice of $f(\mathbf{x}; \mathbf{z})$ (which may
748 be one or multiple statistics), $\boldsymbol{\mu}$, and σ^2

$$\mathcal{X} : \mathbb{E}_{\mathbf{z}, \mathbf{x}} [f(\mathbf{x}; \mathbf{z})] = \boldsymbol{\mu}, \text{Var}_{\mathbf{z}, \mathbf{x}} [f(\mathbf{x}; \mathbf{z})] = \sigma^2. \quad (11)$$

749 Precisely, the emergent property statistics $f(\mathbf{x}; \mathbf{z})$ must have means $\boldsymbol{\mu}$ and variances σ^2 over the
750 EPI distribution of parameters and stochasticity of the data given the parameters. By defining
751 these means and variances over both levels of stochasticity – the inferred distribution and that of
752 the model – there is a fine degree of control over predictions made by the inferred parameters.

753 In EPI, deep probability distributions are optimized to learn the inferred distribution. In deep
754 probability distributions, a simple random variable $\mathbf{z}_0 \sim q_0(\mathbf{z}_0)$ is mapped deterministically via a
755 sequence of deep neural network layers (g_1, \dots, g_l) parameterized by weights and biases $\boldsymbol{\theta}$ to the

756 support of the distribution of interest:

$$\mathbf{z} = g_{\theta}(\mathbf{z}_0) = g_l(\dots g_1(\mathbf{z}_0)) \sim q_{\theta}(\mathbf{z}). \quad (12)$$

757 Such deep probability distributions embed the inferred distribution in a deep network. Once opti-
758 mized, this deep network representation has remarkably useful properties: fast sampling, probability
759 evaluations, and also first- and second-order probability gradient evaluations.

760 By choosing a neural circuit model, often represented as a system of differential equations, we
761 implicitly define a model likelihood $p(\mathbf{x} | \mathbf{z})$, which may be unknown or intractable for our purposes.
762 Given this model choice and that of an emergent property \mathcal{X} , $q_{\theta}(\mathbf{z})$ is optimized via the neural
763 network parameters θ to find a maximally entropic distribution q_{θ}^* within the deep variational
764 family \mathcal{Q} producing the emergent property \mathcal{X} :

$$q_{\theta}(\mathbf{z} | \mathcal{X}) = q_{\theta}^*(\mathbf{z}) = \operatorname{argmax}_{q_{\theta} \in \mathcal{Q}} H(q_{\theta}(\mathbf{z})) \quad (13)$$
$$\text{s.t. } \mathcal{X} : \mathbb{E}_{\mathbf{z}, \mathbf{x}} [f(\mathbf{x}; \mathbf{z})] = \boldsymbol{\mu}, \operatorname{Var}_{\mathbf{z}, \mathbf{x}} [f(\mathbf{x}; \mathbf{z})] = \boldsymbol{\sigma}^2.$$

765 Entropy is chosen as the normative selection principle to match that of Bayesian inference (see
766 Section 5.1.5). However, a key difference is that variational inference and other Bayesian methods
767 do not constrain the predictions of their inferred parameter distribution. This optimization is
768 executed using the algorithm of Maximum Entropy Flow Networks (MEFNs) [48].

769 In the remainder of Section 5.1, we will explain the finer details and motivation of the EPI method.
770 First, we explain related approaches and what EPI introduces to this domain (Section 5.1.1). Sec-
771 ond, we describe the special class of deep probability distributions used in EPI called normalizing
772 flows (Section 5.1.2). Next, we explain the constrained optimization technique used to solve Equa-
773 tion 13 (Section 5.1.3). Then, we demonstrate the details of this optimization in a toy example
774 (Section 5.1.4). Finally, we establish the known relationship between maximum entropy distribu-
775 tions and exponential families (Section 5.1.5), which is used to explain how EPI can be viewed as
776 a form of variational inference (Section 5.1.6).

777 5.1.1 Related approaches

778 When Bayesian inference problems lack conjugacy, scientists use approximate inference methods like
779 variational inference (VI) [82] and Markov chain Monte Carlo (MCMC) [83, 84]. After optimization,
780 variational methods return a parameterized posterior distribution, which we can analyze. Also, the
781 variational approximating distribution class is often chosen such that it permits fast sampling. In

782 contrast MCMC methods only produce samples from the approximated posterior distribution. No
783 parameterized distribution is estimated, and additional samples are always generated with the same
784 sampling complexity. Inference in models defined by systems of differential has been demonstrated
785 with MCMC [85], although this approach requires tractable likelihoods. Advancements have lever-
786 aged structure in stochastic differential equation models to improve likelihood approximations, thus
787 expanding the domain of applicable models [86].

788 Simulation-based inference [68] is model parameter inference in the absence of a tractable likelihood
789 function. The most prevalent approach to simulation-based inference is approximate Bayesian
790 computation [80], in which satisfactory parameter samples are kept from random prior sampling
791 according to a rejection heuristic. The obtained set of parameters do not have a probabilities,
792 and further insight about the model must be gained from examination of the parameter set and
793 their generated activity. Methodological advances to ABC methods have come through the use
794 of Markov chain Monte Carlo (MCMC-ABC) [81] and sequential Monte Carlo (SMC-ABC) [43]
795 sampling techniques. SMC-ABC is considered state-of-the-art ABC, yet this approach still struggles
796 to scale in dimensionality (cf. Fig. 2). Furthermore, once a parameter set has been obtained by
797 SMC-ABC from a finite set of particles, the SMC-ABC algorithm must be run again from scratch
798 with a new population of initialized particles to obtain additional samples.

799 For scientific model analysis, we seek a parameter distribution exhibiting the properties of a well-
800 chosen variational approximation: a parametric form conferring analytic calculations, and trivial
801 sampling time. For this reason, ABC and MCMC techniques are unattractive, since they only
802 produce a set of parameter samples and have unchanging sampling rate. EPI infers parameters
803 in mechanistic models using the MEFN [48] algorithm using a deep variational approximation.
804 The deep neural network of EPI defines the parametric form of the distribution approximation.
805 Furthermore, the EPI distribution is constrained to produce an emergent property. In other words,
806 the summary statistics of the posterior predictive distribution are fixed to have certain first and
807 second moments. EPI optimization is enabled using stochastic gradient techniques in the spirit
808 of likelihood-free variational inference [87]. The analytic relationship between EPI and variational
809 inference is explained in Secton 5.1.6.

810 We note that, during our preparation and early presentation of this work [88, 89], another work
811 has arisen with broadly similar goals: bringing statistical inference to mechanistic models of neural
812 circuits ([45, 90, 91]). We are encouraged by this general problem being recognized by others in the
813 community, and we emphasize that these works offer complementary neuroscientific contributions

814 (different theoretical models of focus) and use different technical methodologies (ours is built on
815 our prior work [48], theirs similarly [92]).

816 The method EPI differs from SNPE in some key ways. SNPE belongs to a “sequential” class
817 of recently developed simulation-based inference methods in which two neural networks are used
818 for posterior inference. This first neural network is a deep probability distribution (normalizing
819 flow) used to estimate the posterior $p(\mathbf{z} | \mathbf{x})$ (SNPE) or the likelihood $p(\mathbf{x} | \mathbf{z})$ (sequential neural
820 likelihood (SNL [46])). A recent advance uses an unconstrained neural network to estimate the
821 likelihood ratio (sequential neural ratio estimation (SNRE [47])). In SNL and SNRE, MCMC
822 sampling techniques are used to obtain samples from the approximated posterior. This contrasts
823 with EPI and SNPE, which use deep probability distributions to model parameters, which facilitates
824 immediate measurements of sample probability, gradient, or Hessian for system analysis. The
825 second neural network in this sequential class of methods is the amortizer. This unconstrained
826 deep network maps data \mathbf{x} (or statistics $f(\mathbf{x}; \mathbf{z})$) or model parameters \mathbf{z} to the weights and biases of
827 the first neural network. These methods are optimized on a conditional density (or ratio) estimation
828 objective. The data used to optimize this objective are generated via an adaptive procedure, in
829 which training data pairs $(\mathbf{x}_i, \mathbf{z}_i)$ become sequentially closer to the true data and posterior.

830 The approximating fidelity of the deep probability distribution in sequential approaches is opti-
831 mized to generalize across the training distribution of the conditioning variable. This generalization
832 property of the sequential methods can reduce the accuracy at the singular posterior of interest.
833 Whereas in EPI, the entire expressivity of the deep probability distribution is dedicated to learning
834 a single distribution as well as possible. Amortization is not possible in EPI, since EPI learns
835 an exponential family distribution parameterized by its mean (see Section 5.1.5). Since EPI dis-
836 tributions are defined by the mean $\boldsymbol{\mu}$ of their statistics, there is the well-known inverse mapping
837 problem of exponential families [93] that prohibits an amortization based approach. However, we
838 have shown that the same two-network architecture of the sequential simulation-based inference
839 methods can be used for amortized inference in intractable exponential family posteriors using their
840 natural parameterization [94].

841 Finally, one important differentiating factor between EPI and sequential simulation-based infer-
842 ence methods is that EPI leverages gradients $\nabla_{\mathbf{z}} f(\mathbf{x}; \mathbf{z})$ during optimization. These gradients can
843 improve convergence time and scalability, as we have shown on an example conditioning low-rank
844 RNN connectivity on the property of stable amplification (see Section 3.3). With EPI, we prove
845 out the suggestion that a deep inference technique can improve efficiency by leveraging these model

846 gradients when they are tractable. Sequential simulation-based inference techniques may be better
 847 suited for scientific problems where $\nabla_{\mathbf{z}} f(\mathbf{x}; \mathbf{z})$ is intractable or unavailable: when there is a non-
 848 differentiable model or it requires lengthy simulations. However, the sequential simulation-based
 849 inference techniques cannot constrain the predictions of the inferred distribution in the manner of
 850 EPI.

851 Structural identifiability analysis involves the measurement of sensitivity and unidentifiabilities in
 852 natural models. Around a point, one can measure the Jacobian. One approach that scales well is
 853 EAR [95]. A popular efficient approach for systems of ODEs has been neural ODE adjoint [96] and
 854 its stochastic adaptation [97]. Casting identifiability as a statistical estimation problem, the profile
 855 likelihood can assess via iterated optimization while holding parameters fixed [98]. An exciting
 856 recent method is capable of recovering the functional form of such unidentifiabilities away from a
 857 point by following degenerate dimensions of the fisher information matrix [99]. Global structural
 858 non-identifiabilities can be found for models with polynomial or rational dynamics equations using
 859 DAISY [100]. With EPI, we have all the benefits given by a statistical inference method plus the
 860 ability to query the first- or second-order gradient of the probability of the inferred distribution at
 861 any chosen parameter value. The second-order gradient of the log probability (the Hessian), which
 862 is directly afforded by EPI distributions, produces salient information about parametric sensitivity
 863 of the emergent property. For example, the eigenvector with most negative eigenvalue of the Hessian
 864 shows parametric combinations away from a parameter choice that decrease the in EPI distribution
 865 probability the fastest. We refer to this eigenvector as the sensitivity dimension, and it is used to
 866 generate scientific insight about a model of superior colliculus connectivity (see Section 3.5).

867 **5.1.2 Deep probability distributions and normalizing flows**

868 Deep probability distributions are comprised of multiple layers of fully connected neural networks
 869 (Equation 12). When each neural network layer is restricted to be a bijective function, the sample
 870 density can be calculated using the change of variables formula at each layer of the network. For
 871 $\mathbf{z}_i = g_i(\mathbf{z}_{i-1})$,

$$p(\mathbf{z}_i) = p(g_i^{-1}(\mathbf{z}_i)) \left| \det \frac{\partial g_i^{-1}(\mathbf{z}_i)}{\partial \mathbf{z}_i} \right| = p(\mathbf{z}_{i-1}) \left| \det \frac{\partial g_i(\mathbf{z}_{i-1})}{\partial \mathbf{z}_{i-1}} \right|^{-1}. \quad (14)$$

872 However, this computation has cubic complexity in dimensionality for fully connected layers. By
 873 restricting our layers to normalizing flows [49, 101] – bijective functions with fast log determinant
 874 Jacobian computations, which confer a fast calculation of the sample log probability. Fast log

probability calculation confers efficient optimization of the maximum entropy objective (see Section 5.1.3). We use the Real NVP [60] normalizing flow class, because its coupling architecture confers both fast sampling (forward) and fast log probability evaluation (backward). Fast probability evaluation in turn facilitates fast gradient and Hessian evaluation of log probability throughout parameter space. Glow permutations were used in between coupling stages [102]. This is in contrast to autoregressive architectures [61, 103], in which only one of the forward or backward passes can be efficient. In this work, normalizing flows are used as flexible posterior approximations $q_{\theta}(\mathbf{z})$ having weights and biases θ . We specify the architecture used in each application by the number of Real-NVP affine coupling stages, and the number of neural network layers and units per layer of the conditioning functions.

5.1.3 Augmented Lagrangian optimization

To optimize $q_{\theta}(\mathbf{z})$ in Equation 13, the constrained maximum entropy optimization is executed using the augmented Lagrangian method. The following objective is minimized:

$$L(\theta; \eta_{\text{opt}}, c) = -H(q_{\theta}) + \eta_{\text{opt}}^{\top} R(\theta) + \frac{c}{2} \|R(\theta)\|^2 \quad (15)$$

where average constraint violations $R(\theta) = \mathbb{E}_{\mathbf{z} \sim q_{\theta}} [\mathbb{E}_{\mathbf{x} \sim p(\mathbf{x}|\mathbf{z})} [T(\mathbf{x}; \mathbf{z}) - \mu_{\text{opt}}]]$, $\eta_{\text{opt}} \in \mathbb{R}^m$ are the Lagrange multipliers where $m = |\mu_{\text{opt}}| = |T(\mathbf{x}; \mathbf{z})| = 2|f(\mathbf{x}; \mathbf{z})|$, and c is the penalty coefficient. The sufficient statistics $T(\mathbf{x}; \mathbf{z})$ and mean parameter μ_{opt} are determined by the means μ and variances σ^2 of emergent property statistics $f(\mathbf{x}; \mathbf{z})$ defined in Equation 13 (see Section 5.1.6). Specifically, $T(\mathbf{x}; \mathbf{z})$ is a concatenation of the first and second moments, μ_{opt} is a concatenation of μ and σ^2 (see section 5.1.5), and the Lagrange multipliers are closely related to the natural parameters η of exponential families (see Section 5.1.5). Weights and biases θ of the deep probability distribution are optimized according to Equation 15 using the Adam optimizer with learning rate 10^{-3} [104].

The gradient with respect to entropy $H(q_{\theta}(\mathbf{z}))$ can be expressed using the reparameterization trick as an expectation of the negative log density of parameter samples \mathbf{z} over the randomness in the parameterless initial distribution $q_0(\mathbf{z}_0)$:

$$H(q_{\theta}(\mathbf{z})) = \int -q_{\theta}(\mathbf{z}) \log(q_{\theta}(\mathbf{z})) d\mathbf{z} = \mathbb{E}_{\mathbf{z} \sim q_{\theta}} [-\log(q_{\theta}(\mathbf{z}))] = \mathbb{E}_{\mathbf{z}_0 \sim q_0} [-\log(q_{\theta}(g_{\theta}(\mathbf{z}_0)))]. \quad (16)$$

Thus, the gradient of the entropy of the deep probability distribution can be estimated as an average with respect to the base distribution \mathbf{z}_0 :

$$\nabla_{\theta} H(q_{\theta}(\mathbf{z})) = \mathbb{E}_{\mathbf{z}_0 \sim q_0} [-\nabla_{\theta} \log(q_{\theta}(g_{\theta}(\mathbf{z}_0)))]. \quad (17)$$

901 The lagrangian parameters η_{opt} are initialized to zero and adapted following each augmented
902 Lagrangian epoch, which is a period of optimization with fixed (η_{opt}, c) for a given number of
903 stochastic optimization iterations. A low value of c is used initially, and conditionally increased
904 after each epoch based on constraint error reduction. The penalty coefficient is updated based
905 on the result of a hypothesis test regarding the reduction in constraint violation. The p-value of
906 $\mathbb{E}[|R(\theta_{k+1})|] > \gamma \mathbb{E}[|R(\theta_k)|]$ is computed, and c_{k+1} is updated to βc_k with probability $1 - p$. The
907 other update rule is $\eta_{\text{opt},k+1} = \eta_{\text{opt},k} + c_k \frac{1}{n} \sum_{i=1}^n (T(\mathbf{x}^{(i)}) - \mu_{\text{opt}})$ given a batch size n . Throughout
908 the study, $\gamma = 0.25$, while β was chosen to be either 2 or 4. The batch size of EPI also varied
909 according to application.

910 The intention is that c and η_{opt} start at values encouraging entropic growth early in optimization.
911 With each training epoch in which the update rule for c is invoked by unsatisfactory constraint
912 error reduction, the constraint satisfaction terms are increasingly weighted, resulting in a decreased
913 entropy. This encourages the discovery of suitable regions of parameter space, and the subsequent
914 refinement of the distribution to produce the emergent property (see example in Section 5.1.4). The
915 momentum parameters of the Adam optimizer are reset at the end of each augmented Lagrangian
916 epoch.

917 Rather than starting optimization from some θ drawn from a randomized distribution, we found
918 that initializing $q_{\theta}(\mathbf{z})$ to approximate an isotropic Gaussian distribution conferred more stable, con-
919 sistent optimization. The parameters of the Gaussian initialization were chosen on an application-
920 specific basis. Throughout the study, we chose isotropic Gaussian initializations with mean μ_{init}
921 at the center of the distribution support and some standard deviation σ_{init} , except for one case,
922 where an initialization informed by random search was used (see Section 5.2.1).

923 To assess whether the EPI distribution $q_{\theta}(\mathbf{z})$ produces the emergent property, we assess whether
924 each individual constraint on the means and variances of $f(\mathbf{x}; \mathbf{z})$ is satisfied. We consider the EPI
925 to have converged when a null hypothesis test of constraint violations $R(\theta)_i$ being zero is accepted
926 for all constraints $i \in \{1, \dots, m\}$ at a significance threshold $\alpha = 0.05$. This significance threshold is
927 adjusted through Bonferroni correction according to the number of constraints m . The p-values for
928 each constraint are calculated according to a two-tailed nonparametric test, where 200 estimations
929 of the sample mean $R(\theta)^i$ are made using N_{test} samples of $\mathbf{z} \sim q_{\theta}(\mathbf{z})$ at the end of the augmented
930 Lagrangian epoch.

931 When assessing the suitability of EPI for a particular modeling question, there are some important
932 technical considerations. First and foremost, as in any optimization problem, the defined emergent

933 property should always be appropriately conditioned (constraints should not have wildly different
 934 units). Furthermore, if the program is underconstrained (not enough constraints), the distribution
 935 grows (in entropy) unstably unless mapped to a finite support. If overconstrained, there is no pa-
 936 rameter set producing the emergent property, and EPI optimization will fail (appropriately). Next,
 937 one should consider the computational cost of the gradient calculations. In the best circumstance,
 938 there is a simple, closed form expression (e.g. Section 5.2.2) for the emergent property statistic
 939 given the model parameters. On the other end of the spectrum, many forward simulation iterations
 940 may be required before a high quality measurement of the emergent property statistic is available
 941 (e.g. Section 5.2.1). In such cases, backpropagating gradients through the SDE evolution will be
 942 expensive.

943 5.1.4 Example: 2D LDS

944 To gain intuition for EPI, consider a two-dimensional linear dynamical system (2D LDS) model
 945 (Fig. S1A):

$$\tau \frac{d\mathbf{x}}{dt} = A\mathbf{x} \quad (18)$$

946 with

$$A = \begin{bmatrix} a_1 & a_2 \\ a_3 & a_4 \end{bmatrix}. \quad (19)$$

947 To run EPI with the dynamics matrix elements as the free parameters $\mathbf{z} = [a_1, a_2, a_3, a_4]$ (fix-
 948 ing $\tau = 1$), the emergent property statistics $T(\mathbf{x})$ were chosen to contain the first and second
 949 moments of the oscillatory frequency, $\frac{\text{imag}(\lambda_1)}{2\pi}$, and the growth/decay factor, $\text{real}(\lambda_1)$, of the oscil-
 950 lating system. λ_1 is the eigenvalue of greatest real part when the imaginary component is zero, and
 951 alternatively of positive imaginary component when the eigenvalues are complex conjugate pairs.
 952 To learn the distribution of real entries of A that produce a band of oscillating systems around
 953 1Hz, we formalized this emergent property as $\text{real}(\lambda_1)$ having mean zero with variance 0.25^2 , and
 954 the oscillation frequency $2\pi\text{imag}(\lambda_1)$ having mean $\omega = 1$ Hz with variance $(0.1\text{Hz})^2$.

$$\mathbb{E}[T(\mathbf{x})] \triangleq \mathbb{E} \begin{bmatrix} \text{real}(\lambda_1) \\ \text{imag}(\lambda_1) \\ (\text{real}(\lambda_1) - 0)^2 \\ (\text{imag}(\lambda_1) - 2\pi\omega)^2 \end{bmatrix} = \begin{bmatrix} 0.0 \\ 2\pi\omega \\ 0.25^2 \\ (2\pi 0.1)^2 \end{bmatrix} \triangleq \boldsymbol{\mu}. \quad (20)$$

955

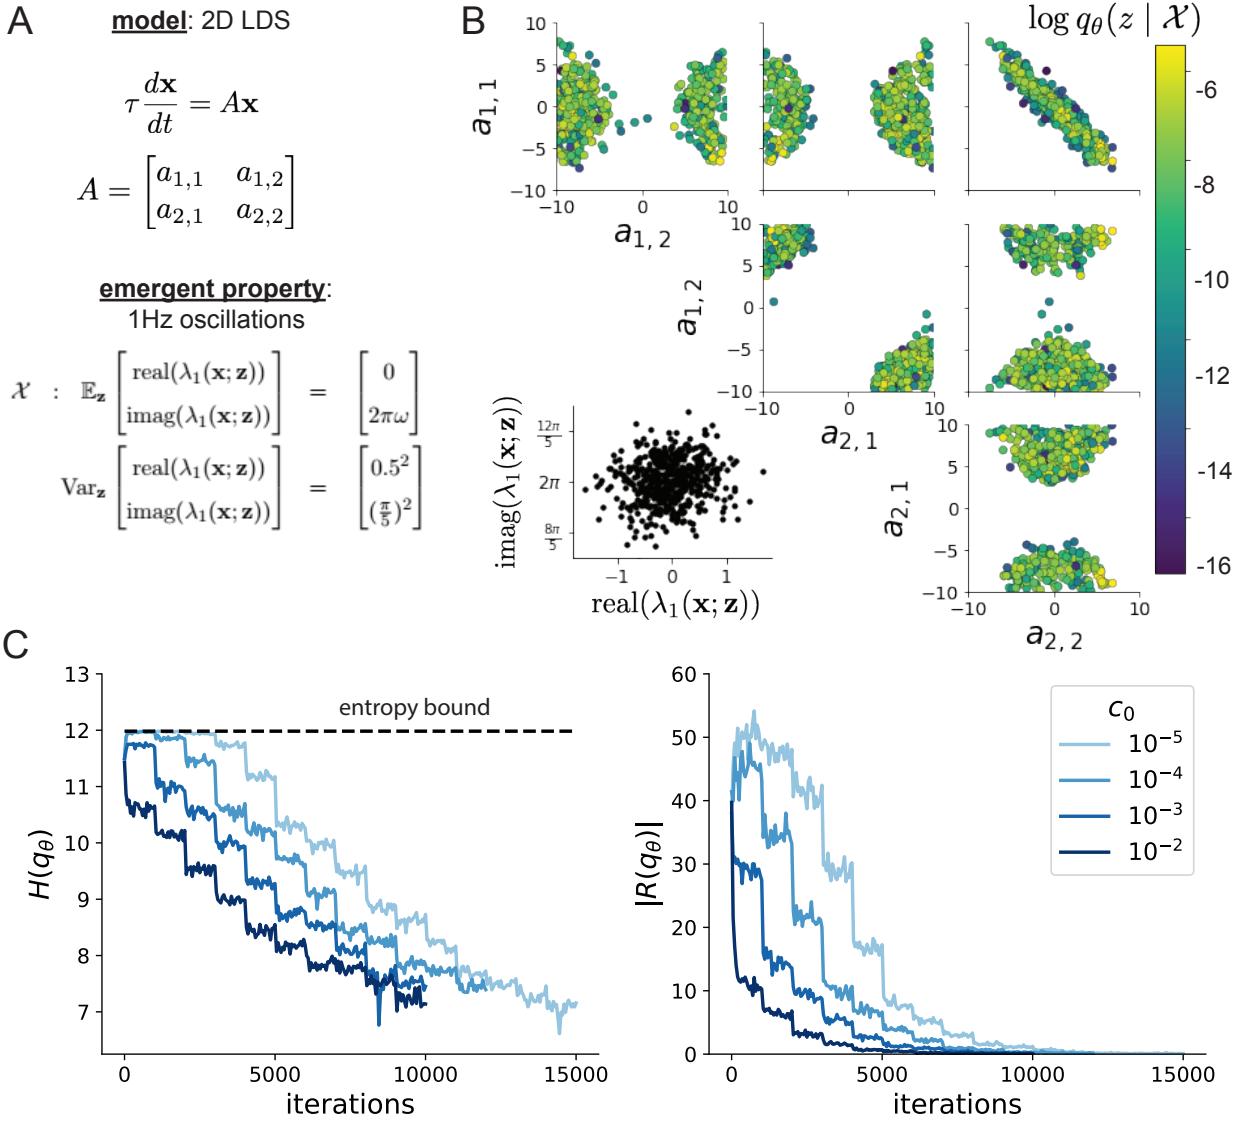


Figure 6: (LDS1): **A.** Two-dimensional linear dynamical system model, where real entries of the dynamics matrix A are the parameters. **B.** The EPI distribution for a two-dimensional linear dynamical system with $\tau = 1$ that produces an average of 1Hz oscillations with some small amount of variance. Dashed lines indicate the parameter axes. **C.** Entropy throughout the optimization. At the beginning of each augmented Lagrangian epoch (2,000 iterations), the entropy dipped due to the shifted optimization manifold where emergent property constraint satisfaction is increasingly weighted. **D.** Emergent property moments throughout optimization. At the beginning of each augmented Lagrangian epoch, the emergent property moments adjust closer to their constraints.

956 Unlike the models we presented in the main text, this model admits an analytical form for the
 957 mean emergent property statistics given parameter \mathbf{z} , since the eigenvalues can be calculated using
 958 the quadratic formula:

$$\lambda = \frac{\left(\frac{a_1+a_4}{\tau}\right) \pm \sqrt{\left(\frac{a_1+a_4}{\tau}\right)^2 + 4\left(\frac{a_2a_3-a_1a_4}{\tau}\right)}}{2}. \quad (21)$$

959 Importantly, even though $\mathbb{E}_{\mathbf{x} \sim p(\mathbf{x}|\mathbf{z})}[T(\mathbf{x})]$ is calculable directly via a closed form function and
 960 does not require simulation, we cannot derive the distribution q_{θ}^* directly. This fact is due to the
 961 formally hard problem of the backward mapping: finding the natural parameters η from the mean
 962 parameters μ of an exponential family distribution [93]. Instead, we used EPI to approximate this
 963 distribution (Fig. S1B). We used a real-NVP normalizing flow architecture with four masks, two
 964 neural network layers of 15 units per mask, with batch normalization momentum 0.99, mapped
 965 onto a support of $z_i \in [-10, 10]$. (see Section 5.1.2).

966 Even this relatively simple system has nontrivial (though intuitively sensible) structure in the
 967 parameter distribution. To validate our method, we analytically derived the contours of the prob-
 968 ability density from the emergent property statistics and values. In the a_1 - a_4 plane, the black
 969 line at $\text{real}(\lambda_1) = \frac{a_1+a_4}{2} = 0$, dotted black line at the standard deviation $\text{real}(\lambda_1) = \frac{a_1+a_4}{2} \pm 0.25$,
 970 and the dotted gray line at twice the standard deviation $\text{real}(\lambda_1) = \frac{a_1+a_4}{2} \pm 0.5$ follow the contour
 971 of probability density of the samples (Fig. S2A). The distribution precisely reflects the desired
 972 statistical constraints and model degeneracy in the sum of a_1 and a_4 . Intuitively, the parameters
 973 equivalent with respect to emergent property statistic $\text{real}(\lambda_1)$ have similar log densities.

974 To explain the bimodality of the EPI distribution, we examined the imaginary component of λ_1 .
 975 When $\text{real}(\lambda_1) = \frac{a_1+a_4}{2} = 0$, we have

$$\text{imag}(\lambda_1) = \begin{cases} \sqrt{\frac{a_1a_4-a_2a_3}{\tau}}, & \text{if } a_1a_4 < a_2a_3 \\ 0 & \text{otherwise} \end{cases}. \quad (22)$$

976 When $\tau = 1$ and $a_1a_4 > a_2a_3$ (center of distribution above), we have the following equation for the
 977 other two dimensions:

$$\text{imag}(\lambda_1)^2 = a_1a_4 - a_2a_3 \quad (23)$$

978 Since we constrained $\mathbb{E}_{\mathbf{z} \sim q_{\theta}}[\text{imag}(\lambda)] = 2\pi$ (with $\omega = 1$), we can plot contours of the equation
 979 $\text{imag}(\lambda_1)^2 = a_1a_4 - a_2a_3 = (2\pi)^2$ for various a_1a_4 (Fig. S2B). With $\sigma_{1,4} = \mathbb{E}_{\mathbf{z} \sim q_{\theta}}(|a_1a_4 - E_{q_{\theta}}[a_1a_4]|)$,
 980 we show the contours as $a_1a_4 = 0$ (black), $a_1a_4 = -\sigma_{1,4}$ (black dotted), and $a_1a_4 = -2\sigma_{1,4}$ (grey
 981 dotted). This validates the curved structure of the inferred distribution learned through EPI. We

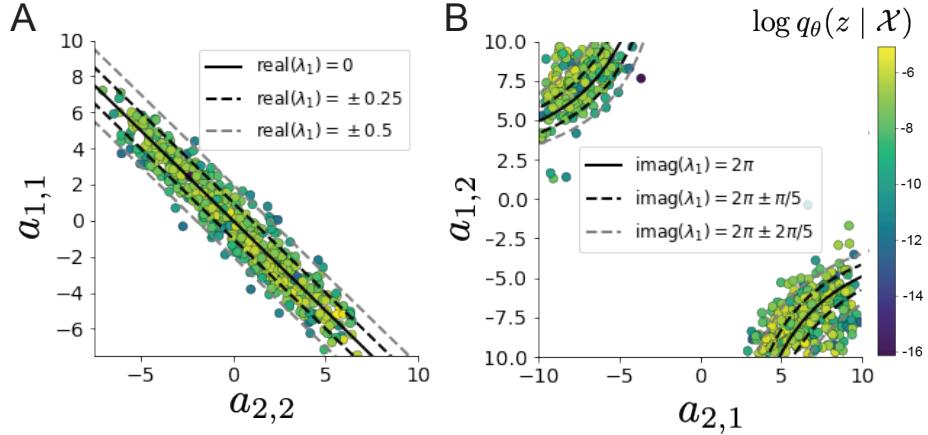


Figure 7: (LDS2): **A.** Probability contours in the a_1 - a_4 plane were derived from the relationship to emergent property statistic of growth/decay factor $\text{real}(\lambda_1)$. **B.** Probability contours in the a_2 - a_3 plane were derived from the emergent property statistic of oscillation frequency $2\pi\text{imag}(\lambda_1)$.

982 took steps in negative standard deviation of a_1a_4 (dotted and gray lines), since there are few positive
 983 values a_1a_4 in the learned distribution. Subtler combinations of model and emergent property will
 984 have more complexity, further motivating the use of EPI for understanding these systems. As we
 985 expect, the distribution results in samples of two-dimensional linear systems oscillating near 1Hz
 986 (Fig. S3).

987 5.1.5 Maximum entropy distributions and exponential families

988 EPI is a maximum entropy distribution, which have fundamental links to exponential family dis-
 989 tributions. A maximum entropy distribution of form:

$$p^*(\mathbf{z}) = \underset{p \in \mathcal{P}}{\operatorname{argmax}} H(p(\mathbf{z})) \quad (24)$$

s.t. $\mathbb{E}_{\mathbf{z} \sim p} [T(\mathbf{z})] = \boldsymbol{\mu}_{\text{opt}}$.

990 will have probability density in the exponential family:

$$p^*(\mathbf{z}) \propto \exp(\boldsymbol{\eta}^\top T(\mathbf{z})). \quad (25)$$

991 The mappings between the mean parameterization $\boldsymbol{\mu}_{\text{opt}}$ and the natural parameterization $\boldsymbol{\eta}$ are
 992 formally hard to identify except in special cases [93].

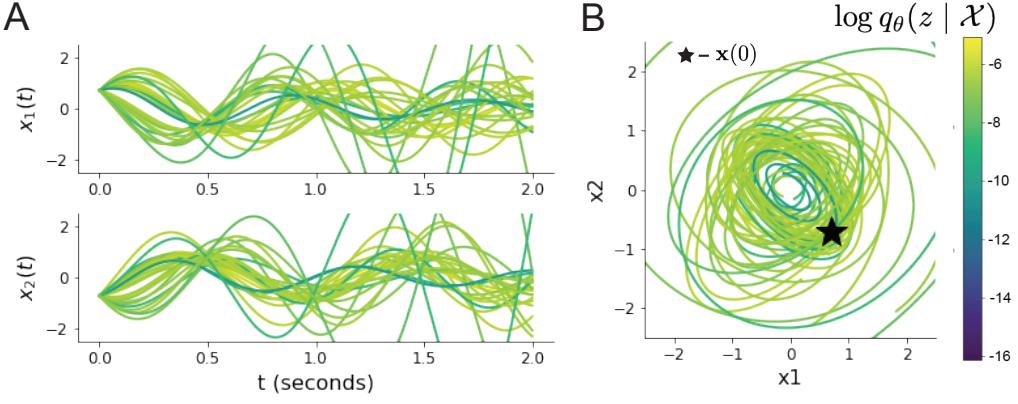


Figure 8: (LDS3): Sampled dynamical systems $\mathbf{z} \sim q_\theta(\mathbf{z})$ and their simulated activity from $\mathbf{x}(0) = [\frac{\sqrt{2}}{2}, -\frac{\sqrt{2}}{2}]$ colored by log probability. **A.** Each dimension of the simulated trajectories throughout time. **B.** The simulated trajectories in phase space.

993 In EPI, emergent properties are defined as statistics having a fixed mean and variance as in Equation
994 4. The variance constraint is a second moment constraint on $f(\mathbf{x}; \mathbf{z})$

$$\text{Var}_{\mathbf{z}, \mathbf{x}} [f(\mathbf{x}; \mathbf{z})] = \mathbb{E}_{\mathbf{z}, \mathbf{x}} \left[(f(\mathbf{x}; \mathbf{z}) - \boldsymbol{\mu})^2 \right] \quad (26)$$

995 As a general maximum entropy distribution (Equation 24), the sufficient statistics vector contains
996 both first and second order moments of $f(\mathbf{x}; \mathbf{z})$

$$T(\mathbf{x}; \mathbf{z}) = \begin{bmatrix} f(\mathbf{x}; \mathbf{z}) \\ (f(\mathbf{x}; \mathbf{z}) - \boldsymbol{\mu})^2 \end{bmatrix}, \quad (27)$$

997 which are constrained to the chosen means and variances

$$\boldsymbol{\mu}_{\text{opt}} = \begin{bmatrix} \boldsymbol{\mu} \\ \sigma^2 \end{bmatrix}. \quad (28)$$

998 5.1.6 EPI as variational inference

999 In Bayesian inference a prior belief about model parameters \mathbf{z} is stated in a prior distribution $p(\mathbf{z})$,
1000 and the statistical model capturing the effect of \mathbf{z} on observed data points \mathbf{x} is formalized in the
1001 likelihood distribution $p(\mathbf{x} | \mathbf{z})$. In Bayesian inference, we obtain a posterior distribution $p(\mathbf{z} | \mathbf{x})$,
1002 which captures how the data inform our knowledge of model parameters using Bayes' rule:

$$p(\mathbf{z} | \mathbf{x}) = \frac{p(\mathbf{x} | \mathbf{z})p(\mathbf{z})}{p(\mathbf{x})}. \quad (29)$$

1003 The posterior distribution is analytically available when the prior is conjugate with the likelihood.
 1004 However, conjugacy is rare in practice, and alternative methods, such as variational inference [82],
 1005 are utilized.

1006 In variational inference, a posterior approximation q_{θ}^* is chosen from within some variational family
 1007 \mathcal{Q}

$$q_{\theta}^*(\mathbf{z}) = \operatorname{argmin}_{q_{\theta} \in \mathcal{Q}} KL(q_{\theta}(\mathbf{z}) \parallel p(\mathbf{z} \mid \mathbf{x})). \quad (30)$$

1008 The KL divergence can be written in terms of entropy of the variational approximation:

$$KL(q_{\theta}(\mathbf{z}) \parallel p(\mathbf{z} \mid \mathbf{x})) = \mathbb{E}_{\mathbf{z} \sim q_{\theta}} [\log(q_{\theta}(\mathbf{z}))] - \mathbb{E}_{\mathbf{z} \sim q_{\theta}} [\log(p(\mathbf{z} \mid \mathbf{x}))] \quad (31)$$

1009

$$= -H(q_{\theta}) - \mathbb{E}_{\mathbf{z} \sim q_{\theta}} [\log(p(\mathbf{x} \mid \mathbf{z})) + \log(p(\mathbf{z})) - \log(p(\mathbf{x}))] \quad (32)$$

1010 Since the marginal distribution of the data $p(\mathbf{x})$ (or ‘‘evidence’’) is independent of θ , variational
 1011 inference is executed by optimizing the remaining expression. This is usually framed as maximizing
 1012 the evidence lower bound (ELBO)

$$\operatorname{argmin}_{q_{\theta} \in \mathcal{Q}} KL(q_{\theta} \parallel p(\mathbf{z} \mid \mathbf{x})) = \operatorname{argmax}_{q_{\theta} \in \mathcal{Q}} H(q_{\theta}) + \mathbb{E}_{\mathbf{z} \sim q_{\theta}} [\log(p(\mathbf{x} \mid \mathbf{z})) + \log(p(\mathbf{z}))]. \quad (33)$$

1013 Now, consider the setting where we have chosen a uniform prior, and stipulate a mean-field gaussian
 1014 likelihood on a chosen statistic of the data $f(\mathbf{x}; \mathbf{z})$

$$p(\mathbf{x} \mid \mathbf{z}) = \mathcal{N}(f(\mathbf{x}; \mathbf{z}) \mid \boldsymbol{\mu}_f, \Sigma_f), \quad (34)$$

1015 where $\Sigma_f = \operatorname{diag}(\sigma_f^2)$. The log likelihood is then proportional to a dot product of the natural
 1016 parameter of this mean-field gaussian distribution and the first and second moment statistics.

$$\log p(\mathbf{x} \mid \mathbf{z}) \propto \boldsymbol{\eta}_f^\top T(\mathbf{x}, \mathbf{z}), \quad (35)$$

1017 where

$$\boldsymbol{\eta}_f = \begin{bmatrix} \frac{\boldsymbol{\mu}_f}{\sigma_f^2} \\ \frac{-1}{2\sigma_f^2} \end{bmatrix}, \text{ and} \quad (36)$$

1018

$$T(\mathbf{x}; \mathbf{z}) = \begin{bmatrix} f(\mathbf{x}; \mathbf{z}) \\ (f(\mathbf{x}; \mathbf{z}) - \boldsymbol{\mu}_f)^2 \end{bmatrix}. \quad (37)$$

1019 The variational objective is then

$$\operatorname{argmax}_{q_{\theta} \in \mathcal{Q}} H(q_{\theta}) + \boldsymbol{\eta}_f^\top \mathbb{E}_{\mathbf{z} \sim q_{\theta}} [T(\mathbf{x}; \mathbf{z})] \quad (38)$$

1020 Comparing this to the Lagrangian objective (without augmentation) of EPI, we see they are the
 1021 same

$$\begin{aligned} q_{\theta}^*(\mathbf{z}) &= \underset{q_{\theta} \in Q}{\operatorname{argmin}} -H(q_{\theta}) + \boldsymbol{\eta}_{\text{opt}}^\top (\mathbb{E}_{\mathbf{z}, \mathbf{x}} [T(\mathbf{x}; \mathbf{z})] - \boldsymbol{\mu}_{\text{opt}}) \\ &= \underset{q_{\theta} \in Q}{\operatorname{argmin}} -H(q_{\theta}) + \boldsymbol{\eta}_{\text{opt}}^\top \mathbb{E}_{\mathbf{z}, \mathbf{x}} [T(\mathbf{x}; \mathbf{z})]. \end{aligned} \quad (39)$$

1022 where $T(\mathbf{x}; \mathbf{z})$ consists of the first and second moments of the emergent property statistic $f(\mathbf{x}; \mathbf{z})$
 1023 (Equation 27). Thus, EPI is implicitly executing variational inference with a uniform prior and a
 1024 mean-field gaussian likelihood on the emergent property statistics. The mean and variances of the
 1025 mean-field gaussian likelihood are predicated by $\boldsymbol{\eta}_{\text{opt}}$ (Equations 36 and 38), which is adapted after
 1026 each EPI optimization epoch based on \mathcal{X} (see Section 5.1.3). In EPI, the inferred distribution is
 1027 not conditioned on a finite dataset as in variational inference, but rather the emergent property
 1028 \mathcal{X} dictates the likelihood parameterization such that the inferred distribution will produce the
 1029 emergent property. As a note, we could not simply choose $\boldsymbol{\mu}_f$ and $\boldsymbol{\sigma}_f$ directly from the outset, since
 1030 we do not know which of these choices will produce the emergent property \mathcal{X} , which necessitates
 1031 the EPI optimization routine that adapts $\boldsymbol{\eta}_{\text{opt}}$. Accordingly, we replace the notation of $p(\mathbf{z} | \mathbf{x})$
 1032 with $p(\mathbf{z} | \mathcal{X})$ conceptualizing an inferred distribution that obeys emergent property \mathcal{X} (see Section
 1033 5.1).

1034 5.2 Theoretical models

1035 In this study, we used emergent property inference to examine several theoretical models of com-
 1036 putation. Here, we provide the details of each model and the related analyses.

1037 5.2.1 Stomatogastric ganglion

1038 We analyze how the parameters $\mathbf{z} = [g_{\text{el}}, g_{\text{synA}}]$ govern the emergent phenomena of intermediate
 1039 hub frequency in a model of the stomatogastric ganglion (STG) [51] shown in Figure 1A with
 1040 activity $\mathbf{x} = [x_{\text{f1}}, x_{\text{f2}}, x_{\text{hub}}, x_{\text{s1}}, x_{\text{s2}}]$, using the same hyperparameter choices as Gutierrez et al.
 1041 Each neuron's membrane potential $x_{\alpha}(t)$ for $\alpha \in \{\text{f1}, \text{f2}, \text{hub}, \text{s1}, \text{s2}\}$ is the solution of the following
 1042 stochastic differential equation:

$$C_m \frac{dx_{\alpha}}{dt} = -[h_{\text{leak}}(\mathbf{x}; \mathbf{z}) + h_{Ca}(\mathbf{x}; \mathbf{z}) + h_K(\mathbf{x}; \mathbf{z}) + h_{hyp}(\mathbf{x}; \mathbf{z}) + h_{elec}(\mathbf{x}; \mathbf{z}) + h_{syn}(\mathbf{x}; \mathbf{z})] + dB. \quad (40)$$

1043 The input current of each neuron is the sum of the leak, calcium, potassium, hyperpolarization,
 1044 electrical and synaptic currents as well as gaussian noise dB . Each current component is a function

1045 of all membrane potentials and the conductance parameters \mathbf{z} .

1046 The capacitance of the cell membrane was set to $C_m = 1nF$. Specifically, the currents are the
 1047 difference in the neuron's membrane potential and that current type's reversal potential multiplied
 1048 by a conductance:

$$1049 \quad h_{leak}(\mathbf{x}; \mathbf{z}) = g_{leak}(x_\alpha - V_{leak}) \quad (41)$$

$$1050 \quad h_{elec}(\mathbf{x}; \mathbf{z}) = g_{el}(x_\alpha^{post} - x_\alpha^{pre}) \quad (42)$$

$$1051 \quad h_{syn}(\mathbf{x}; \mathbf{z}) = g_{syn}S_\infty^{pre}(x_\alpha^{post} - V_{syn}) \quad (43)$$

$$1052 \quad h_{Ca}(\mathbf{x}; \mathbf{z}) = g_{Ca}M_\infty(x_\alpha - V_{Ca}) \quad (44)$$

$$1053 \quad h_K(\mathbf{x}; \mathbf{z}) = g_KN(x_\alpha - V_K) \quad (45)$$

$$1054 \quad h_{hyp}(\mathbf{x}; \mathbf{z}) = g_hH(x_\alpha - V_{hyp}). \quad (46)$$

1054 The reversal potentials were set to $V_{leak} = -40mV$, $V_{Ca} = 100mV$, $V_K = -80mV$, $V_{hyp} = -20mV$,
 1055 and $V_{syn} = -75mV$. The other conductance parameters were fixed to $g_{leak} = 1 \times 10^{-4}\mu S$, g_{Ca} ,
 1056 g_K , and g_{hyp} had different values based on fast, intermediate (hub) or slow neuron. The fast
 1057 conductances had values $g_{Ca} = 1.9 \times 10^{-2}$, $g_K = 3.9 \times 10^{-2}$, and $g_{hyp} = 2.5 \times 10^{-2}$. The intermediate
 1058 conductances had values $g_{Ca} = 1.7 \times 10^{-2}$, $g_K = 1.9 \times 10^{-2}$, and $g_{hyp} = 8.0 \times 10^{-3}$. Finally, the
 1059 slow conductances had values $g_{Ca} = 8.5 \times 10^{-3}$, $g_K = 1.5 \times 10^{-2}$, and $g_{hyp} = 1.0 \times 10^{-2}$.

1060 Furthermore, the Calcium, Potassium, and hyperpolarization channels have time-dependent gating
 1061 dynamics dependent on steady-state gating variables M_∞ , N_∞ and H_∞ , respectively:

$$1062 \quad M_\infty = 0.5 \left(1 + \tanh \left(\frac{x_\alpha - v_1}{v_2} \right) \right) \quad (47)$$

$$1063 \quad \frac{dN}{dt} = \lambda_N(N_\infty - N) \quad (48)$$

$$1064 \quad N_\infty = 0.5 \left(1 + \tanh \left(\frac{x_\alpha - v_3}{v_4} \right) \right) \quad (49)$$

$$1065 \quad \lambda_N = \phi_N \cosh \left(\frac{x_\alpha - v_3}{2v_4} \right) \quad (50)$$

$$1066 \quad \frac{dH}{dt} = \frac{(H_\infty - H)}{\tau_h} \quad (51)$$

$$1067 \quad H_\infty = \frac{1}{1 + \exp \left(\frac{x_\alpha + v_5}{v_6} \right)} \quad (52)$$

$$1068 \quad \tau_h = 272 - \left(\frac{-1499}{1 + \exp \left(\frac{-x_\alpha + v_7}{v_8} \right)} \right). \quad (53)$$

1068 where we set $v_1 = 0mV$, $v_2 = 20mV$, $v_3 = 0mV$, $v_4 = 15mV$, $v_5 = 78.3mV$, $v_6 = 10.5mV$,
 1069 $v_7 = -42.2mV$, $v_8 = 87.3mV$, $v_9 = 5mV$, and $v_{th} = -25mV$.

1070 Finally, there is a synaptic gating variable as well:

$$S_\infty = \frac{1}{1 + \exp\left(\frac{v_{th} - x_\alpha}{v_9}\right)}. \quad (54)$$

1071 When the dynamic gating variables are considered, this is actually a 15-dimensional nonlinear
 1072 dynamical system. Gaussian noise $d\mathbf{B}$ of variance $(1 \times 10^{-12})^2 \text{ A}^2$ makes the model stochastic, and
 1073 introduces variability in frequency at each parameterization \mathbf{z} .

1074 In order to measure the frequency of the hub neuron during EPI, the STG model was simulated for
 1075 $T = 300$ time steps of $dt = 25\text{ms}$. The chosen dt and T were the most computationally convenient
 1076 choices yielding accurate frequency measurement. We used a basis of complex exponentials with
 1077 frequencies from 0.0-1.0 Hz at 0.01Hz resolution to measure frequency from simulated time series

$$\Phi = [0.0, 0.01, \dots, 1.0]^\top \dots \quad (55)$$

1078 To measure spiking frequency, we processed simulated membrane potentials with a relu (spike
 1079 extraction) and low-pass filter with averaging window of size 20, then took the frequency with the
 1080 maximum absolute value of the complex exponential basis coefficients of the processed time-series.
 1081 The first 20 temporal samples of the simulation are ignored to account for initial transients.

1082 To differentiate through the maximum frequency identification, we used a soft-argmax Let $X_\alpha \in$
 1083 $\mathcal{C}^{|\Phi|}$ be the complex exponential filter bank dot products with the signal $x_\alpha \in \mathbb{R}^N$, where $\alpha \in$
 1084 $\{\text{f1}, \text{f2}, \text{hub}, \text{s1}, \text{s2}\}$. The soft-argmax is then calculated using temperature parameter $\beta = 100$

$$\psi_\alpha = \text{softmax}(\beta |X_\alpha| \odot i), \quad (56)$$

1085 where $i = [0, 1, \dots, 100]$. The frequency is then calculated as

$$\omega_\alpha = 0.01\psi_\alpha \text{Hz}. \quad (57)$$

1086 Intermediate hub frequency, like all other emergent properties in this work, is defined by the mean
 1087 and variance of the emergent property statistics. In this case, we have one statistic, hub neuron
 1088 frequency, where the mean was chosen to be 0.55Hz, and variance was chosen to be $(0.025\text{Hz})^2$
 1089 (Equation 4). As a maximum entropy distribution, $T(\mathbf{x}; \mathbf{z})$ is comprised of both these first and
 1090 second moments of the hub neuron frequency (as in Equations 27 and 28)

$$T(\mathbf{x}; \mathbf{z}) = \begin{bmatrix} \omega_{\text{hub}}(\mathbf{x}; \mathbf{z}) \\ (\omega_{\text{hub}}(\mathbf{x}; \mathbf{z}) - 0.55)^2 \end{bmatrix}, \quad (58)$$

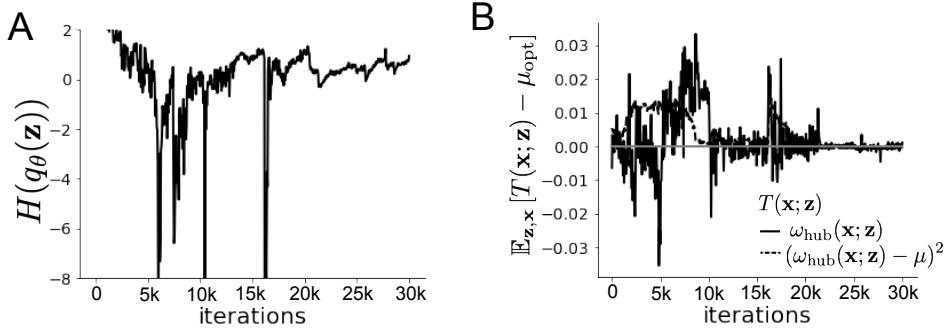


Figure 9: (STG1): EPI optimization of the STG model producing network syncing. **A.** Entropy throughout optimization. **B.** The emergent property statistic means and variances converge to their constraints at 25,000 iterations following the fifth augmented Lagrangian epoch.

1091

$$\boldsymbol{\mu}_{\text{opt}} = \begin{bmatrix} 0.55 \\ 0.025^2 \end{bmatrix}. \quad (59)$$

1092 Throughout optimization, the augmented Lagrangian parameters η and c , were updated after each
 1093 epoch of 5,000 iterations(see Section 5.1.3). The optimization converged after five epochs (Fig. S4).

1094 For EPI in Fig 1E, we used a real NVP architecture with three Real NVP coupling layers and two-
 1095 layer neural networks of 25 units per layer. The normalizing flow architecture mapped $z_0 \sim \mathcal{N}(\mathbf{0}, I)$
 1096 to a support of $\mathbf{z} = [g_{\text{el}}, g_{\text{synA}}] \in [4, 8] \times [0.01, 4]$, initialized to a gaussian approximation of samples
 1097 returned by a preliminary ABC search. We did not include $g_{\text{synA}} < 0.01$, for numerical stability.
 1098 EPI optimization was run using 5 different random seeds for architecture initialization $\boldsymbol{\theta}$ with an
 1099 augmented Lagrangian coefficient of $c_0 = 10^5$, a batch size $n = 400$, and $\beta = 2$. The architecture
 1100 converged with criteria $N_{\text{test}} = 100$.

1101 In Figure 1D, the sensitivity dimension v_1 (solid) and the second eigenvector of the Hessian v_2
 1102 (dashed) are shown evaluated at the mode of the distribution. The length of the arrows is in-
 1103 versely proportional to the square root of the absolute value of their eigenvalues $\lambda_1 = -10.7$ and
 1104 $\lambda_2 = -3.22$. Since the Hessian eigenvectors have sign degeneracy, the visualized directions in 2-D
 1105 parameter space were chosen to have positive g_{synA} .

1106 **5.2.2 Scaling EPI for stable amplification in RNNs**

1107 We examined the scaling properties of EPI by learning connectivities of RNNs of increasing size
 1108 that exhibit stable amplification. Rank-2 RNN connectivity was modeled as $W = UV^\top$, where
 1109 $U = [\mathbf{u}_1 \ \mathbf{u}_2] + g\chi^{(W)}$, $V = [\mathbf{v}_1 \ \mathbf{v}_2] + g\chi^{(V)}$, and $\chi_{i,j}^{(W)}, \chi_{i,j}^{(V)} \sim \mathcal{N}(0, 1)$. This RNN model has
 1110 dynamics

$$\tau \dot{\mathbf{x}} = -\mathbf{x} + W\mathbf{x}. \quad (60)$$

1111 In this analysis, we inferred connectivity parameterizations $\mathbf{z} = [\mathbf{u}_1^\top, \mathbf{u}_2^\top, \mathbf{v}_1^\top, \mathbf{v}_2^\top]^\top \in [-1, 1]^{(4N)}$
 1112 that produced stable amplification using EPI, SMC-ABC [43], and SNPE [45] (see Section Related
 1113 Methods).

1114 For this RNN model to be stable, all real eigenvalues of W must be less than 1: $\text{real}(\lambda_1) < 1$,
 1115 where λ_1 denotes the greatest real eigenvalue of W . For a stable RNN to amplify at least one input
 1116 pattern, the symmetric connectivity $W^s = \frac{W+W^\top}{2}$ must have an eigenvalue greater than 1: $\lambda_1^s > 1$,
 1117 where λ^s is the maximum eigenvalue of W^s . These two conditions are necessary and sufficient for
 1118 stable amplification in RNNs [63]. We defined the emergent property of stable amplification with
 1119 means of these eigenvalues (0.5 and 1.5, respectively) that satisfy these conditions. To complete
 1120 the emergent property definition, we chose variances (0.25^2) about those means such that samples
 1121 rarely violate the eigenvalue constraints. In terms of the EPI optimization variables, this is written
 1122 as

$$T(\mathbf{x}; \mathbf{z}) = \begin{bmatrix} \text{real}(\lambda_1)(\mathbf{x}; \mathbf{z}) \\ \lambda_1^s(\mathbf{x}; \mathbf{z}) \\ (\text{real}(\lambda_1)(\mathbf{x}; \mathbf{z}) - 0.5)^2 \\ (\lambda_1^s(\mathbf{x}; \mathbf{z}) - 1.5)^2 \end{bmatrix}, \quad (61)$$

$$\boldsymbol{\mu}_{\text{opt}} = \begin{bmatrix} 0.5 \\ 1.5 \\ 0.25^2 \\ 0.25^2 \end{bmatrix}. \quad (62)$$

1123 Gradients of maximum eigenvalues of Hermitian matrices like W^s are available with modern auto-
 1124 matic differentiation tools. To differentiate through the $\text{real}(\lambda_1)$, we solved the following equation
 1125 for eigenvalues of rank-2 matrices using the rank reduced matrix $W^r = V^\top U$
 1126

$$\lambda_\pm = \frac{\text{Tr}(W^r) \pm \sqrt{\text{Tr}(W^r)^2 - 4\text{Det}(W^r)}}{2}. \quad (63)$$

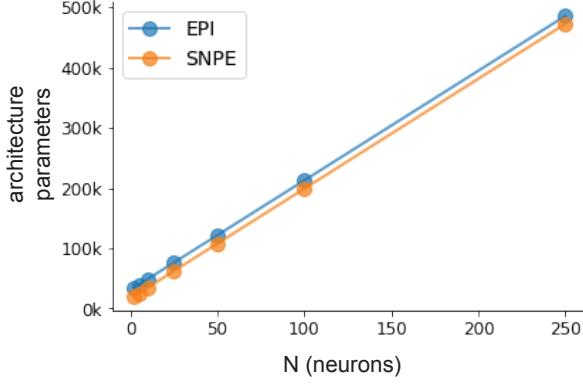


Figure 10: (RNN1): Number of parameters in deep probability distribution architectures of EPI (blue) and SNPE (orange) by RNN size (N).

1127 For EPI in Fig. 2, we used a real NVP architecture with three coupling layers of affine transfor-
 1128 mations parameterized by two-layer neural networks of 100 units per layer. The initial distribution
 1129 was a standard isotropic gaussian $\mathbf{z}_0 \sim \mathcal{N}(\mathbf{0}, I)$ mapped to the support of $\mathbf{z}_i \in [-1, 1]$. We used
 1130 an augmented Lagrangian coefficient of $c_0 = 10^3$, a batch size $n = 200$, $\beta = 4$, and chose to use
 1131 500 iterations per augmented Lagrangian epoch and emergent property constraint convergence was
 1132 evaluated at $N_{\text{test}} = 200$ (Fig. 2B blue line, and Fig. 2C-D blue).

1133 We compared EPI to two alternative simulation-based inference techniques, since the likelihood
 1134 of these eigenvalues given \mathbf{z} is not available. Approximate Bayesian computation (ABC) [80] is a
 1135 rejection sampling technique for obtaining sets of parameters \mathbf{z} that produce activity \mathbf{x} close to some
 1136 observed data \mathbf{x}_0 . Sequential Monte Carlo approximate Bayesian computation (SMC-ABC) is the
 1137 state-of-the-art ABC method, which leverages SMC techniques to improve sampling speed. We ran
 1138 SMC-ABC with the pyABC package [105] to infer RNNs with stable amplification: connectivities
 1139 having eigenvalues within an ϵ -defined l -2 distance of

$$x_0 = \begin{bmatrix} \text{real}(\lambda_1) \\ \lambda_1^s \end{bmatrix} = \begin{bmatrix} 0.5 \\ 1.5 \end{bmatrix}. \quad (64)$$

1140 SMC-ABC was run with a uniform prior over $\mathbf{z} \in [-1, 1]^{(4N)}$, a population size of 1,000 particles
 1141 with simulations parallelized over 32 cores, and a multivariate normal transition model.

1142 SNPE, the next approach in our comparison, is far more similar to EPI. Like EPI, SNPE treats pa-
 1143 rameters in mechanistic models with deep probability distributions, yet the two learning algorithms
 1144 are categorically different. SNPE uses a two-network architecture to approximate the posterior dis-
 1145 tribution of the model conditioned on observed data \mathbf{x}_0 . The amortizing network maps observations

1146 \mathbf{x}_i to the parameters of the deep probability distribution. The weights and biases of the parameter
1147 network are optimized by sequentially augmenting the training data with additional pairs $(\mathbf{z}_i, \mathbf{x}_i)$
1148 based on the most recent posterior approximation. This sequential procedure is important to get
1149 training data \mathbf{z}_i to be closer to the true posterior, and \mathbf{x}_i to be closer to the observed data. For
1150 the deep probability distribution architecture, we chose a masked autoregressive flow with affine
1151 couplings (the default choice), three transforms, 50 hidden units, and a normalizing flow mapping
1152 to the support as in EPI. This architectural choice closely tracked the size of the architecture used
1153 by EPI (Fig. 10). As in SMC-ABC, we ran SNPE with $\mathbf{x}_0 = \mu$. All SNPE optimizations were
1154 run for a limit of 1.5 days on a Tesla V100 GPU, or until two consecutive rounds resulted in a
1155 validation log probability lower than the maximum observed for that random seed.

1156 To clarify the difference in objectives of EPI and SNPE, we show their results on RNN models
1157 with different numbers of neurons N and random strength g . The parameters inferred by EPI
1158 consistently produces the same mean and variance of $\text{real}(\lambda_1)$ and λ_1^s , while those inferred by
1159 SNPE change according to the model definition (Fig. 11A). For $N = 2$ and $g = 0.01$, the SNPE
1160 posterior has greater concentration in eigenvalues around \mathbf{x}_0 than at $g = 0.1$, where the model has
1161 greater randomness (Fig. 11B top, orange). At both levels of g when $N = 2$, the posterior of SNPE
1162 has lower entropy than EPI at convergence (Fig. 11B top). However at $N = 10$, SNPE results in
1163 a predictive distribution of more widely dispersed eigenvalues (Fig. 11A bottom), and an inferred
1164 posterior with greater entropy than EPI (Fig. 11B bottom). We highlight these differences not
1165 to focus on an insightful trend, but to emphasize that these methods optimize different objectives
1166 with different implications.

1167 Note that SNPE converges when it's validation log probability has saturated after several rounds
1168 of optimization (Fig. 11C), and that EPI converges after several epochs of its own optimization
1169 to enforce the emergent property constraints (Fig. 11D blue). Importantly, as SNPE optimizes
1170 its posterior approximation, the predictive means change, and at convergence may be different
1171 than \mathbf{x}_0 (Fig. 11D orange, left). It is sensible to assume that predictions of a well-approximated
1172 SNPE posterior should closely reflect the data on average (especially given a uniform prior and
1173 a low degree of stochasticity), however this is not a given. Furthermore, no aspect of the SNPE
1174 optimization controls the variance of the predictions (Fig. 11D orange, right).

1175 To compare the efficiency of these algorithms for inferring RNN connectivity distributions producing
1176 stable amplification, we develop a convergence criteria that can be used across methods. While EPI
1177 has its own hypothesis testing convergence criteria for the emergent property, it would not make

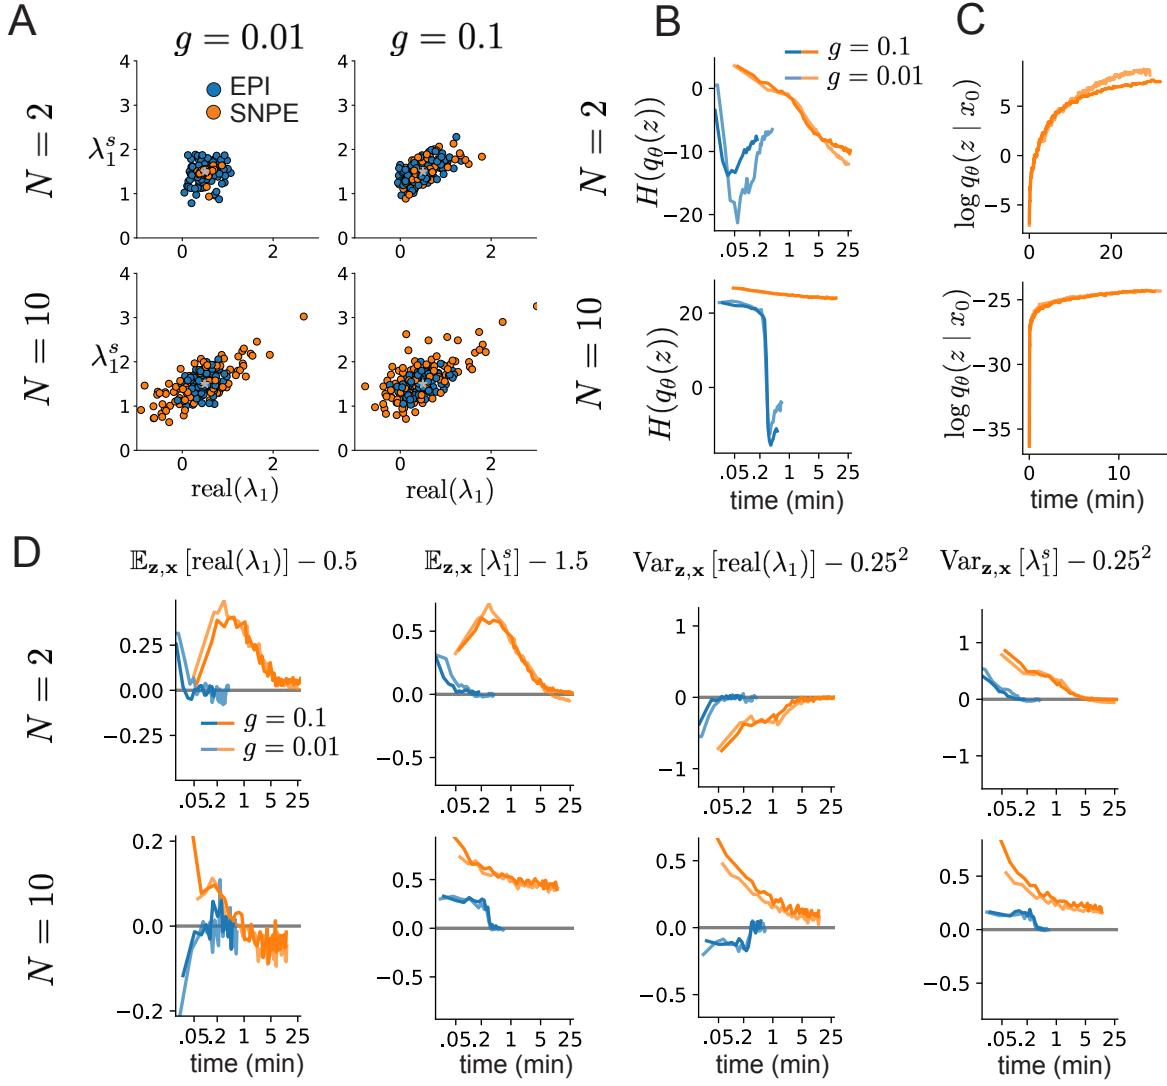


Figure 11: (RNN2): Model characteristics affect predictions of posteriors inferred by SNPE, while predictions of parameters inferred by EPI remain fixed. **A.** Predictive distribution of EPI (blue) and SNPE (orange) inferred connectivity of RNNs exhibiting stable amplification with $N = 2$ (top), $N = 10$ (bottom), $g = 0.01$ (left), and $g = 0.1$ (right). **B.** Entropy of parameter distribution approximations throughout optimization with $N = 2$ (top), $N = 10$ (bottom), $g = 0.1$ (dark shade), and $g = 0.01$ (light shade). **C.** Validation log probabilities throughout SNPE optimization. Same conventions as B. **D.** Adherence to EPI constraints. Same conventions as B.

1178 sense to use this criteria on SNPE and SMC-ABC which do not constrain the means and variances
 1179 of their predictions. Instead, we consider EPI and SNPE to have converged after completing its
 1180 most recent optimization epoch (EPI) or round (SNPE) in which the distance

$$d(q_\theta(z)) = |\mathbb{E}_{\mathbf{z}, \mathbf{x}} [f(\mathbf{x}; \mathbf{z})] - \boldsymbol{\mu}|_2 \quad (65)$$

1181 is less than 0.5. We consider SMC-ABC to have converged once the population produces samples
 1182 within the $\epsilon = 0.5$ ball ensuring stable amplification.

1183 When assessing the scalability of SNPE, it is important to check that alternative hyperparameter-
 1184izations could not yield better performance. Key hyperparameters of the SNPE optimization are
 1185 the number of simulations per round n_{round} , the number of atoms used in the atomic proposals of
 1186 the SNPE-C algorithm [106], and the batch size n . To match EPI, we used a batch size of $n = 200$
 1187 for $N \leq 25$, however we found $n = 1,000$ to be helpful for SNPE in higher dimensions. While
 1188 $n_{\text{round}} = 1,000$ yielded SNPE convergence for $N \leq 25$, we found that a substantial increase to
 1189 $n_{\text{round}} = 25,000$ yielded more consistent convergence at $N = 50$ (Fig. 12A). By increasing n_{round} ,
 1190 we also necessarily increase the duration of each round. At $N = 100$, we tried two hyperparameter
 1191 modifications. As suggested in [106], we increased n_{atom} by an order of magnitude to improve
 1192 gradient quality, but this had little effect on the optimization (much overlap between same random
 1193 seeds) (Fig. 12B). Finally, we increased n_{round} by an order of magnitude, which yielded convergence
 1194 in one case, but no others. We found no way to improve the convergence rate of SNPE without
 1195 making more aggressive hyperparameter choices requiring high numbers of simulations.

1196 In Figure 2C-D, we show samples from the random seed resulting in emergent property convergence
 1197 at greatest entropy (EPI), the random seed resulting in greatest validation log probability (SNPE),
 1198 and the result of all converged random seeds (SMC).

1199 5.2.3 Primary visual cortex

1200 In the stochastic stabilized supralinear network [78], population rate responses \mathbf{x} to input \mathbf{h} , recur-
 1201 rent input $W\mathbf{x}$ and slow noise ϵ are governed by

$$\tau \frac{d\mathbf{x}}{dt} = -\mathbf{x} + \phi(W\mathbf{x} + \mathbf{h} + \epsilon), \quad (66)$$

1202 where the noise is an Ornstein-Uhlenbeck process $\epsilon \sim OU(\tau_{\text{noise}}, \boldsymbol{\sigma})$

$$\tau_{\text{noise}} d\epsilon_\alpha = -\epsilon_\alpha dt + \sqrt{2\tau_{\text{noise}}} \tilde{\sigma}_\alpha dB \quad (67)$$

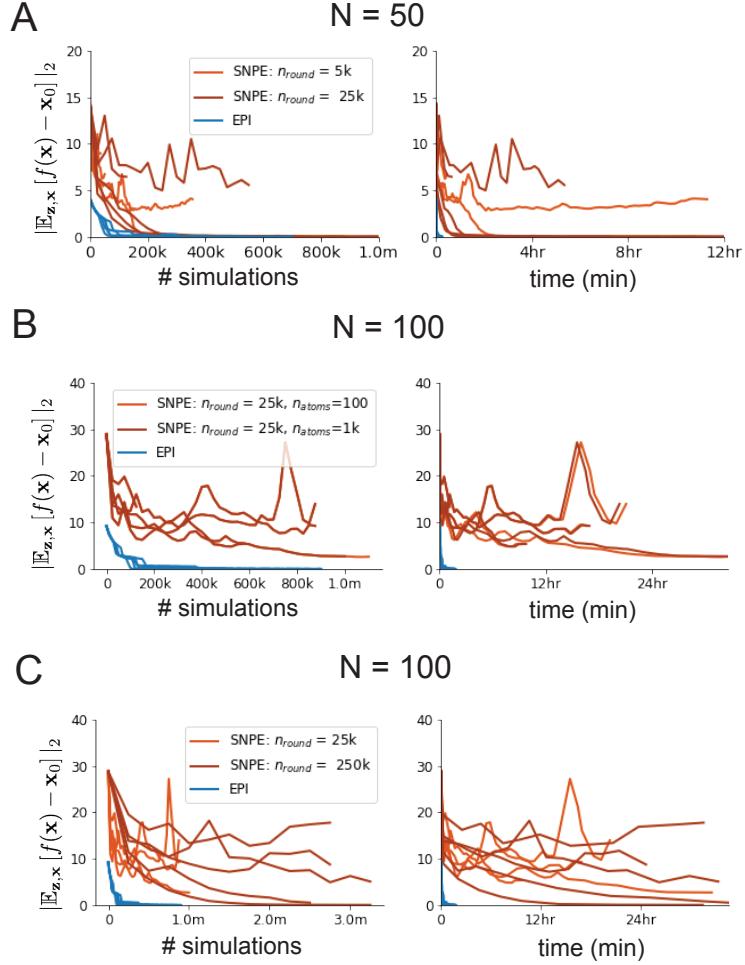


Figure 12: (RNN3): SNPE convergence was enabled by increasing n_{round} , not n_{atom} . **A.** Difference of mean predictions \mathbf{x}_0 throughout optimization at $N = 50$ with by simulation count (left) and wall time (right) of SNPE with $n_{\text{round}} = 5,000$ (light orange), SNPE with $n_{\text{round}} = 25,000$ (dark orange), and EPI (blue). Each line shows an individual random seed. **B.** Same conventions as A at $N = 100$ of SNPE with $n_{\text{atom}} = 100$ (light orange) and $n_{\text{atom}} = 1,000$ (dark orange). **C.** Same conventions as A at $N = 100$ of SNPE with $n_{\text{round}} = 25,000$ (light orange) and $n_{\text{round}} = 250,000$ (dark orange).

1203 with $\tau_{\text{noise}} = 5\text{ms} > \tau = 1\text{ms}$. The noisy process is parameterized as

$$\tilde{\sigma}_\alpha = \sigma_\alpha \sqrt{1 + \frac{\tau}{\tau_{\text{noise}}}}, \quad (68)$$

1204 so that σ parameterizes the variance of the noisy input in the absence of recurrent connectivity
 1205 ($W = \mathbf{0}$). As contrast $c \in [0, 1]$ increases, input to the E- and P-populations increases relative to
 1206 a baseline input $\mathbf{h} = \mathbf{h}_b + c\mathbf{h}_c$. Connectivity (W_{fit}) and input ($\mathbf{h}_{b,\text{fit}}$ and $\mathbf{h}_{c,\text{fit}}$) parameters were fit
 1207 using the deterministic V1 circuit model [56]

$$W_{\text{fit}} = \begin{bmatrix} W_{EE} & W_{EP} & W_{ES} & W_{EV} \\ W_{PE} & W_{PP} & W_{PS} & W_{PV} \\ W_{SE} & W_{SP} & W_{SS} & W_{SV} \\ W_{VE} & W_{VP} & W_{VS} & W_{VV} \end{bmatrix} = \begin{bmatrix} 2.18 & -1.19 & -.594 & -.229 \\ 1.66 & -.651 & -.680 & -.242 \\ .895 & -5.22 \times 10^{-3} & -1.51 \times 10^{-4} & -.761 \\ 3.34 & -2.31 & -.254 & -2.52 \times 10^{-4} \end{bmatrix}, \quad (69)$$

$$\mathbf{h}_{b,\text{fit}} = \begin{bmatrix} .416 \\ .429 \\ .491 \\ .486 \end{bmatrix}, \quad (70)$$

1208 and

$$\mathbf{h}_{c,\text{fit}} = \begin{bmatrix} .359 \\ .403 \\ 0 \\ 0 \end{bmatrix}. \quad (71)$$

1209 To obtain rates on a realistic scale (100-fold greater), we map these fitted parameters to an equiv-
 1210 alence class

$$W = \begin{bmatrix} W_{EE} & W_{EP} & W_{ES} & W_{EV} \\ W_{PE} & W_{PP} & W_{PS} & W_{PV} \\ W_{SE} & W_{SP} & W_{SS} & W_{SV} \\ W_{VE} & W_{VP} & W_{VS} & W_{VV} \end{bmatrix} = \begin{bmatrix} .218 & -.119 & -.0594 & -.0229 \\ .166 & -.0651 & -.068 & -.0242 \\ .0895 & -5.22 \times 10^{-4} & -1.51 \times 10^{-5} & -.0761 \\ .334 & -.231 & -.0254 & -2.52 \times 10^{-5} \end{bmatrix}, \quad (72)$$

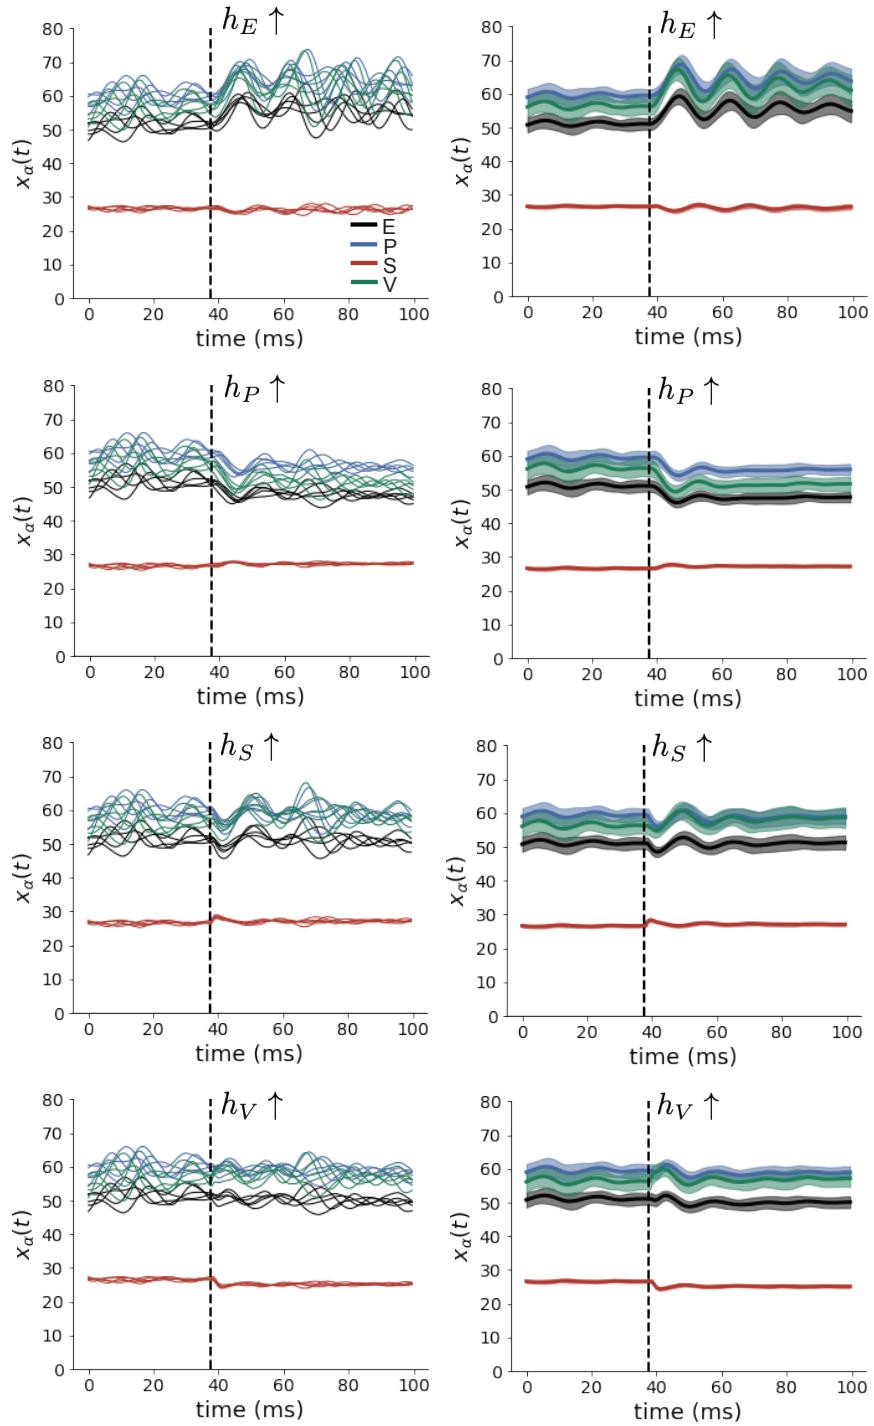


Figure 13: (V1 1) (Left) Simulations for small increases in neuron-type population input. Input magnitudes are chosen so that effect is salient (0.002 for E and P, but 0.02 for S and V). (Right) Average (solid) and standard deviation (shaded) of stochastic fluctuations of responses.

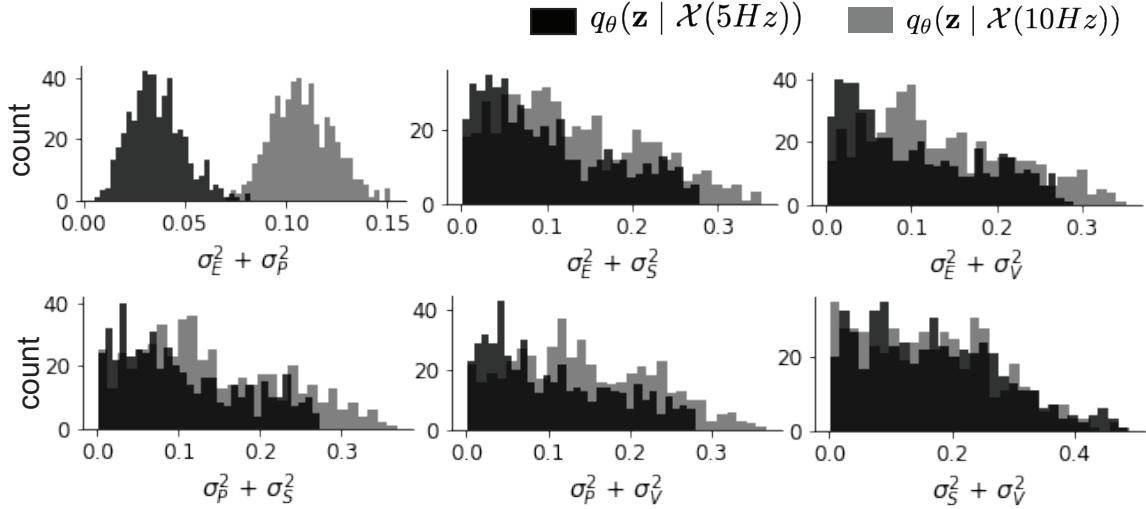


Figure 14: (V1 2) EPI predictive distributions of the sum of squares of each pair of noise parameters.

$$\mathbf{h}_b = \begin{bmatrix} h_{b,E} \\ h_{b,P} \\ h_{b,S} \\ h_{b,V} \end{bmatrix} = \begin{bmatrix} 4.16 \\ 4.29 \\ 4.91 \\ 4.86 \end{bmatrix}, \quad (73)$$

1211 and

$$\mathbf{h}_c = \begin{bmatrix} h_{c,E} \\ h_{c,P} \\ h_{c,S} \\ h_{c,V} \end{bmatrix} = \begin{bmatrix} 3.59 \\ 4.03 \\ 0 \\ 0 \end{bmatrix}. \quad (74)$$

1212 Circuit responses are simulated using $T = 200$ time steps at $dt = 0.5\text{ms}$ from an initial condition
 1213 drawn from $\mathbf{x}(0) \sim U[10 \text{ Hz}, 25 \text{ Hz}]$. Standard deviation of the E-population $s_E(\mathbf{x}; \mathbf{z})$ is calculated
 1214 as the square root of the temporal variance from $t_{ss} = 75\text{ms}$ to $Tdt = 100\text{ms}$ averaged over 100
 1215 independent trials.

$$s_E(\mathbf{x}; \mathbf{z}) = \mathbb{E}_x \left[\sqrt{\mathbb{E}_{t > t_{ss}} \left[(x_E(t) - \mathbb{E}_{t > t_{ss}} [x_E(t)])^2 \right]} \right] \quad (75)$$

1216 For EPI in Fig 3D-E, we used a real NVP architecture with three Real NVP coupling layers
 1217 and two-layer neural networks of 50 units per layer. The normalizing flow architecture mapped
 1218 $z_0 \sim \mathcal{N}(\mathbf{0}, I)$ to a support of $\mathbf{z} = [\sigma_E, \sigma_P, \sigma_S, \sigma_V] \in [0.0, 0.5]^4$. EPI optimization was run using three
 1219 different random seeds for architecture initialization $\boldsymbol{\theta}$ with an augmented Lagrangian coefficient of

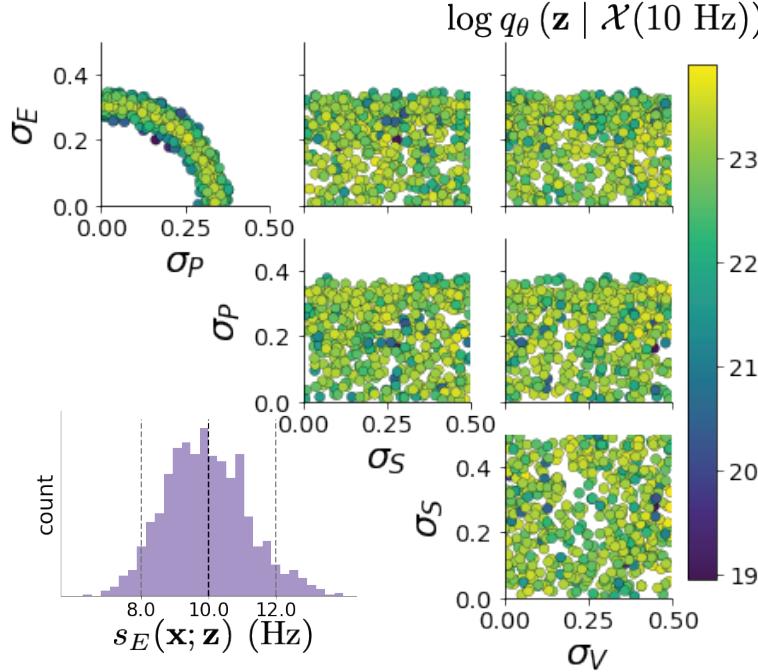


Figure 15: (V1 3) EPI inferred distribution for $\mathcal{X}(10 \text{ Hz})$.

1220 $c_0 = 10^{-1}$, a batch size $n = 100$, and $\beta = 2$. The distributions shown are those of the architectures
1221 converging with criteria $N_{\text{test}} = 100$ at greatest entropy across three random seeds.

1222 In Fig. 3E, we visualize the modes of $q_\theta(\mathbf{z} | \mathcal{X})$ throughout the σ_E - σ_P marginal. Specifically, we
1223 calculated

$$\begin{aligned} \mathbf{z}^*(\sigma_{P,\text{fixed}}) &= \underset{\mathbf{z}}{\operatorname{argmax}} \log q_\theta(\mathbf{z} | \mathcal{X}) \\ \text{s.t. } \sigma_P &= \sigma_{P,\text{fixed}} \end{aligned} \tag{76}$$

1224 At each mode \mathbf{z}^* , we calculated the Hessian and visualized the sensitivity dimension in the direction
1225 of positive σ_E .

1226 5.2.4 Primary visual cortex: challenges to analysis

1227 TODO Agostina and I are putting this together now.

1228 5.2.5 Superior colliculus

1229 The ability to switch between two separate tasks throughout randomly interleaved trials, or “rapid
1230 task switching,” has been studied in rats, and midbrain superior colliculus (SC) has been shown to

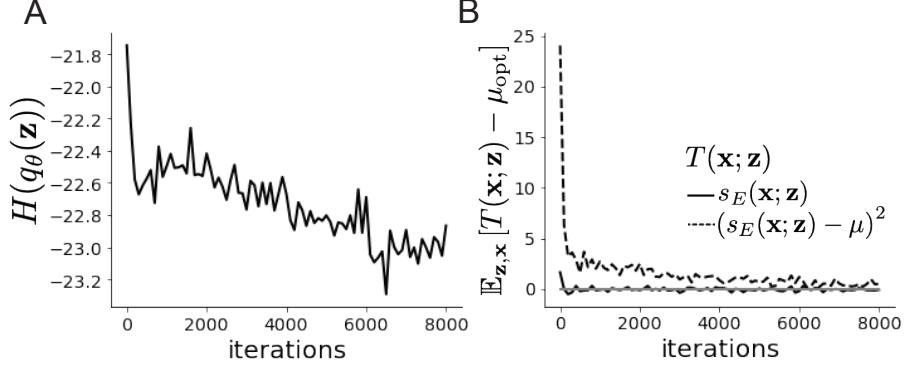


Figure 16: (V1 4) Optimization for V1

play an important in this computation [79]. Neural recordings in SC exhibited two populations of neurons that simultaneously represented both task context (Pro or Anti) and motor response (contralateral or ipsilateral to the recorded side), which led to the distinction of two functional classes: the Pro/Contra and Anti/Ipsi neurons [57]. Given this evidence, Duan et al. proposed a model with four functionally-defined neuron-type populations: two in each hemisphere corresponding to the Pro/Contra and Anti/Ipsi populations. We study how the connectivity of this neural circuit governs rapid task switching ability.

The four populations of this model are denoted as left Pro (LP), left Anti (LA), right Pro (RP) and right Anti (RA). Each unit has an activity (x_α) and internal variable (u_α) related by

$$x_\alpha = \phi(u_\alpha) = \left(\frac{1}{2} \tanh\left(\frac{u_\alpha - a}{b}\right) + \frac{1}{2} \right), \quad (77)$$

where $\alpha \in \{LP, LA, RA, RP\}$, $a = 0.05$ and $b = 0.5$ control the position and shape of the nonlinearity. We order the neural populations of x and u in the following manner

$$\mathbf{x} = \begin{bmatrix} x_{LP} \\ x_{LA} \\ x_{RP} \\ x_{RA} \end{bmatrix} \quad \mathbf{u} = \begin{bmatrix} u_{LP} \\ u_{LA} \\ u_{RP} \\ u_{RA} \end{bmatrix}, \quad (78)$$

which evolve according to

$$\tau \frac{d\mathbf{u}}{dt} = -\mathbf{u} + W\mathbf{x} + \mathbf{h} + d\mathbf{B}. \quad (79)$$

with time constant $\tau = 0.09s$, step size 24ms and Gaussian noise $d\mathbf{B}$ of variance 0.2^2 . These hyperparameter values are motivated by modeling choices and results from [57].

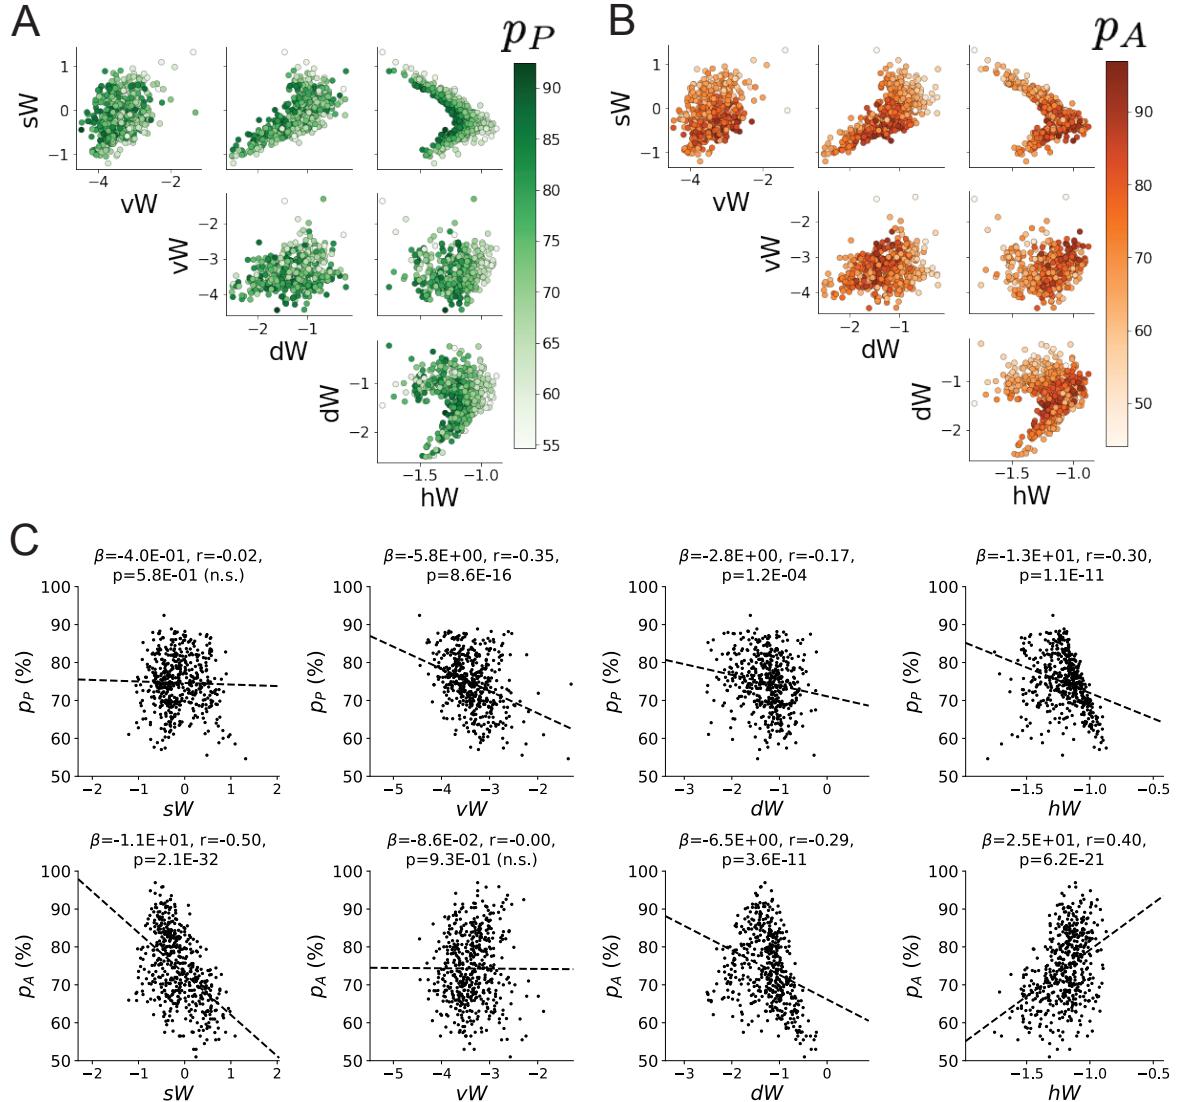


Figure 17: (SC1): **A.** Same pairplot as Fig. 4C colored by Pro task accuracy. **B.** Same as A colored by Anti task accuracy. **C.** Connectivity parameters of EPI distributions versus task accuracies. β is slope coefficient of linear regression, r is correlation, and p is the two-tailed p-value.

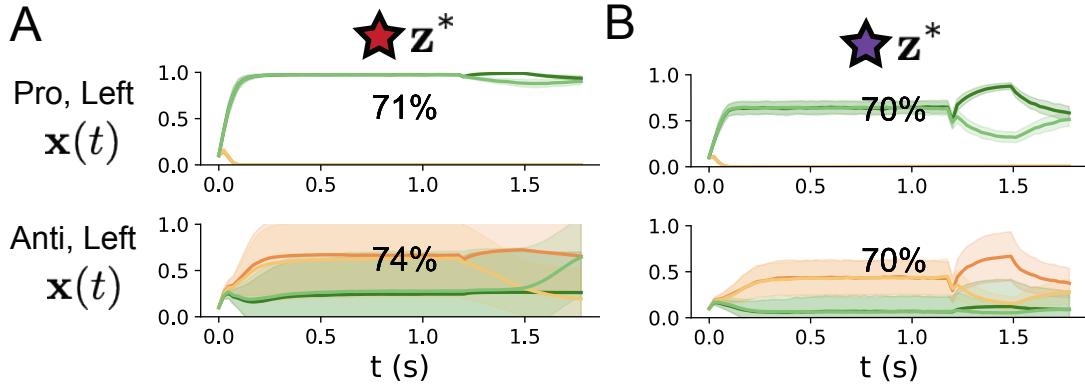


Figure 18: (SC2): **A.** Simulations in network regime 1 ($hW_{\text{fixed}} = -1.5$). **B.** Simulations in network regime 2 ($hW_{\text{fixed}} = -1.5$) .

1245 The weight matrix has 4 parameters for self sW , vertical vW , horizontal hW , and diagonal dW
1246 connections:

$$W = \begin{bmatrix} sW & vW & hW & dW \\ vW & sW & dW & hW \\ hW & dW & sW & vW \\ dW & hW & vW & sW \end{bmatrix}. \quad (80)$$

1247 We study the role of parameters $\mathbf{z} = [sW, vW, hW, dW]^\top$ in rapid task switching.

1248 The circuit receives four different inputs throughout each trial, which has a total length of 1.8s.

$$\mathbf{h} = \mathbf{h}_{\text{constant}} + \mathbf{h}_{\text{P,bias}} + \mathbf{h}_{\text{rule}} + \mathbf{h}_{\text{choice-period}} + \mathbf{h}_{\text{light}}. \quad (81)$$

1249 There is a constant input to every population,

$$\mathbf{h}_{\text{constant}} = I_{\text{constant}}[1, 1, 1, 1]^\top, \quad (82)$$

1250 a bias to the Pro populations

$$\mathbf{h}_{\text{P,bias}} = I_{\text{P,bias}}[1, 0, 1, 0]^\top, \quad (83)$$

1251 rule-based input depending on the condition

$$\mathbf{h}_{\text{P,rule}}(t) = \begin{cases} I_{\text{P,rule}}[1, 0, 1, 0]^\top, & \text{if } t \leq 1.2s \\ 0, & \text{otherwise} \end{cases} \quad (84)$$

1252

$$\mathbf{h}_{\text{A,rule}}(t) = \begin{cases} I_{\text{A,rule}}[0, 1, 0, 1]^\top, & \text{if } t \leq 1.2s \\ 0, & \text{otherwise} \end{cases}, \quad (85)$$

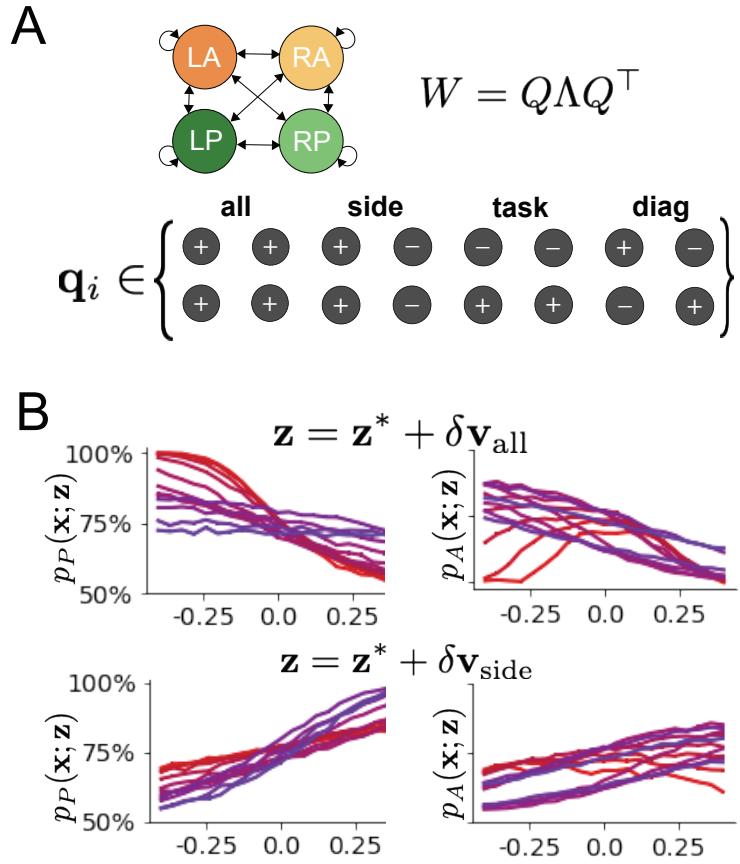


Figure 19: (SC3): **A.** Invariant eigenvectors of connectivity matrix W . **B.** Accuracies for connectivity perturbations for increasing λ_{all} and λ_{side} (rest shown in Fig. 4D).

1253 a choice-period input

$$\mathbf{h}_{\text{choice}}(t) = \begin{cases} I_{\text{choice}}[1, 1, 1, 1]^\top, & \text{if } t > 1.2s \\ 0, & \text{otherwise} \end{cases}, \quad (86)$$

1254 and an input to the right or left-side depending on where the light stimulus is delivered

$$\mathbf{h}_{\text{light}}(t) = \begin{cases} I_{\text{light}}[1, 1, 0, 0]^\top, & \text{if } 1.2s < t < 1.5s \text{ and Left} \\ I_{\text{light}}[0, 0, 1, 1]^\top, & \text{if } 1.2s < t < 1.5s \text{ and Right} \\ 0, & \text{otherwise} \end{cases}. \quad (87)$$

1255 The input parameterization was fixed to $I_{\text{constant}} = 0.75$, $I_{\text{P,bias}} = 0.5$, $I_{\text{P,rule}} = 0.6$, $I_{\text{A,rule}} = 0.6$,

1256 $I_{\text{choice}} = 0.25$, and $I_{\text{light}} = 0.5$.

1257 The accuracies of each task p_P and p_A are calculated as

$$p_P(\mathbf{x}; \mathbf{z}) = \mathbb{E}_{\mathbf{x}} [\Theta[x_{LP}(t = 1.8s) - x_{RP}(t = 1.8s)]] \quad (88)$$

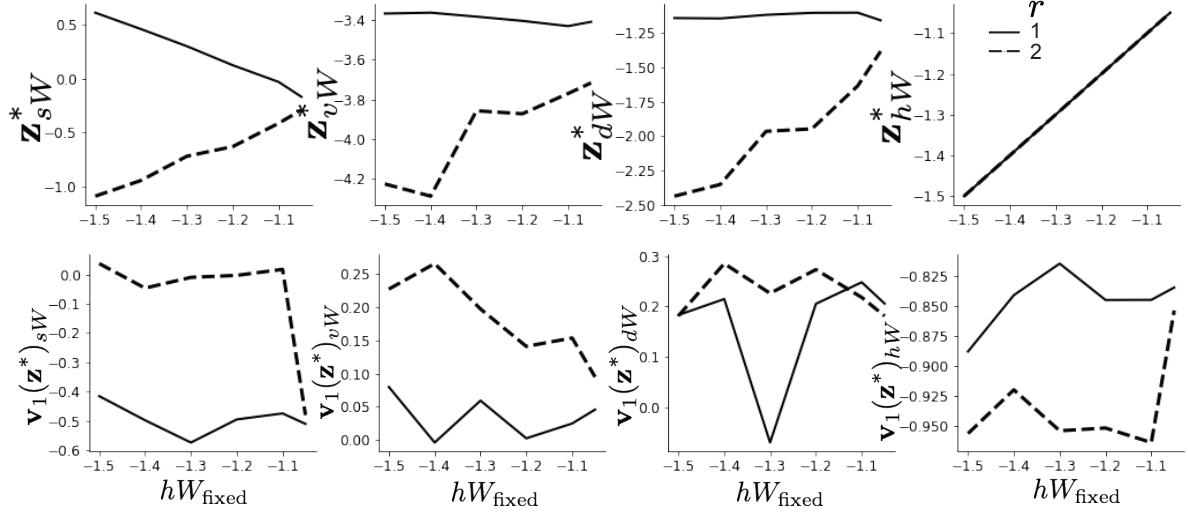


Figure 20: (SC4): **A.** The individual parameters of each mode throughout the two regimes. **B.** The individual sensitivities of parameters of each mode throughout the two regimes.

1258 and

$$p_A(\mathbf{x}; \mathbf{z}) = \mathbb{E}_{\mathbf{x}} [\Theta[x_{RP}(t = 1.8s) - x_{LP}(t = 1.8s)]] \quad (89)$$

1259 given that the stimulus is on the left side, where Θ is the Heaviside step function, and the accuracy
1260 is averaged over 200 independent trials. The Heaviside step function is approximated as

$$\Theta(\mathbf{x}) = \text{sigmoid}(\beta \mathbf{x}), \quad (90)$$

1261 where $\beta = 100$.

1262 Writing the EPI distribution as a maximum entropy distribution, $T(\mathbf{x}, \mathbf{z})$ is comprised of both these
1263 first and second moments of the accuracy in each task (as in Equations 27 and 28)

$$T(\mathbf{x}; \mathbf{z}) = \begin{bmatrix} p_P(\mathbf{x}; \mathbf{z}) \\ p_A(\mathbf{x}; \mathbf{z}) \\ (p_P(\mathbf{x}; \mathbf{z}) - 75\%)^2 \\ (p_A(\mathbf{x}; \mathbf{z}) - 75\%)^2 \end{bmatrix}, \quad (91)$$

$$\boldsymbol{\mu}_{\text{opt}} = \begin{bmatrix} 75\% \\ 75\% \\ 7.5\%^2 \\ 7.5\%^2 \end{bmatrix}. \quad (92)$$

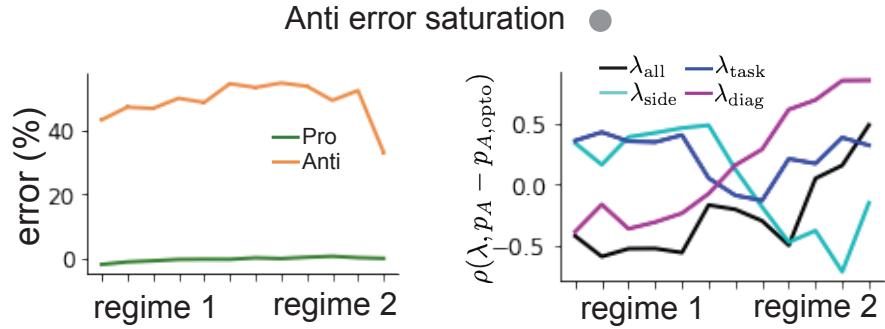


Figure 21: (SC5): (Left) Mean and standard error of Pro and Anti error from regime 1 to regime 2 at $\gamma = 0.85$. (Right) Correlations of connectivity eigenvalues with Anti error from regime 1 to regime 2 at $\gamma = 0.85$.

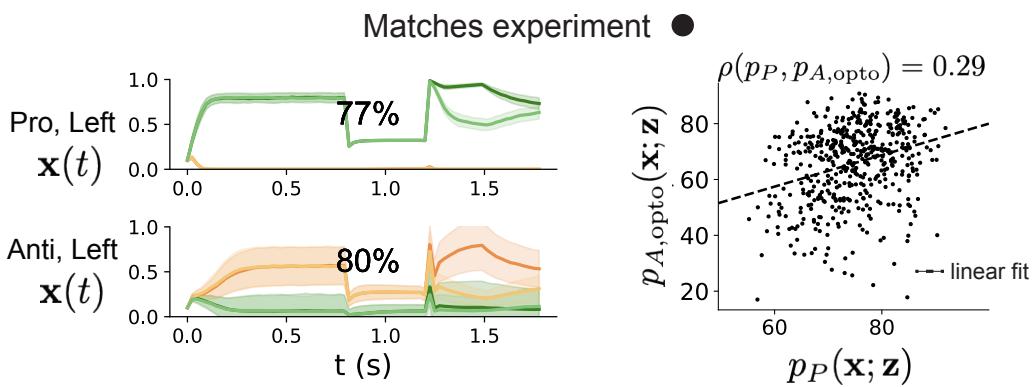


Figure 22: (SC6): (Left) Responses of the SC model at the mode of the EPI distribution to delay period inactivation at $\gamma = 0.675$. (Right) Anti accuracy following delay period inactivation at $\gamma = 0.675$ versus accuracy in the Pro task across connectivities in the EPI distribution.

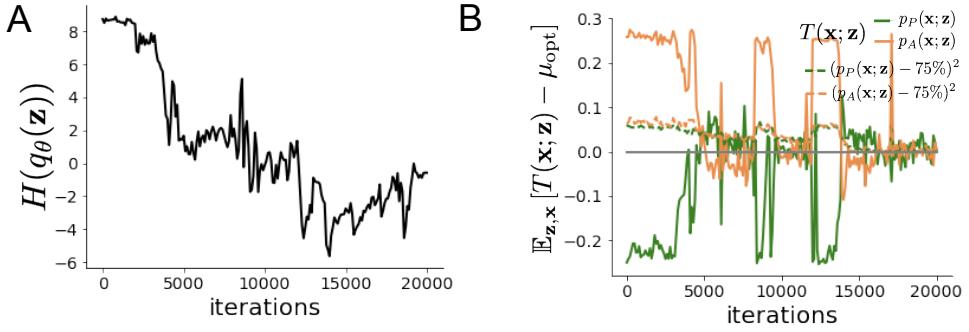


Figure 23: (SC7): **A.** Entropy throughout optimization. **B.** The emergent property statistic means and variances converge to their constraints at 20,000 iterations following the tenth augmented Lagrangian epoch.

1265 Throughout optimization, the augmented Lagrangian parameters η and c , were updated after each
 1266 epoch of 2,000 iterations (see Section 5.1.3). The optimization converged after ten epochs (Fig.
 1267 22).

1268 For EPI in Fig. 4C, we used a real NVP architecture with three coupling layers of affine transfor-
 1269 mations parameterized by two-layer neural networks of 50 units per layer. The initial distribution
 1270 was a standard isotropic gaussian $\mathbf{z}_0 \sim \mathcal{N}(\mathbf{0}, I)$ mapped to a support of $\mathbf{z}_i \in [-5, 5]$. We used an
 1271 augmented Lagrangian coefficient of $c_0 = 10^2$, a batch size $n = 100$, and $\beta = 2$. The distribution
 1272 was the greatest EPI distribution to converge across 5 random seeds with criteria $N_{\text{test}} = 25$.

1273 The EPI distribution of SC model connectivities producing rapid task switching has interesting
 1274 structure. Throughout $q_\theta(\mathbf{z} | \mathcal{X})$, we see that the probability distribution is narrow in hW (Fig.
 1275 4C). This suggests that rapid task switching is sensitive to changes in hW , but this is only a single
 1276 parameter. The local structure of the distribution varies across parameter space, and thus the
 1277 nature in which parameter combinations affect rapid task switching. From visual inspection, we
 1278 may hypothesize that there are two distinct regimes, most easily visualized in the $sW-hW$ marginal
 1279 distribution: one where sW and hW are correlated for greater sW and one where sW and hW are
 1280 anticorrelated for lesser sW .

1281 We sought two sets of parameters in this distribution representative of each regime, so that we
 1282 could assess their implications on computation. For fixed values of hW , we hypothesized that there
 1283 are two modes: one in each regime of greater and lesser sW . To begin, we found one mode for each
 1284 regime at $hW_{\text{fixed}} = -1.5$ using 200 steps of gradient ascent of the deep probability distribution
 1285 $q_\theta(\mathbf{z} | \mathcal{X})$. In regime 1, the initialization had positive sW , and the initialization had negative sW
 1286 in regime 2, which led to disparate modes (Fig. 20 top). These modes were then used as the

1287 initialization to find the next mode at $hW_{\text{fixed}} = -1.4$ and so on. 200 steps of gradient ascent
 1288 were always taken, and learning rates of 2.5×10^{-4} and 5×10^{-4} were used for regimes 1 and 2,
 1289 respectively. Each of these modes is denoted $\mathbf{z}^*(hW_{\text{fixed}}, r)$ for regime $r \in \{1, 2\}$.

1290 For the analyses in Figure 5C and Figure 21, we obtained parameters for each step along the
 1291 continuum between regimes 1 and 2 by sampled from the EPI distribution. Each sample was
 1292 assigned to the closest mode $\mathbf{z}^*(hW_{\text{fixed}}, r)$. Sampling continued until 500 samples were assigned to
 1293 each mode, which took 7.36 seconds. To obtain this many samples for each mode with brute force
 1294 sampling over the chosen prior, this would take 90 days.

1295 At each mode, we measure the sensitivity dimension (that of most negative eigenvalue in the Hessian
 1296 of the EPI distribution) $\mathbf{v}_1(\mathbf{z}^*)$. To resolve sign degeneracy in eigenvectors, we chose $\mathbf{v}_1(\mathbf{z}^*)$ to have
 1297 negative element in hW . This tells us what parameter combination rapid task switching is most
 1298 sensitive to at this parameter choice in the regime. We see that while the modes of each regime
 1299 gradually converge to similar connectivities at $hW_{\text{fixed}} = -1.05$ (Fig. 20 top), the sensitivity
 1300 dimensions remain categorically different throughout the two regimes (Fig. 20 bottom). Only at
 1301 $hW_{\text{fixed}} = -1.05$ is there a flip in sensitivity from regime 2 to regime 1 (in $\mathbf{v}_1(\mathbf{z}^*)_{sW}$ and $\mathbf{v}_1(\mathbf{z}^*)_{hW}$).
 1302 There is thus some ambiguity regarding the “regime” of $\mathbf{z}^*(-1.05, 2)$, since the mode is derived
 1303 from an initialization in regime 2, but has sensitivity like regime 1. We can consider this as an
 1304 intermediate transitional region of parameter space between the two regimes. To emphasize this,
 1305 $\mathbf{z}^*(-1.05, 1)$ and $\mathbf{z}^*(-1.05, 2)$ have the same color.

1306 To understand the connectivity mechanisms governing task accuracy, we took the eigendecomposi-
 1307 tion of the symmetric connectivity matrices $W = Q\Lambda Q^{-1}$, which results in the same basis vectors
 1308 \mathbf{q}_i for all W parameterized by \mathbf{z} (Fig. 19A). These basis vectors have intuitive roles in processing for
 1309 this task, and are accordingly named the *all* eigenmode - all neurons co-fluctuate, *side* eigenmode
 1310 - one side dominates the other, *task* eigenmode - the Pro or Anti populations dominate the other,
 1311 and *diag* mode - Pro- and Anti-populations of opposite hemispheres dominate the opposite pair.
 1312 Due to the parametric structure of the connectivity matrix, the parameters \mathbf{z} are a linear function
 1313 of the eigenvalues $\boldsymbol{\lambda} = [\lambda_{\text{all}}, \lambda_{\text{side}}, \lambda_{\text{task}}, \lambda_{\text{diag}}]^\top$ associated with these eigenmodes.

$$\mathbf{z} = A\boldsymbol{\lambda} \tag{93}$$

1314

$$A = \frac{1}{4} \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & -1 & -1 & 1 \\ 1 & 1 & -1 & -1 \\ 1 & -1 & 1 & -1 \end{bmatrix}. \tag{94}$$

1315 We are interested in the effect of raising or lowering the amplification of each eigenmode in the
 1316 connectivity matrix. To test this, we calculate the unit vector of changes in the connectivity \mathbf{z} that
 1317 result from a change in the associated eigenvalues

$$\mathbf{v}_a = \frac{\frac{\partial \mathbf{z}}{\partial \lambda_a}}{\left\| \frac{\partial \mathbf{z}}{\partial \lambda_a} \right\|_2}, \quad (95)$$

1318 where

$$\frac{\partial \mathbf{z}}{\partial \lambda_a} = A \mathbf{e}_a, \quad (96)$$

1319 and e.g. $\mathbf{e}_{\text{all}} = [1, 0, 0, 0]^\top$. So \mathbf{v}_a is the normalized column of A corresponding to eigenmode a .
 1320 While perturbations in the sensitivity dimension $\mathbf{v}_1(\mathbf{z}^*)$ adapt with the mode \mathbf{z}^* chosen, perturba-
 1321 tions in \mathbf{v}_a for $a \in \{\text{all, side, text, diag}\}$ are invariant to \mathbf{z} (Equation 96).

1322 To understand the connectivity mechanisms that distinguish these two regimes, we perturb connec-
 1323 tivity at each mode in dimensions that have well defined roles in processing for the Pro and Anti
 1324 tasks. A convenient property of this connectivity parameterization is that there are \mathbf{z} -invariant
 1325 eigenmodes of connectivity, whose eigenvalues (or degree of amplification) change with \mathbf{z} . These
 1326 eigenmodes have intuitive roles in processing in each task, and are accordingly named the *all*,
 1327 *side*, *task*, and *diag* eigenmodes (see Section 5.2.5). Furthermore, the parameter dimension \mathbf{v}_a
 1328 ($a \in \{\text{all, side, task, and diag}\}$) that increases the eigenvalue of connectivity λ_a is \mathbf{z} -invariant (un-
 1329 like the sensitivity dimension $\mathbf{v}_1(\mathbf{z})$) and $\mathbf{v}_a \perp \mathbf{v}_{b \neq a}$. Thus, by changing the degree of amplification
 1330 of each processing mode by perturbing \mathbf{z} along \mathbf{v}_a , we can elicit the differentiating properties of
 1331 the two regimes.

1332 Through these connectivity perturbation analyses, we found that increasing λ_{task} strongly reduced
 1333 Pro accuracy in regime 1, yet strongly reduced Anti accuracy in regime 2. This suggests that
 1334 stronger task representations can inhibit both Pro and Anti task performance in different contexts.
 1335 Furthermore, changing λ_{task} in either direction decreases Anti performance in regime 1, showing
 1336 that Anti task performance in regime 1 is dependent on a specific level of task representation.
 1337 We also found that with increasing λ_{diag} , Pro accuracy increased in both regimes, but there were
 1338 opposite effects on Anti accuracy. In regime 1, stronger amplification of diagonal population pat-
 1339 terns decreased Anti accuracy, while in regime 2 accuracy increased. These findings give us an
 1340 understanding of the mechanistic differences in computation enabling rapid task switching in each
 1341 regime.

1342 We tested whether the inferred SC model connectivities could reproduce experimental effects of
 1343 optogenetic inactivation in rats [79]. During periods of simulated optogenetic inactivation, activity

₁₃₄₄ was decreased proportional to the optogenetic strength γ

$$x_\alpha = (1 - \gamma)\phi(u_\alpha). \quad (97)$$

₁₃₄₅ Delay period inactivation was from $0.8 < t < 1.2$.