

# Shipping System API Document

V2.0.1\_2025/11/12

# CONTENT

|     |                                                                 |    |
|-----|-----------------------------------------------------------------|----|
| 1.  | Searching for My Quotations .....                               | 1  |
| 2.  | eSIM .....                                                      | 4  |
| 2.1 | eSIM Order .....                                                | 4  |
| 2.2 | eSIM Order Callback ( when systemMail= false ) .....            | 7  |
| 2.3 | Query eSIM Order .....                                          | 9  |
| 2.4 | eSIM Order and Redeem .....                                     | 11 |
| 2.5 | eSIM Order and Redeem Callback .....                            | 13 |
| 2.6 | Query eSIM Order and Redeem .....                               | 16 |
| 2.7 | eSIM Activation Notification .....                              | 19 |
| 3.  | Redeem .....                                                    | 20 |
| 3.1 | Redeem Redemption Code .....                                    | 20 |
| 3.2 | Redeem Redemption Code Callback .....                           | 22 |
| 4.  | Placing order for SIM card .....                                | 24 |
| 5.  | Top-up SIM Card .....                                           | 26 |
| 5.1 | Top-up .....                                                    | 26 |
| 5.2 | Top-up callback .....                                           | 28 |
| 5.3 | Remote Activation .....                                         | 30 |
| 5.4 | Traffic Reset .....                                             | 32 |
| 6.  | Query .....                                                     | 34 |
| 6.1 | Usage and Status .....                                          | 34 |
| 6.2 | eSIM Basic Info. ....                                           | 38 |
| 6.3 | eSIM Progress Event .....                                       | 40 |
| 6.4 | Verify card number correctness .....                            | 43 |
|     | Attachment1 Response Code Mapping Table .....                   | 45 |
|     | Attachment2 Flow - skipping the display of the redemption ..... | 46 |

## Version History

| Version | Release Date | DESC.                                                                                                                                                                                                                                                                                                                                               |
|---------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.0     | 2023/8/23    | Initial version.                                                                                                                                                                                                                                                                                                                                    |
| 1.1     | 2023/8/28    | Update list:<br>test environment URL.                                                                                                                                                                                                                                                                                                               |
| 1.2     | 2023/8/29    | Update list:<br>eSIM order placement and Top-up column.<br>Rq and Rs example.                                                                                                                                                                                                                                                                       |
| 1.3     | 2023/11/09   | Update list:<br>"Searching for My Quotation" URL                                                                                                                                                                                                                                                                                                    |
| 1.4     | 2024/01/09   | Update list:<br>API-eSIM Order: Added new parameter(systemMail), adjust email parameter explanation and adjust/add example.<br>Add list:<br>Add new API" eSIM Order Callback" .<br>Add new API" Redeem Redemption Code" .<br>Add new API" Redeem Redemption Code Callback" .<br>Add new error code.                                                 |
| 1.5     | 2024/01/15   | Adjust terminology to avoid misunderstandings.                                                                                                                                                                                                                                                                                                      |
| 1.6     | 2024/01/17   | Update list: <ul style="list-style-type: none"><li>● 2.2 eSIM Order Callback Rq parameter(orderId) should be returned Rs orderId of API-eSIM Order.</li><li>● 2.2 eSIM Order Callback added new Rq parameters (orderSN).</li><li>● 3.1 Redeem Redemption Code Callback added new Rq parameters(rcode, qrcodeType, resultcode, resultmsg).</li></ul> |
| 1.7     | 2024/01/25   | Add list: <ul style="list-style-type: none"><li>● 2.3 Query eSIM Order.</li><li>● Response Code Mapping Table add code 407, 408.</li></ul>                                                                                                                                                                                                          |
| 1.7.1   | 2024/02/02   | Add flow - skipping the display of the redemption.                                                                                                                                                                                                                                                                                                  |
| 1.8.0   | 2024/03/15   | Add list: <ul style="list-style-type: none"><li>● 2.4 eSIM Order and Redeem.</li><li>● 2.5 eSIM Order and Redeem Callback.</li></ul> Adjust list: <ul style="list-style-type: none"><li>● 2.1, 2.3 URL: Sorder should be SOrder.</li></ul>                                                                                                          |
| 1.8.1   | 2024/05/31   | Add list:                                                                                                                                                                                                                                                                                                                                           |

|       |            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |            | <ul style="list-style-type: none"> <li>1. Searching for My Quotations add new Rs parameter (leSIM).</li> <li>2.4 API-eSIM Order and Redeem add note(3).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 1.9.0 | 2024/06/25 | <p>Add list:</p> <ul style="list-style-type: none"> <li>Pre-processing.</li> <li>1. Searching for My Quotations add new Rs parameter (wmproductId).</li> <li>2.1 eSIM Order add new Rq parameter (wmproductId), and it is compatible with the old specification (allowing ordering with productid+productName).</li> <li>2.4 eSIM Order and Redeem add new Rq parameter (wmproductId), and it is compatible with the old specification (allowing ordering with productid+productName).</li> <li>5.2 Top-up callback.</li> <li>Response Code Mapping Table add code 808.</li> </ul> <p>Update list:</p> <ul style="list-style-type: none"> <li>5.1 Top-up specification.</li> </ul> |
| 1.9.1 | 2024/07/16 | <p>Add list:</p> <ul style="list-style-type: none"> <li>2.2 eSIM Order Callback add new Rq parameters (code, msg).</li> <li>6. Query Usage and Status.</li> <li>Response Code Mapping Table add code 409.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 1.9.2 | 2024/08/22 | <p>Update list:</p> <ul style="list-style-type: none"> <li>5.1 Top-up Request Example.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 1.9.3 | 2024/10/14 | <p>Update list:</p> <ul style="list-style-type: none"> <li>The original meaning of ICCID referred to the card number, but it has been adjusted to mean the coupon number.</li> </ul> <p>Add list:</p> <ul style="list-style-type: none"> <li>6. Query Usage and Status add new Rs parameter (cid).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                      |
| 1.9.4 | 2024/10/24 | <p>Update list:</p> <ul style="list-style-type: none"> <li>2.5 eSIM Order and Redeem Callback Rq parameter (resultcode) should be modified to string, not int.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 1.9.5 | 2024/11/12 | <p>Update list:</p> <ul style="list-style-type: none"> <li>4. Placing order for SIM card Rq parameter (taxId, note) should be required.</li> <li>Adjust the example.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 1.9.6 | 2025/01/07 | <p>Add list:</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

|       |            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |            | <ul style="list-style-type: none"> <li>● 3.2 Redeem Redemption Code Callback add new Rq parameter (iccid).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 1.9.7 | 2025/03/05 | Add list: <ul style="list-style-type: none"> <li>● 5.3 Remote Activation.</li> <li>● 5.4 Traffic Reset.</li> <li>● 6.1 Query Usage and Status add new Rq parameters (iccid, cid).</li> <li>● 6.2 eSIM Basic Info.</li> <li>● 6.3 eSIM Progress Event.</li> <li>● Response Code Mapping Table add code 410.</li> </ul>                                                                                                                                                                                                                                                             |
| 1.9.8 | 2025/04/28 | Add list: <ul style="list-style-type: none"> <li>● Response Code Mapping Table add code 996.</li> </ul> Update list: <ul style="list-style-type: none"> <li>● Adjust the Attachment2 Flow description.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                 |
| 1.9.9 | 2025/07/17 | Add list: <ul style="list-style-type: none"> <li>● 6.4 Verify card number correctness.</li> <li>● Response Code Mapping Table add code 411.</li> </ul> Update list: <ul style="list-style-type: none"> <li>● Adjust the descriptions of certain parameters.</li> </ul>                                                                                                                                                                                                                                                                                                            |
| 2.0.0 | 2025/07/24 | Add list: <ul style="list-style-type: none"> <li>● 2.4 eSIM Order and Redeem "qrctype" add new Type = 2.</li> <li>● 2.5 eSIM Order and Redeem Callback add new Rq parameters (qrctypeContent, salePlanDays, pin1, pin2, puk1, puk2, cfCode, apnExplain).</li> <li>● 3.1 Redeem Redemption Code "qrctype" add new Type = 2.</li> <li>● 3.2 Redeem Redemption Code Callback add new Rq parameters (qrctypeContent, salePlanDays, pin1, pin2, puk1, puk2, cfCode, apnExplain).</li> </ul> Update list: <ul style="list-style-type: none"> <li>● Adjust some descriptions.</li> </ul> |
| 2.0.1 | 2025/11/12 | Add list: <ul style="list-style-type: none"> <li>● 2.6 Query eSIM Order and Redeem.</li> <li>● 2.7 eSIM Activation Notification.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## Pre-processing

Please get the parameters (MerchantId, DeptId, Token) and set the callback URL at the following position.

Backend > Settings

Worldmove

---

## 1. Searching for My Quotations

### Application Scenarios

- (1). Query the cost price reported to wholesalers by Worldmove.
- (2). Query the selling price reported by wholesalers to C-end. (As wholesalers can import C-end prices into the backend, this data can be queried.)

**▲ Note** It is recommended to query once per week, unless there is a system announcement indicating product changes, in which case you may initiate a query.  
Please do not query too frequently (e.g., every minute or every hour), as the system may consider it an attack and block IP.  
Please do not query this before each purchase request, as the system may consider it an attack and block IP.

### Integration Environment

Prod:

<https://fmshippingsys.fastmove.com.tw/Api/QuoteMg/myQueryAll>

Test:

<https://fmshippingsys.fastmove.com.tw/Api/QuoteMg/myQueryAll>

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name |                 | Desc.                                                                                                                                          | Type        | Rq | Rs |
|------------|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----|----|
| merchantId |                 | Merchant ID                                                                                                                                    | String      | ●  |    |
| encStr     |                 | Parameter Security Verification Calculation Method:<br>merchantId+token and then apply SHA1 encryption to the result and put it in this field. | String      | ●  |    |
| prodList   |                 | Product List                                                                                                                                   | ArrayObject |    | ●  |
|            | wmproductId     | WM Product ID (unique value)                                                                                                                   | String      |    | ●  |
|            | productId       | Product ID                                                                                                                                     | String      |    | ●  |
|            | productName     | Product Name                                                                                                                                   | String      |    | ●  |
|            | productNamelang | Product Language                                                                                                                               | String      |    | ●  |
|            | productRegion   | Applicable Region                                                                                                                              | String      |    | ●  |

|      |               |                                                                                                                                                                                                       |         |  |   |
|------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|--|---|
|      | productType   | Product Type<br>0: Virtual (eSIM)<br>1: SIM card<br>2: Top-Up SIM card                                                                                                                                | Int     |  | ● |
|      | productPrice  | Price (wholesaler cost)<br>Currency: TWD                                                                                                                                                              | Int     |  | ● |
|      | productcPrice | C-end Price<br>Currency: TWD                                                                                                                                                                          | Int     |  | ● |
|      | csight        | Is it C-end Product<br>0: N<br>1: Y                                                                                                                                                                   | Int     |  | ● |
|      | leSIM         | This field is used to identify the source of the eSIM products, there are 2 sources: one is WorldMove, and the other is local carrier.<br><br>true: WorldMove<br>false: local carrier (prepaid cards) | Boolean |  | ● |
| code |               | Response Code                                                                                                                                                                                         | Int     |  | ● |
| msg  |               | Response Message                                                                                                                                                                                      | String  |  | ● |

#### Request Example

```
{
  "merchantId": "b00xxxx",
  "encStr": "83E5D23F05902EBA0D9A5E3CF97954973A8D0A87"
}
```

#### Response Example

```
{
  "code": 0,
  "msg": null,
  "prodList": [
    {
      "wmproductId": "WM_000001",
      "productId": "eSIM-FS-JPtest-3_e",
      "productName": "Japan (1GB per Day) - 03Day",
      "productNamelang": null,
      "productRegion": "Japan",
      "productType": 0,


```



```
    "productPrice": 90,  
    "productcPrice": 0,  
    "csight": 0,  
    "leSIM": false  
  },  
  {  
    "wmproductId": "WM_000008",  
    "productId": "FS-JPtest-1_e",  
    "productName": "Japan, 1GB per day , 10 day",  
    "productNamelang": null,  
    "productRegion": "Japan",  
    "productType": 1,  
    "productPrice": 85,  
    "productcPrice": 0,  
    "csight": 0,  
    "leSIM": false  
  },  
  {  
    "wmproductId": "WM_000005",  
    "productId": "FS-test_e",  
    "productName": "China, Hong Kong and Macau 1.5GB per day",  
    "productNamelang": null,  
    "productRegion": "Mainland China, Hong Kong, Macau",  
    "productType": 2,  
    "productPrice": 25,  
    "productcPrice": 0,  
    "csight": 0,  
    "leSIM": false  
  }  
]  
}
```

## 2. eSIM

### 2.1 eSIM Order

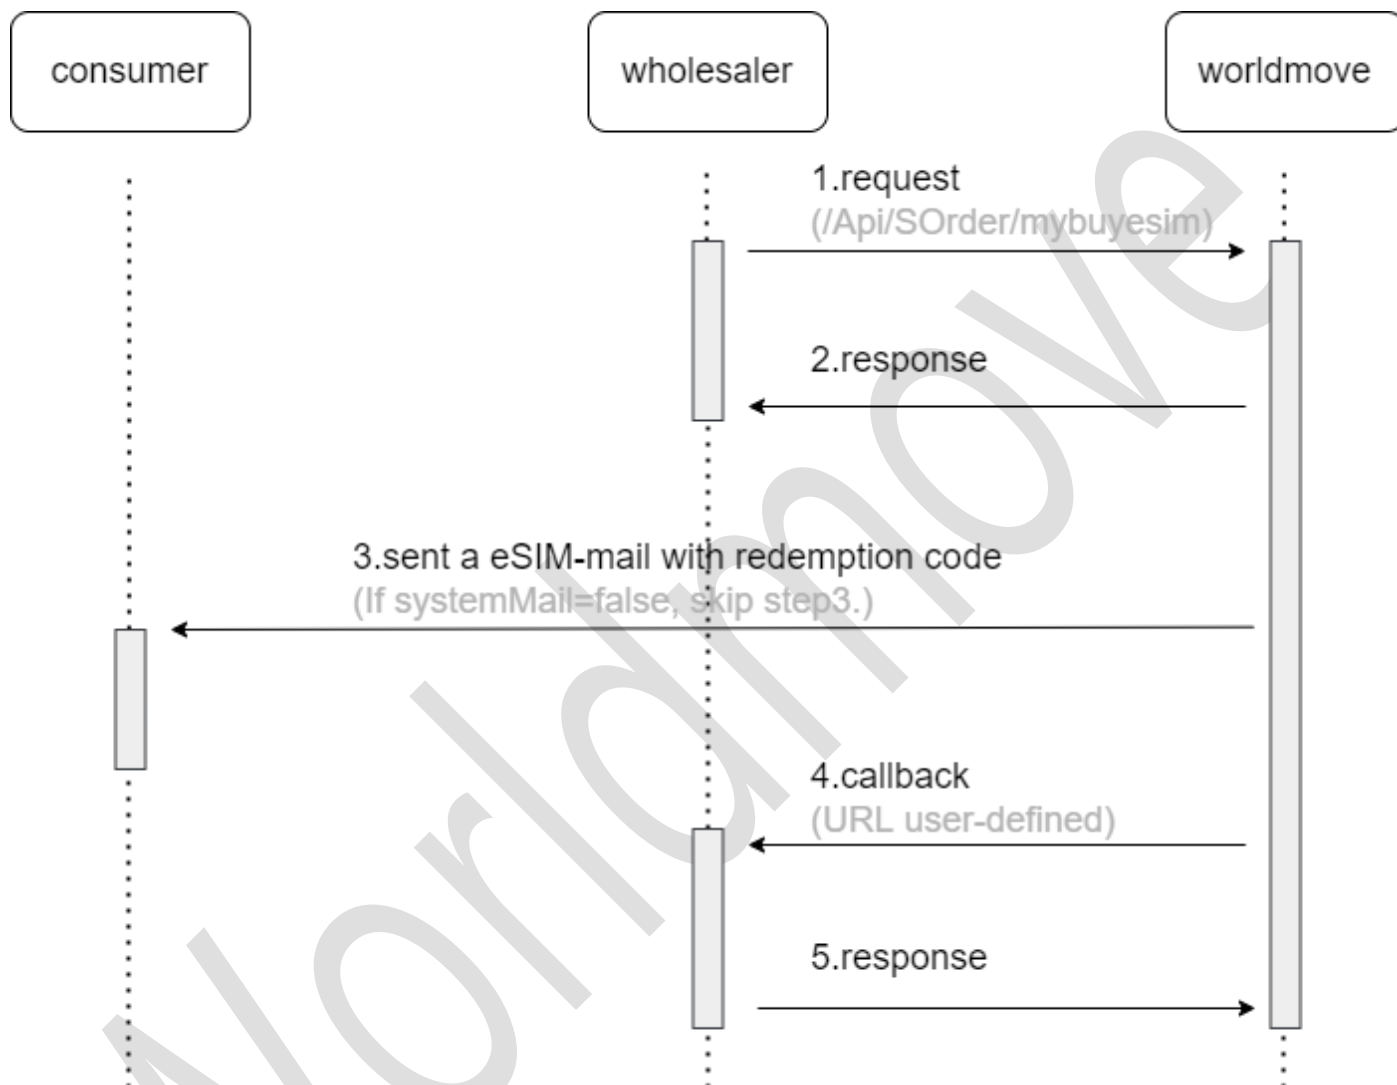

#### Application Scenarios

Create eSIM Purchase Order.

It will only respond that the request has been received, the final result will be provided via 2.2.

#### Integration Environment

Prod:

<https://fmshippingsys.fastmove.com.tw/Api/SOrder/mybuyesim>

Test:

<https://fmshippingsys.fastmove.com.tw/Api/SOrder/mybuyesim>

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name |             | Desc.                                                                                                                                                                                                    | Type        | Rq | Rs |
|------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----|----|
| merchantId |             | Merchant ID                                                                                                                                                                                              | String      | ●  |    |
| deptId     |             | Department ID                                                                                                                                                                                            | String      | ●  |    |
| email      |             | Recipient's email<br><b>▲ Note</b> If systemMail=false, this field will be used for creating order and will not send eSIM order email to this recipient.                                                 | String      | ●  |    |
| prodList   |             | Product List                                                                                                                                                                                             | ArrayObject | ●  |    |
|            | wmproductId | WM Product ID (unique value)                                                                                                                                                                             | String      | ●  |    |
|            | qty         | Quantity(pcs)                                                                                                                                                                                            | Int         | ●  |    |
| systemMail |             | Is the eSIM order email sent by Worldmove.<br>If not provided, the default is true.<br><br>true: Sent by Worldmove<br>false: Not sent by Worldmove.                                                      | Boolean     | ○  |    |
| encStr     |             | Parameter Security Verification Calculation Method:<br>merchantId+deptId+email+ contents within prodList (wmproductId+qty) +token and then apply SHA1 encryption to the result and put it in this field. | String      | ●  |    |
| code       |             | Response Code                                                                                                                                                                                            | Int         |    | ●  |
| msg        |             | Response Message                                                                                                                                                                                         | String      |    | ●  |
| orderId    |             | Order ID (system unique value)                                                                                                                                                                           | String      |    | ●  |

Request Example1 ( not filled parameter systemMail or systemMail= true )

```
{
  "merchantId": "b00xxxx",
  "deptId": "000xxx",
  "email": "abc@gmail.com",
  "prodList": [
    {
```

```
        "wmproductId": "WM-e-JP-1-1GB",
        "qty": 2
    },
    ],
    "encStr": "30F9647B1B8E2388105C2FCC370A9DF2C5AF4454"
}
```

## Response Example

```
{
  "code": 0,
  "msg": null,
  "orderId": "b00xxxx2308230002"
}
```

---

## Request Example2 ( systemMail= false )

```
{
  "merchantId": "b00xxxx",
  "deptId": "000xxx",
  "email": "abc@gmail.com",
  "prodList": [
    {
      "wmproductId": "WM-e-JP-1-1GB",
      "qty": 2
    }
  ],
  "systemMail": false,
  "encStr": "30F9647B1B8E2388105C2FCC370A9DF2C5AF4454"
}
```

## Response Example

```
{
  "code": 0,
  "msg": null,
  "orderId": "b00000e2308230002"
}
```

## 2.2 eSIM Order Callback ( when systemMail= false )

### Application Scenarios

Receive the processing result from 2.1.

### Integration Environment

Prod:

<https://custom>

Test:

<https://custom>

- ▲ **Note** (1). In principle, the callback will be sent within approximately 3 minutes, but the actual timing depending on the situation.
- (2). After obtaining the callback, you can trigger 3. Redeem at any time.

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name |                | Desc.                                                                                                                                                                                                                                       | Type        | Rq | Rs |
|------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----|----|
| orderId    |                | Order ID (system unique value)                                                                                                                                                                                                              | String      | ●  |    |
| orderSN    |                | eSIM mail Order ID                                                                                                                                                                                                                          | String      | ●  |    |
| orderTime  |                | Order Time                                                                                                                                                                                                                                  | String      | ●  |    |
| code       |                | Response Code                                                                                                                                                                                                                               | Int         | ●  |    |
| msg        |                | Response Message                                                                                                                                                                                                                            | String      | ●  |    |
| itemList   |                | Product List                                                                                                                                                                                                                                | ArrayObject | ●  |    |
|            | iccid          | Coupon Number                                                                                                                                                                                                                               | String      | ●  |    |
|            | productName    | Product Name                                                                                                                                                                                                                                | String      | ●  |    |
|            | redemptionCode | Redemption Code                                                                                                                                                                                                                             | String      | ●  |    |
| encStr     |                | Parameter Security Verification Calculation Method:<br>merchantId+orderId+orderSN+orderTime+<br>contents within itemList<br>(iccid+productName+redemptionCode)+token and then apply SHA1 encryption to the result and put it in this field. | String      | ●  |    |

|                                                                                                                         |        |  |   |
|-------------------------------------------------------------------------------------------------------------------------|--------|--|---|
| Please return the string "1" . If not returned, the system will retry once every 5 seconds, for a total of 3-4 retries. | String |  | ● |
|-------------------------------------------------------------------------------------------------------------------------|--------|--|---|

Request Example

```
{
  "orderId": "b00xxxx2401020002",
  "orderSN": "240108141325019LHqJ6Fhh",
  "orderTime": "2024-01-08 14:18:00",
  "code": 0,
  "msg": "成功",
  "itemList":
    [{
      "iccid": "990000000067800012345",
      "productName": "中港澳 ( 按天 1GB ) -03 天",
      "redemptionCode": "t6jks8cqpm"
    }, {
      "iccid": "990000000067800012355",
      "productName": "中港澳 ( 按天 1GB ) -03 天",
      "redemptionCode": "xm56nryz6v"
    }
  ],
  "encStr": "8c20fc870c3093b6da7c45cddc3ec83f9f205b77"
}
```

Response Example

```
"1"
```

## 2.3 Query eSIM Order

### Application Scenarios

Used for actively querying in cases where the 2.2 callback cannot be received due to an exception.

### Integration Environment

Prod:

<https://fmshippingsys.fastmove.com.tw/Api/SOrder/querybuyesim>

Test:

<https://fmshippingsys.fastmove.com.tw/Api/SOrder/querybuyesim>

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name |                | Desc.                                                                                                                                                  | Type        | Rq | Rs |
|------------|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----|----|
| merchantId |                | Merchant ID                                                                                                                                            | String      | ●  |    |
| orderId    |                | Order ID (system unique value)                                                                                                                         | String      | ●  |    |
| encStr     |                | Parameter Security Verification Calculation Method:<br>merchantId+orderId+token and then apply SHA1 encryption to the result and put it in this field. | String      | ●  |    |
| code       |                | Response Code                                                                                                                                          | Int         |    | ●  |
| msg        |                | Response Message                                                                                                                                       | String      |    | ●  |
| orderId    |                | Order ID (system unique value)                                                                                                                         | String      |    | ●  |
| orderSN    |                | eSIM mail Order ID                                                                                                                                     | String      |    | ●  |
| orderTime  |                | Order Time                                                                                                                                             | String      |    | ●  |
| itemList   |                | Product List                                                                                                                                           | ArrayObject |    | ●  |
|            | iccid          | Coupon Number                                                                                                                                          | String      |    | ●  |
|            | productName    | Product Name                                                                                                                                           | String      |    | ●  |
|            | redemptionCode | Redemption Code                                                                                                                                        | String      |    | ●  |

## Request Example

```
{
  "merchantId": "b00xxxx",
  "orderId": "b00xxxx2401240002",
  "encStr": "112AC99E8C838F3E89FA1F416524D3A2B702B9D8"
}
```

## Response Example

```
{
  "code": 0,
  "msg": null,
  "orderId": "b00xxxx2401240002",
  "orderSN": "2401241619340454z4oLnR9",
  "orderTime": "2024-01-24 16:24:00",
  "itemList": [
    {
      "iccid": "240124162400359fEEDgyIR",
      "productName": "中港澳 ( 按天 1GB ) -03 天",
      "redemptionCode": "240124162400359yIQVfYHq"
    },
    {
      "iccid": "240124162400359LtBwLDJq",
      "productName": "中港澳 ( 按天 1GB ) -03 天",
      "redemptionCode": "240124162400359IVXisy9H"
    }
  ]
}
```



## 2.4 eSIM Order and Redeem

### Application Scenarios

After placing the eSIM order, the system will exchange redemption code immediately and respond the QR code or text to the wholesaler.

It will only respond that the request has been received, the final result will be provided via 2.5.

- ▲ **Note**
- (1). If you want to exchange redemption code by yourself, don't need to link this.
  - (2). Each order supports a maximum of 20 eSIMs.
  - (3). Only products with [leSIM=true](#) can be purchased.

### Integration Environment

Prod:

<https://fmshippingsys.fastmove.com.tw/Api/SOrder/mybuyesimRedemption>

Test:

<https://tfmshippingsys.fastmove.com.tw/Api/SOrder/mybuyesimRedemption>

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name |             | Desc.                                                                                                                                                     | Type        | Rq | Rs |
|------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----|----|
| merchantId |             | Merchant ID                                                                                                                                               | String      | ●  |    |
| deptId     |             | Department ID                                                                                                                                             | String      | ●  |    |
| qrCodeType |             | Redemption return format:<br>0: image URL<br>1: text<br>2: image URL and text<br><br>▲ <b>Note</b> The format remains unchanged for repeated redemptions. | Int         | ●  |    |
| prodList   |             | Product List                                                                                                                                              | ArrayObject | ●  |    |
|            | wmproductId | WM Product ID (unique value)                                                                                                                              | String      | ●  |    |
|            | qty         | Quantity(pcs)                                                                                                                                             | Int         | ●  |    |
| encStr     |             | Parameter Security Verification Calculation Method:                                                                                                       | String      | ●  |    |

|         |  |                                                                                                                                                                    |        |  |   |
|---------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--|---|
|         |  | merchantId+deptId+qrctypeType<br>+contents within prodList<br>(wmproductId+qty)+token and<br>then apply SHA1 encryption to<br>the result and put it in this field. |        |  |   |
| code    |  | Response Code                                                                                                                                                      | Int    |  | ● |
| msg     |  | Response Message                                                                                                                                                   | String |  | ● |
| orderId |  | Order ID (system unique value)                                                                                                                                     | String |  | ● |

### Request Example

```
{
  "merchantId": "b00xxxx",
  "deptId": "000xxx",
  "qrctypeType": 2,
  "prodList": [
    {
      "wmproductId": "WM_000003",
      "qty": 1
    }
  ],
  "encStr": "D7837873FD532913048D9CA5A9ADFC026F9B4D8B"
}
```

### Response Example

```
{
  "code": 0,
  "msg": null,
  "orderId": "b00xxxx2403110003"
}
```

## 2.5 eSIM Order and Redeem Callback

### Application Scenarios

Receive the processing result from 2.4.

### Integration Environment

Prod:

<https://custom>

Test:

<https://custom>

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name |             | Desc.                                                                                                                                                                                                                                                 | Type        | Rq | Rs |
|------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----|----|
| orderId    |             | Order ID (system unique value)                                                                                                                                                                                                                        | String      | ●  |    |
| itemList   |             | Product List                                                                                                                                                                                                                                          | ArrayObject | ●  |    |
|            | iccid       | Coupon Number                                                                                                                                                                                                                                         | String      | ●  |    |
|            | productName | Product Name                                                                                                                                                                                                                                          | String      | ●  |    |
|            | qrcode      | Determine the response content based on the qrcodeType in the request.<br>If qrcodeType = 0, return the image URL.<br>If qrcodeType = 1, return the text.<br>If qrcodeType = 2, return the image URL and include the LPA text in qrcodeContent field. | String      | ●  |    |
|            | rcode       | Redemption Code                                                                                                                                                                                                                                       | String      | ●  |    |
|            | qrcodeType  | Redemption return format                                                                                                                                                                                                                              | Int         | ●  |    |
|            | resultcode  | Redeem Response Code<br>000: Success, the rest failed                                                                                                                                                                                                 | String      | ●  |    |
|            | resultmsg   | Redeem Response Message<br>It's depending on the current conditions.                                                                                                                                                                                  | String      | ●  |    |

|                                                                                                                         |               |                                                                                                                                                                                                                                |        |   |   |
|-------------------------------------------------------------------------------------------------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|---|---|
|                                                                                                                         | code          | The response code for redemption request.                                                                                                                                                                                      | Int    | ● |   |
|                                                                                                                         | msg           | The response message for the redemption request.                                                                                                                                                                               | String | ● |   |
|                                                                                                                         | qrcodeContent | LPA text                                                                                                                                                                                                                       | String | ○ |   |
|                                                                                                                         | salePlanDays  | Product days                                                                                                                                                                                                                   | Int    | ○ |   |
|                                                                                                                         | pin1          | PIN1                                                                                                                                                                                                                           | String | ○ |   |
|                                                                                                                         | pin2          | PIN2                                                                                                                                                                                                                           | String | ○ |   |
|                                                                                                                         | puk1          | PUK1                                                                                                                                                                                                                           | String | ○ |   |
|                                                                                                                         | puk2          | PUK2                                                                                                                                                                                                                           | String | ○ |   |
|                                                                                                                         | cfCode        | Confirmation Code                                                                                                                                                                                                              | String | ○ |   |
|                                                                                                                         | apnExplain    | APN Description                                                                                                                                                                                                                | String | ○ |   |
| encStr                                                                                                                  |               | Parameter Security Verification Calculation Method:<br>merchantId+orderId+contents within itemList<br>(iccid+productName+rcode+qrcodeType+qrcode)+token and then apply SHA1 encryption to the result and put it in this field. | String | ● |   |
| Please return the string "1" . If not returned, the system will retry once every 5 seconds, for a total of 3-4 retries. |               |                                                                                                                                                                                                                                | String |   | ● |

### Request Example

```
{
  "orderId": "b00xxxx2403110003",
  "itemList":
    [{
      "iccid": "89862100079403040259",
      "productName": "Japan (1GB per Day) - 01 Day",
      "qrcode":
        "LPA:1$rsp.demo.com$0913F6176020B7C603E3R42B61P686D3",
      "rcode": "v6ba7ichtu",
      "qrcodeType": 1,
      "resultcode": "000",
      "resultmsg": "success",
      "code": 0,
      "msg": "成功",
      "qrcodeContent":
        "LPA:1$rsp.demo.com$0913F6176020B7C603E3R42B61P686D3",
      "salePlanDays": 2,
    }
  ]
}
```

```
"pin1": "1111",  
"pin2": "2222",  
"puk1": "33334444",  
"puk2": "44445555",  
"cfCode": "849372",  
"apnExplain": "rsp.demo.com"  
    },  
"encStr": "de6c099b9a6ddbc3c19e35a92cf11454b748256e"  
}
```

## Response Example

```
"1"
```

## 2.6 Query eSIM Order and Redeem

### Application Scenarios

Used for actively querying in cases where the 2.5 callback cannot be received due to an exception.

### Integration Environment

Prod:

<https://fmshippingsys.fastmove.com.tw/Api/SOrder/querybuyesimRedemption>

Test:

<https://fmshippingsys.fastmove.com.tw/Api/SOrder/querybuyesimRedemption>

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name |             | Desc.                                                                                                                                                     | Type        | Rq | Rs |
|------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----|----|
| merchantId |             | Merchant ID                                                                                                                                               | String      | ●  |    |
| orderId    |             | Order ID (system unique value)                                                                                                                            | String      | ●  |    |
| encStr     |             | Parameter Security Verification Calculation Method:<br>merchantId+orderId+token and then apply SHA1 encryption to the result and put it in this field.    | String      | ●  |    |
| code       |             | Response Code                                                                                                                                             | Int         |    | ●  |
| msg        |             | Response Message                                                                                                                                          | String      |    | ●  |
| orderId    |             | Order ID (system unique value)                                                                                                                            | String      |    | ●  |
| itemList   |             | Product List                                                                                                                                              | ArrayObject |    | ●  |
|            | iccid       | Coupon Number                                                                                                                                             | String      |    | ●  |
|            | productName | Product Name                                                                                                                                              | String      |    | ●  |
|            | qrcode      | Determine the response content based on the qrcodeType in the request.<br>If qrcodeType = 0, return the image URL.<br>If qrcodeType = 1, return the text. | String      |    | ●  |

|  |              |                                                                                   |  |  |   |
|--|--------------|-----------------------------------------------------------------------------------|--|--|---|
|  |              | If qrctype = 2, return the image URL and include the LPA text in qrcontent field. |  |  |   |
|  | rcode        | Redemption Code                                                                   |  |  | ● |
|  | qrctype      | Redemption return format                                                          |  |  | ● |
|  | resultcode   | Redeem Response Code<br>000: Success, the rest failed                             |  |  | ● |
|  | resultmsg    | Redeem Response Message<br>It's depending on the current conditions.              |  |  | ● |
|  | qrcontent    | LPA text                                                                          |  |  | ● |
|  | salePlanDays | Product days                                                                      |  |  | ● |
|  | pin1         | PIN1                                                                              |  |  | ● |
|  | pin2         | PIN2                                                                              |  |  | ● |
|  | puk1         | PUK1                                                                              |  |  | ● |
|  | puk2         | PUK2                                                                              |  |  | ● |
|  | cfCode       | Confirmation Code                                                                 |  |  | ● |
|  | apnExplain   | APN Description                                                                   |  |  | ● |

#### Request Example

```
{
  "merchantId": "b00xxxx",
  "orderId": "b00xxxx2511050001",
  "encStr": "A47664BB58582AB6EAD5FBB258297C6BBA11D20A"
}
```

#### Response Example

```
{
  "orderId": "b00xxxx2511050001",
  "itemList":
    [{
      "iccid": "89862100179100005264",
      "productName": "Multi-region A, 10 Days, 1GB /day, 128kbps",
      "qrctype": 2,
      "qrcontent": "https://tfmshippingsys.fastmove.com.tw/tApi/images/redeem_sample.jpg",
      "rcode": "5Un37NJHwy",
      "qrctype": 2,
      "resultcode": "000",
      "resultmsg": "success",
      "qrcontent": "LPA:1$rsp.demo.com$0913F6176020B7C603E3R42B61P686D3",
    }
  ]
}
```

```
"salePlanDays": 2,  
"pin1": "1111",  
"pin2": "2222",  
"puk1": "33334444",  
"puk2": "44445555",  
"cfCode": "849372",  
"apnExplain": "rsp.demo.com"  
    }  
}
```

Worldamove



## 2.7 eSIM Activation Notification

### Application Scenarios

Receive notification that the user has activated the eSIM.

### Integration Environment

Prod:

<https://custom>

Test:

NONE

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name                                                                                                              | Desc.                          | Type   | Rq | Rs |
|-------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------|----|----|
| orderId                                                                                                                 | Order ID (system unique value) | String | ●  |    |
| rcode                                                                                                                   | Redemption Code                | String | ●  |    |
| iccid                                                                                                                   | Coupon Number                  | String | ●  |    |
| useSDate                                                                                                                | Start Date timestamp           | String | ●  |    |
| useEDate                                                                                                                | End Date timestamp             | String | ●  |    |
| Please return the string "1" . If not returned, the system will retry once every 5 seconds, for a total of 3-4 retries. |                                |        |    | ●  |

### Request Example


```
{
  "orderId": "b00xxxx2511050001",
  "rcode": "5Un37NJHwy",
  "iccid": "89862100179100005264",
  "useSDate": "1762151118027",
  "useEDate": "1733793839860"
}
```

### Response Example

```
"1"
```

### 3. Redeem

#### 3.1 Redeem Redemption Code

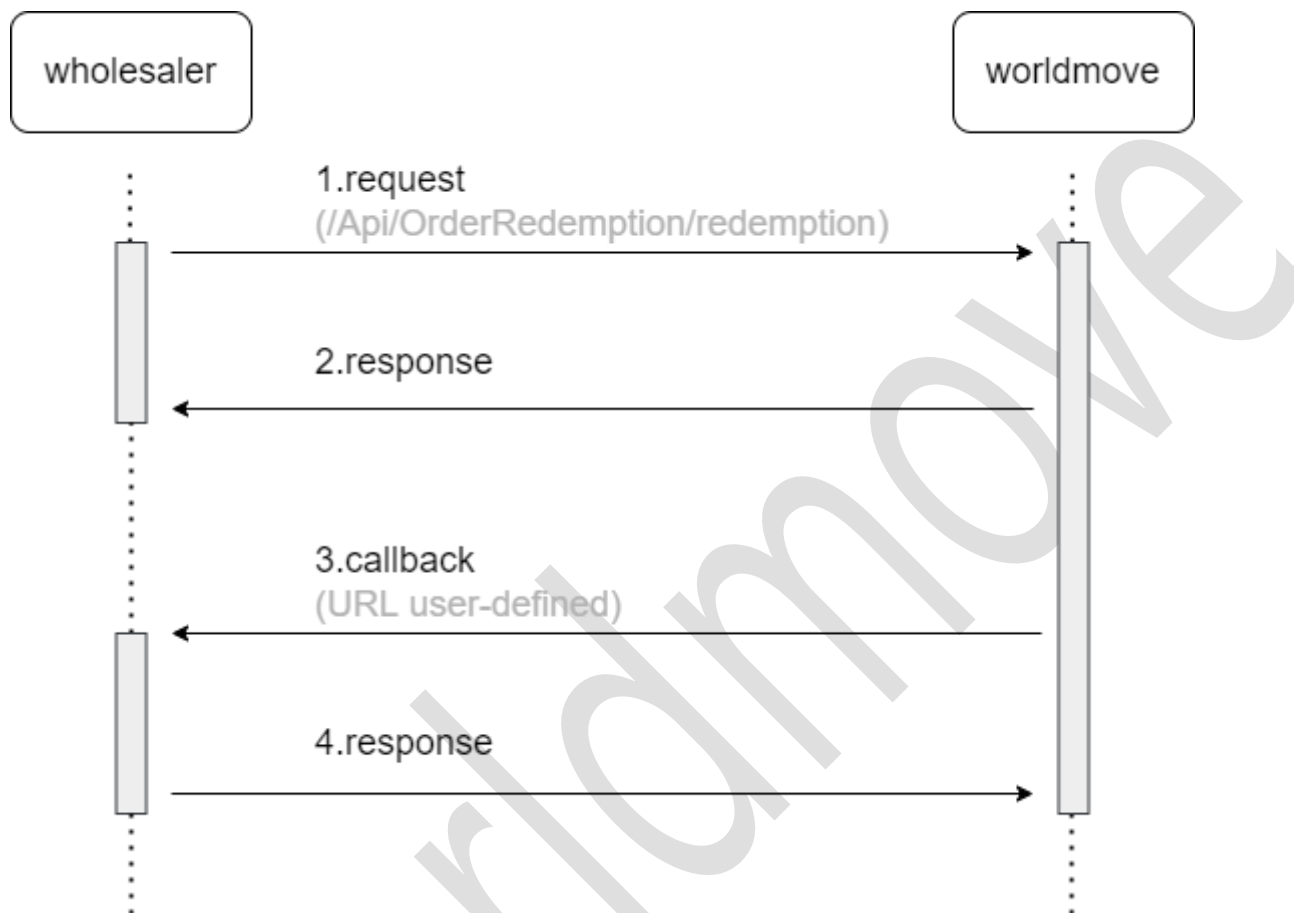

#### Application Scenarios

The eSIM redemption code will be redeemed to a QR code image or text.

It will only respond that the request has been received, the final result will be provided via 3.2.

#### Integration Environment

Prod:

<https://fmshippingsys.fastmove.com.tw/Api/OrderRedemption/redemption>

Test:

<https://tfmshippingsys.fastmove.com.tw/Api/OrderRedemption/redemption>

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name |  | Desc.                                                                                                                                                        | Type   | Rq | Rs |
|------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|----|
| merchantId |  | Merchant ID                                                                                                                                                  | String | ●  |    |
| rcode      |  | Redemption Code                                                                                                                                              | String | ●  |    |
| qrctype    |  | Redemption return format:<br>0: image URL<br>1: text<br>2: image URL and text<br><br>▲ <b>Note</b> The format remains unchanged for repeated redemptions °   | Int    | ●  |    |
| encStr     |  | Parameter Security Verification Calculation Method:<br>merchantId+rcode+qrctype+token and then apply SHA1 encryption to the result and put it in this field. | String | ●  |    |
| code       |  | Response Code                                                                                                                                                | Int    |    | ●  |
| msg        |  | Response Message                                                                                                                                             | String |    | ●  |

#### Request Example

```
{
  "merchantId": "b00xxxx",
  "rcode": "240108141800313U6rA4eKh",
  "qrctype": 2,
  "encStr": "64AB17CF77AA1137BCF0F74982B255C32A79C8DA"
}
```

#### Response Example

```
{
  "code": 0,
  "msg": "成功"
}
```

## 3.2 Redeem Redemption Code Callback

### Application Scenarios

Receive the processing result from 3.1.

### Integration Environment

Prod:

<https://custom>

Test:

<https://custom>

**▲Note** In principle, the callback will be sent within approximately 1 minute, but the actual timing depending on the situation.

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name | Desc.                                                                                                                                                                                                                                                 | Type   | Rq | Rs |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|----|
| qrcode     | Determine the response content based on the qrcodeType in the request.<br>If qrcodeType = 0, return the image URL.<br>If qrcodeType = 1, return the text.<br>If qrcodeType = 2, return the image URL and include the LPA text in qrcodeContent field. | String | ●  |    |
| rcode      | Redemption Code                                                                                                                                                                                                                                       | String | ●  |    |
| qrcodeType | Redemption format                                                                                                                                                                                                                                     | Int    | ●  |    |
| encStr     | Parameter Security Verification Calculation Method:<br>merchantId+qrcode+rcode+qrcodeType+token and then apply SHA1 encryption to the result and put it in this field.                                                                                | String | ●  |    |
| resultcode | Redeem Response Code<br>000: Success, the rest failed                                                                                                                                                                                                 | String | ●  |    |

|                                                                                                                         |  |                                                                      |        |   |   |
|-------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------|--------|---|---|
| resultmsg                                                                                                               |  | Redeem Response Message<br>It's depending on the current conditions. | String | ● |   |
| iccid                                                                                                                   |  | Coupon Number                                                        | String | ● |   |
| qrcodeContent                                                                                                           |  | LPA text                                                             | String | ○ |   |
| salePlanDays                                                                                                            |  | Product days                                                         | Int    | ○ |   |
| pin1                                                                                                                    |  | PIN1                                                                 | String | ○ |   |
| pin2                                                                                                                    |  | PIN2                                                                 | String | ○ |   |
| puk1                                                                                                                    |  | PUK1                                                                 | String | ○ |   |
| puk2                                                                                                                    |  | PUK2                                                                 | String | ○ |   |
| cfCode                                                                                                                  |  | Confirmation Code                                                    | String | ○ |   |
| apnExplain                                                                                                              |  | APN Description                                                      | String | ○ |   |
| Please return the string "1" . If not returned, the system will retry once every 5 seconds, for a total of 3-4 retries. |  |                                                                      | String |   | ● |

Request Example ( In the case of qrcodeType=2 as an example )

```
{
  "qrcode": "https://tfmshippingsys.fastmove.com.tw/tApi/images/redeem_sample.jpg",
  "rcode": "1q2w3e4r5t",
  "qrcodeType": 2,
  "encStr": "8c20fc870c3093b6da7c45cddc3ec83f9f205b77",
  "resultcode": "000",
  "resultmsg": "success",
  "iccid": "250107112500074Du4XyX3u",
  "qrcodeContent": "LPA:1$rsp.demo.com$0913F6176020B7C603E3R42B61P686D3",
  "salePlanDays": 2,
  "pin1": "1111",
  "pin2": "2222",
  "puk1": "33334444",
  "puk2": "44445555",
  "cfCode": "849372",
  "apnExplain": "rsp.demo.com"
}
```

Response Example

```
"1"
```

## 4. Placing order for SIM card

### Application Scenarios

Create SIM card purchase order.

### Integration Environment

Prod:

<https://fmshippingsys.fastmove.com.tw/Api/SOrder/mybuysim>

Test:

<https://tfmshippingsys.fastmove.com.tw/Api/SOrder/mybuysim>

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name    |             | Desc.                                                                                                                                                               | Type        | Rq | Rs |
|---------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----|----|
| merchantId    |             | Merchant ID                                                                                                                                                         | String      | ●  |    |
| deptId        |             | Department ID                                                                                                                                                       | String      | ●  |    |
| invoiceType   |             | Invoice Type<br>0: donate<br>1: electronic(pdf)                                                                                                                     | Int         | ●  |    |
| taxId         |             | company tax ID                                                                                                                                                      | String      | ●  |    |
| receivingName |             | Recipient's Name                                                                                                                                                    | String      | ●  |    |
| receivingTel  |             | Recipient's Phone Number                                                                                                                                            | String      | ●  |    |
| receivingAdd  |             | Recipient's Shipping Address                                                                                                                                        | String      | ●  |    |
| note          |             | Note                                                                                                                                                                | String      | ●  |    |
| prodList      |             | Product List                                                                                                                                                        | ArrayObject | ●  |    |
|               | productId   | Product ID                                                                                                                                                          | String      | ●  |    |
|               | productName | Product Name                                                                                                                                                        | String      | ●  |    |
|               | qty         | Quantity(pcs)                                                                                                                                                       | Int         | ●  |    |
| encStr        |             | Parameter Security Verification<br>Calculation Method:<br>merchantId+deptId+invoiceType+taxId+receivingName+receivingTel+receivingAdd+note+contents within prodList | String      | ●  |    |

|         |  |                                                                                                                    |        |  |   |
|---------|--|--------------------------------------------------------------------------------------------------------------------|--------|--|---|
|         |  | (productid+productName+qty)<br>+token and then apply SHA1<br>encryption to the result and put<br>it in this field. |        |  |   |
| orderId |  | Order ID (system unique value)                                                                                     | String |  | ● |
| code    |  | Response Code                                                                                                      | Int    |  | ● |
| msg     |  | Response Message                                                                                                   | String |  | ● |

### Request Example

```
{
  "merchantId": "b00xxxx",
  "deptId": "000xxx",
  "invoiceType": 0,
  "taxId": "",
  "receivingName": "陳小明",
  "receivingTel": "0912345678",
  "receivingAdd": "新北市汐止區小明路一段 1 號 1 樓",
  "note": "",
  "prodList": [
    {
      "productId": "FS-JPtest-1",
      "productName": "日本每天 1GB 10 天",
      "qty": 50
    },
    {
      "productId": "FS-JPtest-3",
      "productName": "韓國每天 1GB 12 天",
      "qty": 100
    }
  ],
  "encStr": "9A251E504207C233220B869D5C1A8F736CD28064"
}
```

### Response Example

```
{
  "code": 0,
  "msg": null,
  "orderId": "b00xxxx2308210003"
}
```

## 5. Top-up SIM Card

### 5.1 Top-up

#### Application Scenarios

Topping up SIM cards.

It will only respond that the request has been received, the final result will be provided via 5.2.

- ▲ **Note**
- (1). A maximum of 500 cards can be charged per order.
  - (2). No card numbers can be duplicated within the same order.
  - (3). Days cannot exceed 30.

#### Integration Environment

Prod:

<https://fmshippingsys.fastmove.com.tw/Api/SOrder/mydeposit>

Test:

<https://fmshippingsys.fastmove.com.tw/Api/SOrder/mydeposit>

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name |             | Desc.                                                                                                                               | Type        | Rq | Rs |
|------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------|-------------|----|----|
| merchantId |             | Merchant ID                                                                                                                         | String      | ●  |    |
| deptId     |             | Department ID                                                                                                                       | String      | ●  |    |
| prodList   |             | Product List                                                                                                                        | ArrayObject | ●  |    |
|            | wmproductId | WM Product ID (unique value)                                                                                                        | String      | ●  |    |
|            | day         | Day (Max. 30)                                                                                                                       | Int         | ●  |    |
|            | simNum      | Card Number (Max. 500)                                                                                                              | String      | ●  |    |
| encStr     |             | Parameter Security Verification<br>Calculation Method:<br>merchantId+deptId+contents<br>within prodList<br>(wmproductId+day+simNum) | String      | ●  |    |



|         |  |                                                                               |        |  |   |
|---------|--|-------------------------------------------------------------------------------|--------|--|---|
|         |  | +token and then apply SHA1 encryption to the result and put it in this field. |        |  |   |
| code    |  | Response Code                                                                 | Int    |  | ● |
| msg     |  | Response Message                                                              | String |  | ● |
| orderId |  | Order ID (system unique value)                                                | String |  | ● |

### Request Example

```
{
  "merchantId": "b00xxxx",
  "deptId": "000xxx",
  "prodList": [
    {
      "wmproductId": "WM_000006",
      "day": 1,
      "simNum": "12311"
    }
  ],
  "encStr": "0B4CB879A9CB37091D512BA66099A64AE34D89DE"
}
```

### Response Example

```
{
  "code": 0,
  "msg": null,
  "orderId": "b00xxxx2308290005"
}
```

## 5.2 Top-up callback

### Application Scenarios

Receive the processing result from 5.1.

### Integration Environment

Prod:

<https://custom>

Test:

<https://custom>

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name                                                                                                                 | Desc.                                                                                                                                                                                                                       | Type                                                | Rq     | Rs |
|----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|--------|----|
| orderId                                                                                                                    | Order ID (system unique value)                                                                                                                                                                                              | String                                              | ●      |    |
| itemList                                                                                                                   | Product List                                                                                                                                                                                                                | ArrayObject                                         | ●      |    |
|                                                                                                                            | wmproductId                                                                                                                                                                                                                 | WM Product ID (unique value)                        | String | ●  |
|                                                                                                                            | day                                                                                                                                                                                                                         | Day (Max. 30)                                       | Int    | ●  |
|                                                                                                                            | simNum                                                                                                                                                                                                                      | Card Number (Max. 500)                              | String | ●  |
|                                                                                                                            | code                                                                                                                                                                                                                        | Top-Up response code<br>1: Success, the rest failed | Int    | ●  |
|                                                                                                                            | msg                                                                                                                                                                                                                         | Top-Up response message                             | String | ●  |
| encStr                                                                                                                     | Parameter Security Verification<br>Calculation Method:<br>merchantId+orderId+contents<br>within itemList<br>(wmproductId+day+simNum)+<br>token and then apply SHA1<br>encryption to the result and put it<br>in this field. | String                                              | ●      |    |
| Please return the string "1" . If not returned, the system will retry<br>once every 5 seconds, for a total of 3-4 retries. |                                                                                                                                                                                                                             | String                                              |        | ●  |

## Request Example

```
{
  "orderId": "b00xxxx2406200006",
  "itemList":
    [{
      "wmproductId": "WM_000006",
      "day": 1,
      "simNum": "12311",
      "code": 1,
      "msg": "成功"
    },{
      "wmproductId": "WM_000007",
      "day": 1,
      "simNum": "23456",
      "code": 1,
      "msg": "成功"
    }],
  "encStr": "8c20fc870c3093b6da7c45cddc3ec83f9f205b77"
}
```

## Response Example

```
"1"
```

## 5.3 Remote Activation

### Application Scenarios

Remote activation of top-up SIM card.

### Integration Environment

Prod:

<https://fmshippingsys.fastmove.com.tw/Api/SimOperate/simRemoteActiv>

Test:

<https://fmshippingsys.fastmove.com.tw/Api/SimOperate/simRemoteActiv>

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name | Desc.                                                                                                                                                                 | Type   | Rq | Rs |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|----|
| merchantId | Merchant ID                                                                                                                                                           | String | ●  |    |
| simNum     | Card Number                                                                                                                                                           | String | ●  |    |
| orderId    | Order ID (system unique value)                                                                                                                                        | String | ●  |    |
| mcc        | Country Code, refer the <a href="#">standard specifications</a> .                                                                                                     | String | ●  |    |
| encStr     | Parameter Security Verification Calculation Method:<br>merchantId+simNum+orderId+<br>mcc+token and then apply SHA1 encryption to the result and put it in this field. | String | ●  |    |
| code       | Response Code                                                                                                                                                         | Int    |    | ●  |
| msg        | Response Message                                                                                                                                                      | String |    | ●  |

### Request Example

```
{
  "merchantId": "b00xxxx",
  "simNum": "8985990070001081xxxx",
  "orderId": "b00xxxx2405160078",
  "mcc": "345",
  "encStr": "79207DE7DB761E1EB7C9EF3554AEEA52F4DCB9F5"
}
```

## Response Example

```
{  
  "code": 0,  
  "msg": "成功"  
}
```

Worldamove

## 5.4 Traffic Reset

### Application Scenarios

Reset traffic of top-up SIM card.

### Integration Environment

Prod:

<https://fmshippingsys.fastmove.com.tw/Api/SimOperate/simTrafficReset>

Test:

NONE

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name | Desc.                                                                                                                                                                                                                                                             | Type   | Rq | Rs |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|----|
| merchantId | Merchant ID                                                                                                                                                                                                                                                       | String | ●  |    |
| simNum     | Card Number                                                                                                                                                                                                                                                       | String | ●  |    |
| orderId    | Order ID (system unique value)                                                                                                                                                                                                                                    | String | ●  |    |
| encStr     | Parameter Security Verification Calculation Method:<br>merchantId+simNum+orderId+ token and then apply SHA1 encryption to the result and put it in this field.                                                                                                    | String | ●  |    |
| code       | Response Code                                                                                                                                                                                                                                                     | Int    |    | ●  |
| msg        | Response Message                                                                                                                                                                                                                                                  | String |    | ●  |
| depositMap | 0 : WorldMove' s product<br>If success is received, it means the reset was successful, and there is no need to actively notify WorldMove.<br><br>1 : Prepaid<br>If success is received, it means the reset was successful, but need to actively notify WorldMove. | Int    |    | ●  |

## Request Example

```
{  
  "merchantId": "b00xxxx",  
  "simNum": "8985980004000294xxxx",  
  "orderId": "b00xxxx2502210006",  
  "encStr": "D1A2FB7AD585E5E3DB90CACD47E226B4965259E4"  
}
```

## Response Example

```
{  
  "code": 0,  
  "msg": "已申請流量重置，請主動通知世界移動",  
  "depositMap": 1  
}
```

## 6. Query

### 6.1 Usage and Status

#### Application Scenarios

Query SIM or eSIM data usage and status.

#### Integration Environment

Prod:

<https://fmshippingsys.fastmove.com.tw/Api/UseageDetail/queryUsage>

Test:

NONE

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name | Desc.                                                                                                                                 | Type   | Rq | Rs |
|------------|---------------------------------------------------------------------------------------------------------------------------------------|--------|----|----|
| merchantId | Merchant ID                                                                                                                           | String | ●  |    |
| simNum     | Card Number<br>(simNum / rcode, either one is required.)                                                                              | String | ●  |    |
| rcode      | Redemption Code<br>(simNum / rcode, either one is required.)                                                                          | String | ●  |    |
| iccid      | Coupon Number<br>( rcode / iccid / cid, either one is required. )                                                                     | String | ○  |    |
| cid        | eSIM Number<br>( rcode / iccid / cid, either one is required. )                                                                       | String | ○  |    |
| orderId    | Order ID (system unique value)<br>If querying simNum, this field must be included.<br>If querying rcode, this field is not required." | String | ●  |    |



|             |           |                                                                                                                                                                                                                                                                                                                                                    |             |   |   |
|-------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---|---|
| encStr      |           | Parameter Security Verification Calculation Method:<br><b>SIM</b><br>merchantId+simNum+orderId+token and then apply SHA1 encryption to the result and put it in this field.<br><br><b>Virtual (eSIM)</b><br>Use "rcode" as an encryption example.<br>merchantId+rcode+token and then apply SHA1 encryption to the result and put it in this field. | String      | ● |   |
| code        |           | Response Code                                                                                                                                                                                                                                                                                                                                      | Int         |   | ● |
| msg         |           | Response Message                                                                                                                                                                                                                                                                                                                                   | String      |   | ● |
| cid         |           | eSIM Card Number                                                                                                                                                                                                                                                                                                                                   | String      |   | ● |
| useSDate    |           | Start Date timestamp                                                                                                                                                                                                                                                                                                                               | String      |   | ● |
| useEDate    |           | End Date timestamp                                                                                                                                                                                                                                                                                                                                 | String      |   | ● |
| totalUsage  |           | Accumulated Usage, unit: byte.                                                                                                                                                                                                                                                                                                                     | String      |   | ● |
| esimStatus  |           | eSIM Status<br>0: Unknown<br>1: Active<br>2: Invalid                                                                                                                                                                                                                                                                                               | Int         |   | ● |
| simStatus   |           | SIM Status<br>0: Inactive<br>1: Active<br>5: Voided<br>6: Expired                                                                                                                                                                                                                                                                                  | Int         |   | ● |
| productType |           | 0: Virtual (eSIM)<br>2: Top-Up SIM card                                                                                                                                                                                                                                                                                                            | Int         |   | ● |
| itemList    |           | list                                                                                                                                                                                                                                                                                                                                               | ArrayObject |   | ● |
|             | usageDate | Usage Date, format: yyyyymmdd.                                                                                                                                                                                                                                                                                                                     | String      |   | ● |
|             | mcc       | Country Code                                                                                                                                                                                                                                                                                                                                       | String      |   | ● |
|             | code      | ISO 3166-1                                                                                                                                                                                                                                                                                                                                         | String      |   | ● |
|             | zhtw      | Country(ZH)                                                                                                                                                                                                                                                                                                                                        | String      |   | ● |
|             | enus      | Country(EN)                                                                                                                                                                                                                                                                                                                                        | String      |   | ● |
|             | usage     | Dosage, unit: byte.                                                                                                                                                                                                                                                                                                                                | String      |   | ● |

## Request Example

```
{
  "merchantId": "b00xxxx",
  "rcode": "3V8eAYuotc",
  "encStr": "677ABE089E9FC2308150C7187A4006E09F627350"
}
```

## Response Example

```
{
  "code": 0,
  "msg": null,
  "cid": "8985110000200200xxxx",
  "useSDate": "1715914638000",
  "useEDate": "1717171199000",
  "totalUsage": "21531551384",
  "esimStatus": 2,
  "simStatus": 0,
  "productType": 0,
  "itemList": [
    {
      "usageDate": "20240523",
      "mcc": "460",
      "code": "CN",
      "zhtw": "中國",
      "enus": "China",
      "usage": "3024446023"
    },
    {
      "usageDate": "20240522",
      "mcc": "460",
      "code": "CN",
      "zhtw": "中國",
      "enus": "China",
      "usage": "3750896913"
    },
    {
      "usageDate": "20240521",
      "mcc": "460",
      "code": "CN",
      "zhtw": "中國",
      "enus": "China",
      "usage": "2869333767"
    },
    {
      "usageDate": "20240520",
      "mcc": "460",
      "code": "CN",
      "zhtw": "中國",

```

```
    "enus": "China",  
    "usage": "4694795394"  
  },  
  {  
    "usageDate": "20240519",  
    "mcc": "460",  
    "code": "CN",  
    "zhtw": "中國",  
    "enus": "China",  
    "usage": "3135936927"  
  },  
  {  
    "usageDate": "20240518",  
    "mcc": "460",  
    "code": "CN",  
    "zhtw": "中國",  
    "enus": "China",  
    "usage": "2221064316"  
  }  
]  
}
```

## 6.2 eSIM Basic Info.

### Application Scenarios

Query eSIM Basic Info.

### Integration Environment

Prod:

<https://fmshippingsys.fastmove.com.tw/Api/UseageDetail/queryBasicInfo>

Test:

NONE

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name |  | Desc.                                                                                                                                                                                                | Type   | Rq | Rs |
|------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|----|
| merchantId |  | Merchant ID                                                                                                                                                                                          | String | ●  |    |
| rcode      |  | Redemption Code<br>( rcode or iccid or cid, either one is required. )                                                                                                                                | String | ●  |    |
| iccid      |  | Coupon Number<br>( rcode or iccid or cid, either one is required. )                                                                                                                                  | String | ○  |    |
| cid        |  | eSIM Number<br>( rcode or iccid or cid, either one is required. )                                                                                                                                    | String | ○  |    |
| encStr     |  | Parameter Security Verification Calculation Method:<br><b>Use "rcode" as an encryption example.</b><br>merchantId+rcode+token and then apply SHA1 encryption to the result and put it in this field. | String | ●  |    |
| code       |  | Response Code                                                                                                                                                                                        | Int    |    | ●  |
| msg        |  | Response Message                                                                                                                                                                                     | String |    | ●  |
| firmName   |  | Merchant Name                                                                                                                                                                                        | String |    | ●  |
| cid        |  | eSIM Number                                                                                                                                                                                          | String |    | ●  |

|              |  |                                                                                                                 |        |  |   |
|--------------|--|-----------------------------------------------------------------------------------------------------------------|--------|--|---|
| status       |  | Card Lifecycle<br>0: Unknown<br>1: Active<br>2: Invalid                                                         | Int    |  | ● |
| couponStatus |  | Coupon Status<br>0: Not enabled<br>1: Unused<br>2: Used<br>3: Occupied<br>4: Voided<br>5: Expired<br>6: Invalid | Int    |  | ● |
| eid          |  | Equipment ID                                                                                                    | String |  | ● |
| device       |  | Device Model                                                                                                    | String |  | ● |

#### Request Example

```
{
  "merchantId": "b00xxxx",
  "rcode": "abcde12345",
  "encStr": "992C165C803BF7B6B3AC834A5B00053EF2625700"
}
```

#### Response Example

```
{
  "code": 0,
  "msg": null,
  "firmName": "World Move",
  "cid": "8985100000000357xxxx",
  "status": 2,
  "couponStatus": 2,
  "eid": "89049032007108882600140004945097",
  "device": "iPhone 14 Pro"
}
```

## 6.3 eSIM Progress Event

### Application Scenarios

Query the Process of Installing eSIM on a Mobile Device.

▲Note Only supported past 3 months data.

### Integration Environment

Prod:

<https://fmshippingsys.fastmove.com.tw/Api/UseageDetail/queryEsimProgresses>

Test:

NONE

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name     |  | Desc.                                                                                                                                                                                                | Type        | Rq | Rs |
|----------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----|----|
| merchantId     |  | Merchant ID                                                                                                                                                                                          | String      | ●  |    |
| rcode          |  | Redemption Code<br>( rcode or iccid or cid, either one is required. )                                                                                                                                | String      | ●  |    |
| iccid          |  | Coupon Number<br>( rcode or iccid or cid, either one is required. )                                                                                                                                  | String      | ○  |    |
| cid            |  | eSIM Number<br>( rcode or iccid or cid, either one is required. )                                                                                                                                    | String      | ○  |    |
| encStr         |  | Parameter Security Verification Calculation Method:<br><b>Use "rcode" as an encryption example.</b><br>merchantId+rcode+token and then apply SHA1 encryption to the result and put it in this field. | String      | ●  |    |
| code           |  | Response Code                                                                                                                                                                                        | Int         |    | ●  |
| msg            |  | Response Message                                                                                                                                                                                     | String      |    | ●  |
| esimProgresses |  | Merchant Name                                                                                                                                                                                        | ArrayObject |    | ●  |

|  |                     |                                                                                                                                                                                           |        |  |   |
|--|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--|---|
|  | cid                 | eSIM Number                                                                                                                                                                               | String |  | ● |
|  | eid                 | Equipment ID                                                                                                                                                                              | String |  | ● |
|  | progressDate        | Date, format: yyyy-mm-dd<br>hh:mm:ss                                                                                                                                                      | String |  | ● |
|  | notificationPointid | Event<br>3: Profile download notice<br>4: Profile install notice<br>5: Delete notice<br>6: Profile enable notice<br>7: Profile disable notice<br>101: EID blacklist<br>102: TAC blacklist | Int    |  | ● |
|  | status              | Execution Status                                                                                                                                                                          | String |  | ● |

#### Request Example

```
{
  "merchantId": "b00xxxx",
  "rcode": "abcde12345",
  "encStr": "A87484F017770FA22B1C28CF6B86813C91254AAD"
}
```

#### Response Example

```
{
  "code": 0,
  "msg": null,
  "esimProgresses": [
    {
      "cid": "8985100000000404xxxx",
      "eid": "89049032007008882600125701275506",
      "progressDate": "2025-02-24 05:34:50",
      "notificationPointid": 3,
      "status": "Executed-Success"
    },
    {
      "cid": "8985100000000404xxxx",
      "eid": "89049032007008882600125701275506",
      "progressDate": "2025-02-24 05:35:07",
      "notificationPointid": 4,
      "status": "Executed-Success"
    },
    {
      "cid": "8985100000000404xxxx",
```

```

        "eid": "89049032007008882600125701275506",
        "progressDate": "2025-02-24 05:35:11",
        "notificationPointid": 6,
        "status": "Executed-Success"
    },
    {
        "cid": "8985100000000404xxxx",
        "eid": "89049032007008882600125701275506",
        "progressDate": "2025-02-24 06:17:04",
        "notificationPointid": 7,
        "status": "Executed-Success"
    },
    {
        "cid": "8985100000000404xxxx",
        "eid": "89049032007008882600125701275506",
        "progressDate": "2025-02-24 08:41:40",
        "notificationPointid": 6,
        "status": "Executed-Success"
    },
    {
        "cid": "8985100000000404xxxx",
        "eid": "89049032007008882600125701275506",
        "progressDate": "2025-02-24 12:30:32",
        "notificationPointid": 7,
        "status": "Executed-Success"
    },
    {
        "cid": "8985100000000404xxxx",
        "eid": "89049032007008882600125701275506",
        "progressDate": "2025-02-24 12:30:39",
        "notificationPointid": 6,
        "status": "Executed-Success"
    },
    {
        "cid": "8985100000000404xxxx",
        "eid": "89049032007008882600125701275506",
        "progressDate": "2025-03-02 16:27:37",
        "notificationPointid": 7,
        "status": "Executed-Success"
    },
    {
        "cid": "8985100000000404xxxx",
        "eid": "89049032007008882600125701275506",
        "progressDate": "2025-03-02 16:27:41",
        "notificationPointid": 6,
        "status": "Executed-Success"
    }
}
]
}

```



## 6.4 Verify card number correctness

### Application Scenarios

When wholesalers perform top-ups on their own platform, they can call this to verify the correctness of the SIM card number.

**▲Note** Please perform a preliminary check based on the following logic on your own platform before calling this API.

Logic: The length must be 20 characters, consisting of half-width digits only. Spaces, symbols, and letters are not allowed.

### Integration Environment

Prod:

<https://fmshippingsys.fastmove.com.tw/Api/SimQuery/simExists>

Test:

<https://tfmshippingsys.fastmove.com.tw/Api/SimQuery/simExists>

Parameters: Rq marked with ● are required, and those marked with ○ are optional.

Content Type : application/json

HTTP Method : POST

| Para. Name |  | Desc.                                                                                                                                                             | Type   | Rq | Rs |
|------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|----|
| merchantId |  | Merchant ID                                                                                                                                                       | String | ●  |    |
| simNum     |  | Card Number<br>Test environment card number<br>(always returns failure):<br>81234567891234567891                                                                  | String | ●  |    |
| encStr     |  | Parameter Security Verification<br>Calculation Method:<br>merchantId+simNum+token<br>and then apply SHA1<br>encryption to the result and put<br>it in this field. | String | ●  |    |
| code       |  | Response Code                                                                                                                                                     | Int    |    | ●  |
| msg        |  | Response Message                                                                                                                                                  | String |    | ●  |

## Request Example

```
{  
  "merchantId": "b00xxxx",  
  "simNum": "8888888888888888xxxx",  
  "encStr": "E5CC987E392B23167E90A1279E033867C2FA73FE"  
}
```

## Response Example

```
{  
  "code": 0,  
  "msg": "成功"  
}
```

## Attachment1 Response Code Mapping Table

| Code | Desc.                                                           |
|------|-----------------------------------------------------------------|
| 0    | Success.                                                        |
| 400  | {XX} cannot be empty.                                           |
| 401  | Encryption verification failed.                                 |
| 402  | Failed to retrieve the product list.                            |
| 403  | The quantity of the product list must be greater than 0.        |
| 404  | The number of days for the product list must be greater than 0. |
| 405  | Card number in the product list cannot be empty.                |
| 406  | The value needs to be between {XX} and {XX}.                    |
| 407  | OrderID error.                                                  |
| 408  | Esim data has not been generated yet.                           |
| 409  | eSIM order failed.                                              |
| 410  | SIM traffic cannot be reset.                                    |
| 411  | SIM card number does not exist.                                 |
| 801  | No corresponding products for the top-up plan.                  |
| 802  | Topping up days for the card number cannot exceed 30.           |
| 804  | Topping up SIM cards cannot exceed 500.                         |
| 805  | {XX} Out of stock.                                              |
| 808  | Duplicate card numbers.                                         |
| 996  | The top-up/order functions have been frozen.                    |
| 999  | Failure.                                                        |

## Attachment2 Flow - skipping the display of the redemption

This process is: after placing an order through the 2.1 and receiving the 2.2 callback, the goal is to immediately redeem a QR code or text to provide to the customer.

This approach is for reference only; the actual process will depend on the wholesaler's Business model.

