

The Sealed Harbor

Mutually Confidential Computation with Explicit, Gated, Bounded Releases

Paper 4 of the Harbor program — the four-pillar assurance argument, executed

Prepared for Erich Owens

August 2026

Abstract

Two parties who will share neither data nor model can nonetheless obtain an attributable, policy-bound joint computation, with every information release explicit, gated, and bounded — and the security boundary is the declassification gate, not token-level taint. We present the clean-room design for tool-using LLM agents (dual-attested key release, whole-worker taint, two declassification gates) and its assurance argument as four independently verified pillars: (1) observational noninterference modulo declassification, verified exhaustively on the finite clean-room model with a mutation suite that catches both canonical breaks; (2) the supervisory-control result that fixes *which* boundary can be enforced at all — the channel, never the token; (3) ε -conservation of the release ledger, with differential-privacy composition giving the conserved sum its meaning; and (4) a canary detection theory with a quotable operating curve and a sequential-test alarm clock. We price the residual honestly: an information-theoretic leakage budget of $q \cdot b$ bits across q jobs through any b -bit release channel, before timing channels, which are out of model. *Express lane: the one-breath claim of each pillar opens its section; the formal statement is in the box below it; a reader in a hurry needs nothing else.*

1 The problem: Derek and Erin

The scene. Derek owns sensitive financial data D . Erin owns a valuable agent system M — weights, prompts, skills, tools, orchestration. Both want the answer $y = f_M(D)$. Neither will hand over the crown jewels: Derek must not receive M , Erin must not receive D , and the cloud operator hosting the computation must receive neither. Every week some enterprise negotiates this exact standoff with lawyers and air-gapped laptops; the question is whether a *computational* contract can replace the lawyers’ one — and what, precisely, it can promise.

The tempting pitch — and the one an early product review of this program actually wrote — is a “silicon-enforced NDA”: tag Erin’s agent [TAINT:HIGH] the moment it reads Derek’s data, drop any tainted egress packet, and declare that the data “mathematically cannot phone home.” This paper’s first job is to explain why that sentence must never be shipped, and its second job is to prove the sentence that replaces it. Token-level taint through an LLM is not soundly definable: the model taints everything it writes with everything it read, so a taint tracker faces a binary choice between marking every output token (useless) and missing semantic flows (unsound). A secret can ride out in wording, punctuation, error messages, output length, or timing; no regex, PII scanner, or second LLM can certify that arbitrary prose contains no secret. And an ordinary remote model API is *itself* a trusted reader of plaintext — cryptography cannot repair sending Derek’s data to a third party’s inference endpoint.

The honest architecture therefore controls the *channel*, not the token, and §2 lays it out. The design converts the question a CISO will actually ask — *how do I know the wall has no other holes?* — into four provable claims, one per section below: the gate is the only hole (§3); the gate sits on the only boundary that can be enforced at all (§4); what passes through

it is metered by a conserved budget (§5); and what tries to sneak around the meter is caught with quotable probability and latency (§6). Section 7 composes the pillars into a single leakage account, and §8 states, at equal prominence, what none of this promises.

Each pillar section opens with its idea in one breath — an italic express-lane sentence an expert can read alone before jumping to the formal box — and closes with an honest-boundary block at the same prominence as the claim. Every number carries a provenance tag: [verified] means externally recomputable (a textbook value or a closed form restated in the box); [internal, *script*] means it regenerates from the named self-contained script at seed 20260816, shipped with the paper.

2 The design: one work order, two fences, two gates

The work order. Both principals sign the same contract before any key is released:

$$C = \langle H(\text{data manifest}), H(\text{agent bundle}), H(\text{runtime}), H(\text{policy}), \text{function, tools, recipients, output schemas, budgets, retention, validators, payment, liability} \rangle.$$

The order names the measured runtime and agent bundle, the encrypted data inputs, the allowed tools and external providers, the result and telemetry schemas, the output-bit/query/timing budgets, the declassification authorities, retention and key destruction, success evidence, dispute procedure, and guarantee. Any change makes a new hash and requires both signatures.

Dual-attested key release. The workload boots in a confidential VM and creates an ephemeral job key with fresh attestation evidence binding runtime, policy, worker image, key, nonce, and epoch. Derek and Erin *independently* verify the attestation; Derek’s key broker releases the data key only to the approved measurement, and Erin’s key broker releases the model/skill key under the same condition — the attester/verifier/relying-party pattern of IETF RATS [11]. The job then runs with no ambient network or credentials. Neither principal, and not the cloud operator, can read the other’s plaintext: the room is sealed from three sides at once.

Two fences. Erin’s worker is treated as hostile even if Erin is honest — prompt injection or a compromised dependency can turn a loyal agent into an exfiltrator — so it receives *semantic handles only*: `read(handle, range)`, `infer(model handle, prompt handle)`, `execute(tool handle, args)`, `write(result handle, bytes)`, `request_declassification(candidate handle, channel)`. An attested in-guest monitor mediates labels, handles, and encrypted content; a Derek-controlled outer gateway mediates network, storage, timing, destination, and volume. Direct outbound TLS is forbidden; permitted services terminate at a policy gateway. And because an ordinary remote model API is itself a trusted reader of plaintext, the model runs *inside* the confidential domain — an external inference endpoint would be a third principal the contract never admitted.

Whole-worker taint and two gates. After the first secret read the entire worker state, and every later emission, is conservatively tainted until job destruction — decentralized labels in the Myers–Liskov style [6], owned by mutually distrustful principals, under which ordinary computation can only *add* restrictions. Removing an owner’s clause requires a declassification authority delegated by that owner, and the only exits are the two declassification gates — Derek’s and Erin’s, each executing a declared release function — with exactly three pre-authorized channels: a rich result to Derek; fixed-schema, aggregated or differentially private feedback to Erin; a padded public receipt to both. Each party gets an audience-redacted signed receipt $R = \text{Sign}(H(C), H(\text{attestation}), H(\text{inputs}), H(M), H(\text{output ciphertext}), \text{labels, declassifications, counters, nonce, epoch})$ Merkle-anchored in both principals’ ledgers. The receipt proves what the measured system reported under a policy; it does not prove the answer is true, nor that no unmodeled side channel existed.

Alongside the four pillars, the design carries a set of deliberately tractable side properties — label monotonicity (no label weakens without a declassification witness), complete mediation (every release has exactly one gate decision), provenance closure (every release traces to committed input, model, runtime, policy, and declassifier nodes), replay safety (each job nonce settles at most once), measurement binding (neither secret key is released for a different runtime or policy), and rollback detectability (accepted epochs strictly increase in both external ledgers). These are design invariants backed by implementation and tests, not theorems; the program’s discipline is to label every important statement as theorem, design invariant, model-checked property, or empirical hypothesis, and never let one impersonate another.

Pillar	Claim	Verification	Artifact
I (§3)	NI modulo declassification	exhaustive, depth 7; 2/2 mutations	<code>c1_noninterference.py</code>
II (§4)	enforceable = controllable	product-automaton checker	<code>b3_controllability.py</code>
III (§5)	ϵ -ledger conserves	exhaustive + 2000 random; 2/2 mut.	<code>a3_epsilon_ledger.py</code>
IV (§6)	canary power + SPRT clock	analytic vs. simulation agreement	<code>a4_canary_sprt.py</code>

The four rows are not four independent guarantees stacked for redundancy; they are four links in one pipeline, each closing a gap the others leave open, in exactly the order Figure 1 draws it. Enforceability (II) fixes *where* a boundary can exist at all — gate the channel, or nothing about the design is provably enforceable. Noninterference (I) then proves that boundary, once installed, is silent except through its declared release. Conservation (III) meters the cumulative cost of everything that legitimately crosses it, because a gate honest on every single release can still bankrupt the contract over many releases — an individually-sound decision rule is not a portfolio-sound one. And detection (IV) polices for what tries to cross without going through the meter at all: a compromised worker, a bug, an adversary who found an unmediated path. Drop any one link and a concrete gap reopens, named inside its box in the figure below; the composed result — an honestly bounded leakage account, not an eliminated one — is §7.

3 Pillar I: silence except through the slot

Run the whole world twice — identical except for Derek’s secret — under every possible sequence of moves, and prove Erin’s view is bit-for-bit identical whenever the gate’s declared function maps the two secrets to the same release — formal statement in the box below.

Intuition. You cannot inspect a wall for holes by staring at bricks; you inspect it by standing outside in two parallel worlds and asking whether anything you can see ever differs. If Derek’s secret is 0 in one world and 2 in the other, and the gate is contracted to release only *parity*, then a sound room makes those worlds indistinguishable to Erin forever, under every interleaving of loads, reads, submissions, releases, and reports. The analogy with teeth is the voting booth: the turnstile clicks once per voter and the tally board shows only party totals; a poll-watcher outside learns exactly the declared aggregate and nothing about any ballot, *no matter how long she watches or in what order voters arrive*. That is noninterference *modulo declassification* in the Goguen–Meseguer lineage [1, 2]: silence except through the slot, and through the slot, only what the contract says. Figure 2 draws the mapping by relations, not surface features. The misread to preempt: the theorem does not say the slot is safe — it says the slot is the *only* opening; whether the declared function g releases too much is a contract question the next two pillars price.

Theorem 1 (noninterference modulo declassification; finite model, exhaustive).
Fix the clean-room transition system with secrets $s \in \{0, 1, 2, 3\}$, Erin-observable state


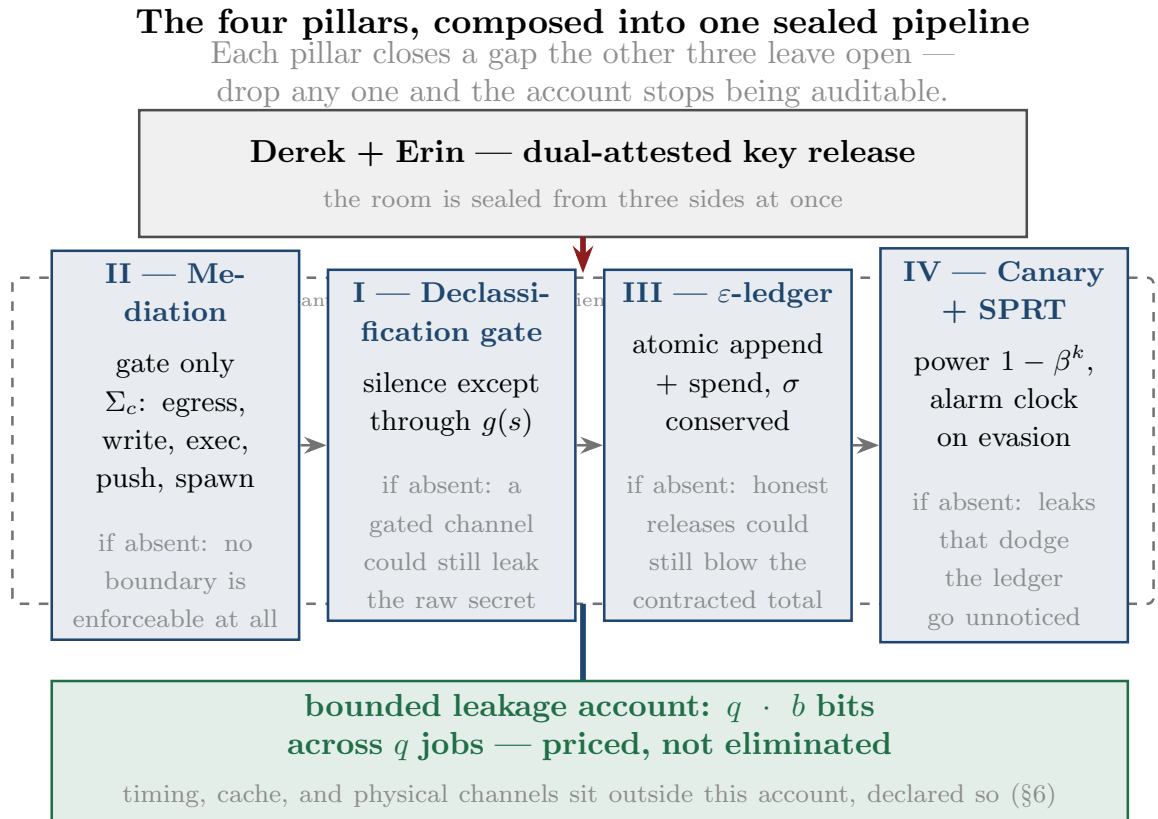


Figure 1: The four pillars composed into the sealed pipeline, in the order the closing section states it: enforceability (II) says where the boundary can be, noninterference (I) says the boundary holds, conservation (III) meters what crosses it, detection (IV) polices evasion. Each box also names the gap left open if that pillar alone were dropped.

R9 — every release explicit, gated, and bounded

sealed airlock $\longleftrightarrow$ sealed-room noninterference modulo declassification

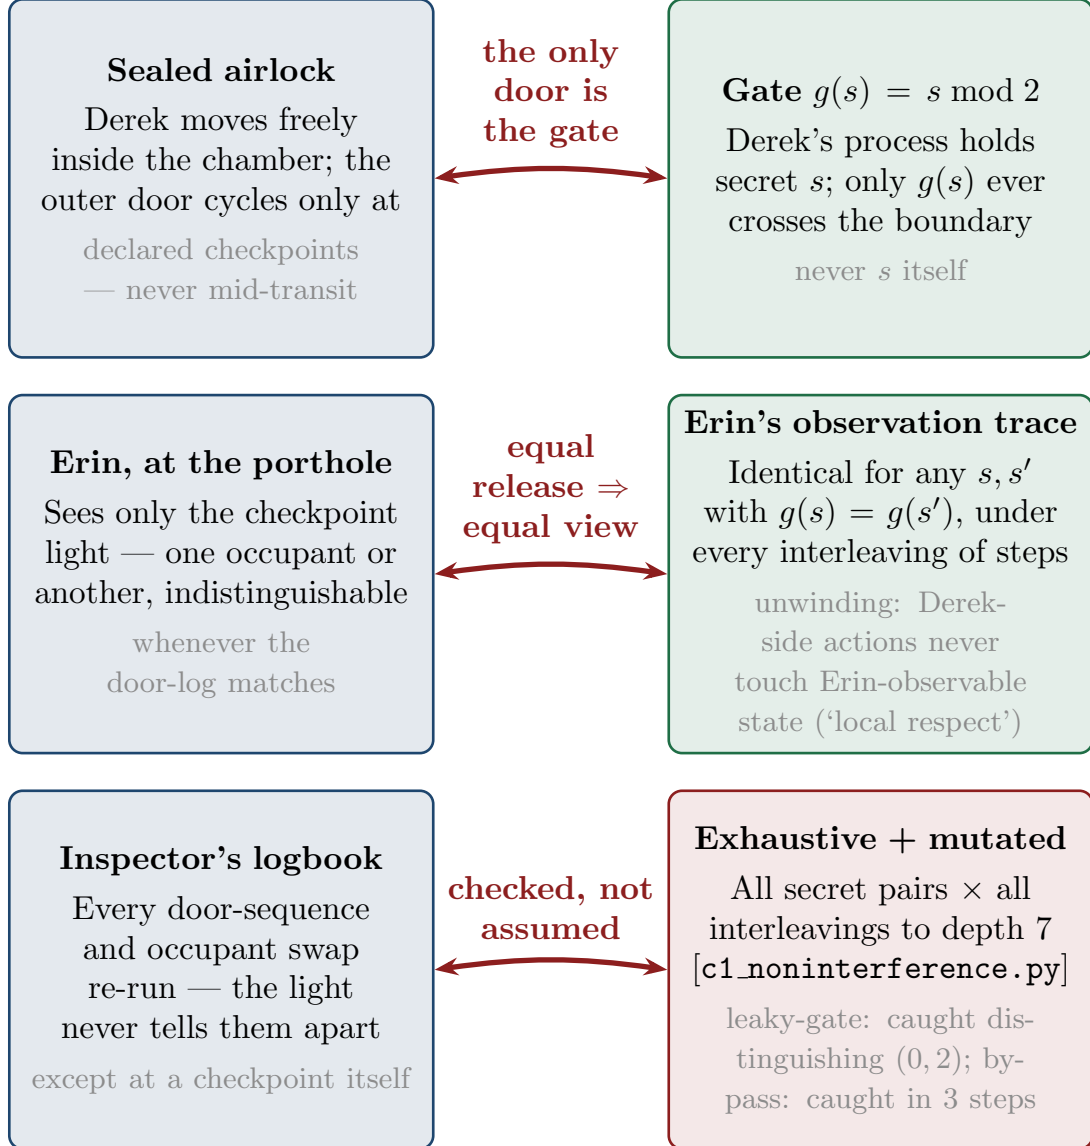

Two directions, one theorem: R5 gates the channel, R9 shows the gate suffices

(Goguen–Mesequer noninterference modulo declassification; Rushby unwinding, local-respect condition).

Figure 2: Relation-map for Pillar I. The voting booth maps to the sealed workroom by *relations*, not surface features: booth walls $\rightarrow$ attested isolation (no observation of the work); the tally board $\rightarrow$ the declassification gate (the sole declared release); “watching all day reveals no ballot” $\rightarrow$ two-run observational equivalence under every interleaving. The analogy predicts, correctly, that the residual risk is a too-revealing tally — a per-precinct board with one voter is a leaky g .

Obs_E , and declared release function $g(s) = s \bmod 2$. For secrets s, s' and *every* action sequence: if $g(s) = g(s')$ then Erin’s observation sequences are identical; if $g(s) \neq g(s')$ they may differ only at explicit gate-release steps.

Verification. Exhaustive over all interleavings to depth $7 \times$ all secret pairs: zero distinguishing observations in the honest model [internal, `c1_noninterference.py`]. The schedule itself is secret-independent, checked separately — an enabledness difference would itself be a channel. The Rushby unwinding condition *local respect* (Derek-side actions never touch Erin-observable state) holds mechanically [3]. **Mutations:** (m1) a gate that leaks the raw secret is caught distinguishing secrets $(0, 2)$ — an *equal-parity* pair the honest gate provably keeps identical — with witness trace `load` $\rightarrow$ `read` $\rightarrow$ `submit` $\rightarrow$ `release`, after which Erin sees `(gate, 0)` in one world and `(gate, 2)` in the other; (m2) a worker bypassing the gate is caught in a 3-step trace. Reverting the mutations restores the property [internal, `c1_noninterference.py`].

Numbers by hand. Four secrets give $\binom{4}{2} = 6$ unordered pairs; two of them — $(0, 2)$ and $(1, 3)$ — are equal-parity, and it is exactly those two on which the honest gate must keep Erin’s worlds identical forever, and did. The m1 witness is a four-step, human-readable proof that a particular gate breaks its contract; a CISO can read it aloud. The full mutant grid, honest gate against both breaks, is Figure 3. *Now you try:* with $g(s) = s \bmod 2$ over secrets $\{0, \dots, 7\}$, how many unordered secret pairs must a sound room keep Erin-indistinguishable? (Both parity classes have four members: $2\binom{4}{2} = 12$ pairs.)

What it buys. The product’s headline sentence in its corrected, provable form: *every release is explicit, gated, and bounded*. This is the finite-model core of the paper; the general theorem over unbounded state is the Isabelle/AFP unwinding obligation (§9), for which this model is the blueprint — the same three unwinding conditions, discharged mechanically rather than exhaustively.

Honest boundary. Finite depth, finite secrets: depth-7 exhaustion is a proof about the model, not the deployment; the lift is §9’s job. The guarantee is possibilistic — timing, token counts, and termination channels are out of model, as the design declares (§8). The gate’s *specification* is the residual oracle: we prove releases match g ; choosing a g that leaks too much is a contract failure no theorem prevents — that risk is priced, not eliminated, by Pillars III–IV. And a human who reads a released parity may still remember it: the system bounds channels, not minds.

4 Pillar II: the channel, never the token

A safety policy over an agent’s behavior can be enforced by a hypervisor if and only if it constrains only events the hypervisor mediates — so the enforceable clean-room boundary is the egress channel, and any promise phrased over model-internal events is detect-only forever — formal statement in the box below.

Intuition. A bouncer at the door of a club can prevent anyone from *entering or leaving*; no bouncer can prevent a patron from *thinking about* leaving. Split the agent’s event alphabet accordingly: controllable events the mediation layer can veto (Σ_c : `fs_write`, `net_egress`, `exec_tool`, `git_push`, `spawn_child`) and uncontrollable events it can at best observe (Σ_u : `model_emit_token`, `in_context_read`, `internal_plan`). Ramadge–Wonham supervisory control theory [4] then answers, per policy, whether a supervisor achieving exactly that policy exists.

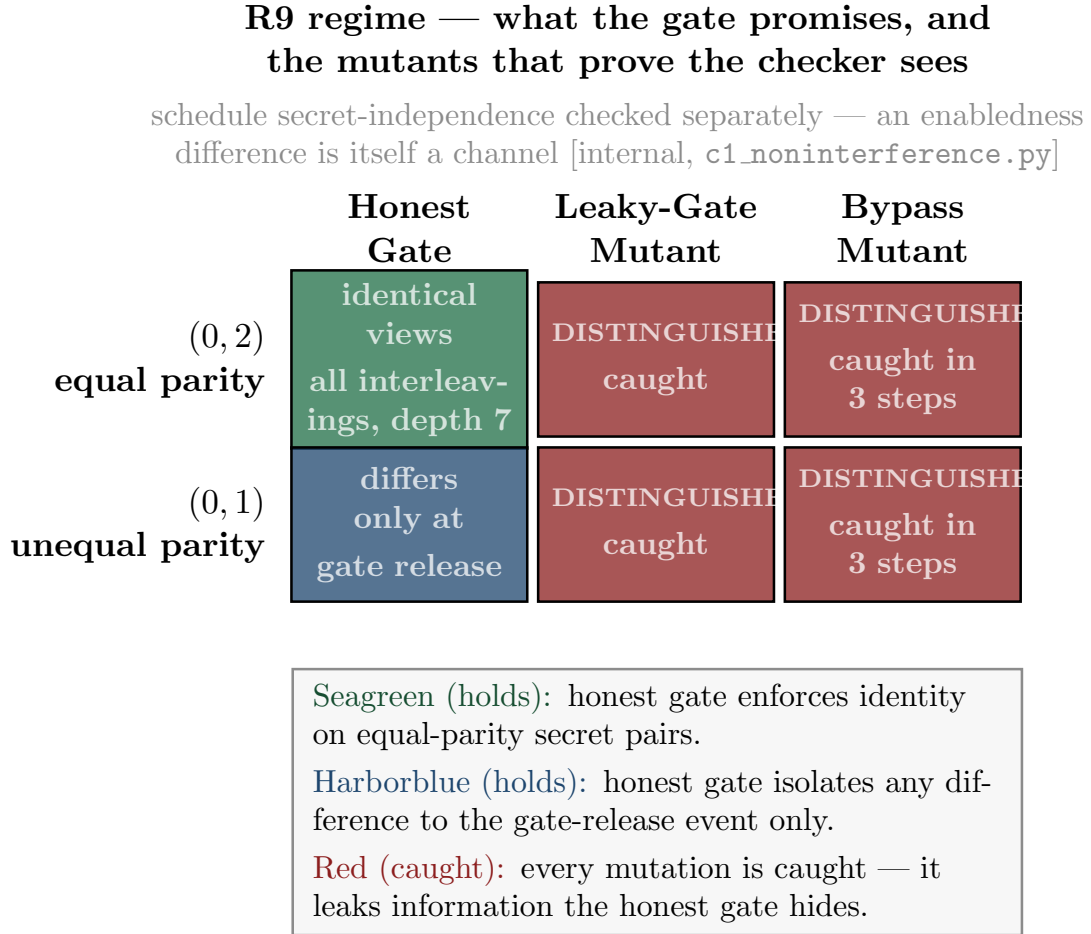


Figure 3: Regime diagram for Pillar I: what the gate promises, and the mutants that prove the checker sees. The property holds on the shaded region (equal declassified value, any interleaving); the two mutation witnesses (leaky gate; gate bypass) sit provably outside it, each with a concrete trace [internal, c1_noninterference.py].

Theorem 2 (enforceability = controllability). A safety policy K over the agent alphabet $\Sigma = \Sigma_c \cup \Sigma_u$ is regimentable (enforceable by the mediation layer, prefix-closed plant language L) iff K is controllable: $\overline{K}\Sigma_u \cap \overline{L} \subseteq \overline{K}$ [verified framework, [4]]. Consequences, from the product-automaton checker [internal, `b3_controllability.py`]: *forbid egress / push / write / exec / spawn* $\Rightarrow$ regimentable; *forbid emit-token / context-read / internal-plan* (“the confident lie”) $\Rightarrow$ detect-only forever. The decisive compound case — “no *net_egress* after *in_context_read* of a secret” — is **regimentable**: the policy permits the uncontrollable read, records it as taint, and gates only the controllable egress.

The compound case is the whole clean-room design in one line, and it is a computational vindication of the architecture correction in §1: gating the uncontrollable trigger (the model reading, thinking, emitting) would be unregimentable, while gating the controllable effect (the egress channel) is not. Whole-worker taint is exactly what the theorem licenses: since token-level taint through an LLM is not soundly definable, the sound over-approximation is to taint *everything* after the first secret read and spend all enforcement budget on the one boundary where enforcement is possible. This is why the honest claim — every release explicit, gated, bounded — *replaces* “mathematically cannot phone home”: the latter quantifies over uncontrollable events and is therefore not a theorem about any implementable supervisor; the former quantifies over the mediated channel and is Theorem 1.

What it buys. Pillars I and II are the same boundary proved from two independent directions: controllability says the clean room *must* gate the channel and not the token (no alternative design is enforceable); two-run equivalence says gating the channel *suffices* for the contracted secrecy. Together they close the design question. The taint-drop-egress mechanism of the naive pitch survives demoted to what it really is: a containment layer beneath the gate — the “confine” rung of the risk ladder — not the guarantee.

Honest boundary. Controllability is relative to the mediated alphabet: partial observation shrinks the regimentable set (Lin–Wonham [5]), and policies referencing unmediated *state* need that extension. Detect-only is not hopeless — it is a different business: post-hoc audit and slashing, which this program treats elsewhere (Paper 3). And complete mediation — every effect passes through the layer — is the deployment assumption the two remaining pillars inherit; it is an attested property of the workroom, not a theorem.

5 Pillar III: the budget is a ledger, and the ledger conserves

Make the privacy budget a ledger — one atomic transition appends the record and adds the spend — and conservation of $\sigma = \sum_{\Lambda} \varepsilon_i$ survives every interleaving, because the single writer makes every concurrent history observationally sequential — formal statement in the box below.

The scene, resumed. Derek’s data never leaves the room; what leaves is a stream of gated releases, each carrying a differential-privacy cost ε_i . The contract says the total never exceeds $\varepsilon_{\max}$. But releases race: two of Erin’s jobs invoke the gate concurrently, and the classic time-of-check/time-of-use gap between “is there budget?” and “spend it” is exactly where a meter drifts from its journal. The intuition is double-entry bookkeeping: balance and journal updated in one stroke, so an auditor summing the journal always reproduces the balance.

Theorem 3 (ε -conservation). State = (σ, Λ) with Λ append-only. The only spending transition is $\text{release}(\varepsilon_i)$: if $\sigma + \varepsilon_i \leq \varepsilon_{\max}$ it *atomically* appends $(\varepsilon_i, \text{artifact hash}, \text{policy hash})$ to Λ and sets $\sigma += \varepsilon_i$; otherwise it refuses and changes nothing. Then every reachable state satisfies $\sigma = \sum_{\Lambda} \varepsilon_i$ and $\sigma \leq \varepsilon_{\max}$ — including under concurrent invocation, since the

kernel’s single-writer serialization makes any concurrent execution observationally equal to some sequential interleaving, over which the induction runs unchanged (base: $\sigma = 0, \Lambda = ()$; step: the guard preserves the bound, the atomic pair preserves the equality; non-spending transitions touch neither).

Corollary (what the conserved sum means). If each release is ε_i -DP, sequential composition makes $\sigma \leq \varepsilon_{\max}$ an $(\varepsilon_{\max}, 0)$ -DP certificate; for k releases at ε each, advanced composition (Dwork–Rothblum–Vadhan [8]) certifies $(\sqrt{2k \ln(1/\delta')} \varepsilon + k\varepsilon(e^\varepsilon - 1), \delta')$ -DP, tighter once k is large.

Verification. Exhaustive explicit-state check, two concurrent clients racing programs (2, 2) and (1, 2) against $\varepsilon_{\max} = 4$: all 15 reachable states satisfy both invariants under every interleaving; 2000 randomized deeper instances, 0 violations [internal, `a3_epsilon_ledger.py`].

Mutations: (m1) spend-without-append breaks conservation in 1 step; (m2) the torn write ($\log \varepsilon$, add $\varepsilon - 1$) breaks it in 1 step *and* in 3 steps drives the *recorded* log to $\sum \Lambda = 5 > \varepsilon_{\max} = 4$ — the undercounting balance silently admits auditable over-spend, so atomicity is what makes the budget promise auditable [internal].

Numbers by hand. At $\delta' = 10^{-6}$: for $k=32$ releases at $\varepsilon=0.1$, basic composition gives $32 \times 0.1 = 3.20$ while advanced gives 3.31 — not yet paying; at $k=128$, $\varepsilon=0.05$, basic gives 6.40 but advanced gives 3.30 — paying [verified]. The crossover tells the contract writer exactly which accounting to quote at which engagement length: below it, quote the exact, δ -free sequential bound; above it, the $\sqrt{k}$ -scaled advanced bound (Figure 4). *Now you try:* at $k=8$, $\varepsilon=0.5$, which bound is smaller? (Basic: 4.00; advanced: 10.03 — quote sequential, and by a wide margin [verified].)

R10 regime — which DP accounting to quote at which engagement length ($\delta' = 10^{-6}$)

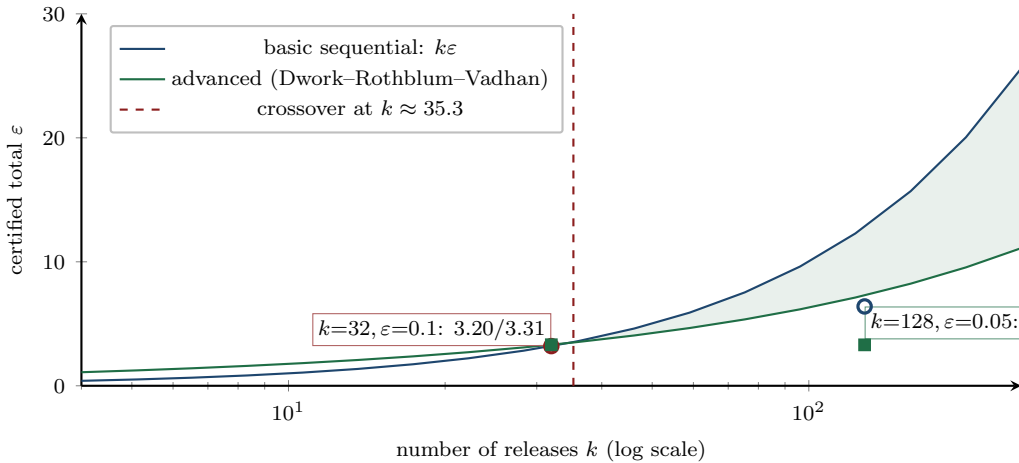


Figure 4: Regime diagram for Pillar III: which DP accounting to quote at which engagement length ($\delta' = 10^{-6}$). Below the crossover in k the sequential bound $k\varepsilon$ is exact, δ -free, and smaller; past it, advanced composition’s $\sqrt{k}$ scaling wins. The session’s two measured points ($k=32, \varepsilon=0.1$ and $k=128, \varepsilon=0.05$) are marked [verified; regenerated by `a3_epsilon_ledger.py`].

What it buys. The clean-room contract’s budget line becomes an auditable invariant with the same proof shape as the harbor’s bond-conservation result, and the mutation suite shows the invariant has teeth: both canonical atomicity breaks are caught with shortest traces, and the torn write’s deeper crime — recorded over-spend past the contracted maximum — is exhibited concretely.

Honest boundary. Conservation governs *recorded* spend; that all spend is recorded is precisely the complete-mediation assumption — Pillar II is the prerequisite, not a nicety. Advanced composition pays only past the k -crossover. And the theorem conserves the meter, not the meaning: choosing per-release ε_i honestly is the DP mechanism’s obligation, outside this ledger — differential privacy bounds individual influence in aggregates; it does not protect the whole dataset, nor Erin’s model IP.

6 Pillar IV: canaries with a power curve and a clock

Independent per-canary misses turn k smuggled canaries into detection probability $1 - \beta^k$; uniform planting turns leak size into a hypergeometric operating curve; and Wald’s sequential test against the permutation null turns leak intensity into an expected time-to-detection — formal statements in the box below.

Intuition. Dye packs in bank bundles: each pack fails alone with probability β , so grabbing k dyed bundles fails to stain with probability β^k ; how many dyed bundles a thief grabs is set by how much he takes and how densely packs are planted. The sequential half is quality control: each gate output is a Bernoulli trial, and the sequential probability ratio test is the optimal stopping rule for “is this stream leaking?” Pillars I–III govern what the gate is *allowed* to pass; this pillar measures what happens when something tries to pass anyway — “we have canaries” is a vibe, and a CISO buys a number.

Theorem 4a (power). With per-canary false-negative rate β , independent across canaries, a leak carrying k canary spans is detected with probability $1 - \beta^k$. Under uniform planting of c canaries in an n -span corpus, a leak of m spans carries $K \sim \text{Hypergeom}(n, c, m)$ canaries, so $\Pr(\text{detect} \mid m) = 1 - \mathbb{E}[\beta^K] \approx 1 - \left(1 - \frac{c}{n}(1 - \beta)\right)^m$ — the operating curve.

Theorem 4b (latency, Wald). Gate outputs are Bernoulli with canary-hit rate p_0 under the no-leak permutation null and $p_1 > p_0$ under exfiltration. The SPRT with error targets (α, b) stops, under leak, after expected $\mathbb{E}_1[N] = \left[(1-b) \ln \frac{1-b}{\alpha} + b \ln \frac{b}{1-\alpha}\right] / \text{KL}(p_1 \parallel p_0)$ outputs (analogously $\mathbb{E}_0[N]$ under the null), and is optimal in the Wald–Wolfowitz sense [9, 10].

Verification. $n=10^4$, $c=100$ (density 1%), $\beta=0.2$: a 100-span leak is caught with probability 0.554, an 800-span leak at 0.999; exact hypergeometric, binomial approximation, and simulation agree to Monte-Carlo precision across the curve, and the $1 - \beta^k$ line is confirmed at $k=1, 2, 5$ [internal, `a4_canary_sprt.py`]. SPRT at $p_0=10^{-3}$, $p_1=10^{-2}$, $\alpha=0.01$, $b=0.05$: Wald $\mathbb{E}_1[N] = 297$ vs simulated 359 (the gap is boundary overshoot, which the Wald identities ignore — and overshoot only *helps* the error rates: realized miss $0.048 \leq 0.05$, false alarm $0.005 \leq 0.01$); $\mathbb{E}_0[N] = 432$ vs simulated 438. Latency sweep: $10\times$ leak intensity cuts time-to-detection $\approx 30\times$ [internal].

Numbers by hand. At $\beta = 0.2$, two smuggled canaries are caught with probability $1 - 0.04 = 0.96$ [verified]; the full operating curve against leak size is Figure 5. *Now you try:* at the same β , what does a five-canary leak survive with? ($\beta^5 = 0.00032$ — detection 0.9997 [verified].)

What it buys. The clean-room contract can *quote* $\Pr(\text{detect}) = f(\text{leak size})$ and expected alarm latency per leak intensity — so the exfiltration bond is re-scoped to its honest job, funding detection and response rather than pretending to cover unbounded breach damage.

Honest boundary. Independence and *secrecy* of planting are load-bearing: an adversary who obtains the canary list with probability 0.3 and strips all of them drops measured power from 0.9997 to 0.698 at $k=5$ [internal, `a4_canary_sprt.py`] — canary secrecy is part

R11 regime — the operating curve a CISO can buy, and the boundary that voids it

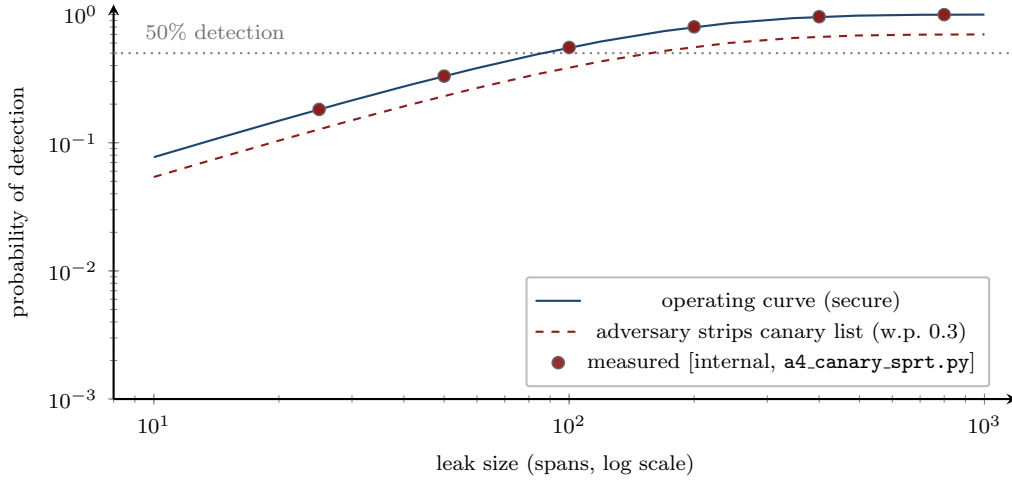


Figure 5: Regime diagram for Pillar IV: the operating curve a CISO can buy, and the boundary that voids it. Left: $\Pr(\text{detect})$ against leak size m at density 1%, $\beta = 0.2$ — exact, approximate, and simulated agree [internal, `a4_canary_sprt.py`]. The guarantee’s load-bearing regime is secret, uniform planting: an adversary who obtains the canary list with probability 0.3 and strips all of them drops measured power from 0.9997 to 0.698 at $k=5$ [internal].

of the security boundary, priced explicitly. β is a measured property of the suppressor, not an assumption. The Wald stopping-time formulas are approximations (overshoot inflates $\mathbb{E}[N] \sim 20\%$ here, conservatively); and the SPRT detects *statistical* leak signatures — a single-shot exfiltration is Theorem 4a’s job, not 4b’s.

7 The leakage budget: $q \cdot b$ bits, before timing

The four pillars compose into one information-theoretic account, and the account is deliberately unromantic. If an Erin-visible channel permits b freely chosen bits per job, a malicious worker can exfiltrate up to b bits through it — the noninterference theorem guarantees only that those bits pass through the declared gate, not that they are innocent. Across q jobs the raw capacity is $q \cdot b$ bits; choosing among s timing slots adds up to $\log_2 s$ bits per event, which is why timing sits outside the possibilistic model and inside §8. In Geoffrey Smith’s vocabulary [7], the design does not drive min-entropy leakage to zero; it makes leakage a *declared, metered* quantity: fixed schemas, padding, coarse statuses, query limits, and scheduled release turn an unlimited covert channel into a leakage budget the contract states, the ledger of Pillar III meters (with DP composition giving the aggregate-feedback portion its formal semantics), and the canaries of Pillar IV police for evasion around.

The design rule that falls out is quotable: *never negotiate over “does this output contain a secret” — negotiate over channel capacity*. The first question is undecidable in practice for prose; the second is arithmetic. A contract that grants Erin a 64-bit status schema per job, 200 jobs, has granted at most 12,800 bits of adversarial capacity before timing — and can price, bond, and canary-police exactly that.

8 What cannot honestly be promised

The pitch discipline of this paper is that the boundary list is as prominent as the theorem list. None of the following is promised, and a contract that implies any of them is overclaiming:

- **Zero model leakage with unlimited useful adaptive outputs to Derek.** The model-confidentiality property is necessarily weaker than the data property, because Derek *intentionally observes* evaluations of M : unlimited adaptive black-box access enables model extraction. Erin’s confidentiality is stated relative to the contracted query-and-output interface, not as absolute secrecy — the asymmetry is structural, not an engineering gap.
- **Zero data leakage with arbitrary natural-language telemetry to Erin.** That channel is the $q \cdot b$ budget of §7; “zero” is available only at $b = 0$.
- **Elimination of timing, cache, speculative, firmware, or physical channels.** The noninterference guarantee is possibilistic; these channels are out of model, declared so, and partially mitigated (padding, scheduled release) rather than closed.
- **Confidentiality through an unapproved external model or tool provider.** A remote API that reads plaintext is another trusted reader; the model runs inside the confidential domain or the guarantee does not apply.
- **Correctness of the answer.** The receipt proves what the measured system reported under a policy; it does not prove the financial advice was good.
- **Literal deletion of information a party already observed,** availability if a key owner refuses or aborts, or security against colluding hardware vendor, cloud operator, and principal — each needs a strictly stronger threat model (MPC/FHE backends are the high-assurance option for narrow fixed computations, not the first implementation for arbitrary tool-using agents).
- **Bounds on minds.** A human who reads a released aggregate may remember it; the system bounds channels.

9 The lift: from exhaustive model to Isabelle unwinding

Theorem 1 is exhaustive on a finite model; the general claim over unbounded state is a proof obligation with a known shape. Rushby’s channel-control formulation [3] reduces noninterference for a transition system to three local *unwinding conditions* — output consistency, step consistency, and local respect — each a per-transition lemma amenable to mechanization; the Isabelle Archive of Formal Proofs already carries stateful intransitive-noninterference and noninfluence developments in exactly this lineage. The finite model of §3 is the blueprint: its local-respect check (Derek-side actions never touch Erin-observable state) already holds mechanically, its declassification steps are the intransitive “downgrader” domain of Rushby’s framework, and the lift consists of restating the clean-room transition relation abstractly and discharging the three lemmas once, for all depths and all secrets. We flag the lift as the program’s stated next obligation for this paper rather than folding a half-finished mechanization into it; the finite result plus mutation suite is what the lift will certify at scale, not a substitute for it.

10 Related work, and what is actually new

Imported. Noninterference and its unwinding proof technique are Goguen–Meseguer [1, 2]; the intransitive/channel-control generalization that models a declassifier as a distinguished domain is Rushby [3]. The enforceability boundary is Ramadge–Wonham supervisory control [4] with the Lin–Wonham partial-observation refinement [5]. Labels owned by mutually distrustful principals are the Myers–Liskov decentralized label model [6]. Quantitative leakage is Smith’s min-entropy framework [7]; the composition corollary of Pillar III is Dwork–Rothblum–Vadhan [8]; the sequential test is Wald [9, 10]; attestation vocabulary is IETF RATS [11]. Confidential-VM offerings and attested key-release systems demonstrate the substrate pattern in industry.

New, honestly. No single component theorem above is ours. The contribution is the end-to-end clean-room *design* for tool-using LLM agents — dual-attested key release from two mutually distrustful key brokers; whole-worker taint adopted *because* token-level taint through an LLM is not soundly definable; exactly two declassification gates as the complete exit set; the $q \cdot b$ leakage-budget contract — together with the four-pillar assurance argument that makes the design’s promise a theorem schedule rather than a slogan: enforceability (II) says where the boundary can be, noninterference (I) says the boundary holds, conservation (III) meters what crosses it, and detection (IV) polices evasion with quotable power and latency. The correction this delivers to practice is the replacement of “taint analysis prevents exfiltration” and “mathematically cannot phone home” with the claim that is both stronger and true: *bring the encrypted agent to the encrypted data, and every release is explicit, gated, and bounded.*

Reproducibility

Every [internal] number regenerates from three self-contained Python scripts at seed 20260816, shipped alongside this paper: `c1_noninterference.py` (Pillar I: exhaustive depth-7 check, schedule-independence check, unwinding check, 2/2 mutations caught with witness traces), `a3_epsilon_ledger.py` (Pillar III: 15-state exhaustive interleaving check, 2000-instance randomized sweep, 2/2 mutations with shortest crimes, DP composition table), and `a4_canary_sprt.py` (Pillar IV: $1 - \beta^k$ at $k=1, 2, 5$, hypergeometric/binomial/simulated operating curve, SPRT latency and error realization, canary-stripping boundary experiment). Pillar II’s classification table regenerates from `b3_controllability.py`. Every [verified] number is a closed form the reader can recompute from the formulas in the boxes.

References

- [1] J. A. Goguen and J. Meseguer. Security policies and security models. In *Proc. IEEE Symposium on Security and Privacy (Oakland)*, pp. 11–20, 1982.
- [2] J. A. Goguen and J. Meseguer. Unwinding and inference control. In *Proc. IEEE Symposium on Security and Privacy*, 1984.
- [3] J. Rushby. Noninterference, transitivity, and channel-control security policies. Technical Report CSL-92-02, SRI International, December 1992.
- [4] P. J. Ramadge and W. M. Wonham. Supervisory control of a class of discrete event processes. *SIAM Journal on Control and Optimization*, 25(1):206–230, 1987.
- [5] F. Lin and W. M. Wonham. On observability of discrete-event systems. *Information Sciences*, 44(3):173–198, 1988.
- [6] A. C. Myers and B. Liskov. A decentralized model for information flow control. In *Proc. 16th ACM Symposium on Operating Systems Principles (SOSP)*, 1997.
- [7] G. Smith. On the foundations of quantitative information flow. In *Proc. FoSSaCS 2009*, LNCS 5504, pp. 288–302, 2009.
- [8] C. Dwork, G. N. Rothblum, and S. Vadhan. Boosting and differential privacy. In *Proc. 51st IEEE Symposium on Foundations of Computer Science (FOCS)*, pp. 51–60, 2010.
- [9] A. Wald. Sequential tests of statistical hypotheses. *Annals of Mathematical Statistics*, 16(2):117–186, 1945.
- [10] A. Wald and J. Wolfowitz. Optimum character of the sequential probability ratio test. *Annals of Mathematical Statistics*, 19(3):326–339, 1948.

- [11] H. Birkholz, D. Thaler, M. Richardson, N. Smith, and W. Pan. Remote ATtestation procedureS (RATS) architecture. RFC 9334, IETF, January 2023.