


Introduction

Batch Execution Banking Architecture in APX is based on *Spring Batch*, providing the following characteristics:

- Integration with schedulers: *Control-M*.
- Option for partial commits.
- Batch process restart in case of error.
- Multi-DB support using configurable Datasources.
- Customizable Readers and Writers.
- Access to system utilities and resources.
- Reading/Writing of multiple file formats (TXT, CSV, etc.).
- Execution Segment Control.
 - Readers access the Databases in "read only" mode.
 - Does not allow execution of certain system delete commands.
- Restricted invocation of:
 - Invocation WebServices, Rest services.
 - Access to external resources via HTTP.
- Utilities inherent to the APX Architecture.
 - Compression/Decompression.
- Data application (Transformations, Transmission and Division).
- Process application and its parts (Logical processing and Business processing).
- Orchestration over this process and other different processes (Jobs planification).
- Usually Processing large volumes of information.
- No user interaction (direct).
- Normal processing in a batch window during off-line.
- Complex non-functional requirements:
 - Traceability of information and execution.
 - High speed performance / processing.

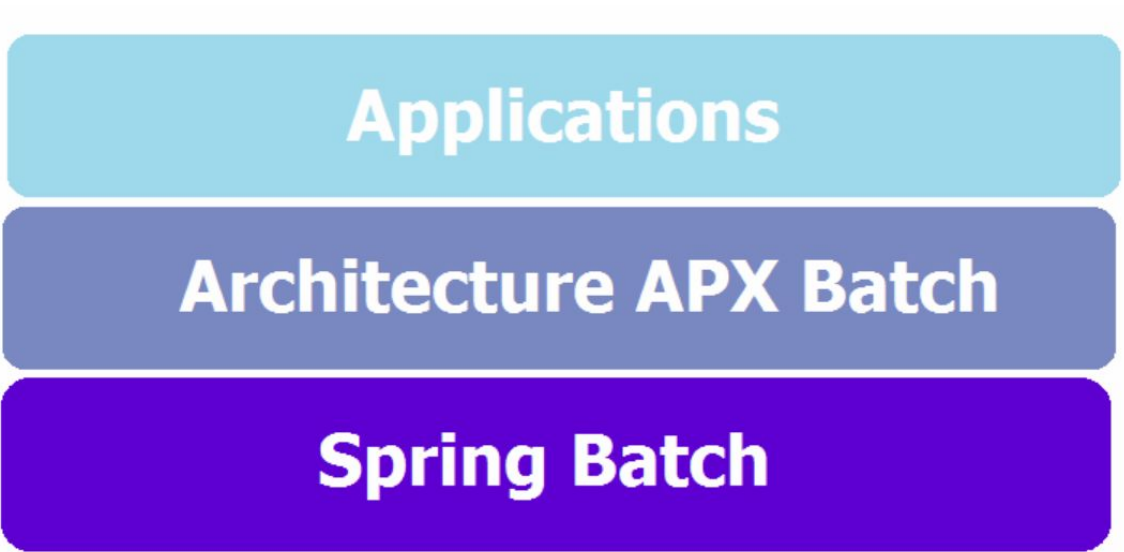

Applications

Architecture APX Batch

Spring Batch

Spring Batch is a lightweight, comprehensive batch framework designed to enable the development of robust batch applications vital for the daily operations. *Spring Batch* builds upon the characteristics of the *Spring Framework* that people have come to expect. *Spring Batch* is not a scheduling framework.

Processing strategies

1. Normal processing in a batch window during off-line.
2. Concurrent batch / on-line processing (multithreading).
3. Parallel processing of many different batch runs or jobs at the same time.
4. Data Partitioning (i.e. processing of many instances of the same job at the same time).
5. A combination of these.

Types of Batch

For the Data input source the batch can be categorized by:

1. Database-driven applications: Led retrieved values of a BD.
2. File-driven applications: From Remote file transfer values.
3. Message-driven applications: Event model.
4. Workflow-driven applications: Launch from Process model.