

AWS · Día 2 — El tramo que no pudiste hacer

Del rol de CodeDeploy (MP-9, paso 1) a la limpieza (§5), lo recorrí paso a paso en una cuenta real el viernes 11 de septiembre de 2026 y fui capturando cada pantalla. Complemento de la guía « Guía del día — AWS: DynamoDB, CodePipeline y CodeDeploy».

0. Por qué tienes este documento

El viernes llegamos a **MP-9 · Cablear el pipeline** y ahí se paró la clase: al abrir **CodeDeploy**, tu consola te mandó a una pantalla que dice «*Complete your account setup... your account is currently on the free plan*». No hiciste nada mal. Es el tipo de cuenta.

Dos cuentas gratuitas distintas. La que creaste en aws.amazon.com con «Free account plan» es la del **registro clásico**: AWS la describe como «acceso a servicios selectos» y los que faltan se bloquean en la consola con esa pantalla. CodeDeploy es uno de ellos. La cuenta de la **experiencia nueva** (se entra por settings.aws.com, tiene un «proyecto» y solo existe Ohio) incluye CodeDeploy, CodePipeline y CodeBuild en su lista oficial de servicios gratuitos. Este recorrido lo hice yo en una cuenta de ese segundo tipo, por eso llega hasta el final.

Fuentes: docs.aws.amazon.com/awsaccountbilling/latest/aboutv2/free-tier-plans.html (tabla «Access to select AWS services and features» frente a «Access to all AWS services and features») · docs.aws.amazon.com/accounts/latest/reference/supported-services-sign-up-new.html (lista que incluye AWS CodeDeploy, AWS CodePipeline y AWS CodeBuild).

Cómo leerlo. Cada bloque sigue el orden exacto de la guía: qué se elige, la captura real de esa pantalla, y qué significa lo que se ve. Todo lo que hiciste hasta MP-8 sigue valiendo: los cuatro archivos de tu repo (`buildspec.yml` , `appspec.yml` , `taskflow.service` y `scripts/*.sh`) son exactamente los que aquí construye y despliega el pipeline. La cuenta usada es de la experiencia nueva, así que la región es **Ohio (us-east-2)**; en una cuenta clásica sería N. Virginia (us-east-1) y todo lo demás es igual.

1. MP-9 · Paso 1 — El rol de CodeDeploy

Se cablea **de atrás hacia adelante**: primero quien despliega (CodeDeploy), luego el director de orquesta (CodePipeline), que crea el proyecto de build por el camino. Y CodeDeploy es el único de los tres cuyo asistente **no crea su rol**: lo creas tú antes.

Dónde	Qué eliges
IAM → Roles → Create role	Trusted entity: AWS service
Service or use case	escribe <code>CodeDeploy</code> y elígelo; abajo, en <i>Use case</i> , el que dice solo CodeDeploy (no <i>CodeDeploy for Lambda</i> ni <i>CodeDeploy - ECS</i>) → Next
Add permissions	viene ya adjunta <code>AWSCodeDeployRole</code> → Next
Role name	<code>taskflow-codedeploy-role</code> → Create role

Qué es este rol. Es la «credencial» con la que CodeDeploy va a mirar tus instancias EC2, leer sus tags y ordenarle al agente que despliegue. Hasta ayer los permisos eran de personas (tu usuario IAM); desde hoy también los necesita el software, y un rol es justo eso: un permiso que no es de nadie y que un servicio «se pone» para trabajar en tu cuenta.

Sin captura de esta pantalla. Es un formulario de IAM de cuatro pasos y la tabla de arriba lo recorre rótulo por rótulo. El resultado se ve en la captura 3 del paso siguiente: el rol `taskflow-codedeploy-role` elegido en el grupo de despliegue, con su ARN.

2. MP-9 · Paso 2 — La aplicación y el grupo de despliegue

Barra de búsqueda → `CodeDeploy` → menú izquierdo **Applications**. La lista sale vacía: es el punto de partida.

2.1 Create application

Campo	Valor
Application name	<code>taskflow</code>
Compute platform (desplegable)	EC2/On-premises (las otras dos opciones, Lambda y ECS, no son nuestro caso: desplegamos a una máquina)

Create application

Application configuration

Application name

Enter an application name

100 character limit

Compute platform

Choose a compute platform

Tags

[Cancel](#)

Captura 1. El formulario tal cual queda antes de pulsar Create application. Una aplicación en CodeDeploy es solo un nombre que agrupa despliegues; lo que importa viene después.

Applications > taskflow ?

✔ Application created
In order to create a new deployment, you must first create a deployment group.

Create a notification rule for this application ✕

taskflow

Notify ▼ Delete application

Application details

Name
taskflow

Compute platform
EC2/On-premises

Deployments Deployment groups Revisions

Deployment groups

View details Edit Create deployment group

< 1 > ⚙

Name	Status	Last attempted deployment	Last successful deployment	Trigger count
No deployment groups				
Before you can deploy your application using CodeDeploy, you must create a deployment group.				
Create deployment group				

Captura 2. Aplicación creada. Fíjate en el aviso verde: «In order to create a new deployment, you must first create a deployment group». La pestaña *Deployment groups* está vacía y ahí está el botón **Create deployment group**.

2.2 Create deployment group

Pantalla	Qué eliges
Deployment group name	<code>taskflow-dg</code>
Service role	en la caja escribe <code>taskflow</code> y elige <code>taskflow-codedeploy-role</code> (el rol del paso 1; la caja lo convierte en su ARN completo)
Deployment type	In-place (viene marcado): actualiza la misma instancia; <i>Blue/green</i> crearía instancias nuevas y necesita balanceador
Environment configuration	marca Amazon EC2 instances · Tag group 1: Key <code>Name</code> · Value <code>taskflow-ec2</code>
Agent configuration with AWS Systems Manager	viene en <i>Now and schedule updates</i> : cámbialo a Never (el agente ya lo instalaste tú en MP-5)
Deployment settings	<code>CodeDeployDefault.AllAtOnce</code> (viene puesto)
Load balancer	desmarca <i>Enable load balancing</i>

Create deployment group

Application

Application

taskflow

Compute type

EC2/On-premises

Deployment group name

Enter a deployment group name

taskflow-dg

100 character limit

Service role

Enter a service role

Enter a service role with CodeDeploy permissions that grants AWS CodeDeploy access to your target instances.

arn:aws:iam::243396653884:role/taskflow-codedeploy-role



Deployment type

Choose how to deploy your application

☒ In-place

Updates the instances in the deployment group with the latest application revisions. During a deployment, each instance will be briefly taken offline for its update.

☐ Blue/green

Replaces the instances in the deployment group with new instances and deploys the latest application revision to them. After instances in the replacement environment are registered with a load balancer, instances from the original environment are deregistered and can be terminated.

Environment configuration

Captura 3. Nombre del grupo y el rol ya elegido: la caja muestra `arn:aws:iam::...:role/taskflow-codedeploy-role`. Abajo, *In-place* marcado.

Tools > CodeDeploy > Applications > taskflow > Create deployment group

Deployment type

Choose how to deploy your application

☒ **In-place**
Updates the instances in the deployment group with the latest application revisions. During a deployment, each instance will be briefly taken offline for its update

☐ **Blue/green**
Replaces the instances in the deployment group with new instances and deploys the latest application revision to them. After instances in the replacement environment are registered with a load balancer, instances from the original environment are deregistered and can be terminated.

Environment configuration

Select any combination of Amazon EC2 Auto Scaling groups, Amazon EC2 instances, and on-premises instances to add to this deployment

☐ Amazon EC2 Auto Scaling groups

☒ **Amazon EC2 instances**
1 unique matched instance. [Click here for details](#)

You can add up to three groups of tags for EC2 instances to this deployment group.
One tag group: Any instance identified by the tag group will be deployed to.
Multiple tag groups: Only instances identified by all the tag groups will be deployed to.

Tag group 1

Key	Value - optional	
Name	taskflow-ec2	Remove tag

☐ On-premises instances

Matching instances
1 unique matched instance. [Click here for details](#)

Captura 4. La línea más importante del día: con Key `Name` y Value `taskflow-ec2`, debajo dice «**1 unique matched instance**». Así es como CodeDeploy sabe a qué máquina desplegar: no por nombre, por tag. Si dijera 0, el despliegue saldría «succeeded» sin haber tocado nada; es el fallo más engañoso del día, y se corrige aquí, antes de seguir.

Tools > CodeDeploy > Applications > taskflow > Create deployment group

Add tag

+ Add tag group

☐ On-premises instances

Matching instances
1 unique matched instance. [Click here for details](#)

Agent configuration with AWS Systems Manager Info

 We recommend configuring your CodeDeploy Agent install and updates with AWS Systems Manager. AWS Systems Manager provides more control over CodeDeploy Agent version updates and rollbacks than installing using other methods. [Learn more](#)

Install AWS CodeDeploy Agent
☒ Never
☐ Only once
☐ Now and schedule updates

Deployment settings

Deployment configuration
Choose from a list of default and custom deployment configurations. A deployment configuration is a set of rules that determines how fast an application is deployed and the success or failure conditions for a deployment.
CodeDeployDefault.AllAtOnce ▼ or [Create deployment configuration](#)

Load balancer
Select a load balancer to manage incoming traffic during the deployment process. The load balancer blocks traffic from each instance while it's being deployed to and allows traffic to it again after the deployment succeeds.
☒ Enable load balancing

Captura 5. Install AWS CodeDeploy Agent en **Never**. La consola recomienda dejar que Systems Manager instale el agente; nosotros ya lo instalamos a mano en MP-5 y así vimos qué es. El aviso amarillo es solo esa recomendación.

[Tools](#) > [CodeDeploy](#) > [Applications](#) > [taskflow](#) > Create deployment group

1 unique matched instance. [Click here for details](#)

Agent configuration with AWS Systems Manager [Info](#)

 We recommend configuring your CodeDeploy Agent install and updates with AWS Systems Manager. AWS Systems Manager provides more control over CodeDeploy Agent version updates and rollbacks than installing using other methods. [Learn more](#)

Install AWS CodeDeploy Agent

☒ Never

☐ Only once

☐ Now and schedule updates

Deployment settings

Deployment configuration

Choose from a list of default and custom deployment configurations. A deployment configuration is a set of rules that determines how fast an application is deployed and the success or failure conditions for a deployment.

CodeDeployDefault.AllAtOnce ▼ or [Create deployment configuration](#)

Load balancer

Select a load balancer to manage incoming traffic during the deployment process. The load balancer blocks traffic from each instance while it's being deployed to and allows traffic to it again after the deployment succeeds.

☐ Enable load balancing

► **Advanced - optional**

[Cancel](#) [Create deployment group](#)

Captura 6. Deployment configuration en `CodeDeployDefault.AllAtOnce` (con una sola instancia, «todas a la vez» es la única que tiene sentido) y *Enable load balancing* **desmarcado**: no hay balanceador delante de la EC2.

Applications > taskflow > taskflow-dg

Success
Deployment group created

taskflow-dg

EditDeleteCreate deployment

Deployment group details

Deployment group name
taskflow-dg

Deployment type
In-place

Rollback enabled
False

Application name
taskflow

Service role ARN
arn:aws:iam::243396653884:role/taskflow-codedeploy-role

Agent update scheduler
Learn to schedule update in AWS Systems Manager

Compute platform
EC2/On-premises

Deployment configuration
CodeDeployDefault.AllAtOnce

Environment configuration: Amazon EC2 instances

Key	Value
Name	taskflow-ec2

Triggers

Name	Events	Type
No triggers have been created for this deployment group.		

Alarms

Name

Captura 7. «Deployment group created». La ficha resume todo: In-place, el ARN del rol, AllAtOnce, y en *Environment configuration* la pareja Name = taskflow-ec2. *Rollback enabled: False*.

3. MP-9 · Paso 3 — El pipeline

Barra de búsqueda → CodePipeline → **Pipelines** → **Create pipeline**. El asistente tiene siete pasos; el 4 abre CodeBuild en otra ventana.

3.1 Paso 1 de 7 · Choose creation option

[Tools](#) > [CodePipeline](#) > [Pipelines](#) > Create new pipeline

Step 1

Choose creation option

Step 2

Choose source

Step 3

Configure template

Choose creation option [Info](#)

Step 1 of 3

Category

☒ Deployment

☐ Continuous Integration

☐ Automation

☐ Build custom pipeline

Template

☒ **Push to ECR**
Build and push a new container image to Amazon ECR.


☐ **Deploy to ECS Fargate**
Deploy a ECR image to Amazon ECS Fargate cluster.


☐ **Deploy to CloudFormation**
Deploy your cloud formation template.


☐ **Terraform Deploy To AWS**
Deploy your terraform configuration to AWS.


[Cancel](#) [Next](#)

Captura 8. Así abre el asistente: categoría *Deployment* y plantilla *Push to ECR* preseleccionadas, y dice «Step 1 of 3». No es lo nuestro.

pools > CodePipeline > Pipelines > Create new pipeline

Step 1
Choose creation option

Step 2
Choose pipeline settings

Step 3
Add source stage

Step 4 - optional
Add build stage

Step 5 - optional
Add test stage

Step 6
Add deploy stage

Step 7
Review

Choose creation option [Info](#)

Step 1 of 7

Category

☐ Deployment

☐ Continuous Integration

☐ Automation

☒ Build custom pipeline

[Cancel](#) [Next](#)

Captura 9. Al marcar **Build custom pipeline** la plantilla desaparece y el asistente pasa a **7 pasos** (mira la columna izquierda). → Next.

3.2 Paso 2 de 7 · Choose pipeline settings

Campo	Valor
Pipeline name	taskflow-pipeline
Execution mode	el que viene (Queued ; <i>Superseded</i> también sirve)
Service role	New service role , con el nombre que propone (<code>AWSCodePipelineServiceRole-us-east-2-taskflow-pipeline</code>)
Advanced settings → Artifact store	Custom location → Bucket: tu <code>taskflow-artefactos-<usuario></code> (en esta cuenta el bucket se llama <code>askflow-artefactos-mrugerio</code> ; el nombre no importa, importa que sea el tuyo y esté versionado)

Step 1

Choose creation option

Step 2

Choose pipeline settings

Step 3

Add source stage

Step 4 - optional

Add build stage

Step 5 - optional

Add test stage

Step 6

Add deploy stage

Step 7

Review

Choose pipeline settings [Info](#)

Step 2 of 7

Pipeline settings

Pipeline name
Enter the pipeline name. You cannot edit the pipeline name after it is created.

No more than 100 characters

Execution mode [Info](#)
Choose the execution mode for your pipeline. This determines how the pipeline is run.

☐ Superseded

☒ Queued

☐ Parallel

Service role

☒ **New service role**
Create a service role in your account

☐ **Existing service role**
Choose an existing service role from your account

Role name

Type your service role name

☒ Allow AWS CodePipeline to create a service role so it can be used with this new pipeline

▼ **Advanced settings**
Configure artifact store location, encryption settings, and pipeline variables for your pipeline.

Artifact store

☐ **Default location**
Create a default S3 bucket in your account.

☒ **Custom location**
Choose an existing S3 location from your account in the same region and account as your pipeline

Captura 10. Nombre, modo Queued, rol nuevo. El rol de CodePipeline es el segundo de los tres roles de servicio de hoy, y este sí lo crea el asistente.

> Create new pipeline

Type your service role name

☒ Allow AWS CodePipeline to create a service role so it can be used with this new pipeline

▼ Advanced settings

Configure artifact store location, encryption settings, and pipeline variables for your pipeline.

Artifact store

☐ Default location
Create a default S3 bucket in your account.

☒ Custom location
Choose an existing S3 location from your account in the same region and account as your pipeline

Bucket

Encryption key

☒ Default AWS Managed Key
Use the AWS managed customer master key for CodePipeline in your account to encrypt the data in the artifact store.

☐ Customer Managed Key
To encrypt the data in the artifact store under an AWS KMS customer managed key, specify the key ID, key ARN, or alias ARN.

Variables

You can add variables at the pipeline level. You can choose to assign the value when you start the pipeline. [Learn more](#)

No variables defined at the pipeline level in this pipeline.

Add variable

You can add up to 50 variables.

Cancel

Previous

Next

Captura 11. Advanced settings desplegado, *Custom location* marcado y el bucket elegido. Aquí se guardan el zip del código (SourceArtifact) y el zip del build (BuildArtifact). Este detalle es el que provocará el primer fallo del pipeline, y está puesto a propósito: lo verás en el punto 4.

3.3 Paso 3 de 7 · Add source stage

Campo	Valor
Source provider	GitHub (via GitHub App)
Connection	<code>github-taskflow</code> , la del prework (tiene que estar <i>Available</i> ; si no tienes ninguna, el botón Connect to GitHub de esta misma pantalla la crea)
Repository name	<code><tu-usuario>/taskflow-aws-<tu-usuario></code>
Default branch	<code>main</code>
Output artifact format	CodePipeline default
Webhook events	deja marcado <i>Start your pipeline on push and pull request events</i>

Step 1

[Choose creation option](#)

Step 2

[Choose pipeline settings](#)

Step 3

Add source stage

Step 4 - optional

[Add build stage](#)

Step 5 - optional

[Add test stage](#)

Step 6

[Add deploy stage](#)

Step 7

[Review](#)

Add source stage [Info](#)

Step 3 of 7

Source

Source provider

This is where you stored your input artifacts for your pipeline. Choose the provider and then provide the connection details.

GitHub (via GitHub App) ▼

Connection

Choose an existing connection that you have already configured, or create a new one and then return to this task.

arn:aws:codeconnections:us-



or [Connect to GitHub](#)

Repository name

Choose a repository in your GitHub account.

cursostrugurio/taskflow-aws-mrugurio 

You can type or paste the group path to any project that the provided credentials can access. Use the format 'group/subgroup/project'.

Default branch

Default branch will be used only when pipeline execution starts from a different source or manually started.

main 

Output artifact format

Choose the output artifact format.

☒ **CodePipeline default**
AWS CodePipeline uses the default zip format for artifacts in the pipeline. Does not include Git metadata about the repository.

☐ **Full clone**
AWS CodePipeline passes metadata about the repository that allows subsequent actions to do a full Git clone. Only supported for AWS CodeBuild actions. [Learn more](#)

☒ Enable automatic retry on stage failure

Webhook events

Captura 12. La conexión elegida (la caja muestra su ARN), el repo y la rama `main`. Nota el botón **Connect to GitHub** junto a la conexión: es la salida si la del prework no quedó Available.

Tools

>

CodePipeline

>

Pipelines

>

Create new pipeline

Add build stage

Step 5 - optional

Add test stage

Step 6

Add deploy stage

Step 7

Review

Choose an existing connection that you have already configured, or create a new one and then return to this task.

arn:aws:codeconnections:us-1

or

Connect to GitHub

Repository name

Choose a repository in your GitHub account.

Q cursosmrugerio/taskflow-aws-mrugerio

X

You can type or paste the group path to any project that the provided credentials can access. Use the format 'group/subgroup/project'.

Default branch

Default branch will be used only when pipeline execution starts from a different source or manually started.

Q main

X

Output artifact format

Choose the output artifact format.

☒ CodePipeline default

AWS CodePipeline uses the default zip format for artifacts in the pipeline. Does not include Git metadata about the repository.

☐ Full clone

AWS CodePipeline passes metadata about the repository that allows subsequent actions to do a full Git clone. Only supported for AWS CodeBuild actions. [Learn more](#)

☒ Enable automatic retry on stage failure

Webhook events

Webhook - optional

☒ Start your pipeline on push and pull request events.

► Webhook event filters - optional

Starts your pipeline on a specific event.

Remove filters

Cancel

Previous

Next

Captura 13. El bloque *Webhook events* con «Start your pipeline on push and pull request events» marcado. Esta casilla es la que convierte un `git push` en un despliegue: GitHub avisa a AWS, AWS arranca el pipeline.

3.4 Paso 4 de 7 · Add build stage (y la ventana de CodeBuild)

Campo	Valor
Build provider	Other build providers → AWS CodeBuild
Region	la tuya (aquí Ohio)
Project name	Create project (se abre CodeBuild en otra ventana)

Step 1

Choose creation option

Step 2

Choose pipeline settings

Step 3

Add source stage

Step 4 - optional

Add build stage

Step 5 - optional

Add test stage

Step 6

Add deploy stage

Step 7

Review

Add build stage - optional [Info](#)

Step 4 of 7

Build - optional

Build provider
Choose the tool you want to use to run build commands and specify artifacts for your build action.

☐ Commands

☒ Other build providers

AWS CodeBuild ▼

Project name
Choose a build project that you have already created in the AWS CodeBuild console. Or create a build project in the AWS CodeBuild console and then return to this task.

 or [Create project ↗](#)

☐ **Define buildspec override - optional**
Buildspec file or definition that overrides the latest one defined in the build project, for this build only.

Service role override - optional
Choose an IAM role that overrides the CodeBuild project's default service role for this action.

Environment variables - optional
Choose the key, value, and type for your CodeBuild environment variables. In the value field, you can reference variables generated by CodePipeline. [Learn more ↗](#)

Add environment variable

Build type

☒ **Single build**
Triggers a single build.

☐ **Batch build**
Triggers multiple builds as a single execution.

Region

United States (Ohio) ▼

Captura 14. Build provider en AWS CodeBuild y el botón **Create project**. La opción *Commands* serviría para pegar comandos aquí mismo; nosotros queremos que el build lo describa `buildspec.yml`, que ya está en el repo.

En la ventana de CodeBuild (Create build project):

Campo	Valor
Project name	taskflow-build
Environment	Provisioning model On-demand · Environment image Managed image · Compute EC2 · Running mode Container · Operating system Amazon Linux · Runtime(s) Standard · Image: la amazonlinux-x86_64-standard de número más alto (viene puesta; hoy :6.0)
Service role	New service role (codebuild-taskflow-build-service-role)
Buildspec	viene en <i>Insert build commands</i> : cámbialo a Use a buildspec file
Salir	solo con Continue to CodePipeline , nunca con la X de la ventana

Continue to CodePipeline
Create a new CodeBuild build project and return to CodePipeline to finish configuring your pipeline.

Create build project

In the future new CodeBuild projects will default to Amazon Linux 2023 as the host operating system. CodeBuild will continue to support Amazon Linux 2, but we recommend that you move to Amazon Linux 2023. To test your builds before then, in the Environment section under Additional configuration, choose Amazon Linux 2023 for Host kernel.

[Learn more](#)

Project configuration

Project name

taskflow-build

A project name must be 2 to 255 characters. It can include the letters A-Z and a-z, the numbers 0-9, and the special characters - and _.

Project type

Select what type of project you would like to create. [Info](#)

☒ Default project

Create a custom CodeBuild project.

☐ Runner project

Create a CodeBuild managed runner for workflows in GitHub Actions, GitHub Enterprise Actions, GitLab, or Buildkite.

► Additional configuration

Description, public build access, build badge, concurrent build limit, tags

▼ Environment

Provisioning model [Info](#)

☒ On-demand

Automatically provision build infrastructure in response to new builds.

☐ Reserved capacity

Use a dedicated fleet of instances for builds. A fleet's compute and environment type will be used for the project.

Captura 15. La ventana de CodeBuild. El aviso azul de arriba, «Continue to CodePipeline», te recuerda que estás dentro del asistente. Project name `taskflow-build`, Default project.

tools > CodeBuild > Build projects > Create build project

Description, public build access, build badge, concurrent build limit, tags

▼ Environment

Provisioning model [Info](#)

☒ On-demand
Automatically provision build infrastructure in response to new builds.

☐ Reserved capacity
Use a dedicated fleet of instances for builds. A fleet's compute and environment type will be used for the project.

Environment image

☒ Managed image
Use an image managed by AWS CodeBuild

☐ Custom image
Specify a Docker image

Compute

☒ EC2
Optimized for flexibility during action runs

☐ Lambda
Optimized for speed and minimizes the start up time of workflow actions

Running mode

☒ Container
Running on Docker container

☐ Instance
Running on EC2 instance directly

Operating system

Amazon Linux

Runtime(s)

Standard

Image

aws/codebuild/amazonlinux-x86_64-standard:6.0

Image version

Captura 16. Environment con todo lo que viene por defecto: On-demand, Managed image, EC2, Container, Amazon Linux, Standard, imagen `aws/codebuild/amazonlinux-x86_64-standard:6.0`. Esa imagen trae Java 21 y Maven: por eso `buildspec.yml` solo dice qué runtime usar y qué comando correr.

tools > CodeBuild > Build projects > Create build project

Runtime(s)

Standard ▼

Image

aws/codebuild/amazonlinux-x86_64-standard:6.0 ▼

Image version

Always use the latest image for this runtime version ▼

☐ Use GPU-enhanced compute

Service role

☒ **New service role**
Create a service role in your account

☐ **Existing service role**
Choose an existing service role from your account

Role name

codebuild-taskflow-build-service-role

Type your service role name

► **Additional configuration**
Timeout, privileged, certificate, VPC, compute type, environment variables, file systems, auto-retry, registry credential

▼ **Buildspec**

Build specifications

☐ **Insert build commands**
Store build commands as build project configuration

☒ **Use a buildspec file**
Store build commands in a YAML-formatted buildspec file

Buildspec name - optional
By default, CodeBuild looks for a file named buildspec.yml in the source code root directory. If your buildspec file uses a different name or location, enter its path from the source root here (for example, buildspec-two.yml or configuration/buildspec.yml).

Captura 17. Service role nuevo (codebuild-taskflow-build-service-role , el tercer rol de servicio) y **Use a buildspec file** marcado. CodeBuild buscará `buildspec.yml` en la raíz del zip que le pase el pipeline: tu repo.

[Tools](#) > [CodeBuild](#) > [Build projects](#) > **Create build project**

▼ **Batch configuration**

You can run a group of builds as a single execution. Batch configuration is also available in advanced option when starting build.

☐ Define batch configuration - *optional*

You can also define or override batch configuration when starting a build batch.

▼ **Logs**

CloudWatch

☒ CloudWatch logs - *optional*

Checking this option will upload build output logs to CloudWatch.

Group name - optional

The group name of the logs in CloudWatch Logs. The log group name will be /aws/codebuild/<project-name> by default.

Stream name prefix - optional

The prefix of the stream name of the CloudWatch Logs.

S3

☐ S3 logs - *optional*

Checking this option will upload build output logs to S3.

[Cancel](#) [Continue to CodePipeline](#)

Captura 18. Final de la ventana: logs a CloudWatch (por defecto) y el botón **Continue to CodePipeline**. Si cierras con la X, el asistente avisa «You closed the popup window prior to creating the resource» y hay que pulsar Create project otra vez.

- Step 1
[Choose creation option](#)
- Step 2
[Choose pipeline settings](#)
- Step 3
[Add source stage](#)
- Step 4 - optional
Add build stage
- Step 5 - optional
[Add test stage](#)
- Step 6
[Add deploy stage](#)
- Step 7
[Review](#)

Add build stage - optional [Info](#)

Step 4 of 7

Build - optional

Build provider

Choose the tool you want to use to run build commands and specify artifacts for your build action.

☐ Commands

☒ Other build providers

AWS CodeBuild ▼

Project name

Choose a build project that you have already created in the AWS CodeBuild console. Or create a build project in the AWS CodeBuild console and then return to this task.

taskflow-build ✕

or

Create project ↗

☐ Define buildspec override - optional

Buildspec file or definition that overrides the latest one defined in the build project, for this build only.

Service role override - optional

Choose an IAM role that overrides the CodeBuild project's default service role for this action.

Q

✓ Successfully created taskflow-build in CodeBuild. ✕

Environment variables - optional

Choose the key, value, and type for your CodeBuild environment variables. In the value field, you can reference variables generated by CodePipeline. [Learn more](#)

Add environment variable

Build type

☒ Single build

Triggers a single build.

☐ Batch build

Triggers multiple builds as a single execution.

Captura 19. De vuelta en el asistente: «Successfully created taskflow-build in CodeBuild» y el proyecto ya puesto en *Project name*. Build type **Single build** → Next.

3.5 Paso 5 de 7 · Add test stage

[ools](#) > [CodePipeline](#) > [Pipelines](#) > Create new pipeline

Step 1

[Choose creation option](#)

Step 2

[Choose pipeline settings](#)

Step 3

[Add source stage](#)

Step 4 - optional

[Add build stage](#)

Step 5 - optional

Add test stage

Step 6

[Add deploy stage](#)

Step 7

[Review](#)

Add test stage - optional [Info](#)

Step 5 of 7

Test - optional

Test provider
Choose how you want to test your application or content. Choose the provider, and then provide the configuration details for that provider.

☒ Enable automatic retry on stage failure

[Cancel](#) [Previous](#) [Skip test stage](#) [Next](#)

Captura 20. Sin proveedor de pruebas: **Skip test stage**. Los tests del proyecto los corre Maven dentro del build (hoy con `-DskipTests`, como dice el `buildspec.yml` del lab).

3.6 Paso 6 de 7 · Add deploy stage

Campo	Valor
Deploy provider	AWS CodeDeploy · Region: la tuya
Input artifacts	tiene que decir BuildArtifact (el zip que dejó Build; si dijera <i>SourceArtifact</i> , cámbialo)
Application name	<code>taskflow</code>
Deployment group	<code>taskflow-dg</code>
Configure automatic rollback on stage failure	desmarcar (si lo dejas, cuando rompas el despliegue en 4.2 el pipeline lanzará solo una ejecución «Rollback» que también sale en rojo y confunde)

Step 1

[Choose creation option](#)

Step 2

[Choose pipeline settings](#)

Step 3

[Add source stage](#)

Step 4 - optional

[Add build stage](#)

Step 5 - optional

[Add test stage](#)

Step 6

Add deploy stage

Step 7

[Review](#)

Add deploy stage [Info](#)

Step 6 of 7

Deploy - optional

Deploy provider

Choose how you want to deploy your application or content. Choose the provider, and then provide the configuration details for that provider.

AWS CodeDeploy

Region

United States (Ohio)

Input artifacts

Choose an input artifact for this action. [Learn more](#)

BuildArtifact

Defined by: Build

No more than 100 characters

Application name

Choose an application that you have already created in the AWS CodeDeploy console. Or create an application in the AWS CodeDeploy console and then return to this task.

taskflow

Deployment group

Choose a deployment group that you have already created in the AWS CodeDeploy console. Or create a deployment group in the AWS CodeDeploy console and then return to this task.

taskflow-dg

☐ Configure automatic rollback on stage failure

☐ Enable automatic retry on stage failure

[Cancel](#)

[Previous](#)

[Skip deploy stage](#)

[Next](#)

Captura 21. Deploy con CodeDeploy en Ohio, *BuildArtifact* como entrada, aplicación `taskflow`, grupo `taskflow-dg`, y las dos casillas de abajo desmarcadas. Aquí se unen los dos pasos anteriores: el pipeline le entregará a CodeDeploy el zip que construyó CodeBuild, y CodeDeploy lo llevará a la instancia con el tag.

3.7 Paso 7 de 7 · Review → Create pipeline

[Tools](#) > [CodePipeline](#) > [Pipelines](#) > [Create new pipeline](#)

Step 1

[Choose creation option](#)

Step 2

[Choose pipeline settings](#)

Step 3

[Add source stage](#)

Step 4 - optional

[Add build stage](#)

Step 5 - optional

[Add test stage](#)

Step 6

[Add deploy stage](#)

Step 7

Review

Review [Info](#)

Step 7 of 7

Step 2: Choose pipeline settings

Pipeline settings

Pipeline name

taskflow-pipeline

Pipeline type

V2

Execution mode

QUEUED

Artifact location

askflow-artefactos-mrugerio

Service role name

AWSCodePipelineServiceRole-us-east-2-taskflow-pipeline

Step 3: Add source stage

Source action provider

Source action provider

GitHub (via GitHub App)

OutputArtifactFormat

CODE_ZIP

DetectChanges

true

ConnectionArn

arn:aws:codeconnections:us-east-2:243396653884:connection/59aaa5a5-9a07-4e6a-be5f-98f9891f1144

Captura 22. El resumen, parte 1: nombre, tipo V2, modo QUEUED, *Artifact location* con tu bucket, el rol, y el origen GitHub (via GitHub App) con *DetectChanges: true* (es el webhook).

> Create new pipeline

Build action provider

Build action provider
AWS CodeBuild

ProjectName
taskflow-build

Commands
-

Enable automatic retry on stage failure
Enabled

Step 6: Add deploy stage

Deploy action provider

Deploy action provider
AWS CodeDeploy

ApplicationName
taskflow

DeploymentGroupName
taskflow-dg

Configure automatic rollback on stage failure
Disabled

Enable automatic retry on stage failure
Disabled

[Cancel](#) [Previous](#) [Create pipeline](#)

Captura 23. Parte 2: Build con `taskflow-build`, Deploy con CodeDeploy, aplicación y grupo, rollback *Disabled*. Y el botón **Create pipeline**. Nada más pulsarlo, el pipeline arranca solo con lo que hay en `main`.

4. La primera ejecución — Build sale en rojo, y es a propósito

Developer Tools > CodePipeline > Pipelines > taskflow-pipeline

Success
Congratulations! The pipeline taskflow-pipeline has been created.

taskflow-pipeline

Pipeline | Executions | Triggers | Settings | Tags

Source
7ab92774-dfd8-4c62-94ce-588f1e05121d
All actions succeeded.
Source
✔ GitHub (via GitHub App) [Just now](#)
19958305 [Source: ci: buildspec, appspec, hooks y taskflow.service](#)

Build
7ab92774-dfd8-4c62-94ce-588f1e05121d
1 of 1 action failed.
Build
✖ AWS CodeBuild [Just now](#)
19958305 [Source: ci: buildspec, appspec, hooks y taskflow.service](#)

Deploy
Didn't Run
Deploy
AWS CodeDeploy [Just now](#)

Captura 24. «Congratulations! The pipeline taskflow-pipeline has been created», y debajo la primera ejecución ya corriendo: **Source en verde** (bajó tu commit de GitHub: se ve el hash y el mensaje del último commit), **Build en rojo** «1 of 1 action failed», y Deploy «Didn't Run». Fue así a los 70 segundos.

Developer Tools > CodePipeline > Pipelines > taskflow-pipeline

Success
Congratulations! The pipeline taskflow-pipeline has been created.

taskflow-pipeline

Pipeline | Executions | Triggers | Settings

Source
7ab92774-dfd8-4c62-94ce-588f1e05121d
All actions succeeded.
Source
✔ GitHub (via GitHub App) 3 minutes ago
19958305 Source: ci: buildspec, appspec, hooks y taskflow.service

Build
7ab92774-dfd8-4c62-94ce-588f1e05121d
1 of 1 action failed.
Build
✖ AWS CodeBuild 2 minutes ago
19958305 Source: ci: buildspec, appspec, hooks y taskflow.service

Deploy
Didn't Run
Deploy
AWS CodeDeploy

Latest retry trigger
AutomatedStageRetry
Auto retry attempt 1

Captura 25. El icono de aviso de Build explica que hubo un reintento automático (*AutomatedStageRetry*, attempt 1): es la casilla «Enable automatic retry on stage failure» que el asistente marcó sola. Reintentar no arregla un permiso: falló las dos veces.

Qué dice el error (CodeBuild → Build history → la ejecución → *Phase details*, o en el pipeline, Build → View details):

```
DOWNLOAD_SOURCE error while downloading key taskflow-pipeline/SourceArti/zrGTc0D,  
error: AccessDenied: User: arn:aws:sts::243396653884:assumed-role/codebuild-taskflow-build-service-role/...  
is not authorized to perform: s3:GetObject on resource:  
"arn:aws:s3:::askflow-artefactos-mrugerio/taskflow-pipeline/SourceArti/zrGTc0D"  
because no identity-based policy allows the s3:GetObject action (status code: 403)
```

Léelo con calma, porque es «IAM para servicios» en vivo. No es tu `buildspec.yml`: el build ni siquiera llegó a leerlo. Falló en la fase **DOWNLOAD_SOURCE**, al intentar bajar el zip del código desde tu bucket. El rol que el asistente le creó a CodeBuild (`codebuild-taskflow-build-service-role`) solo sabe leer los buckets `codepipeline-us-east-2-*` que crea AWS, y tú le diste **tu** bucket como almacén (captura 11). El software necesita permiso, y nadie se lo dio.

El arreglo (un permiso, no un cambio de código): IAM → **Roles** → busca `codebuild-taskflow-build-service-role` → **Add permissions** → **Attach policies** → marca `AmazonS3FullAccess` → **Add permissions**. Vuelve al pipeline y pulsa el icono ↺ (**Retry stage**) en la caja Build. Medido el 5-sep: verde en 1 min 36 s; hoy, 2 min 30 s.

Sin captura de esta pantalla. Es la misma pantalla de IAM → Roles de siempre, con el botón *Add permissions* → *Attach policies*. Cómo comprobar que quedó bien, desde la CLI:

```
$ aws iam list-attached-role-policies --role-name codebuild-taskflow-build-service-role  
CodeBuildBasePolicy-taskflow-build-us-east-2    AmazonS3FullAccess
```

Developer Tools > CodePipeline > Pipelines > taskflow-pipeline

Success
Stage Build successfully retried

taskflow-pipeline

Pipeline Executions Triggers Settings Tags

The screenshot displays the AWS CodePipeline console for a pipeline named 'taskflow-pipeline'. At the top, a green banner indicates 'Success' and 'Stage Build successfully retried'. Below this, the pipeline's structure is shown with three stages: Source, Build, and Deploy. The Source stage is green, indicating success, and shows the action 'Source' using 'GitHub (via GitHub App)'. The Build stage is blue, indicating it is in progress or has failed, and shows the action 'Build' using 'AWS CodeBuild'. The Deploy stage is grey, indicating it has not run, and shows the action 'Deploy' using 'AWS CodeDeploy'. A 'Stop execution' button is visible above the Build stage. The pipeline is currently in a state where the Build stage is being retried.

Captura 26. Tras pulsar ♻: «Stage Build successfully retried». Build vuelve a correr (azul, en marcha) con el mismo commit; Source no se repite porque ya tenía el código.

Developer Tools > CodePipeline > Pipelines > taskflow-pipeline

taskflow-pipeline

Pipeline Executions Triggers Settings Tags

Three stages (Source, Build, Deploy) are shown, all with green status indicators and "All actions succeeded" messages. The Build stage has a warning icon.

Source Stage: 7ab92774-dfd8-4c62-94ce-588f1e05121d. All actions succeeded. Source: GitHub (via GitHub App) 14 minutes ago.

Build Stage: 7ab92774-dfd8-4c62-94ce-588f1e05121d. All actions succeeded. Build: AWS CodeBuild 1 minute ago.

Deploy Stage: 7ab92774-dfd8-4c62-94ce-588f1e05121d. All actions succeeded. Deploy: AWS CodeDeploy 1 minute ago.

19958305 Source: ci: buildspec, appspec, hooks y taskflow.service

Captura 27. Las tres etapas en verde. Medido hoy: Build $\approx$ 2 min, Deploy 32 s (2 min 30 s en total). El mismo `buildspec.yml` que falló hace un minuto ahora compila: el problema nunca fue el código.

Listo cuando... y la prueba de que el despliegue tocó la máquina. Verde no basta: hay que pedir `http://<IP nueva>:8080/info` . Respondió:

```
$ curl http://18.222.29.16:8080/info  
{"version":"3.0.0","app":"taskflow-api"}
```

Nadie entró por SSH, nadie copió el jar, nadie tecleó `systemctl` : lo hicieron tus cuatro hooks, en orden. Y como la API la arrancó `taskflow.service` (hook `AfterInstall` copia la unit; `ApplicationStart` hace `systemctl start taskflow`), esta es también **la prueba de MP-6**: la aplicación ya no depende de una sesión SSH abierta. Si cierras la sesión y vuelves, `systemctl status taskflow` sigue en *active (running)*.

Deployments > d-OQKT1EDK

Installing application on your instances

100%

1 of 1 instances updated Succeeded

Deployment details

Application
taskflow

Deployment configuration
CodeDeployDefault.AllAtOnce

Deployment description
-

Deployment ID
d-OQKT1EDK

Deployment group
taskflow-dg

Status
Succeeded

Initiated by
User action

Revision details

Revision location
s3://askflow-artefactos-mrugerio/taskflow-pipeline/BuildArtif/Axaett5?versionId=bNy5YY.8WLTIEeC8vH6eJrtixbKF3pOH&eTag=e2e75f754afa56c2876414972d27bd09-3

Revision created
1 minute ago

Revision description
Application revision registered by Deployment ID: d-OQKT1EDK

Deployment lifecycle events

Instance ID	Duration	Status	Most recent event	Events	Start time	End time
i-03052731c646c860a	24 seconds	Succeeded	ValidateService	View events	Sep 11, 2026 12:45 PM (UTC-6:00)	Sep 11, 2026 12:46 PM (UTC-6:00)

Captura 28. CodeDeploy → Deployments → el despliegue `d-OQKT1EDK` : «1 of 1 instances updated · Succeeded», la revisión es el zip `BuildArtif...` que dejó CodeBuild en tu bucket, y abajo la instancia `i-03052731c646c860a` con su enlace **View events**.

arn:aws:ec2:us-east-2:243396653884:instance/i-03052731c646c860a

Deployment details

Application

taskflow

Deployment ID

d-OQKT1EDK

Status

✔ Succeeded

Deployment configuration

CodeDeployDefault.AllAtOnce

Deployment group

taskflow-dg

Initiated by

User action

Deployment description

-

Revision details

Revision location

s3://askflow-artefactos-mrugerio/taskflow-pipeline/BuildArtif/Axaett5?
versionId=bNySYY.8WLTIEeC8vH6eJrtixbKF3pOH&eTag=e2e75f754afa56c28
76414972d27bd09-3

Revision created

1 minute ago

Revision description

Application revision registered by Deployment ID: d-OQKT1EDK

Event	Duration	Status	Error code	Start time	End time
ApplicationStop	less than one second	✔ Succeeded	-	Sep 11, 2026 12:45 PM (UTC-6:00)	Sep 11, 2026 12:45 PM (UTC-6:00)
DownloadBundle	4 seconds	✔ Succeeded	-	Sep 11, 2026 12:45 PM (UTC-6:00)	Sep 11, 2026 12:45 PM (UTC-6:00)
BeforeInstall	less than one second	✔ Succeeded	-	Sep 11, 2026 12:45 PM (UTC-6:00)	Sep 11, 2026 12:45 PM (UTC-6:00)
Install	less than one second	✔ Succeeded	-	Sep 11, 2026 12:45 PM (UTC-6:00)	Sep 11, 2026 12:45 PM (UTC-6:00)
AfterInstall	less than one second	✔ Succeeded	-	Sep 11, 2026 12:45 PM (UTC-6:00)	Sep 11, 2026 12:45 PM (UTC-6:00)
ApplicationStart	less than one second	✔ Succeeded	-	Sep 11, 2026 12:45 PM (UTC-6:00)	Sep 11, 2026 12:45 PM (UTC-6:00)

Captura 29. View events: los siete eventos del ciclo de vida, todos en Succeeded y en este orden: **ApplicationStop**, **DownloadBundle**, **BeforeInstall**, **Install**, **AfterInstall**, **ApplicationStart**, **ValidateService**. DownloadBundle e Install son del agente; los otros cinco son tus scripts (`de-comandos-a-hooks.md` dice cuál vive en cada uno). Memoriza esta tabla: es la que vas a leer cuando algo falle.

5. §4.1 · El momento — el push que despliega

Un cambio de **una línea visible**: la constante `VERSION` de `InfoController`, de `3.0.0` a `3.0.1`, en `src/main/java/com/taskflow/controller/InfoController.java`. Hoy el `buildspec.yml` lleva `-DskipTests`, así que el test que comprueba «3.0.0» no corre y no hace falta tocarlo.

```
$ cd ~/taskflow-aws-<tu-usuario>
$ git status      # solo InfoController.java
$ git add . && git commit -m "chore: v3.0.1" && git push
```

Medido aquí: push a las 12:47:47; el pipeline arrancó solo **11 s** después; verde a los **107 s**.

Developer Tools > CodePipeline > Pipelines > taskflow-pipeline

taskflow-pipeline

Pipeline Executions Triggers Settings Tags

Source Build Deploy

3ace61f3-814b-4b55-ba1b-a95d674ffe43

All actions succeeded.

Source

GitHub (via GitHub App) 1 minute ago

a18691ce Source: chore: v3.0.1

Build

3ace61f3-814b-4b55-ba1b-a95d674ffe43

All actions succeeded.

Build

AWS CodeBuild Just now

a18691ce Source: chore: v3.0.1

Deploy

3ace61f3-814b-4b55-ba1b-a95d674ffe43

All actions succeeded.

Deploy

AWS CodeDeploy Just now

a18691ce Source: chore: v3.0.1

+

-

↺

Captura 30. Las tres cajas ahora dicen «Source: chore: v3.0.1» con el hash `a18691ce` de tu commit. Es el mismo pipeline; lo que cambió fue quién lo disparó: GitHub, por el webhook del paso 3.

Developer Tools
>
CodePipeline
>
Pipelines
>
taskflow-pipeline

taskflow-pipeline

Edit
Stop execution
Create trigger
Clone pipeline
Release change

Pipeline
Executions
Triggers
Settings
Tags

Execution ID	Status	Source revisions	Trigger	Started	Duration	Completed
3ace61f3	Succeeded	Source - a18691ce : chore: v3.0.1	Commit a18691ce pushed in cursosmrugerio/taskflow-aws-mrugerio/main chore: v3.0.1	Sep 11, 2026 12:47 PM (UTC-6:00)	1 minute 39 seconds	Sep 11, 2026 12:49 PM (UTC-6:00)
7ab92774	Succeeded	Source - 19958305 : ci: buildspec, appspec, hooks y taskflow.service	CreatePipeline - AccountFullAccessRole/a48854b8-a001-707f-27cd-a9b0c6cc838c	Sep 11, 2026 12:32 PM (UTC-6:00)	13 minutes 35 seconds	Sep 11, 2026 12:46 PM (UTC-6:00)

Captura 31. Pestaña *Executions*: la primera ejecución la disparó **CreatePipeline** (tú, al crearlo); la segunda, **Commit a18691ce pushed in .../main**. Duración 1 min 39 s.

```
$ curl http://18.222.29.16:8080/info
{"version":"3.0.1","app":"taskflow-api"}
```

Cero comandos. No entraste por SSH, no empaquetaste, no copiaste nada. Hiciste un `push` .

6. §4.2 · Rómpelo a propósito — y léelo

Un pipeline que nunca falla no enseña nada. Se cambia en `appspec.yml` la ruta del hook **AfterInstall** (no la de `ApplicationStop`: ese corre con la revisión anterior, la buena, y el despliegue saldría verde): `location: scripts/permisos.sh` → `location: scripts/no-existe.sh`.

```
$ git add appspec.yml && git commit -m "rompe el hook a propósito" && git push
```

Medido: Deploy en rojo a los **107 s** del push. Mientras está roto, `/info` **no responde** (curl devuelve código 000): `ApplicationStop` paró el servicio y `ApplicationStart` nunca corrió. Es normal.

Developer Tools > CodePipeline > Pipelines > taskflow-pipeline

taskflow-pipeline

Pipeline Executions Triggers Settings Tags

Source Build Deploy

Source: GitHub (via GitHub App) 2 minutes ago

Build: AWS CodeBuild 1 minute ago

Deploy: AWS CodeDeploy Just now

1 of 1 action failed.

29729640 Source: rompe el hook a propósito

29729640 Source: rompe el hook a propósito

29729640 Source: rompe el hook a propósito

Captura 32. Source y Build en verde, **Deploy en rojo** «1 of 1 action failed». El código compiló bien; lo que falló ocurrió dentro de la máquina. Y como el asistente quedó sin *automatic rollback*, hay una sola ejecución roja, la tuya.

Ahora lee, siempre en este orden:

Deployments

Deployment history

< 1 >

View details

Actions ▾

Copy deployment

Retry deployment

	Deployment Id	Status	Deployment type	Compute platf...	Application	Deployment gr...	Revision location	Initiating event	Start time	End time
☐	d-AW29PVDDK	Failed	In-place	EC2/On-premises	taskflow	taskflow-dg	s3://askflow-art...	User action	Sep 11, 2026 1...	Sep 11, 2026 1...
☐	d-KJI96IEDK	Succeeded	In-place	EC2/On-premises	taskflow	taskflow-dg	s3://askflow-art...	User action	Sep 11, 2026 1...	Sep 11, 2026 1...
☐	d-OQKT11EDK	Succeeded	In-place	EC2/On-premises	taskflow	taskflow-dg	s3://askflow-art...	User action	Sep 11, 2026 1...	Sep 11, 2026 1...

Paso 1 · Captura 33. CodeDeploy → menú izquierdo **Deployments**: la fila en rojo (*Failed*) es `d-AW29PVDDK` ; debajo los dos despliegues verdes anteriores. Pulsa su Deployment Id.

Deployments > d-AW29PVDDK

d-AW29PVDDK

Copy deployment

Retry deployment

The overall deployment failed because too many individual instances failed deployment, too few healthy instances are available for deployment, or some instances in your deployment group are experiencing problems.

Deployment status

Installing application on your instances

1%

0 of 1 instances updated

Failed

Deployment details

Application

taskflow

Deployment ID

d-AW29PVDDK

Status

Failed

Deployment configuration

CodeDeployDefault.AllAtOnce

Deployment group

taskflow-dg

Initiated by

User action

Deployment description

-

Revision details

Revision location

s3://askflow-artefactos-mrugerio/taskflow-pipeline/BuildArtif/E2zT1Mg?versionId=DbtX8D64RPlxR2NhpWTlztQGu_74VE6r&eTag=0e65ede65e58f5702dcaca12cee79d86-3

Revision created

1 minute ago

Revision description

Application revision registered by Deployment ID: d-AW29PVDDK

Deployment lifecycle events

Paso 2 · Captura 34. La ficha del despliegue: banner rojo con el mensaje genérico de CodeDeploy («The overall deployment failed because too many individual instances failed deployment...») y «0 of 1 instances updated · Failed». Ese banner no dice qué pasó: hay que bajar a la instancia.

[Deployments](#) > [d-AW29PVDDK](#)

Deployment status

Installing application on your instances

1%

0 of 1 instances updated Failed

Deployment details

Application
[taskflow](#)

Deployment configuration
[CodeDeployDefault.AllAtOnce](#)

Deployment description
-

Deployment ID
d-AW29PVDDK

Deployment group
[taskflow-dg](#)

Status
Failed

Initiated by
User action

Revision details

Revision location
[s3://askflow-artefactos-mrugerio/taskflow-pipeline/BuildArtif/E2zT1Mg?versionId=DbtX8D64RPlxR2NhpWTlztQGu_74VE6r&eTag=0e65ede65e58f5702dcaca12cee79d86-3](#)

Revision created
1 minute ago

Revision description
Application revision registered by Deployment ID: d-AW29PVDDK

Deployment lifecycle events

< 1 >

Instance ID	Duration	Status	Most recent event	Events	Start time	End time
i-03052731c646c860a	-	Failed	AfterInstall	View events	Sep 11, 2026 12:51 PM (UTC-6:00)	-

Captura 35. En *Deployment lifecycle events*, la instancia aparece con Status **Failed** y «Most recent event: **AfterInstall**». Ya sabes **qué hook** y **en qué instancia**. Pulsa **View events**.

Deployment details

Application
taskflow**Deployment ID**
d-AW29PVDDK**Status**
❌ Failed**Deployment configuration**
CodeDeployDefault.AllAtOnce**Deployment group**
taskflow-dg**Initiated by**
User action**Deployment description**
-

Revision details

Revision location
s3://askflow-artefactos-mrugerio/taskflow-pipeline/BuildArtif/E2zT1Mg?versionId=DbtX8D64RPixR2NhpWTlztQGu_74VE6r&eTag=0e65ede65e58f5702dcaca12cee79d86-3**Revision created**
2 minutes ago**Revision description**
Application revision registered by Deployment ID: d-AW29PVDDK

Event	Duration	Status	Error code	Start time	End time
ApplicationStop	less than one second	✅ Succeeded	-	Sep 11, 2026 12:51 PM (UTC-6:00)	Sep 11, 2026 12:51 PM (UTC-6:00)
DownloadBundle	1 second	✅ Succeeded	-	Sep 11, 2026 12:51 PM (UTC-6:00)	Sep 11, 2026 12:51 PM (UTC-6:00)
BeforeInstall	less than one second	✅ Succeeded	-	Sep 11, 2026 12:51 PM (UTC-6:00)	Sep 11, 2026 12:51 PM (UTC-6:00)
Install	less than one second	✅ Succeeded	-	Sep 11, 2026 12:51 PM (UTC-6:00)	Sep 11, 2026 12:51 PM (UTC-6:00)
AfterInstall	less than one second	❌ Failed	ScriptMissing	Sep 11, 2026 12:51 PM (UTC-6:00)	Sep 11, 2026 12:51 PM (UTC-6:00)
ApplicationStart	-	ⓘ Skipped	-	-	-
ValidateService	-	ⓘ Skipped	-	-	-

Paso 3 · Captura 36. La tabla de eventos: ApplicationStop, DownloadBundle, BeforeInstall e Install en Succeeded; **AfterInstall en Failed con Error code `ScriptMissing`** ; ApplicationStart y ValidateService en Skipped (no llegaron a correr: por eso ⓘ está muerto). El código de error es un enlace.

Event Logs

Event details

Error code ScriptMissing**Script name**

scripts/no-existe.sh

Message


Script does not exist at specified location: /opt/codedeploy-agent/deployment-root/07a99e44-9cc9-4ec4-a8b7-47044deed064/d-AW29PVDDK/deployment-archive/scripts/no-existe.sh

Logs

LifecycleEvent - AfterInstall

Paso 4 · Captura 37. Event Logs: Script name `scripts/no-existe.sh` y el mensaje completo, «Script does not exist at specified location: /opt/codedeploy-agent/deployment-root/.../deployment-archive/scripts/no-existe.sh». Es el mismo texto que verías con `journalctl` dentro de la EC2, sin entrar por SSH. El archivo que faltó está dicho con su ruta.

Restaurar: `location: scripts/permisos.sh`, commit y push. Medido: verde otra vez a los **112 s**, y `/info` vuelve a responder `{"version":"3.0.1","app":"taskflow-api"}`.

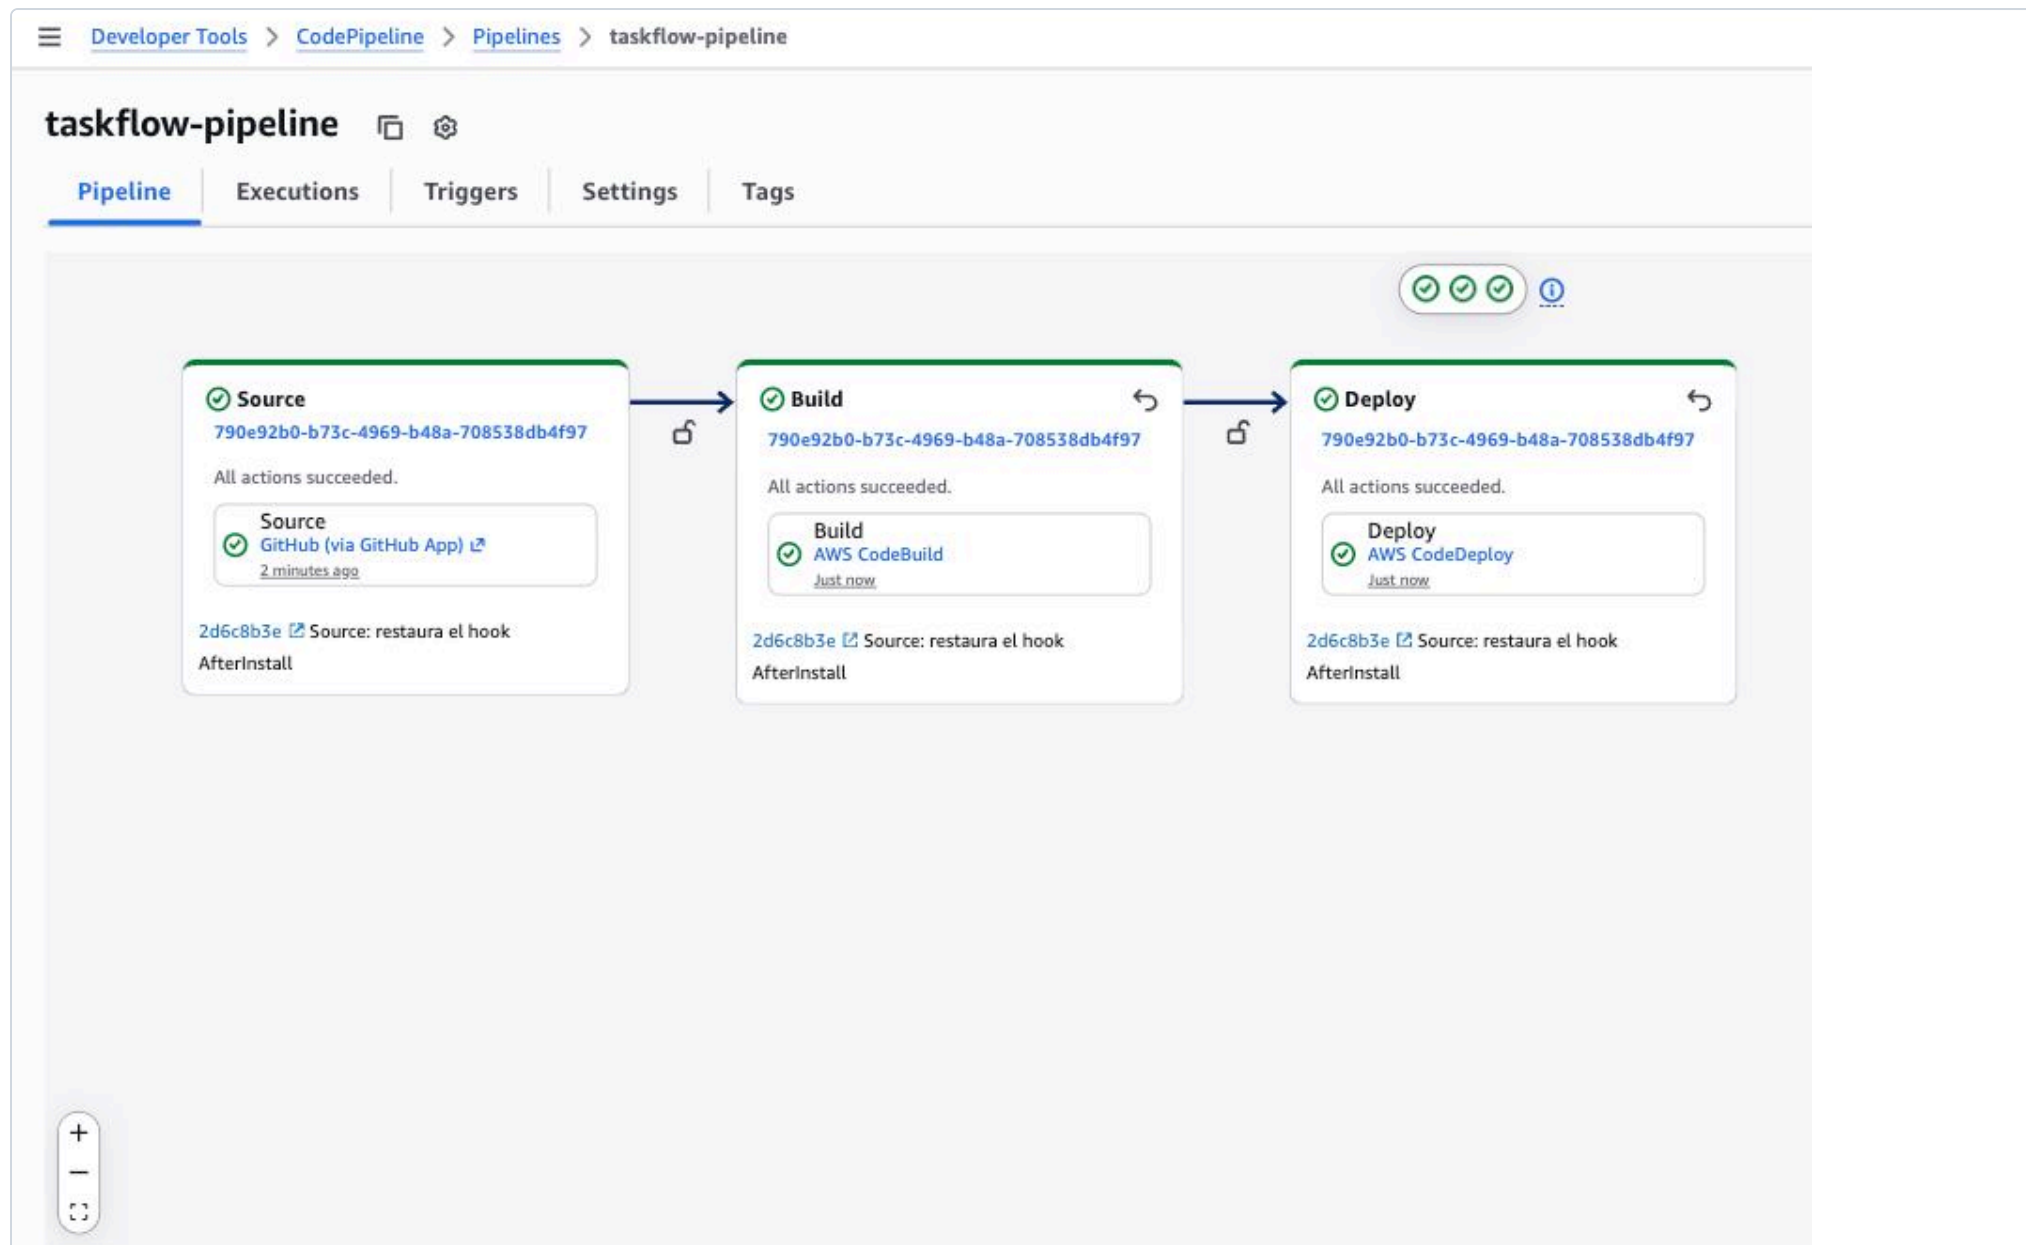

Captura 38. Verde con «Source: restaura el hook AfterInstall».

Developer Tools
CodePipeline
Pipelines
taskflow-pipeline

taskflow-pipeline

Edit
Stop execution
Create trigger
Clone pipeline
Release change

Pipeline
Executions
Triggers
Settings
Tags

Execution ID	Status	Source revisions	Trigger	Started	Duration	Completed
790e92b0	Succeeded	Source – 2d6c8b3e : restaura el hook AfterInstall	Commit 2d6c8b3e pushed in cursosmrugerio/taskflow-aws-mrugerio/main restaura el hook AfterInstall	Sep 11, 2026 12:54 PM (UTC-6:00)	1 minute 42 seconds	Sep 11, 2026 12:56 PM (UTC-6:00)
c493287c	Failed	Source – 29729640 : rompe el hook a propósito	Commit 29729640 pushed in cursosmrugerio/taskflow-aws-mrugerio/main rompe el hook a propósito	Sep 11, 2026 12:50 PM (UTC-6:00)	1 minute 39 seconds	Sep 11, 2026 12:52 PM (UTC-6:00)
3ace61f3	Succeeded	Source – a18691ce : chore: v3.0.1	Commit a18691ce pushed in cursosmrugerio/taskflow-aws-mrugerio/main chore: v3.0.1	Sep 11, 2026 12:47 PM (UTC-6:00)	1 minute 39 seconds	Sep 11, 2026 12:49 PM (UTC-6:00)
7ab92774	Succeeded	Source – 19958305 : ci: buildspec, appspec, hooks y taskflow.service	CreatePipeline - AccountFullAccessRole/a48854b8-a001-707f-27cd-a9b0c6cc838c	Sep 11, 2026 12:32 PM (UTC-6:00)	13 minutes 35 seconds	Sep 11, 2026 12:46 PM (UTC-6:00)

Captura 39. El historial completo del día en *Executions*: creación del pipeline (Succeeded), v3.0.1 (Succeeded), «rompe el hook a propósito» (**Failed**), «restaura el hook AfterInstall» (Succeeded). Cada fila dice qué commit y quién la disparó.

7. §4.3 · Evidencia — lo que habrías entregado

Todo va a tu repo `taskflow-aws-<tu-usuario>`, en una carpeta `evidencia/` en la raíz, con push antes de las 17:00. Seis archivos:


Archivo	Qué es
<code>evidencia/pipeline-verde.png</code>	captura del pipeline con las tres etapas en verde (aquí, la captura 30)
<code>evidencia/deploy-fallido.png</code>	captura del despliegue fallido con el hook en <i>Failed</i> señalado (aquí, la captura 36)
<code>evidencia/comandos-dynamodb.md</code>	tal cual viene en <code>academyMty/aws/dia-2/dynamodb/</code>
<code>evidencia/modelado.md</code>	tal cual viene
<code>evidencia/de-comandos-a-hooks.md</code>	tal cual viene en <code>academyMty/aws/dia-2/pipeline/</code>
<code>evidencia/checklist-limpieza.md</code>	con la línea <i>Mi consola la revisó</i> rellena por tu pareja (§5)

```
$ cd ~/taskflow-aws-<tu-usuario>
$ mkdir -p evidencia
$ cp ~/academyMty/aws/dia-2/dynamodb/comandos-dynamodb.md ~/academyMty/aws/dia-2/dynamodb/modelado.md \
  ~/academyMty/aws/dia-2/pipeline/de-comandos-a-hooks.md ~/academyMty/aws/dia-2/checklist-limpieza.md evidencia/
# y mueve a evidencia/ las dos capturas: pipeline-verde.png y deploy-fallido.png
$ git add evidencia && git commit -m "feat: pipeline de despliegue continuo (codebuild + codedeploy) + evidencia" && git push
```

Ese push, con el pipeline aún vivo, lo dispara una vez más y sale en verde (solo añade archivos). Así quedó en mi repo (`cursosmrugerio/taskflow-aws-mrugerio`): los seis archivos en `evidencia/`, y la ejecución número cinco en verde. **Manda al canal la URL de tu repo.** Hoy no se sube nada a Moodle.

8. §5 · Limpieza — nada queda corriendo

Lo de ayer más lo de hoy: pipeline, proyecto de CodeBuild, aplicación de CodeDeploy, tabla, EC2, bucket, roles, clave de acceso, key pair y conexión. Es lo que más se olvida porque nada de esto «se ve» corriendo, y un pipeline parado sigue contando. Aquí ves las tres piezas nuevas de hoy borrándose; el resto es idéntico a ayer y va en la tabla de abajo.

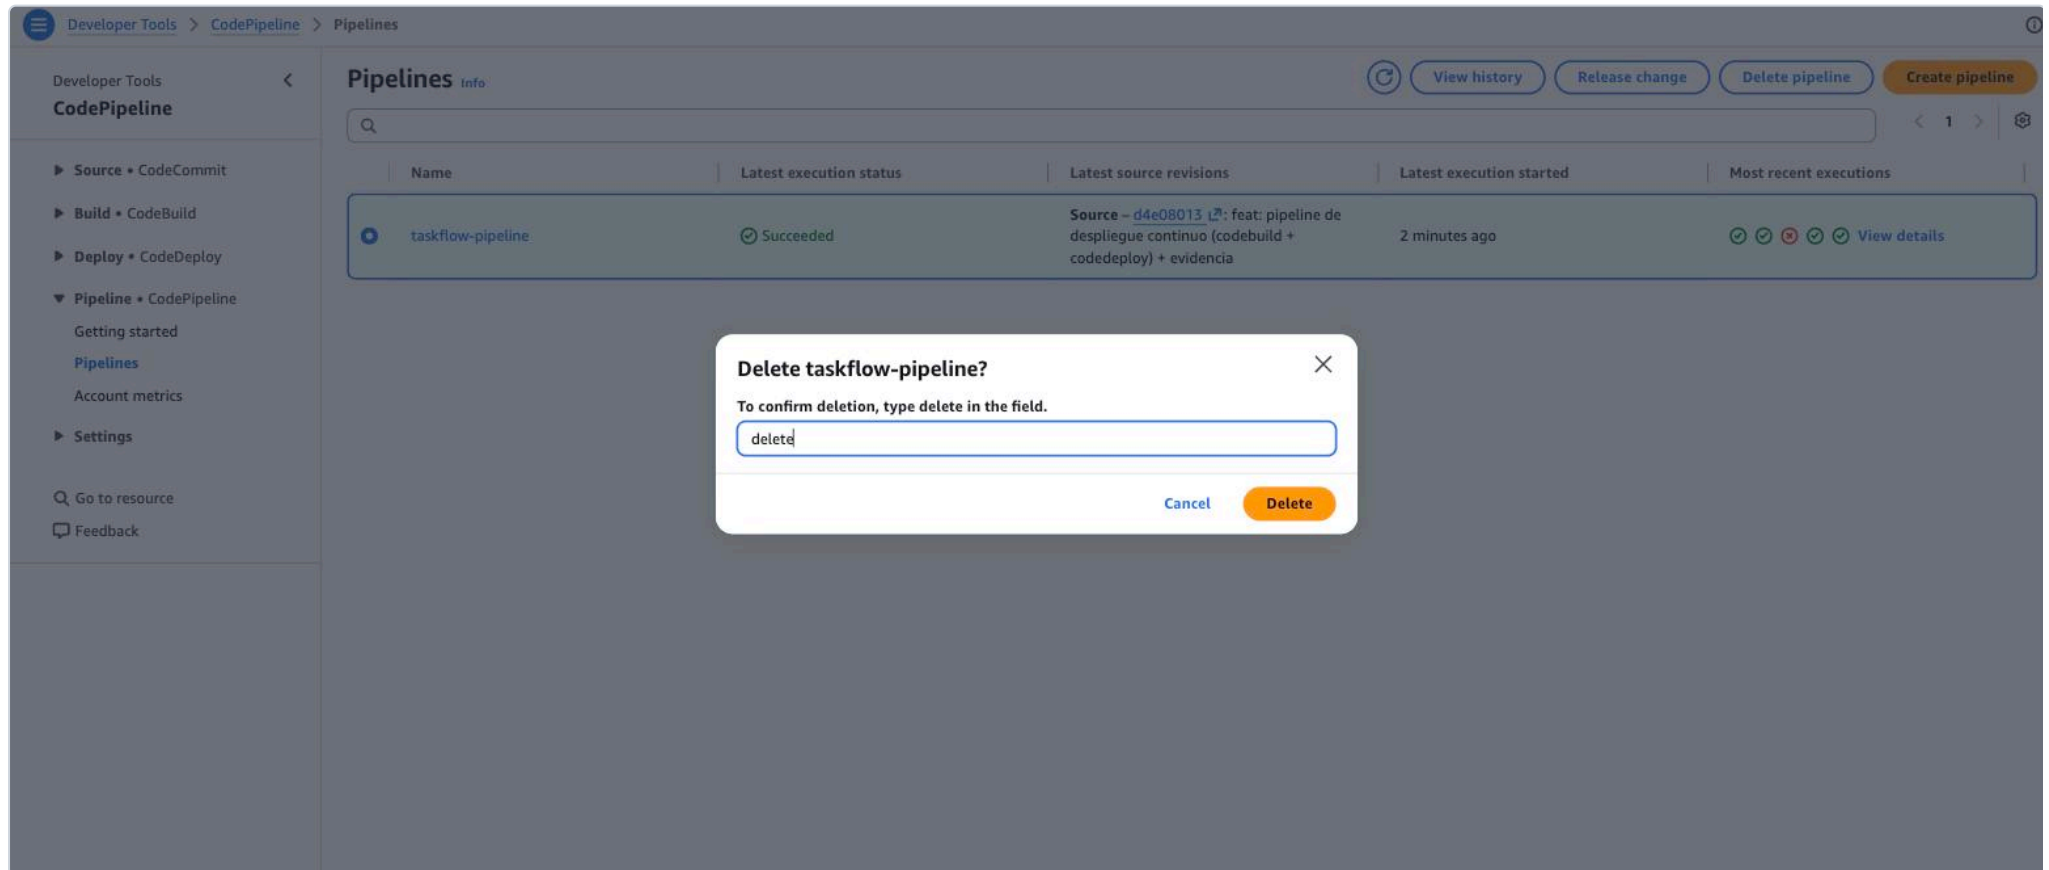

Captura 40. CodePipeline → Pipelines → marca `taskflow-pipeline` → **Delete pipeline** → escribe `delete` → Delete.

Pipelines

✓ Successfully deleted
Pipeline: taskflow-pipeline has been deleted.

Pipelines

Info

View history

Release change


Delete pipeline

Create pipeline

< 1 >

Name	Latest execution status	Latest source revisions	Latest execution started	Most recent executions
No results There are no results to display.				

Captura 41. «Pipeline: taskflow-pipeline has been deleted». La lista, vacía.

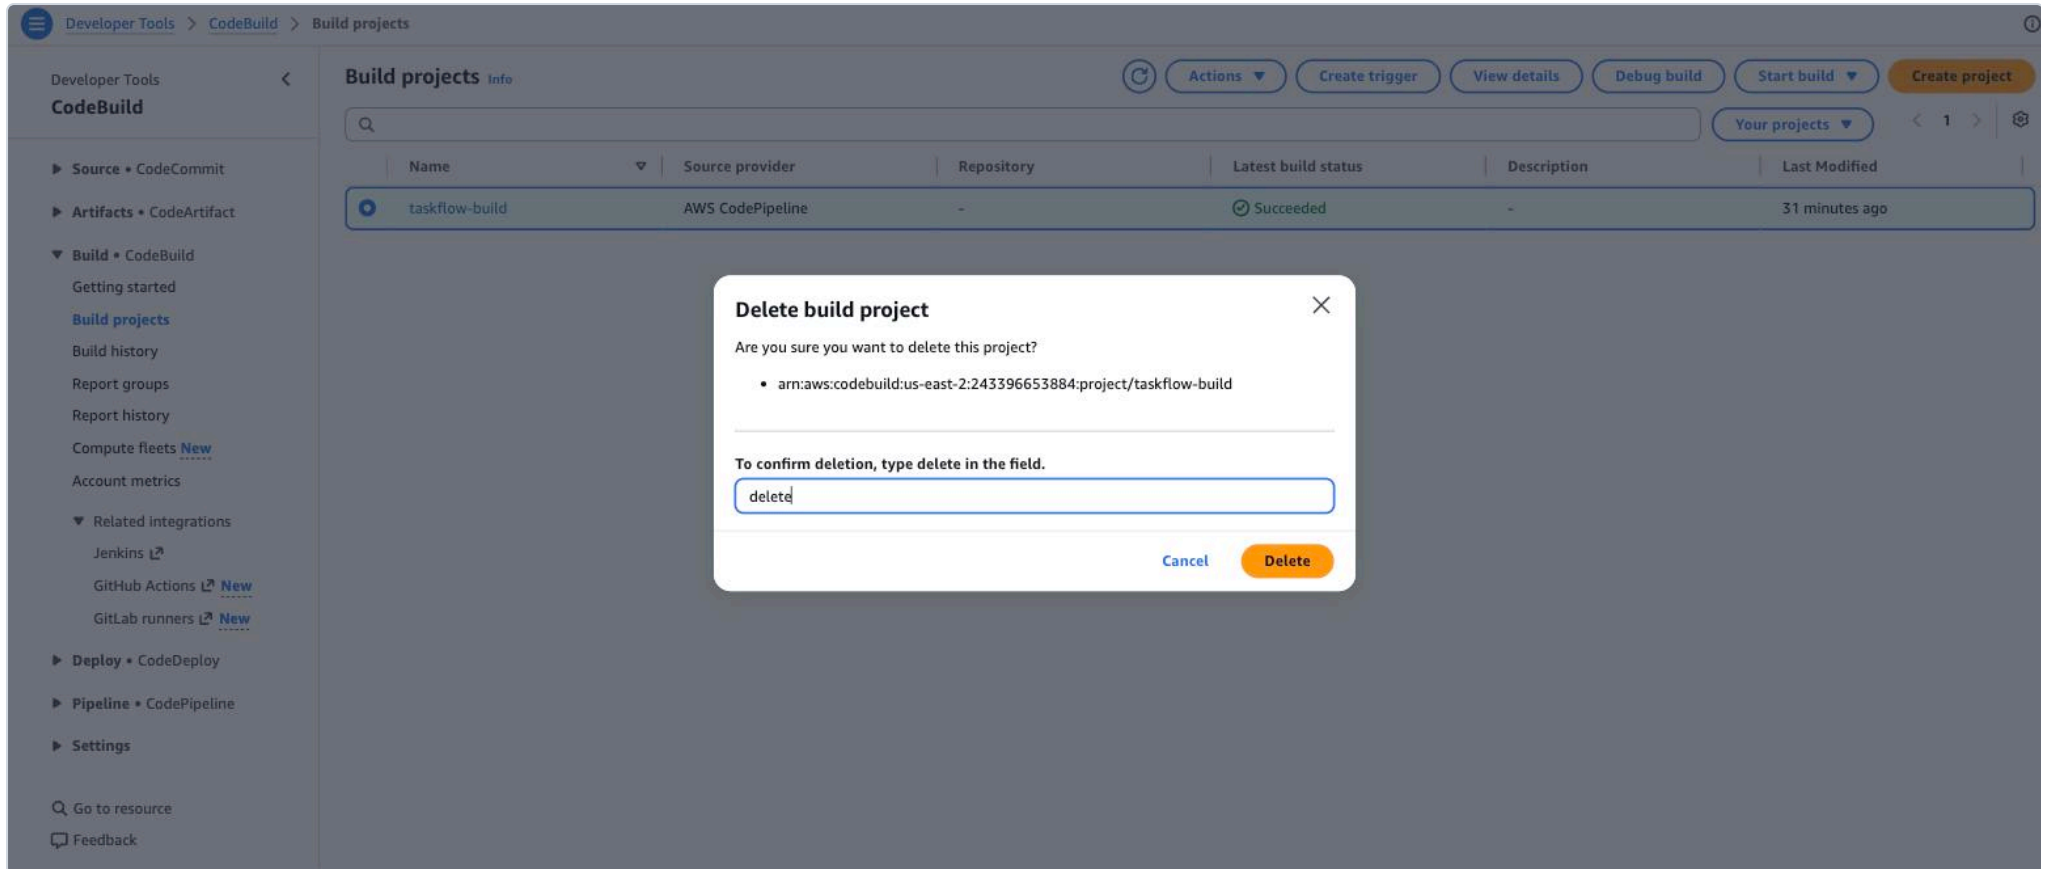

Captura 42. CodeBuild → Build projects → marca `taskflow-build` → **Actions** → **Delete** → escribe `delete` → Delete.

Build projects

Success

Project arn:aws:codebuild:us-east-2:243396653884:project/taskflow-build successfully deleted

Build projects

Info

Actions

Create trigger

View details

Debug build

Start build


Create project

Your projects

< 1 >

Name	Source provider	Repository	Latest build status	Description	Last Modified
No results There are no results to display.					

Captura 43. «Project ...:project/taskflow-build successfully deleted».

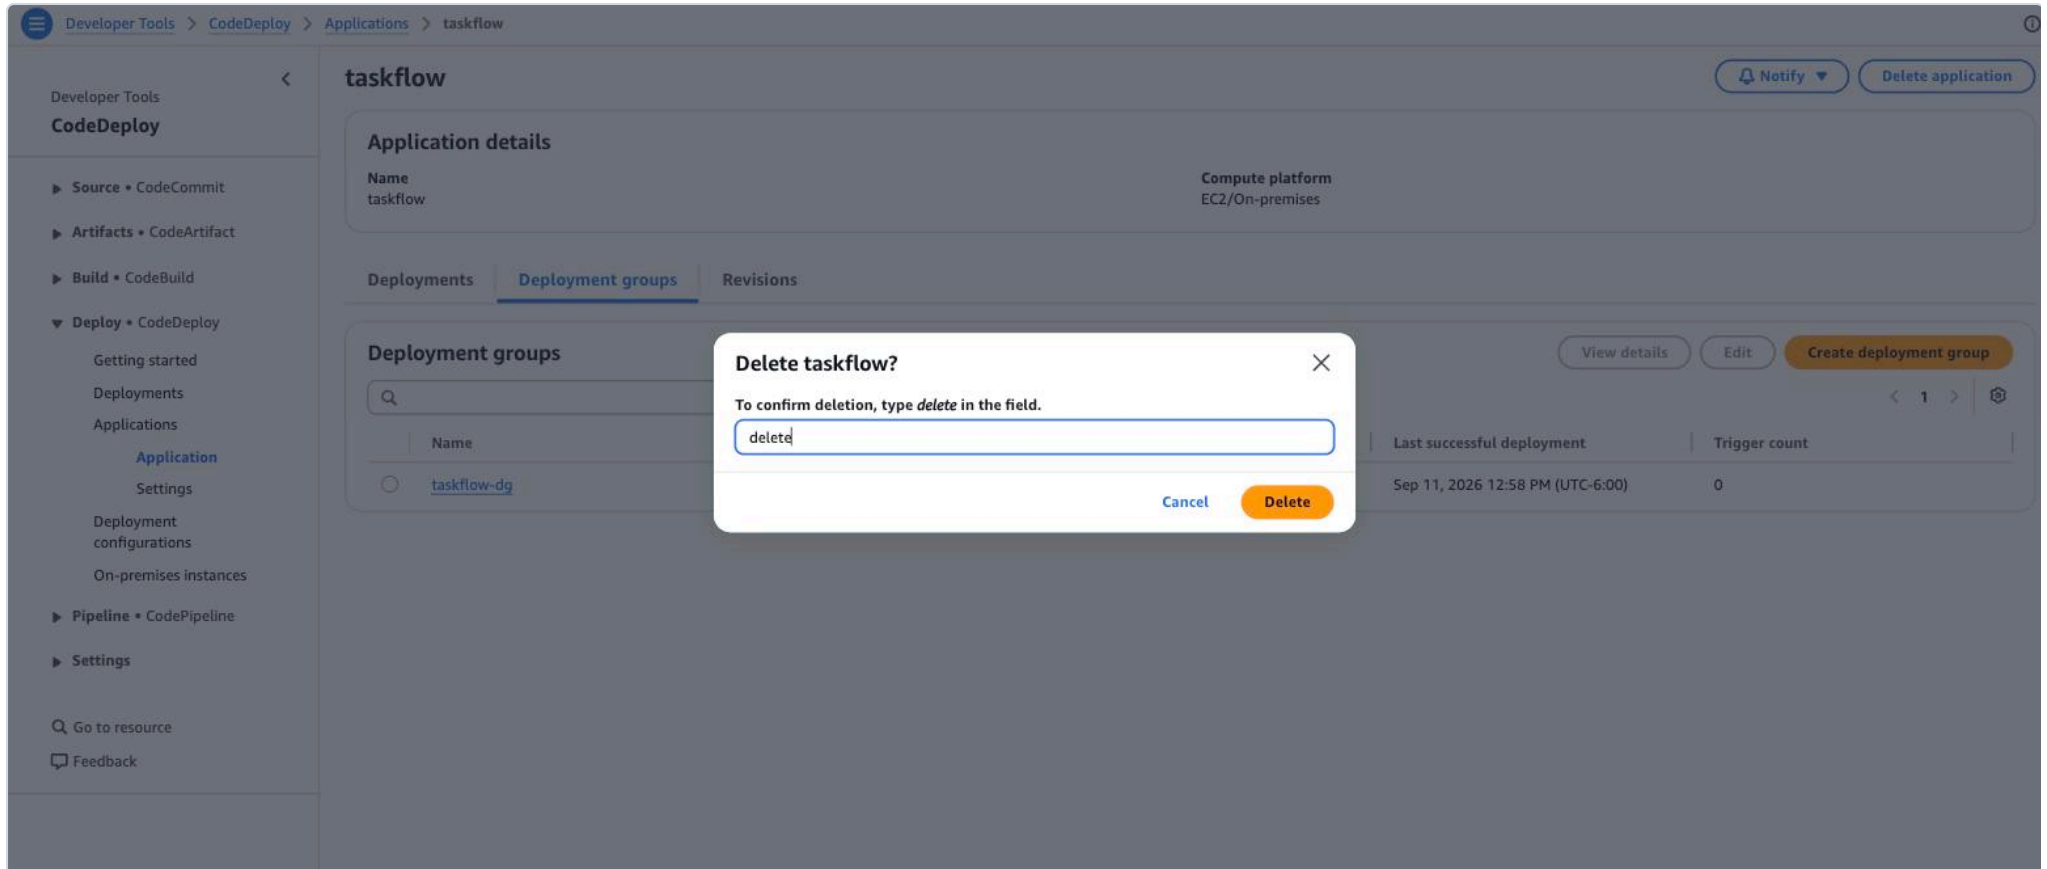

Captura 44. CodeDeploy → Applications → taskflow → Delete application → escribe delete → Delete. Se lleva el deployment group taskflow-dg .

Applications

Success
Application taskflow successfully deleted

Applications

Notify View details Deploy application Create application

Q

< 1 > ⚙

Application name	Compute platform	Created
No results There are no results to display.		

Captura 45. «Application taskflow successfully deleted». Es la misma pantalla vacía con la que empezó el documento.

Dónde	Qué se borra
DynamoDB → Tables	marca <code>taskflow-eventos</code> → Delete → escribe <code>confirm</code> → Delete table (si ya la borraste con el <code>delete-table</code> de <code>comandos-dynamodb.md</code> , la lista sale vacía)
EC2 → Instances	<code>taskflow-ec2</code> → Instance state → Terminate (delete) instance
S3	el bucket de artefactos: Empty → Delete. Y si CodePipeline creó otro <code>codepipeline-us-east-1-...</code> (o <code>-us-east-2-</code> en Ohio), también
IAM → Roles	busca <code>taskflow</code> y <code>codebuild/codepipeline</code> : <code>taskflow-ec2-role</code> , <code>taskflow-codedeploy-role</code> , <code>codebuild-taskflow-build-service-role</code> y <code>AWSCodePipelineServiceRole-...-taskflow-pipeline</code> → Delete → escribe el nombre → Delete
IAM → Users → <code>taskflow-admin</code>	Security credentials → Access keys → Actions → Deactivate, luego Delete
EC2 → Key Pairs	<code>taskflow-key</code> → Delete, y <code>rm taskflow-key.pem</code> en tu laptop
CodePipeline → Settings → Connections	<code>github-taskflow</code> : no cuesta nada; bórrala si no la vas a usar más (y cualquier <i>Pending</i> con el mismo nombre)
Budgets	NO TOCAR

Verificación cruzada. Tu pareja mira tu consola mientras recorres los once puntos, escribe su nombre en la línea *Mi consola la revisó* de tu `checklist-limpieza.md`, y cambian los papeles. Esa línea es la firma, y el archivo va a `evidencia/`.

9. Lo que tienes que saber decir (DoD del día)

1. `buildspec.yml`, `appspec.yml`, los cuatro hooks y `taskflow.service` en la raíz de tu repo, commiteados, y **sabes decir qué hace cada bloque** (vienen explicados línea a línea). Esto sí lo hiciste.
2. Un pipeline que llegó a verde: captura 27 y 30, y por qué la primera vez salió en rojo (sección 4).
3. Un despliegue **fallido** leído: capturas 33 a 37; sabes decir **en qué hook**, **en qué instancia** y **qué archivo faltó**.
4. `de-comandos-a-hooks.md` leído: sabes decir en qué hook vive cada comando de ayer (captura 29 los muestra corriendo en orden).
5. `modelado.md` leído: sabes decir cuál de los cuatro patrones no cabe y por qué.
6. Checklist de limpieza con la verificación cruzada.

Recorrido hecho el 11 de septiembre de 2026 en una cuenta de la experiencia nueva (Ohio). Tiempos que medí ese día: pipeline nuevo, primera ejecución con Build en rojo a los 70 s; tras el permiso, verde en 2 min 30 s; push a verde, 107 s; push a Deploy rojo, 107 s; restauración, 112 s.