Defining Agents

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

The journey to **trust AI**

1

Where are my agents?



Discover agents across your environment

2


Who are my agents?



Establish trusted agent identities

3

Can I trust my agents?



Prove the agent identity, including on-behalf-of the user

4

What can my agents do?



Enforce controls, policies, & least privilege

5

What have my agents done?




Assess risk & validate compliance. Evaluate trustworthiness.

DISCOVER → **REGISTER** → **AUTHENTICATE** → **AUTHORIZE** → **GOVERN**

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Four kinds of agents.
Same outcome, different paths.



Personal Agents
On the Device at Work or Home

Employee Agents


Personal productivity: Native, browser, and coding agents running on the user's device.

ChatGPT · Claude · CLAUDE CODE

Consumer & Partner Agents

The new front door: Agents acting on behalf of customers and partners in digital channels.

ChatGPT · Claude



Enterprise Agents
In the Cloud

Workload Agents

The digital workforce: Assistants & Autonomous Agents running on self-hosted or third-party platforms.

Amazon Bedrock · Google Vertex.ai · LangChain

SaaS-Embedded Agents

Vendor embedded: Agents running inside SaaS applications.

salesforce · glean

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Customer Discovery Questions - Guidance (not for deck)

1. Which agents are already in use today?

Ask:

- Are employees using personal AI tools or desktop agents?
- Are developers using coding agents?
- Are SaaS copilots or embedded AI features already enabled?
- Are business teams building their own agents?
- Are any customer-facing AI assistants already live?

Why it matters: This separates sanctioned AI from shadow AI and reveals where immediate identity risk may already exist.

2. Who is the agent acting on behalf of?

Ask:

- Is the agent acting for a customer?
- Is it acting for an employee?
- Is it acting for a partner?
- Is it acting as its own workload or service identity?
- Is it acting on behalf of multiple users or business processes?

Why it matters: Identity controls depend on whether the agent represents a human, an organization, a workload, or a delegated relationship.

3. Where does the agent run?

Ask:

- On a user endpoint?
- Inside a SaaS application?
- In a cloud agent platform?
- In a self-managed enterprise environment?
- Outside the enterprise, controlled by a customer or partner?

Why it matters: The runtime environment determines how much control the enterprise has over identity, policy, monitoring, and enforcement.

4. What can the agent access?

Ask:

- Can it access customer data?
- Can it access employee data?
- Can it access source code or secrets?
- Can it call APIs?
- Can it trigger transactions?
- Can it make changes in business systems?

Why it matters: The risk increases when agents can move from reading information to taking action.

5. How is the agent authenticated and authorized?

Ask:

- Does the agent have its own identity?
- Does it inherit a user's identity?
- Does it use service accounts, API keys, OAuth tokens, or delegated access?
- Can access be limited by policy?
- Can permissions change based on risk, context, or action sensitivity?

Why it matters: AI agents need identity controls that support least privilege, delegation, consent, and continuous authorization.

6. Can you prove what the agent did?

Ask:

- Can you distinguish agent actions from human actions?
- Can you trace which user, customer, or workload the agent represented?
- Can you audit the agent's decisions and system access?
- Can you revoke or constrain the agent if risk changes?

Why it matters: Customers will need accountability, auditability, and governance as agents become operational actors.

Confidential | Do not distribute - ©2025, Ping Identity Co., All rights reserved


AI Coding Agents

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Reference Architecture

Endpoint Agents

Know what agents are running. Control what they can reach across your managed resources.

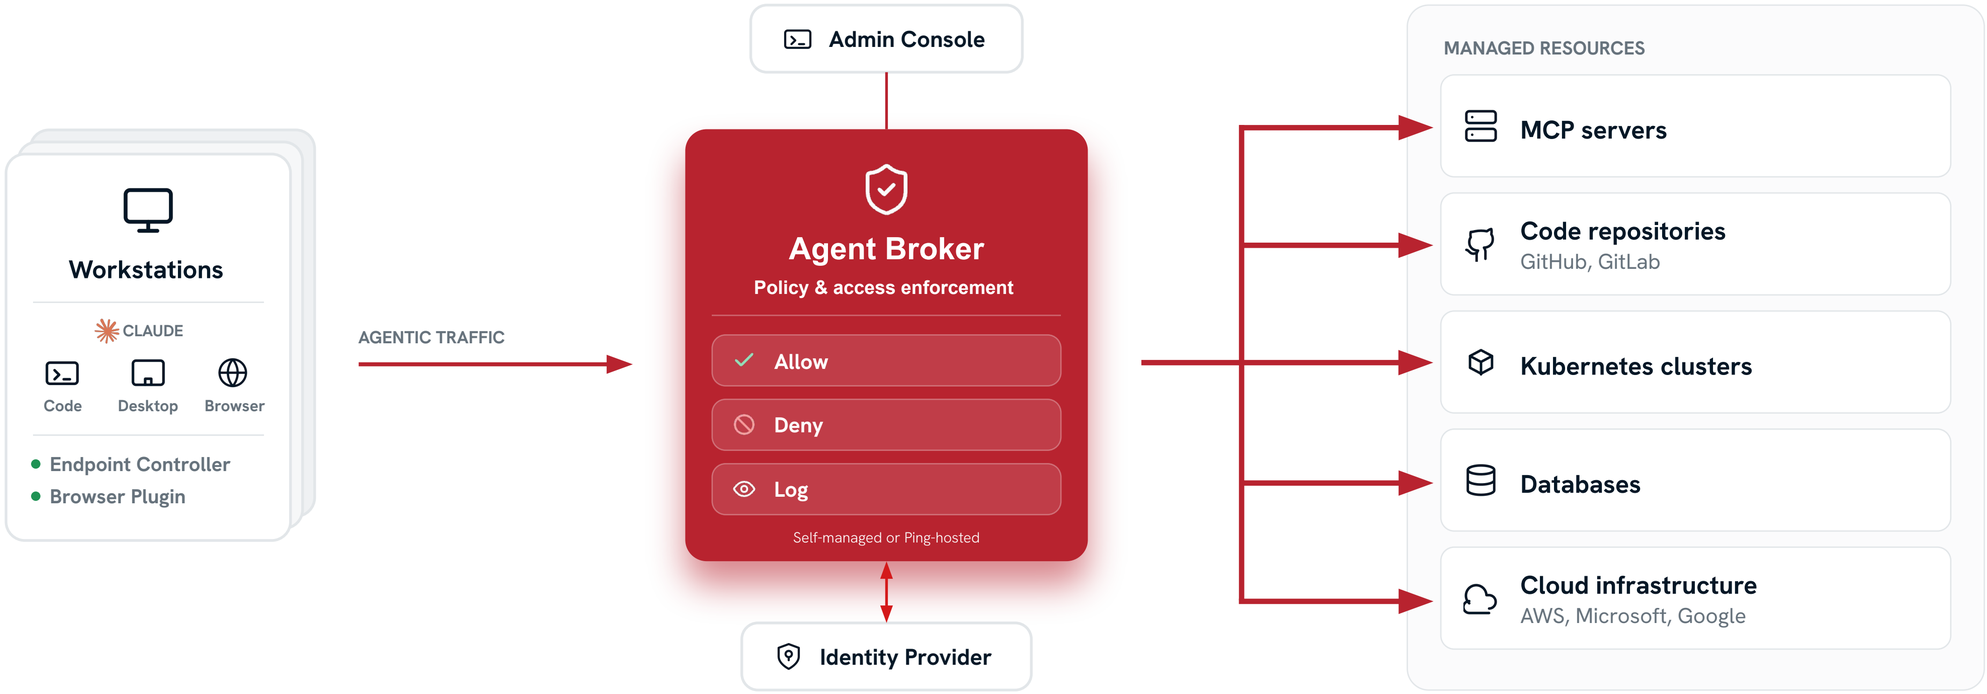


Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Reference Architecture

Coding Agents

Policy governs every action. When it's met, credentials are injected just in time to complete the task.

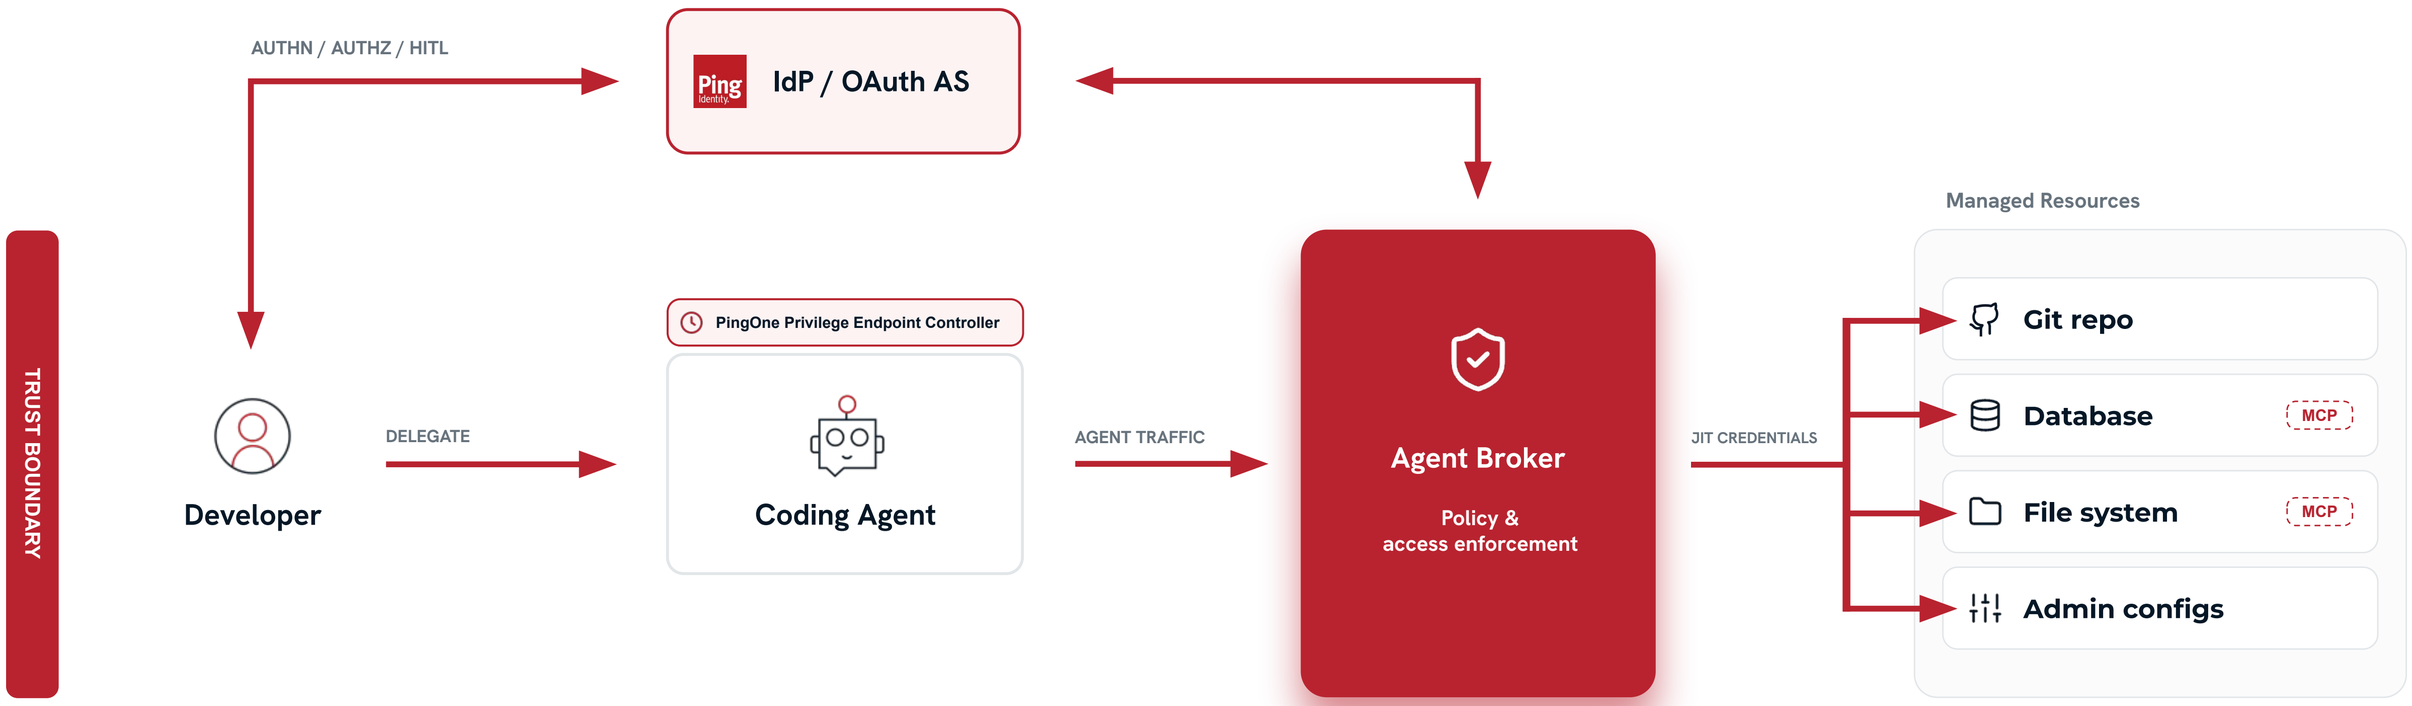


Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Employee Agents: Coding Agents


Distinguish between humans and agents
Avoid long lived credential exposure

Agents can only access what they need, when they need it
See exactly what agents have done and committed

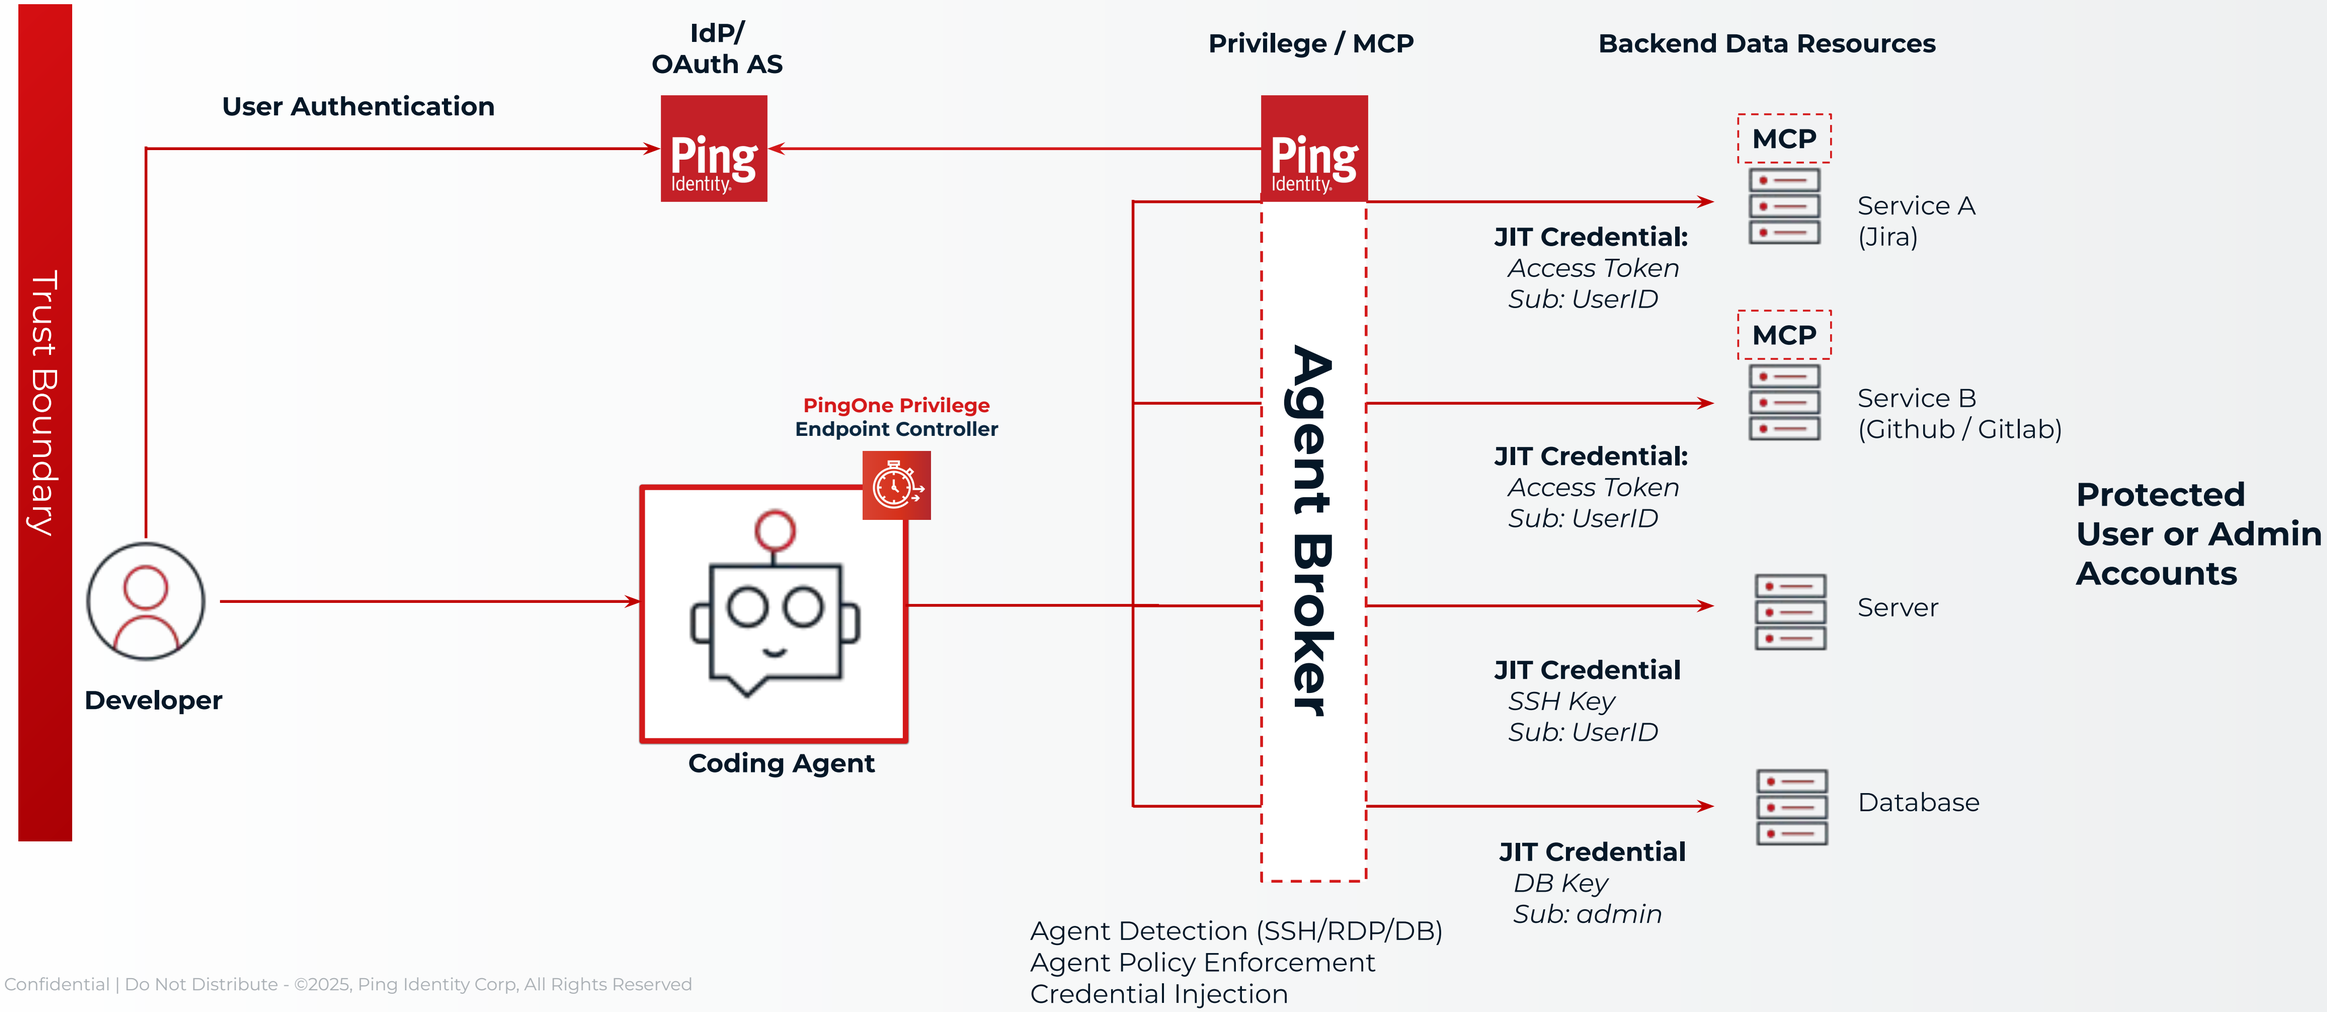


Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Logical Architecture

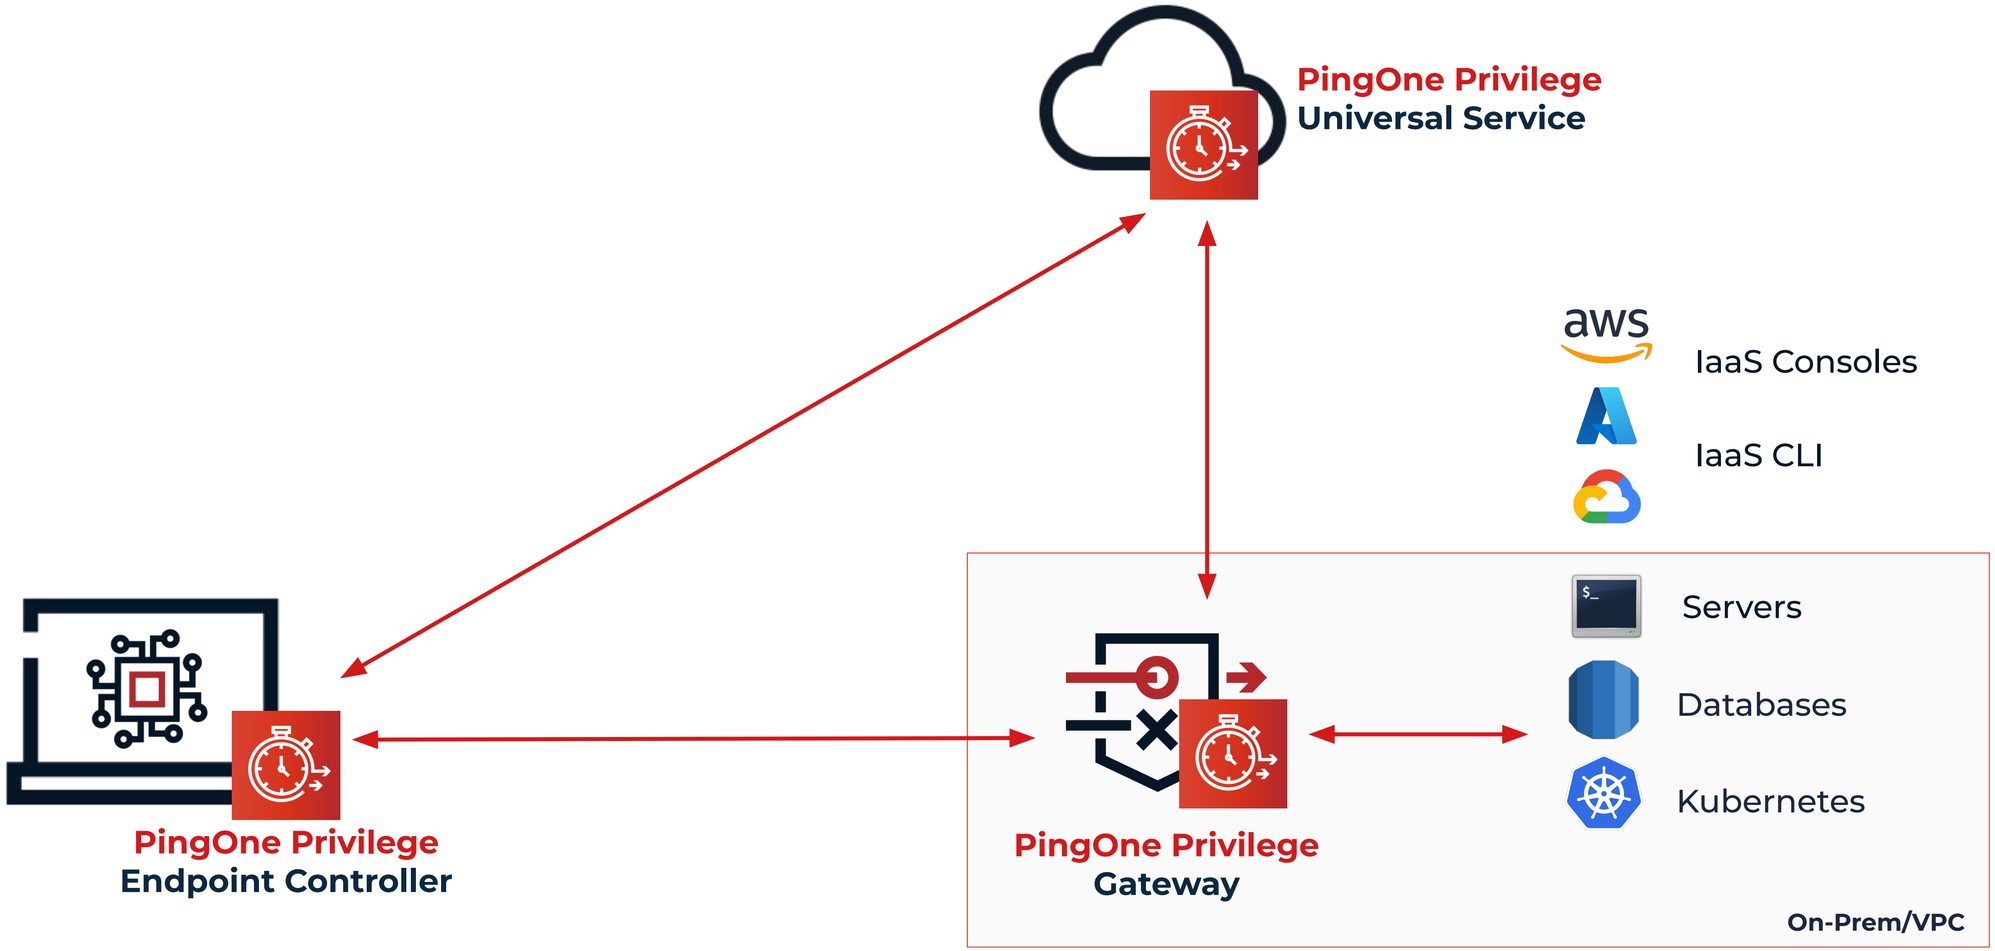

Confidential | Do Not Distribute - ©2026, Ping Identity Corp, All Rights Reserved

Just-In-Time Privileged Access

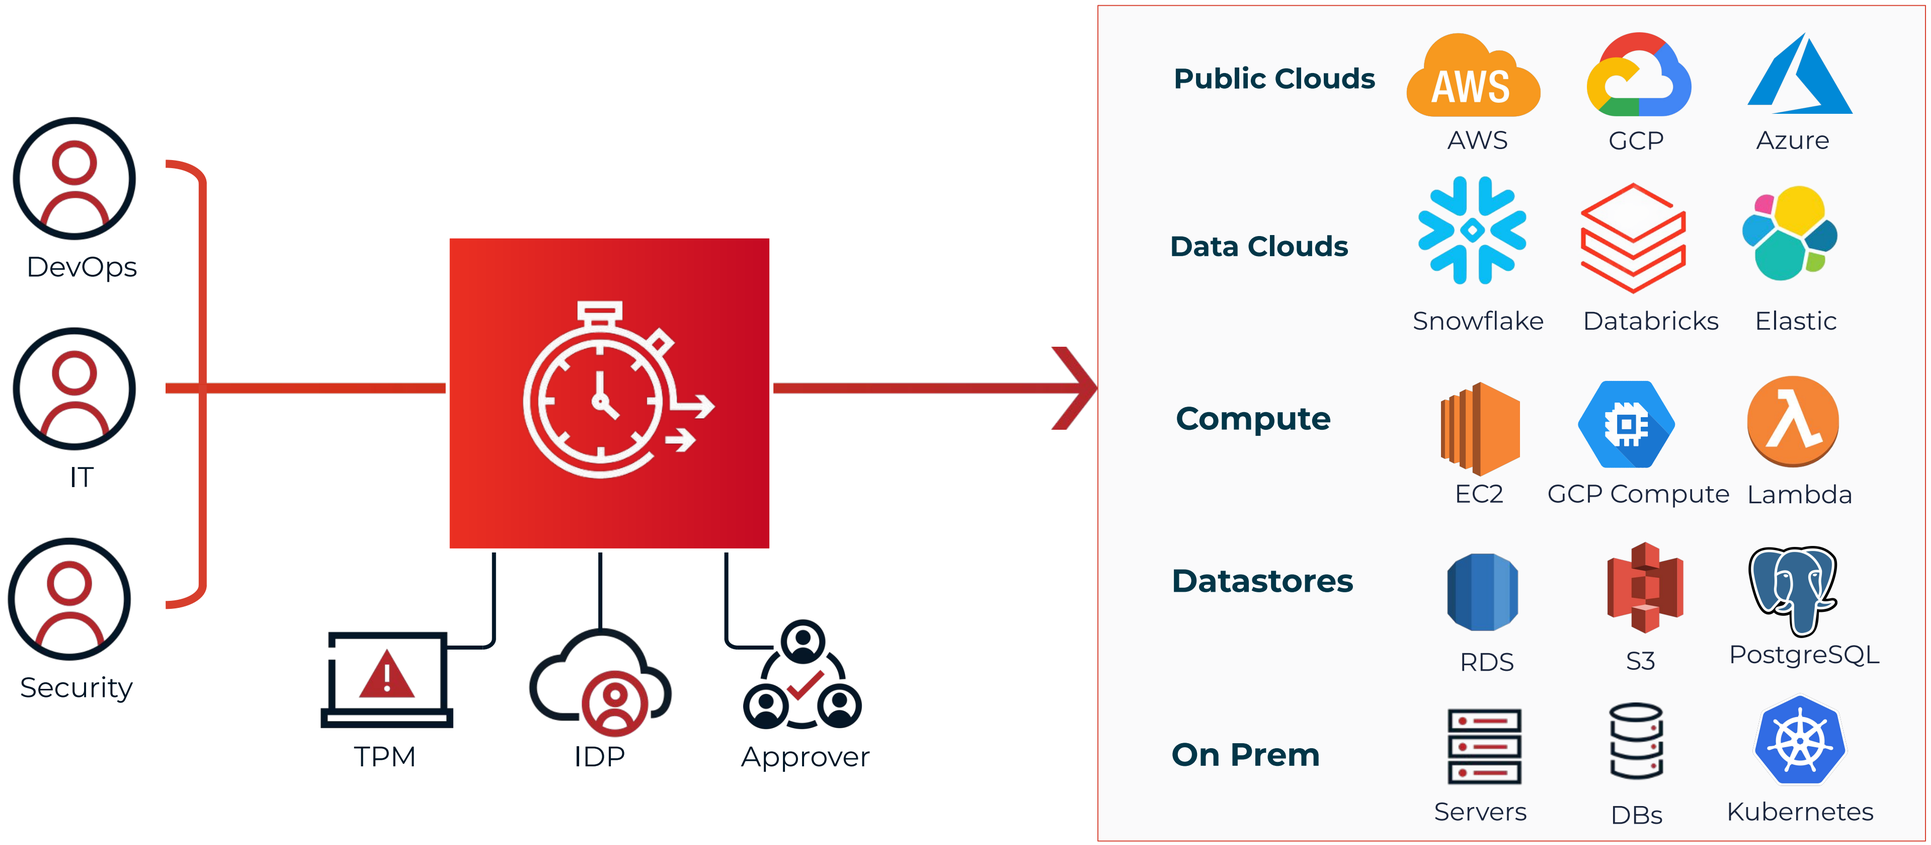

Ephemeral Credential Issuance
No Long Standing Privileges or Secrets

High Assurance & Phishing Resistant
Leverage TPM to bind verified identity to device


Flexible & Hybrid Deployment
Agentless & agent-based for cloud and on-prem

Session Recording & Kill Switch
Record in real time for compliance/forensics

Confidential | Do Not Distribute - ©2026, Ping Identity Corp, All Rights Reserved

Privilege MCP Gateway

Protect developer & admin access to MCP-exposed privileged resources

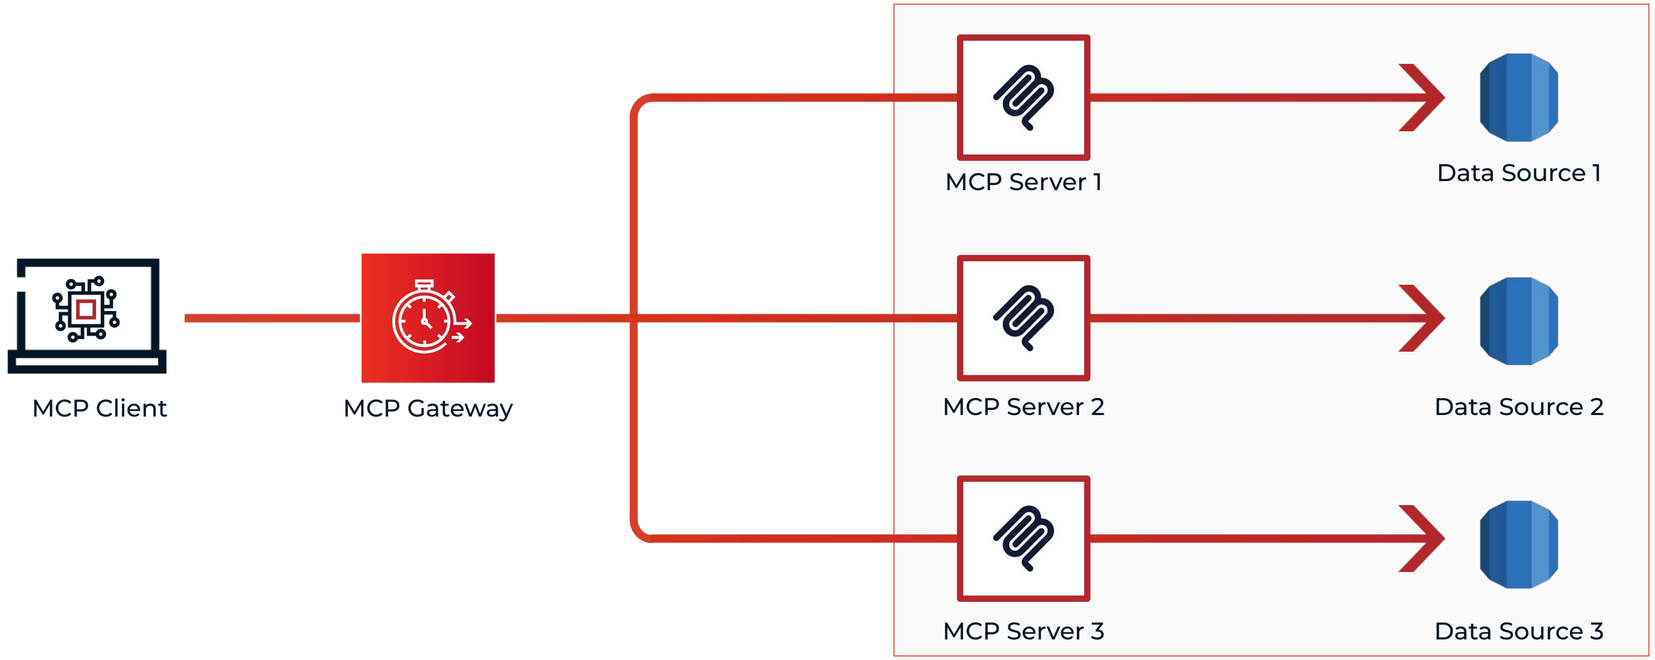


Time-Bound Approvals	Access to MCP servers is granted only for the duration of a session
Secretless Access	Eliminate static API keys, credentials, passwords for MCP access
Privilege Scoping for Least Agency	Fine grained access control to tools, prompts and resources agents can invoke
Session Visibility	Full session recording for all invocations for audit and compliance

Confidential | Do Not Distribute - ©2026, Ping Identity Corp, All Rights Reserved

Securing Agentic Building

Agent Commit Tracking

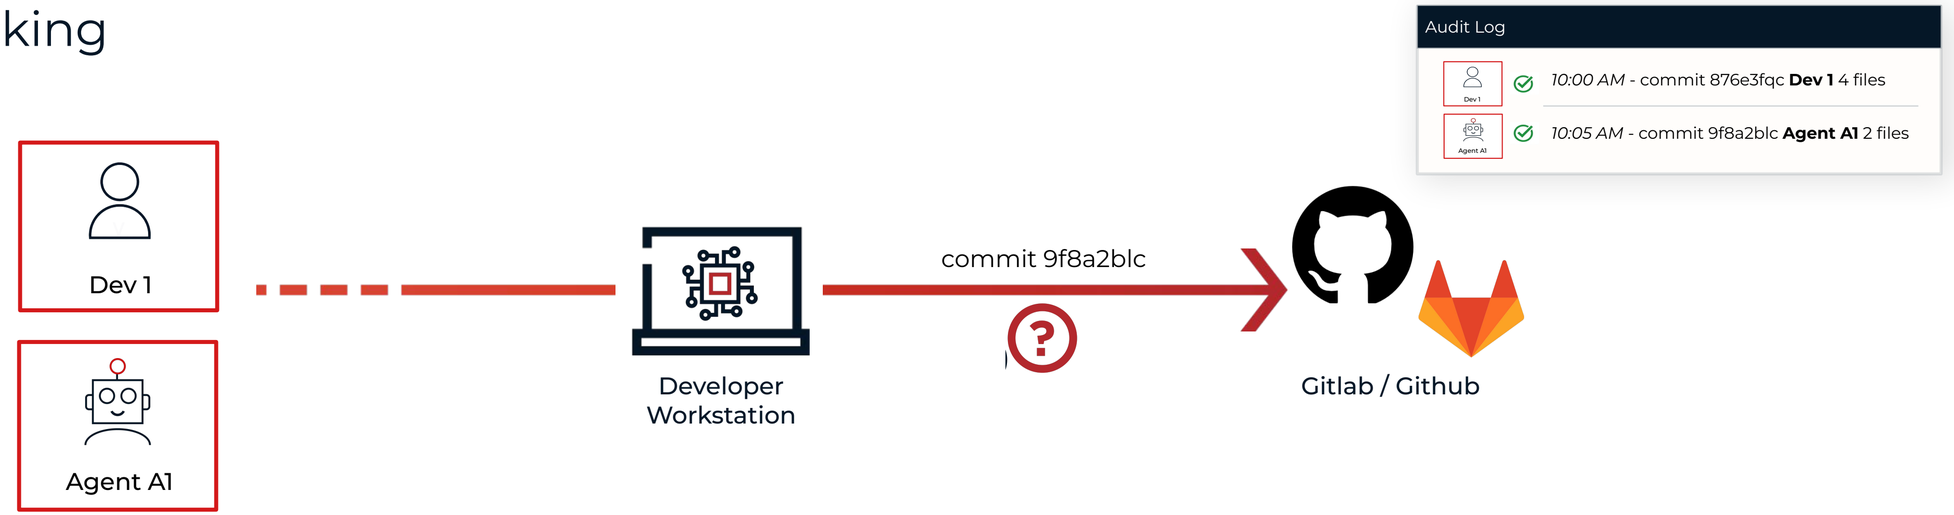

Human vs Agent Attribution

Distinguishes between humans and agents on the same workstation

Applies precise attribution and tracking to commits

Secretless Access

Removes the need for developers to manage, rotate, or store git credentials

Agents cannot accidentally leak or misuse credentials


Policy Based Enforcement

Ephemeral access granted on demand based on policies

Every git operation is intercepted, checked, and audited

Confidential | Do Not Distribute - ©2026, Ping Identity Corp, All Rights Reserved

SSO for AI Agents: Cross-App Access

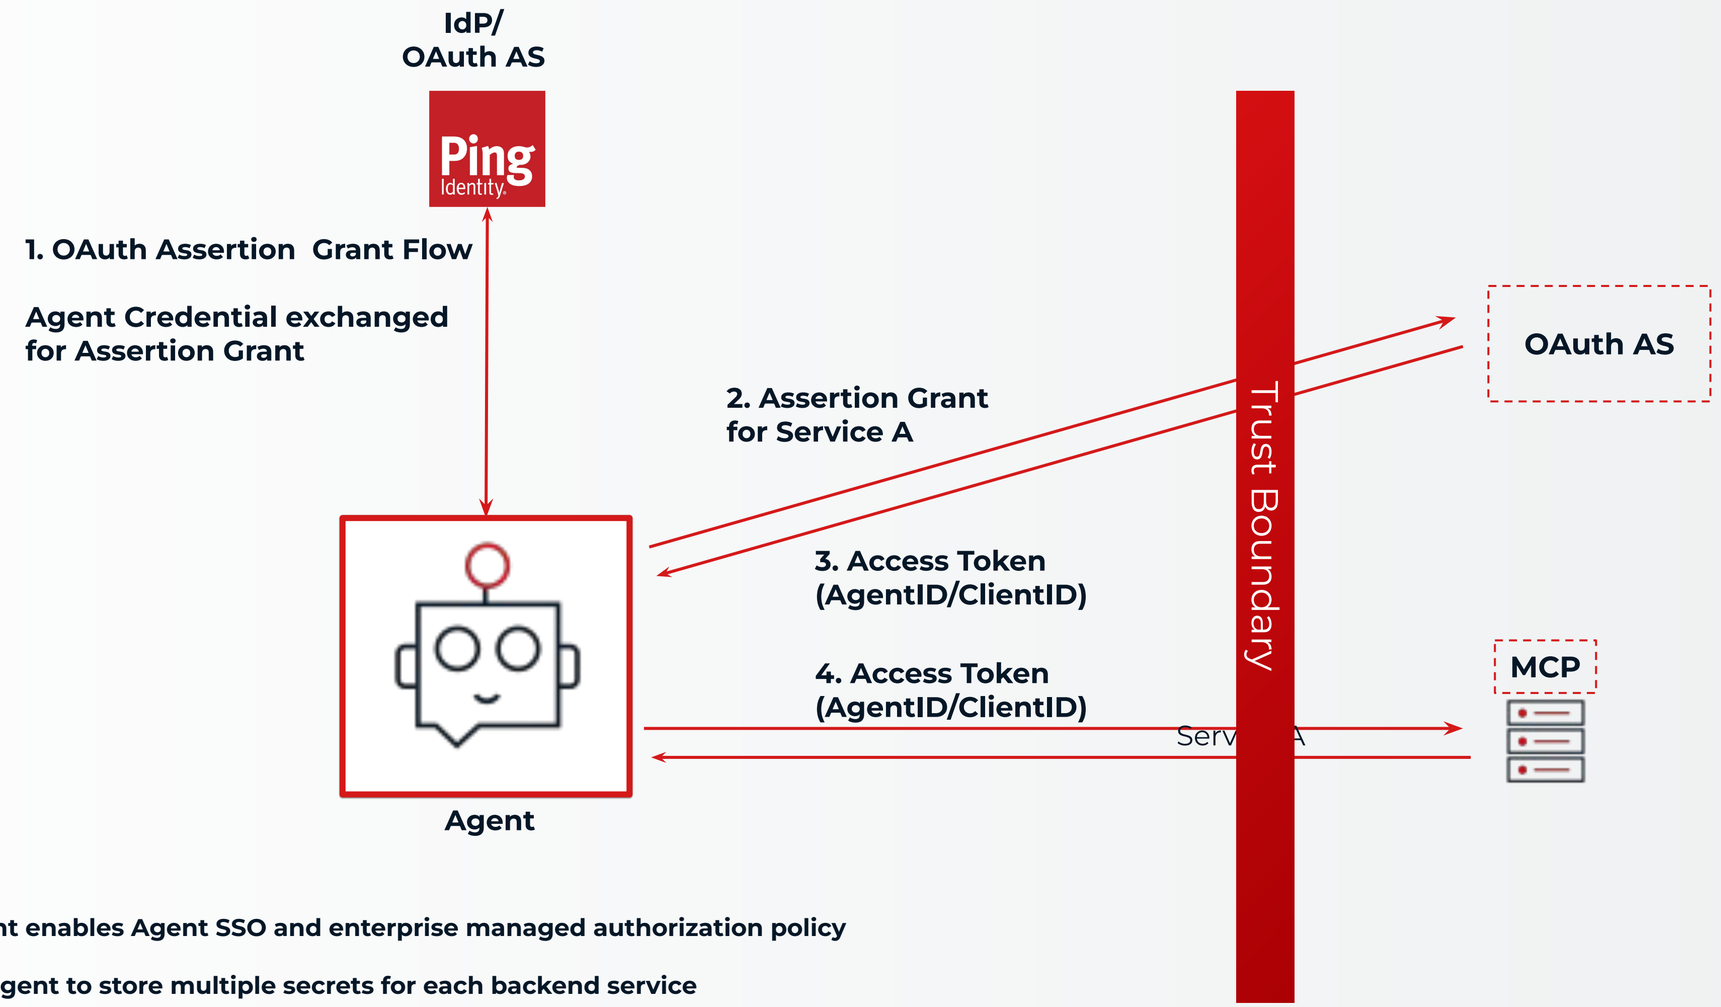

- OAuth Assertion Grant enables Agent SSO and enterprise managed authorization policy
- Eliminates need for agent to store multiple secrets for each backend service


Confidential | Do Not Distribute - ©2026, Ping Identity Corp, All Rights Reserved

Endpoint Personal Agents

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved


Reference Architecture
Employee Personal Agents

Know what agents are running. Control what they can reach across your managed resources.

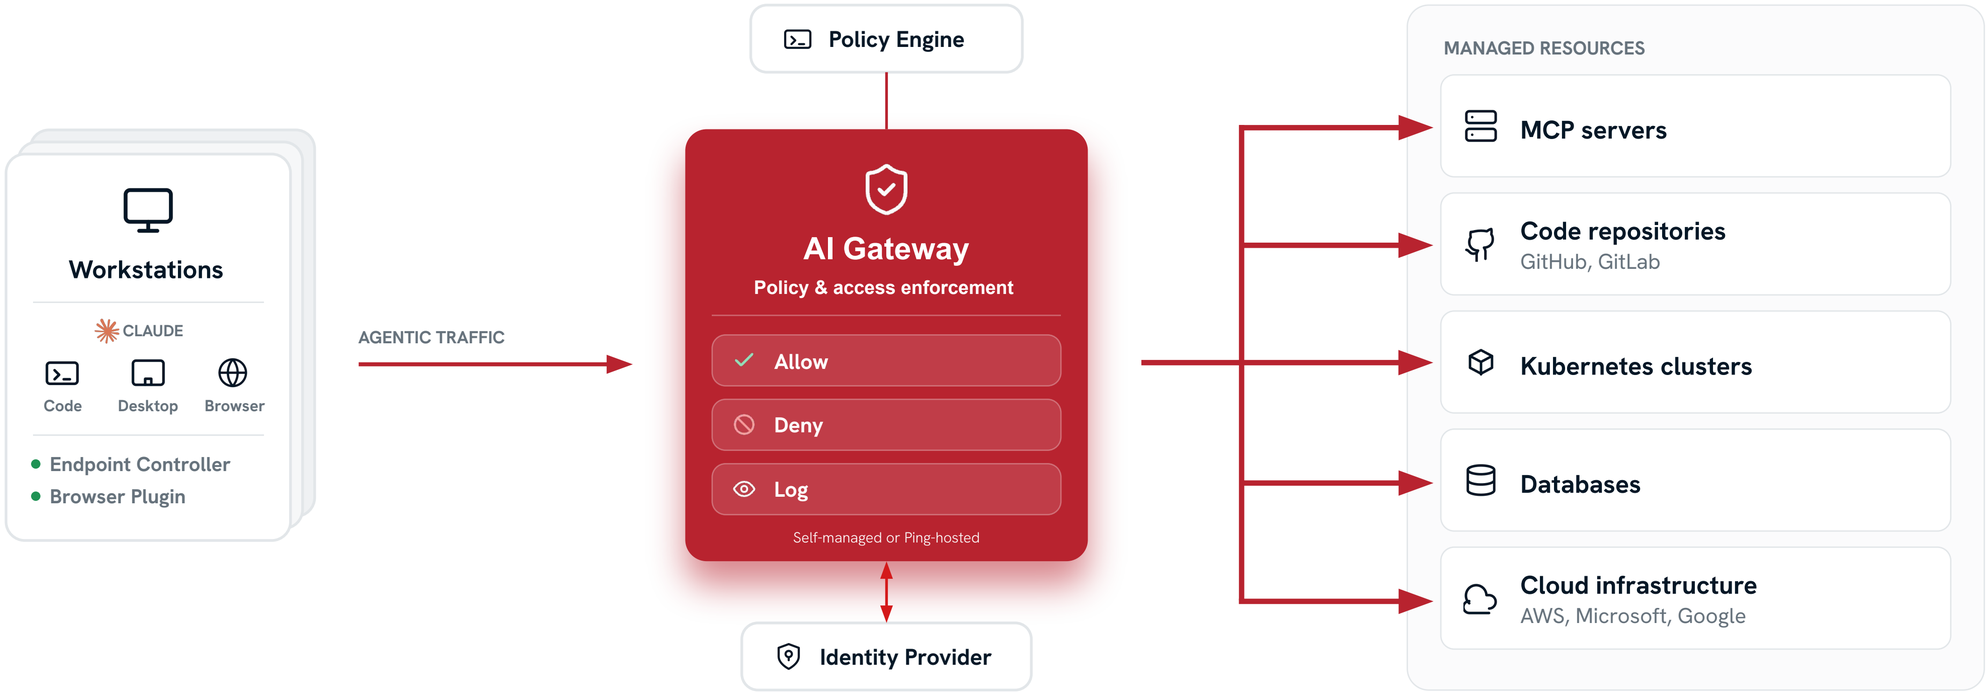


Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Employee Agents
Productivity Agents

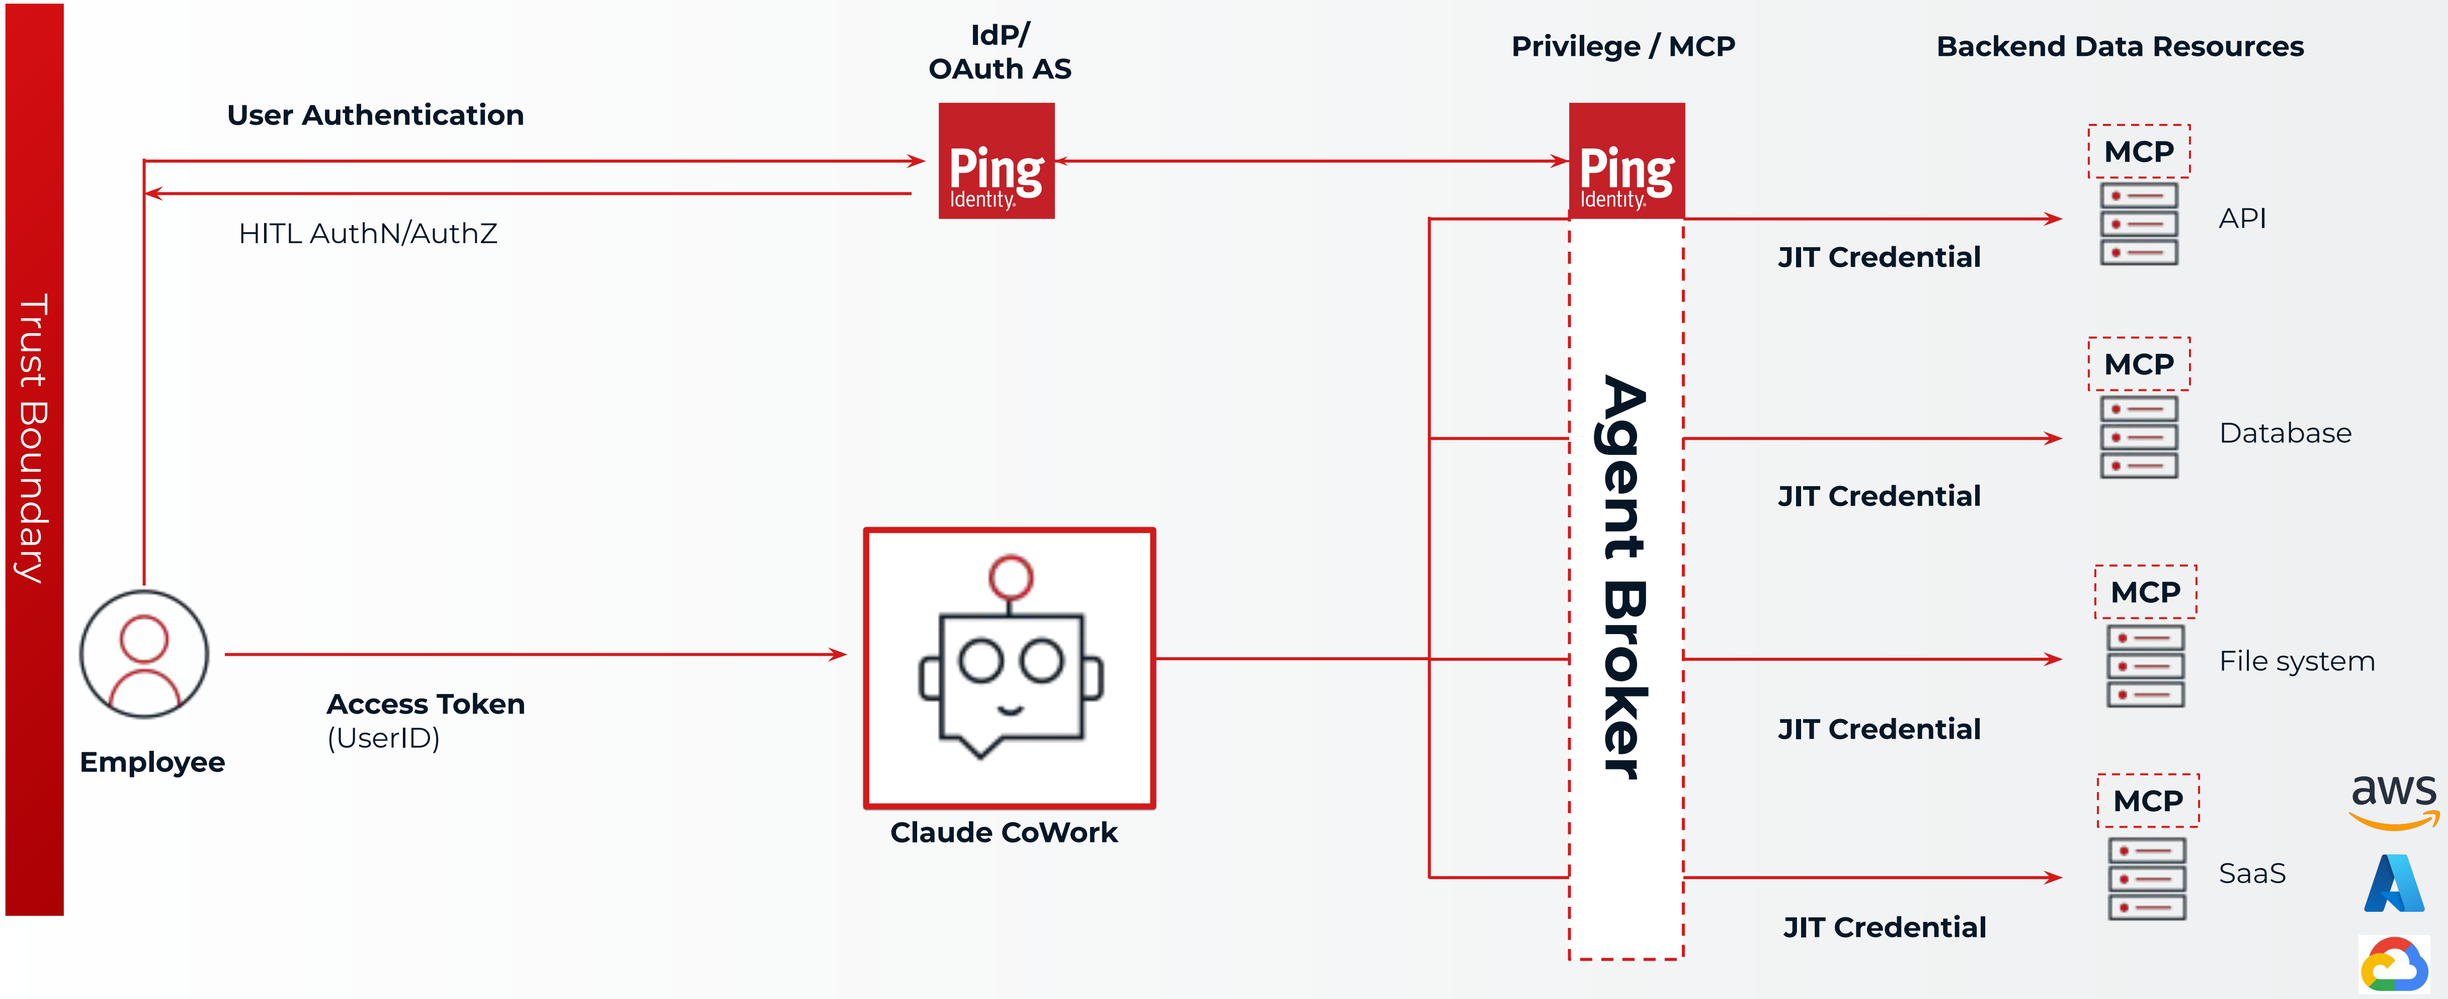

Confidential | Do Not Distribute - ©2026, Ping Identity Corp, All Rights Reserved

SSO for AI Agents: Cross-App Access

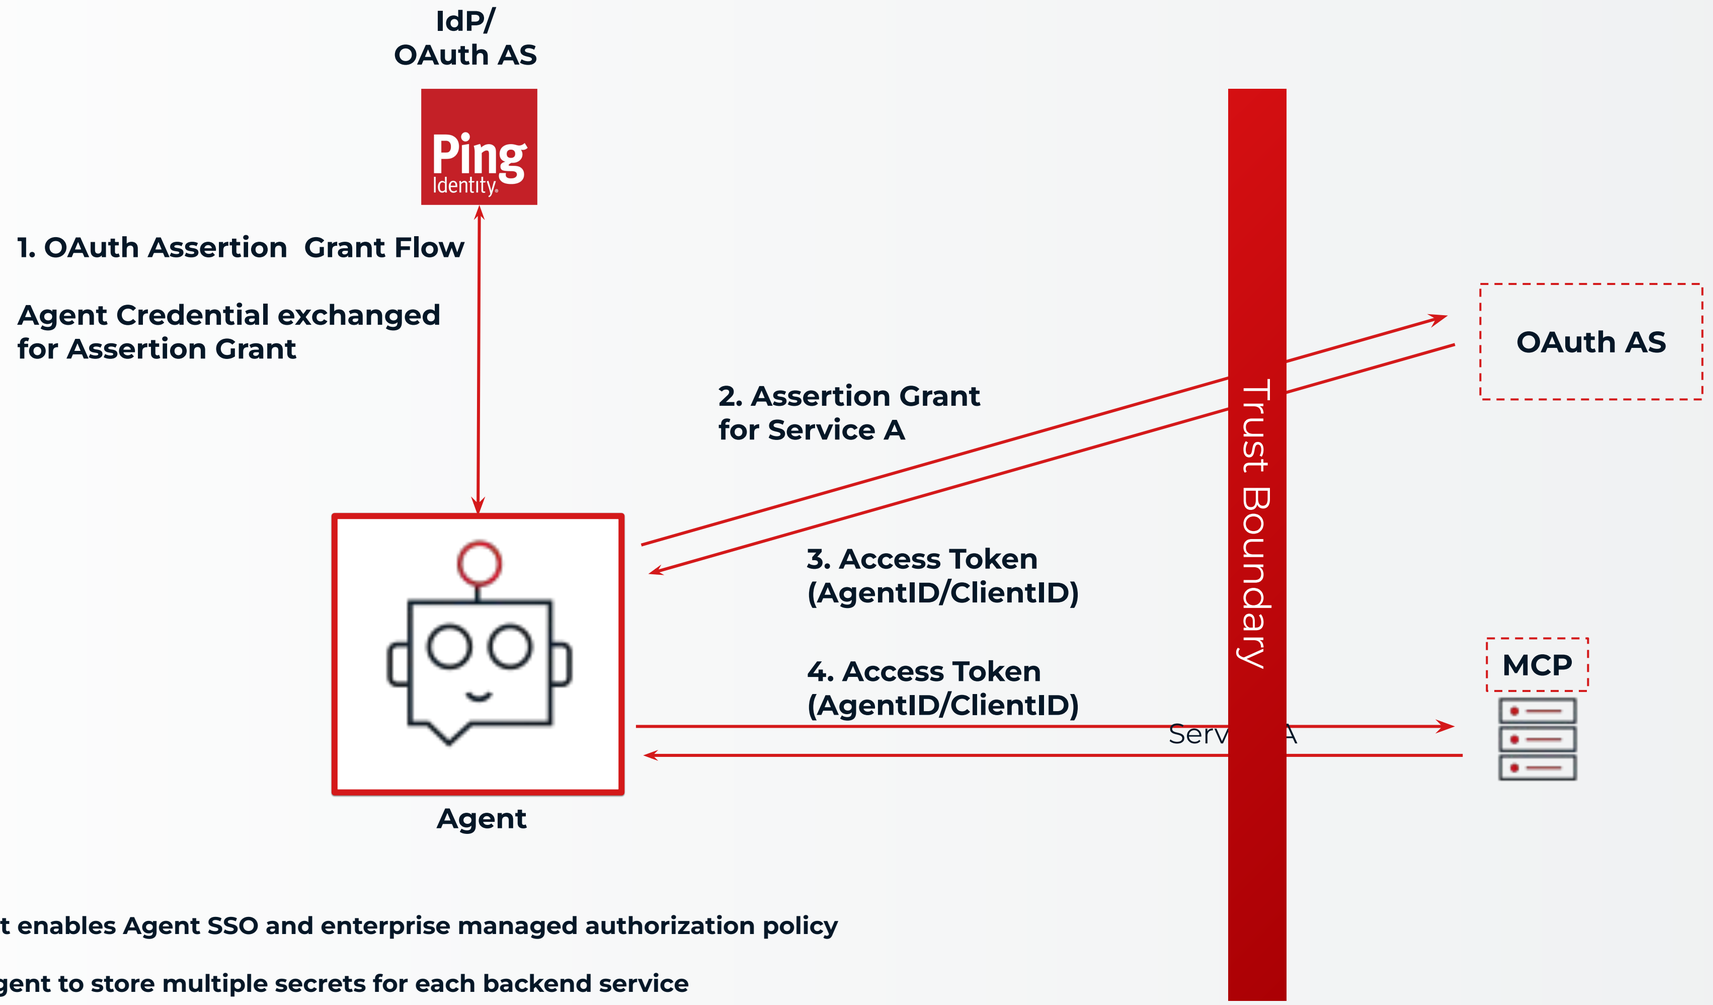


- OAuth Assertion Grant enables Agent SSO and enterprise managed authorization policy
- Eliminates need for agent to store multiple secrets for each backend service

Confidential | Do Not Distribute - ©2026, Ping Identity Corp, All Rights Reserved


Agentic Customers and Partners

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Consumer and Partner Agents

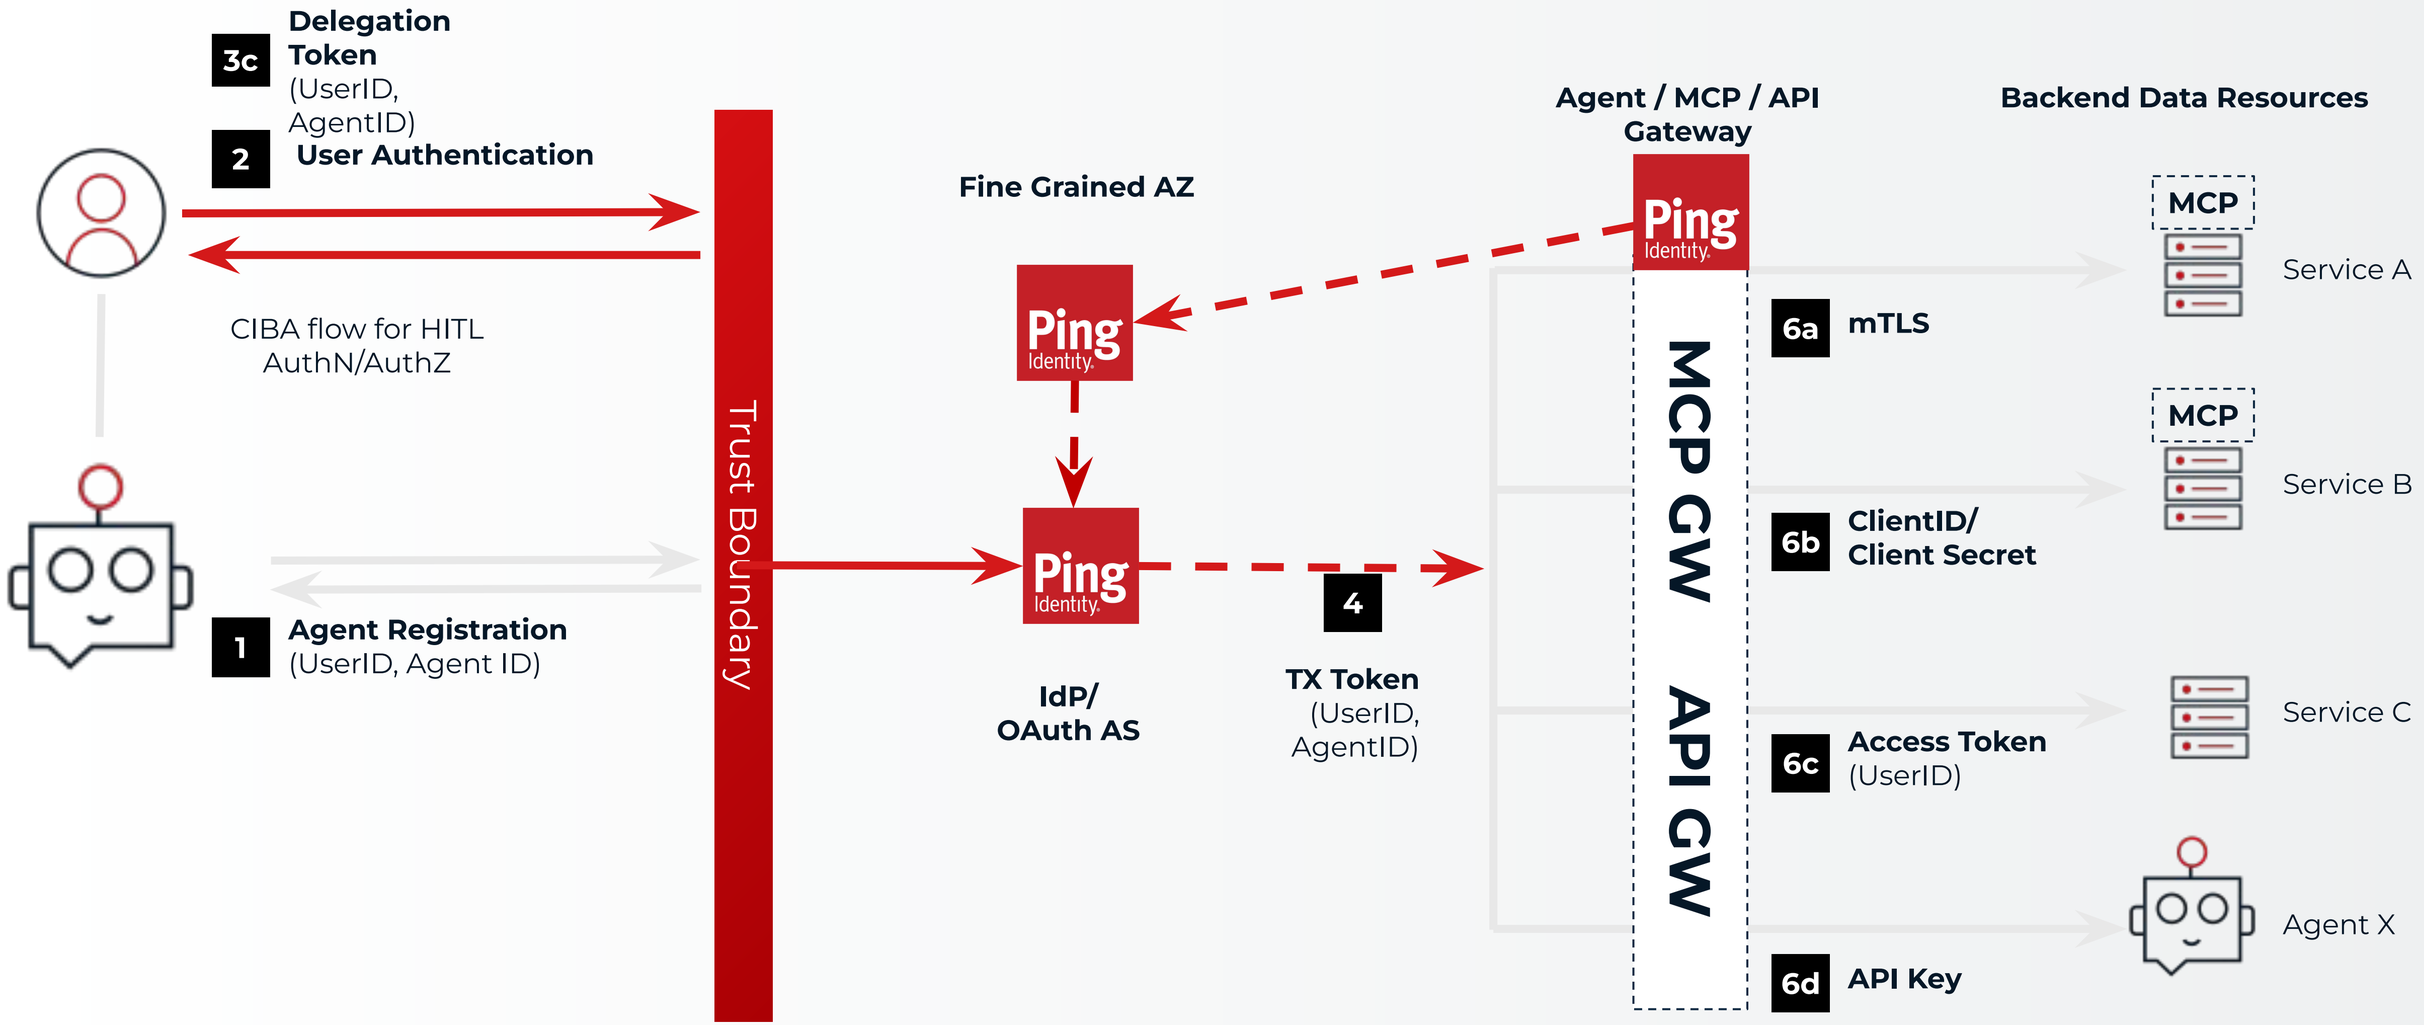


Personal Agents: MCP

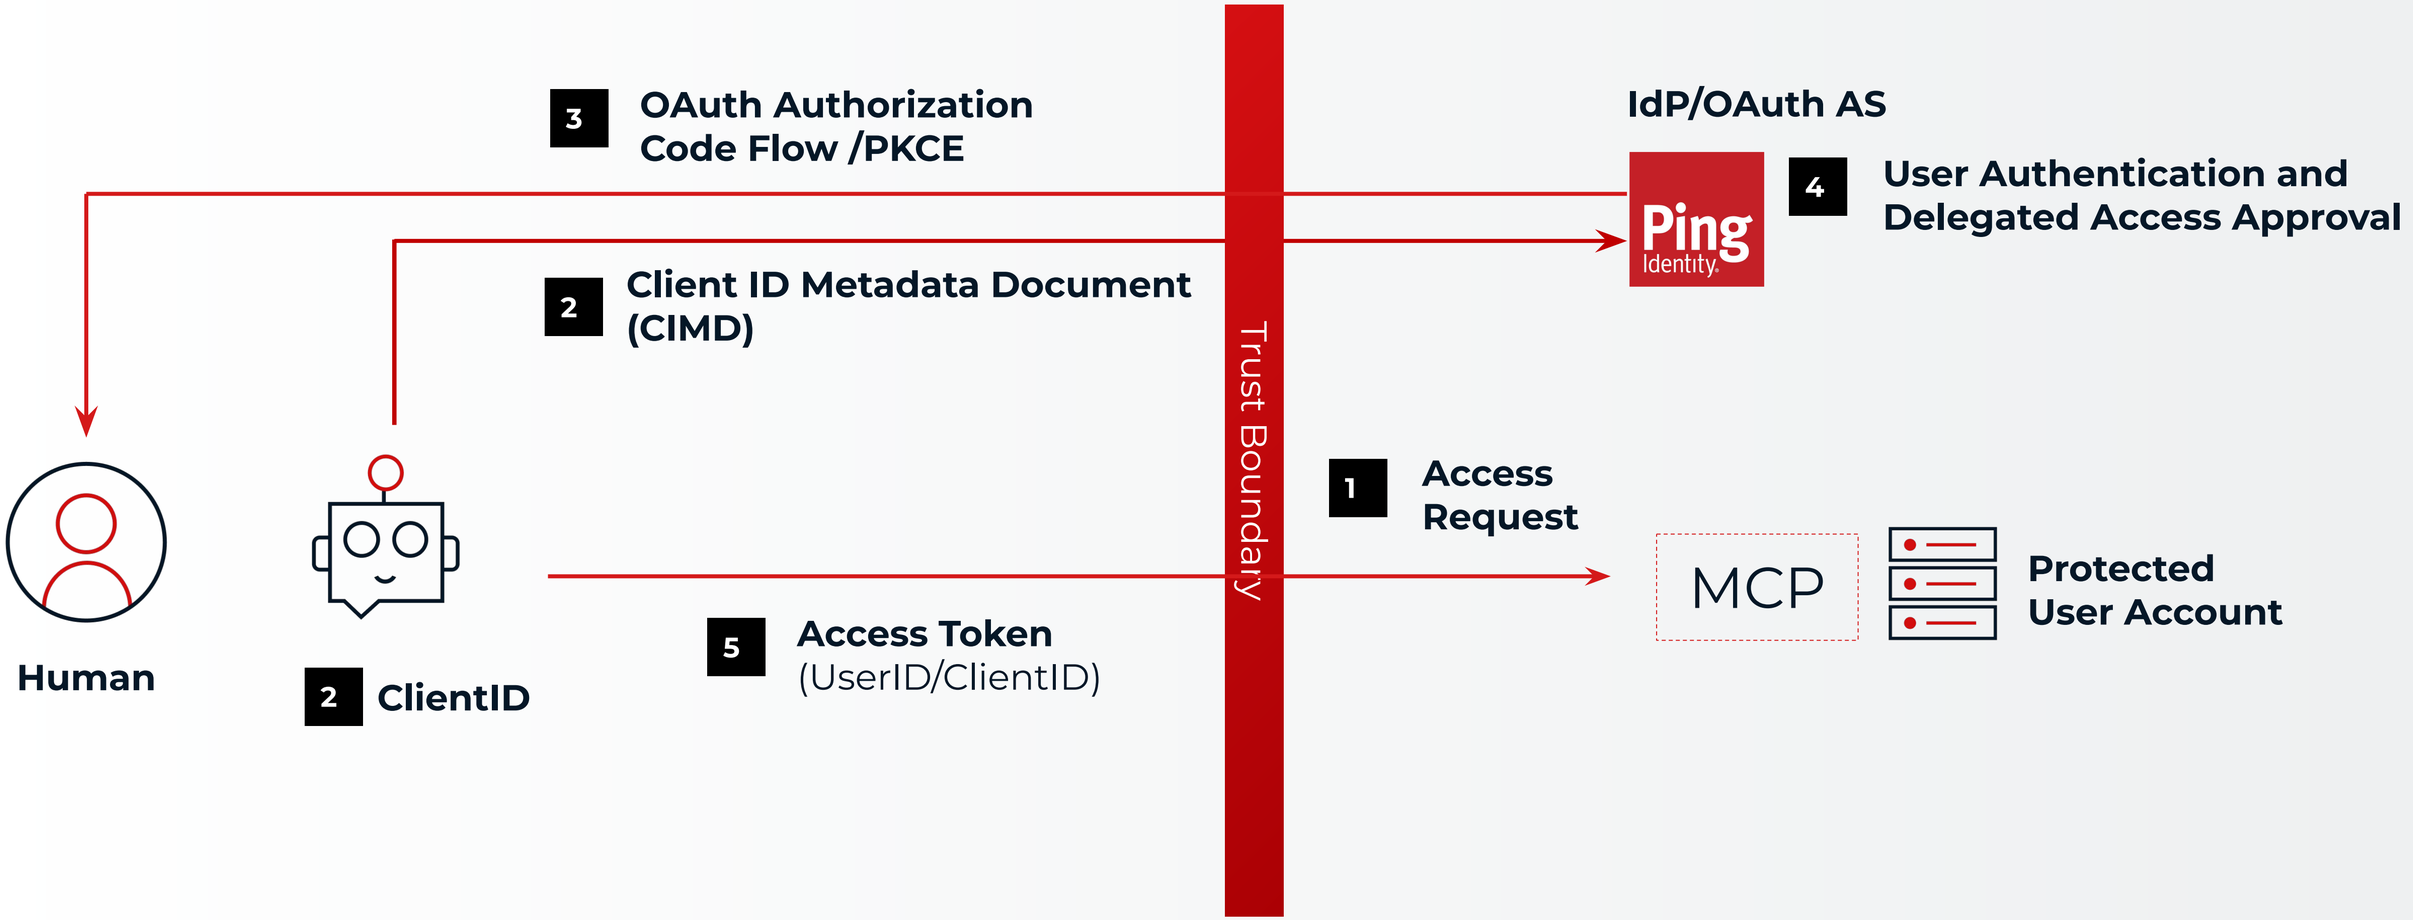

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Personal Agents: CUA

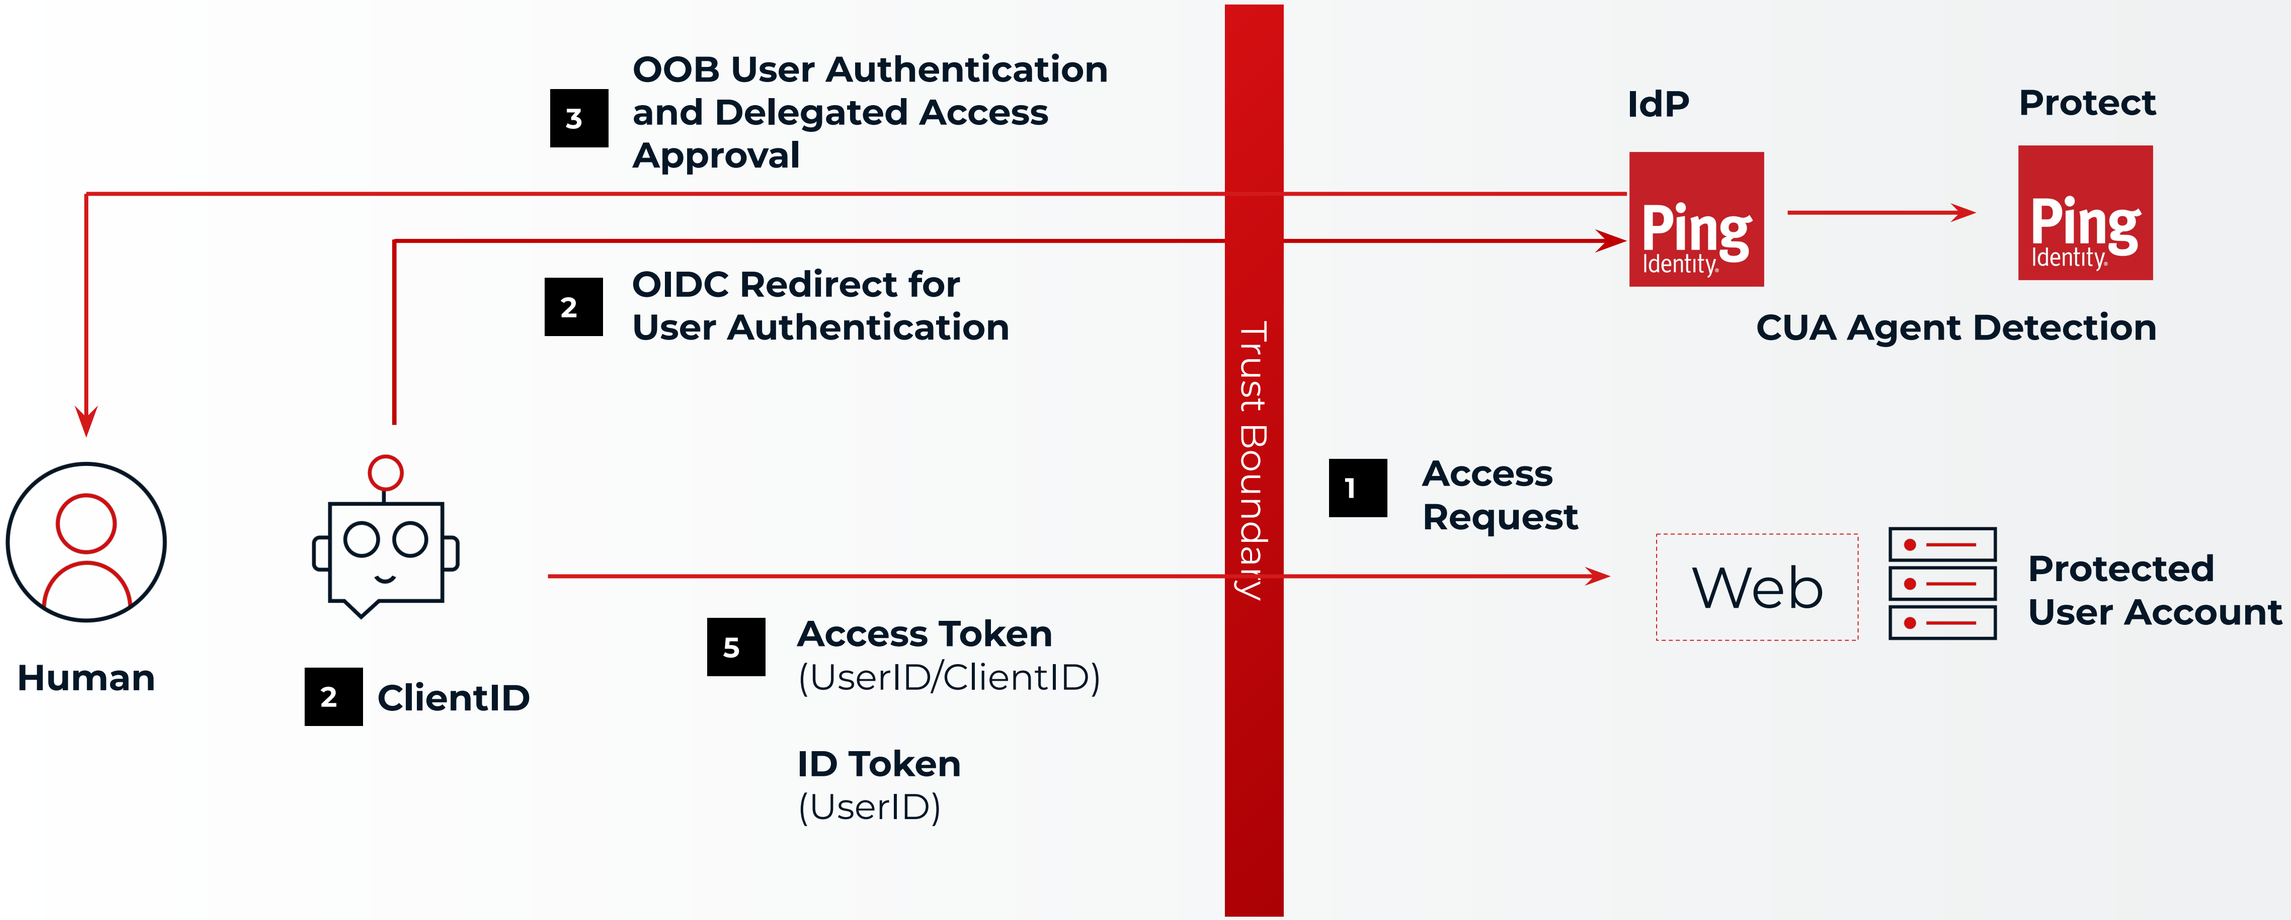

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved


Workload Agents

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Reference Architecture


Workload Agents

Every agent runs on a delegated identity, so its access is scoped, brokered, and accountable end to end.

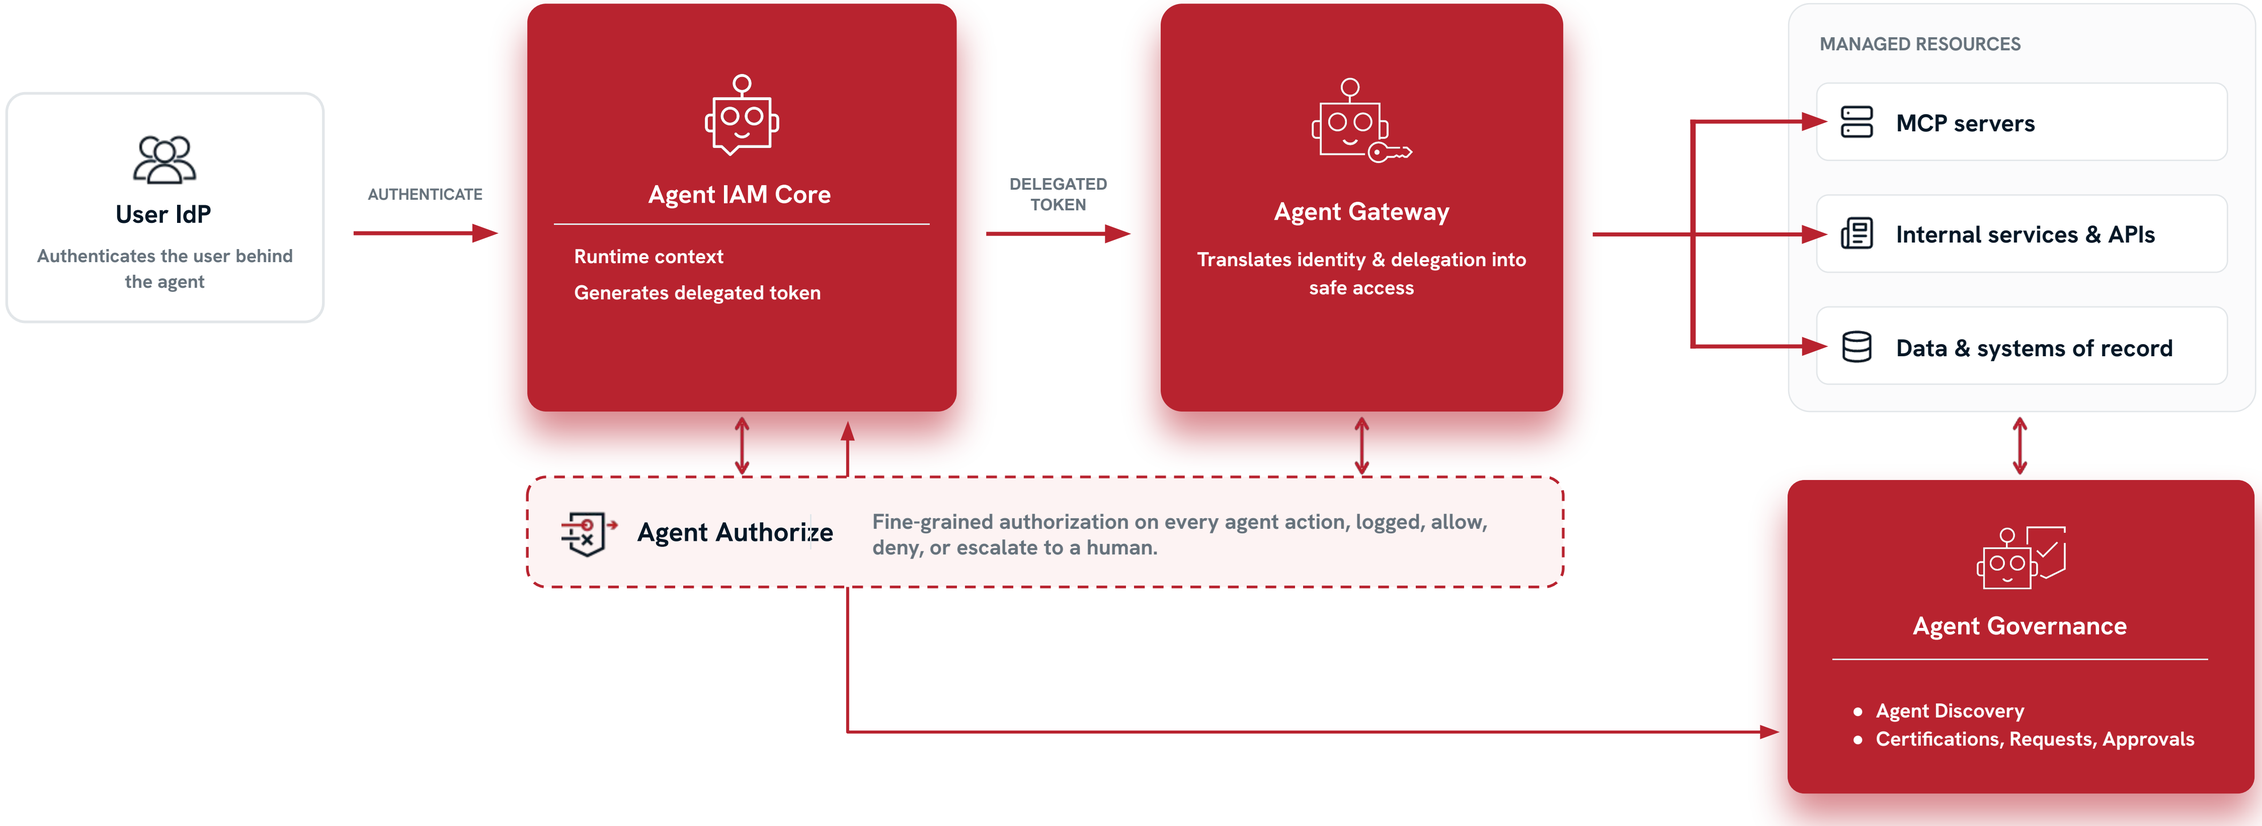


Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Workload Agent: Digital Assistant (OBO)

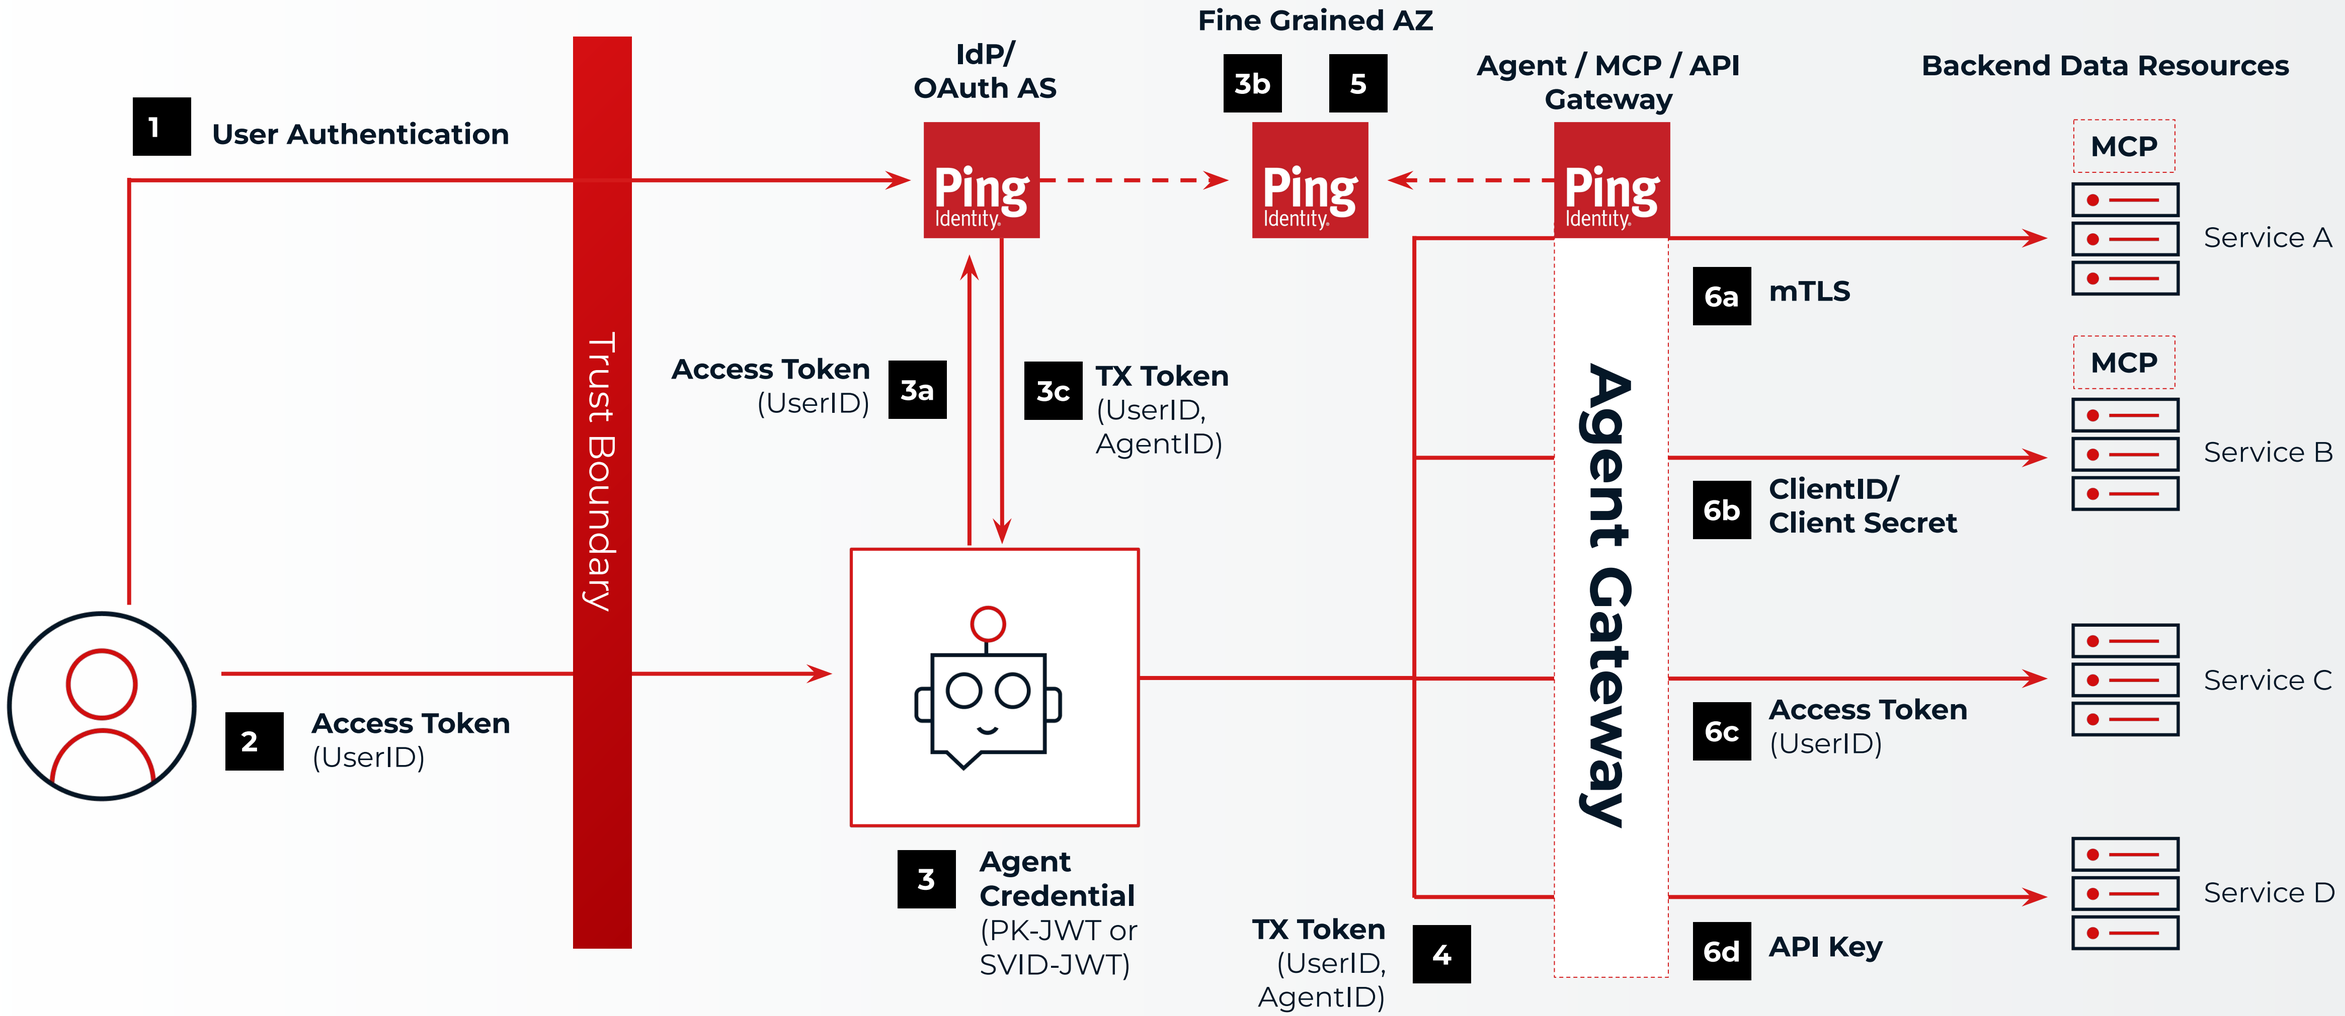

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Workload Agent: Digital Worker (Autonomous)

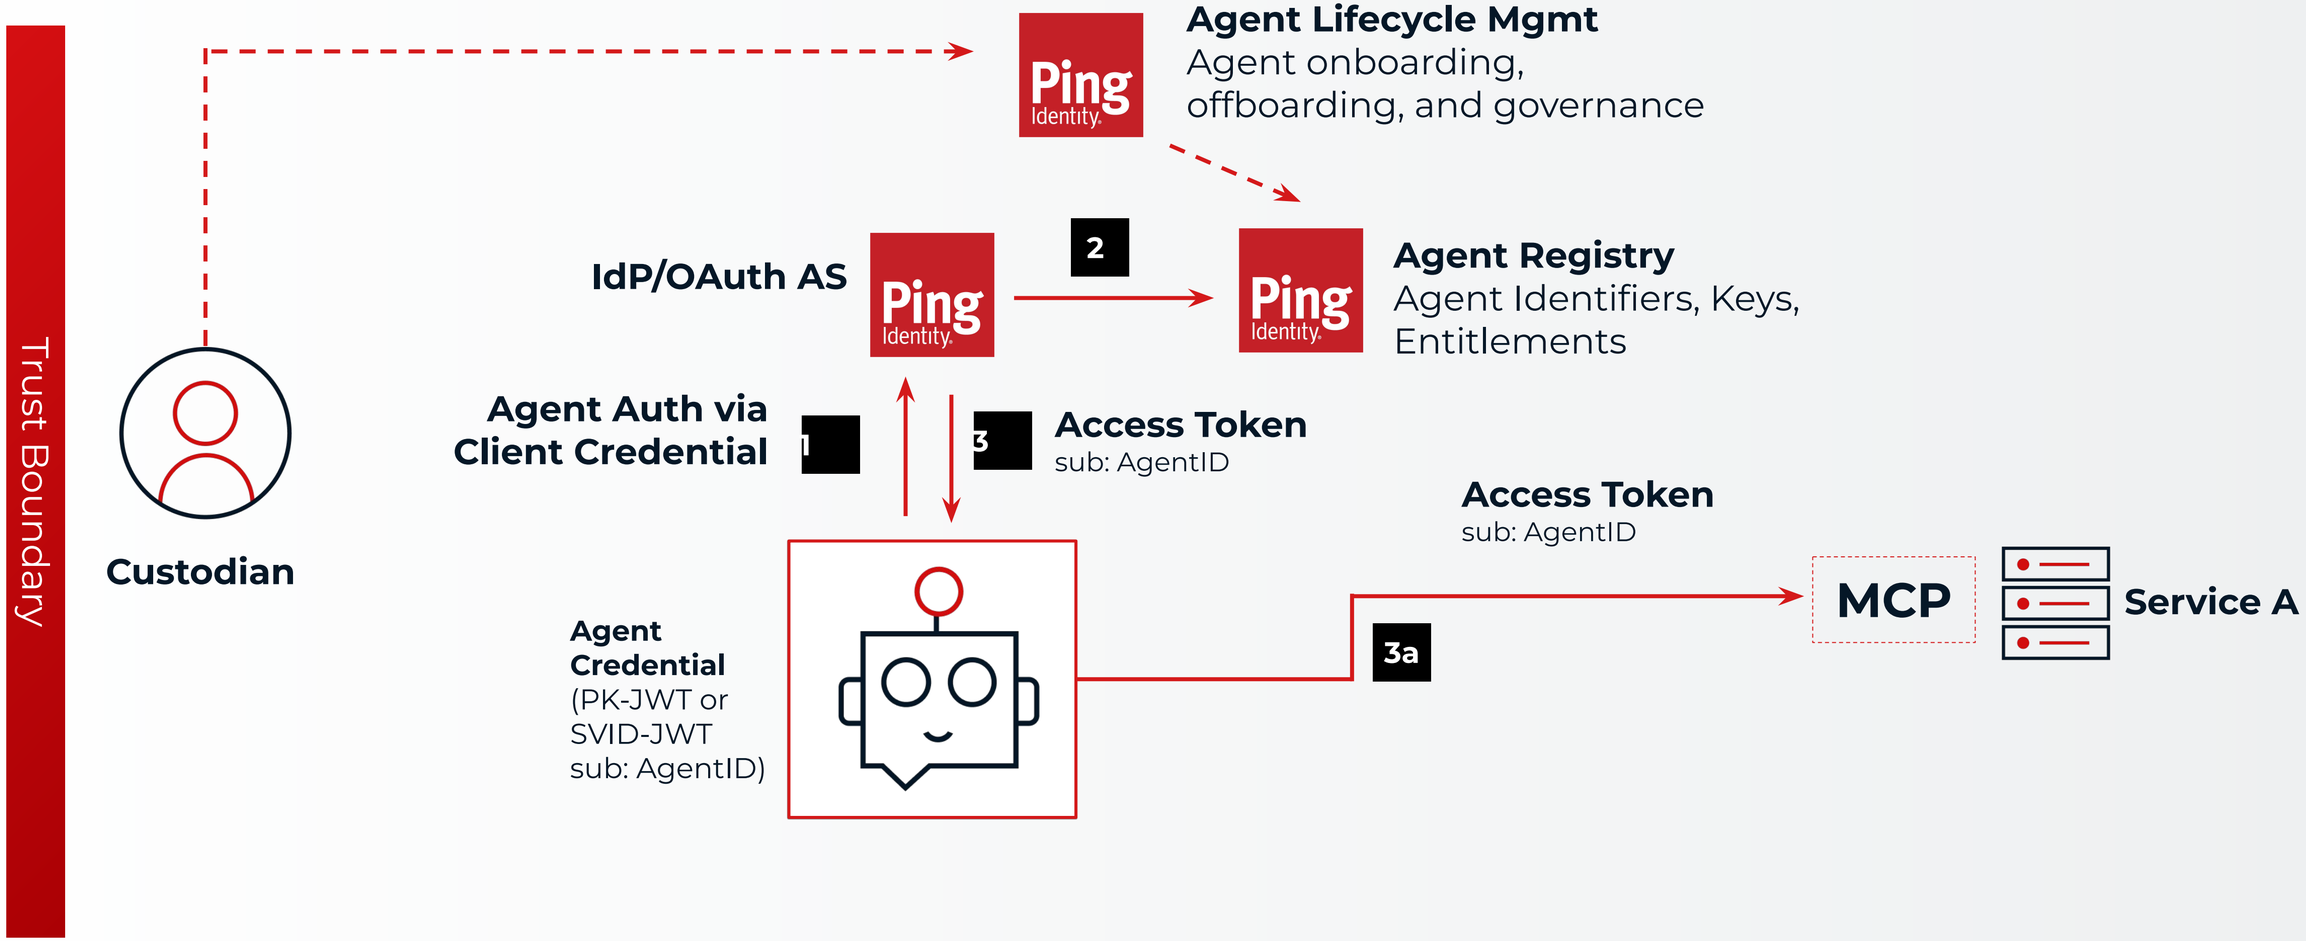


Confidential | Do Not Distribute - ©2026, Ping Identity Corp, All Rights Reserved

Useful Slides

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved


AI Agents Need Access to Data and Services

To get ‘smart’, AI Agents need to integrate with APIs and Services
This interactivity means that **IAM is central to AI Agent success**

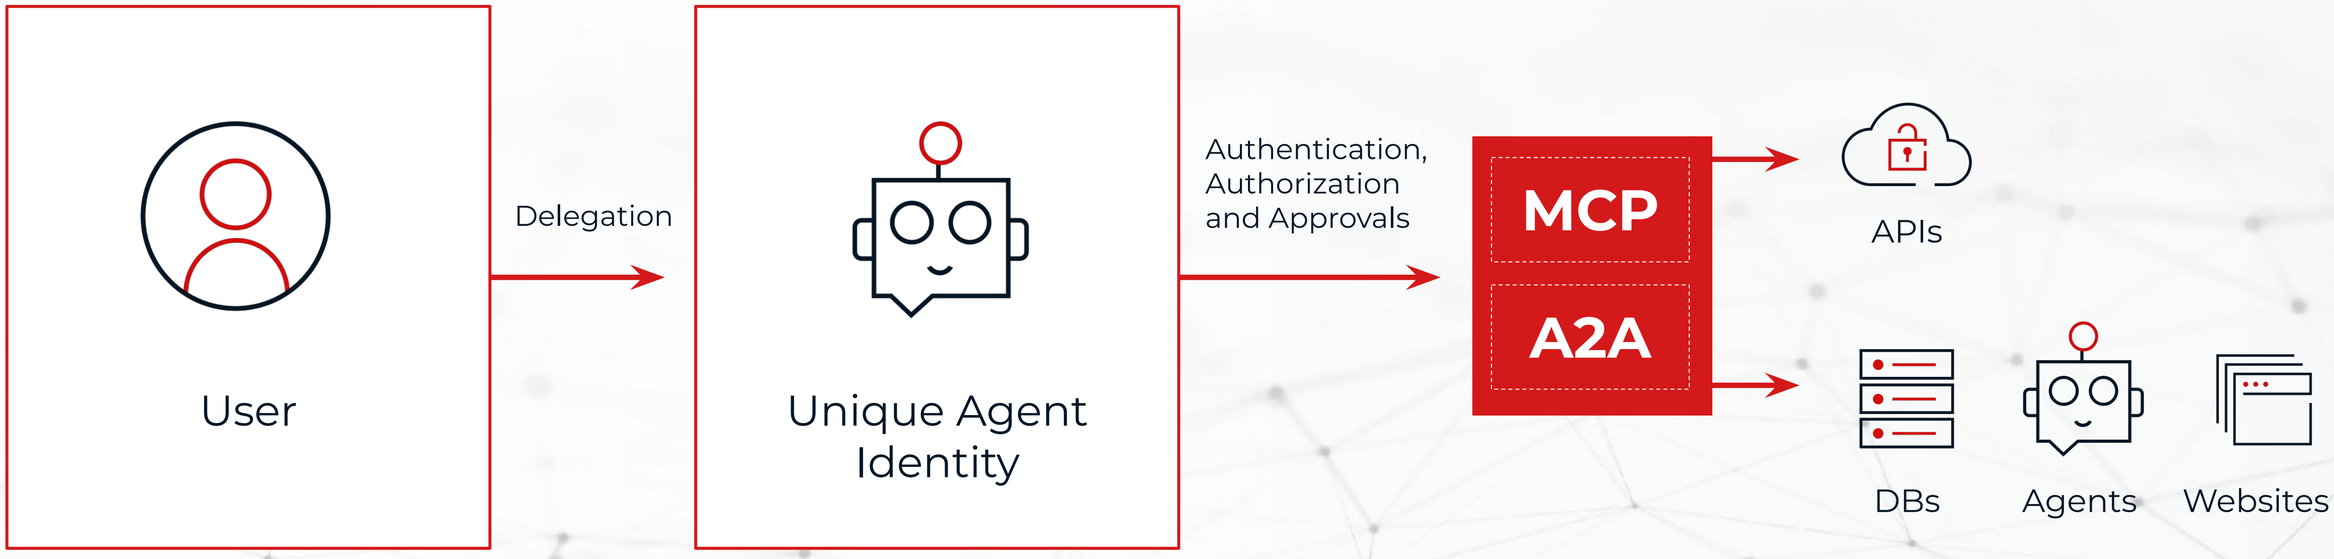


Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Four Kinds of Agents: **Same outcome, different paths**



Personal Agents

On the Device at Work or Home



Enterprise Agents

In the Cloud

Employee Agents

Personal productivity: Native, browser, and coding agents running on the user's device.

ChatGPT · Claude · CLAUDE CODE

Consumer & Partner Agents

The new front door: Agents acting on behalf of customers and partners in digital channels.

ChatGPT · Claude

Workload Agents

The digital workforce: Assistants & autonomous agents running on self-hosted or third-party platforms.

Amazon Bedrock · Google Vertex.ai · LangChain

SaaS-Embedded Agents

Vendor embedded: Agents running inside SaaS applications.

salesforce · glean

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

The Customer Journey to **Trust AI**

1

Where are my agents?



Discover agents across your environment

2


Who are my agents?



Establish trusted agent identities

3

Is this agent who it says it is?



Prove the agent identity, including on-behalf-of the user

4

What can this agent do?



Enforce controls, policies, & least privilege

5

Can I trust this agent?




Assess risk & validate compliance. Evaluate trustworthiness.

DISCOVER → **REGISTER** → **AUTHENTICATE** → **AUTHORIZE** → **GOVERN**

Today’s focus

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Best Practices



Implement Delegated Access

- Use Delegation, not impersonation
- Capture explicit consent to grant an agent delegated access to a user account
- Issue delegated tokens for proper on-behalf-of controls




Enforce Least Privilege

- Reduce boundaries of agent access
- Minimize default agent access
- Use short-lived tokens
- Eliminate over-permissioned credentials like API Keys and Client Secrets




Authorize with Agent Specific Policies

- Define specific policies for agents acting on-behalf-of users
- Trace decisions for audit purposes
- Authorize agent requests at the resource



Human in the Loop Approvals


- Prompt human for sensitive operations or elevated privilege
- Strongly verify humans when brought into the loop



Intent Based Decisioning

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Agents Leverage OAuth for Delegation



Personal Agents

- Runs on user endpoint
- Does not have a unique identity
- Cannot store secrets or credentials securely
- Supports delegation via Authorization Code Grant
- Are registered dynamically via CIMD




Workload Agents

- Runs as a Workload in Infrastructure
- Has a unique identity
- Can store credentials / private keys securely
- Supports delegation via Token Exchange
- Are Pre-registered

Delegation is handled differently across agent types - but the principle remains the same

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Layers of Agent Identity

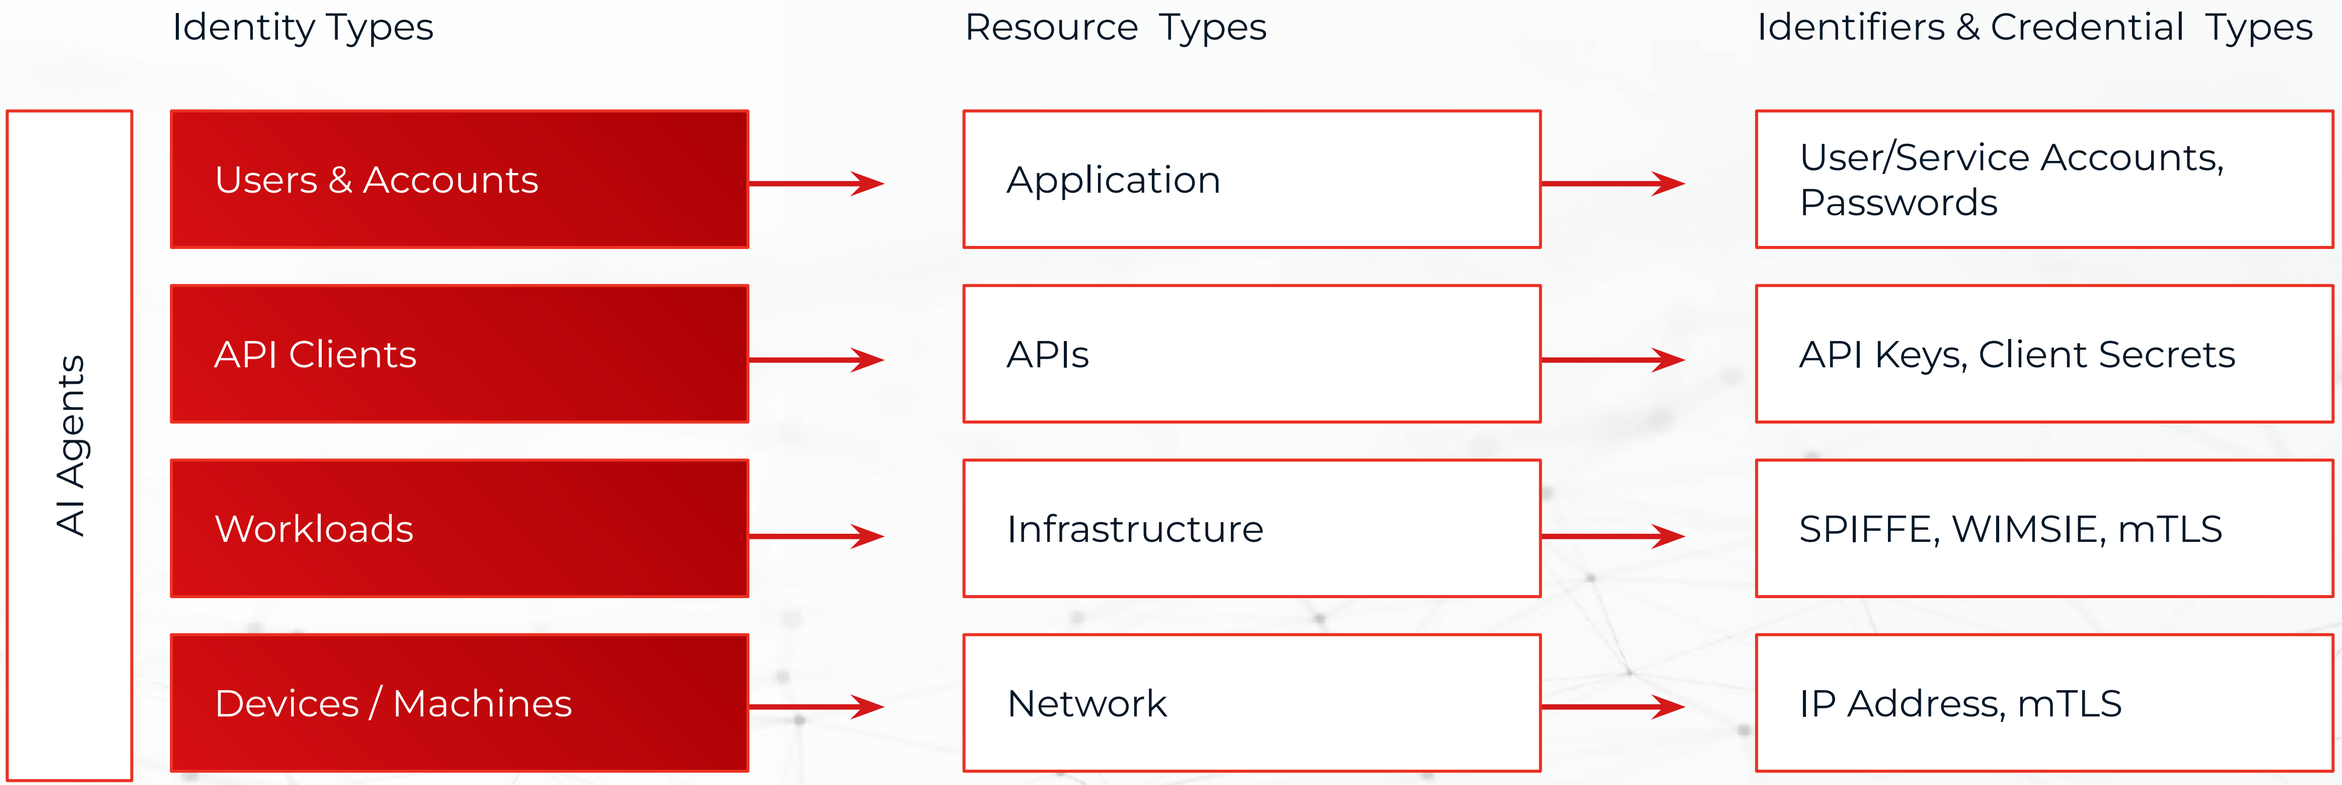

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Emerging Standards




CIMD



ID-JAG




SPIFFE for Workload Identity



Emergence of TX Tokens

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Four Kinds of Agents: **Same Outcome, Different Paths**



Personal Agents

On the Device at Work or Home

Employee Agents

Personal productivity: Native, browser, and coding agents running on the user's device.

ChatGPT Claude CLAUDE CODE

Consumer & Partner Agents

The new front door: Agents acting on behalf of customers and partners in digital channels.

ChatGPT Claude

Enterprise Agents

In the Cloud

Workload Agents

The digital workforce: Assistants & autonomous agents running on self-hosted or third-party platforms.

Amazon Bedrock Google Vertex.ai LangChain

SaaS-Embedded Agents

Vendor embedded: Agents running inside SaaS applications.


salesforce glean

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Employee Agents: Coding Agents


Distinguish between humans and agents
Avoid long lived credential exposure

Agents can only access what they need, when they need it
See exactly what agents have done and committed

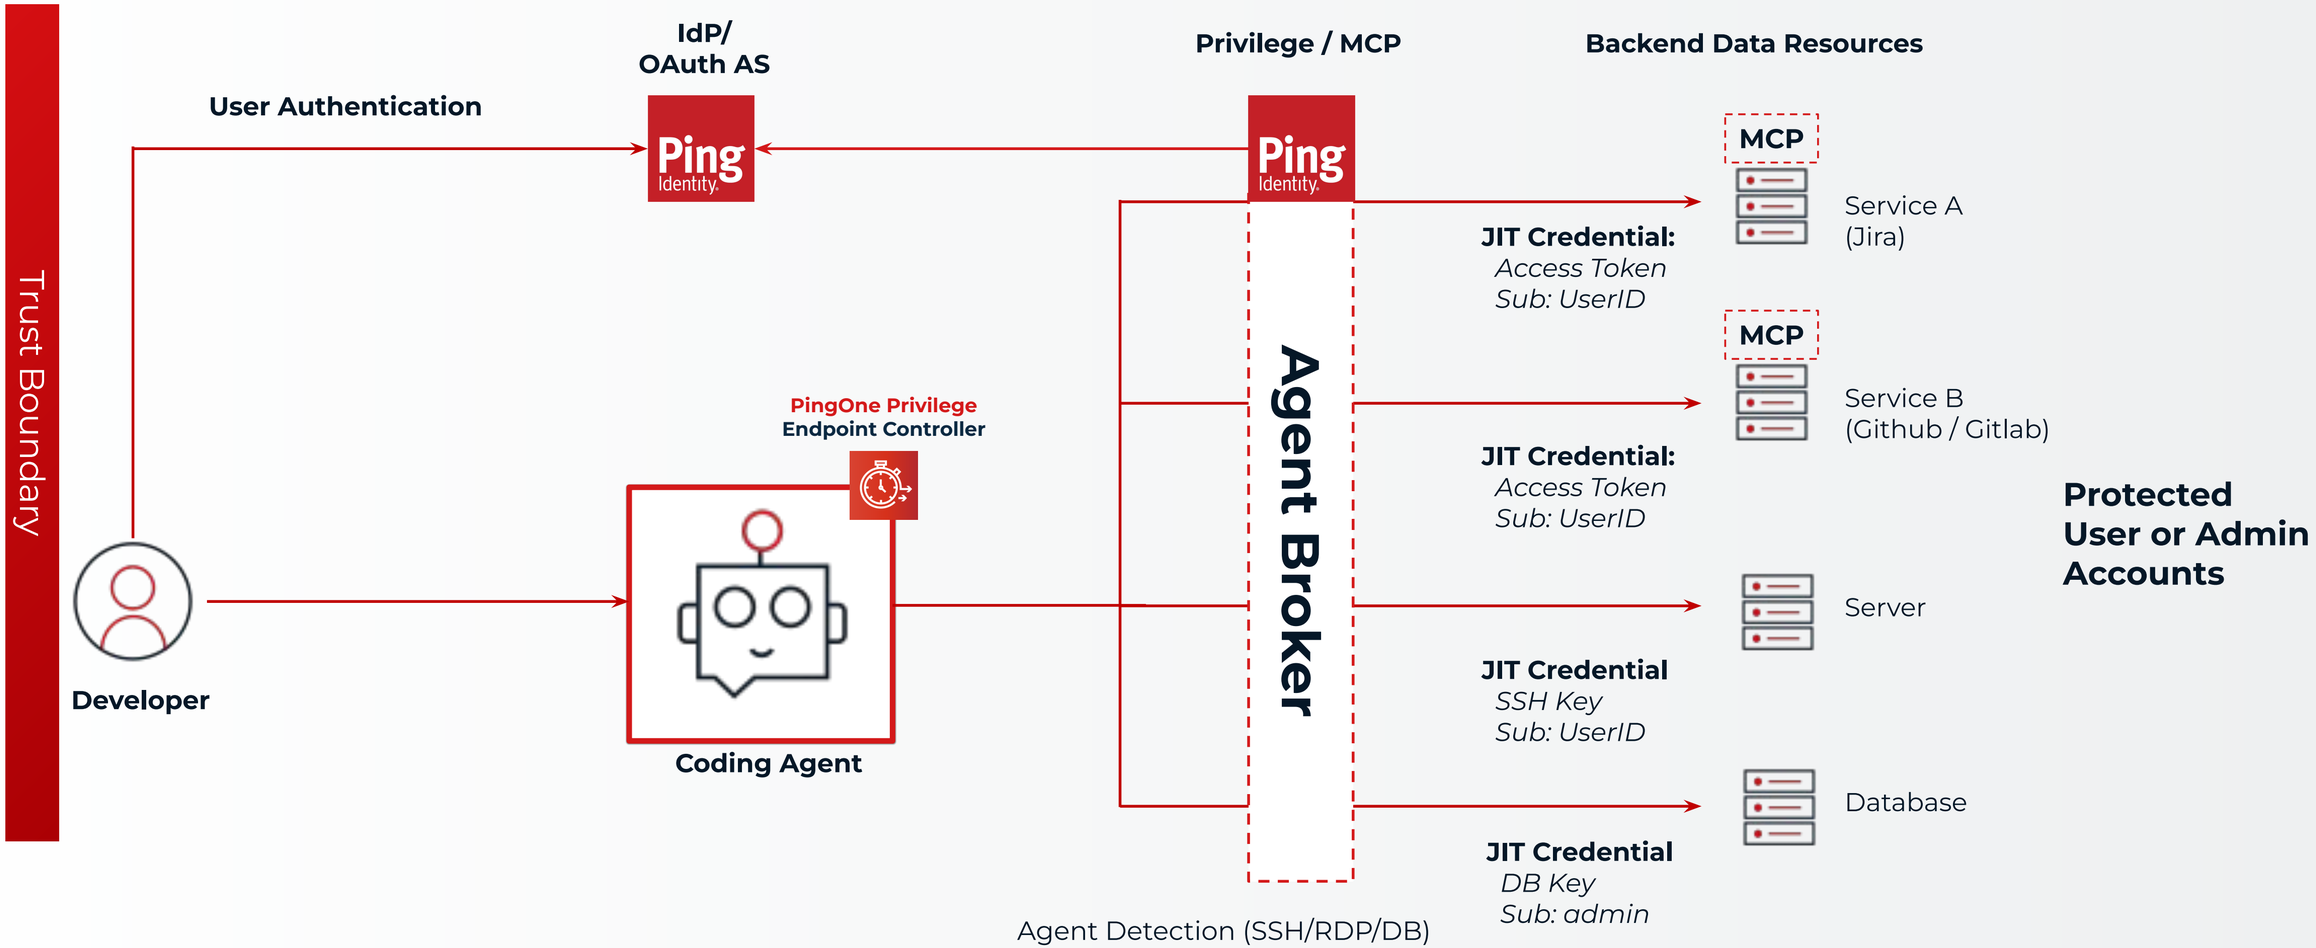

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Four Kinds of Agents: **Same Outcome, Different Paths**



Personal Agents

On the Device at Work or Home

Employee Agents

Personal productivity: Native, browser, and coding agents running on the user's device.

ChatGPT Claude CLAUDE CODE

Consumer & Partner Agents

The new front door: Agents acting on behalf of customers and partners in digital channels.

ChatGPT Claude

Enterprise Agents

In the Cloud

Workload Agents

The digital workforce: Assistants & autonomous agents running on self-hosted or third-party platforms.

Amazon Bedrock Google Vertex.ai LangChain


SaaS-Embedded Agents

Vendor embedded: Agents running inside SaaS applications.

salesforce glean


Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Personal Agents: MCP

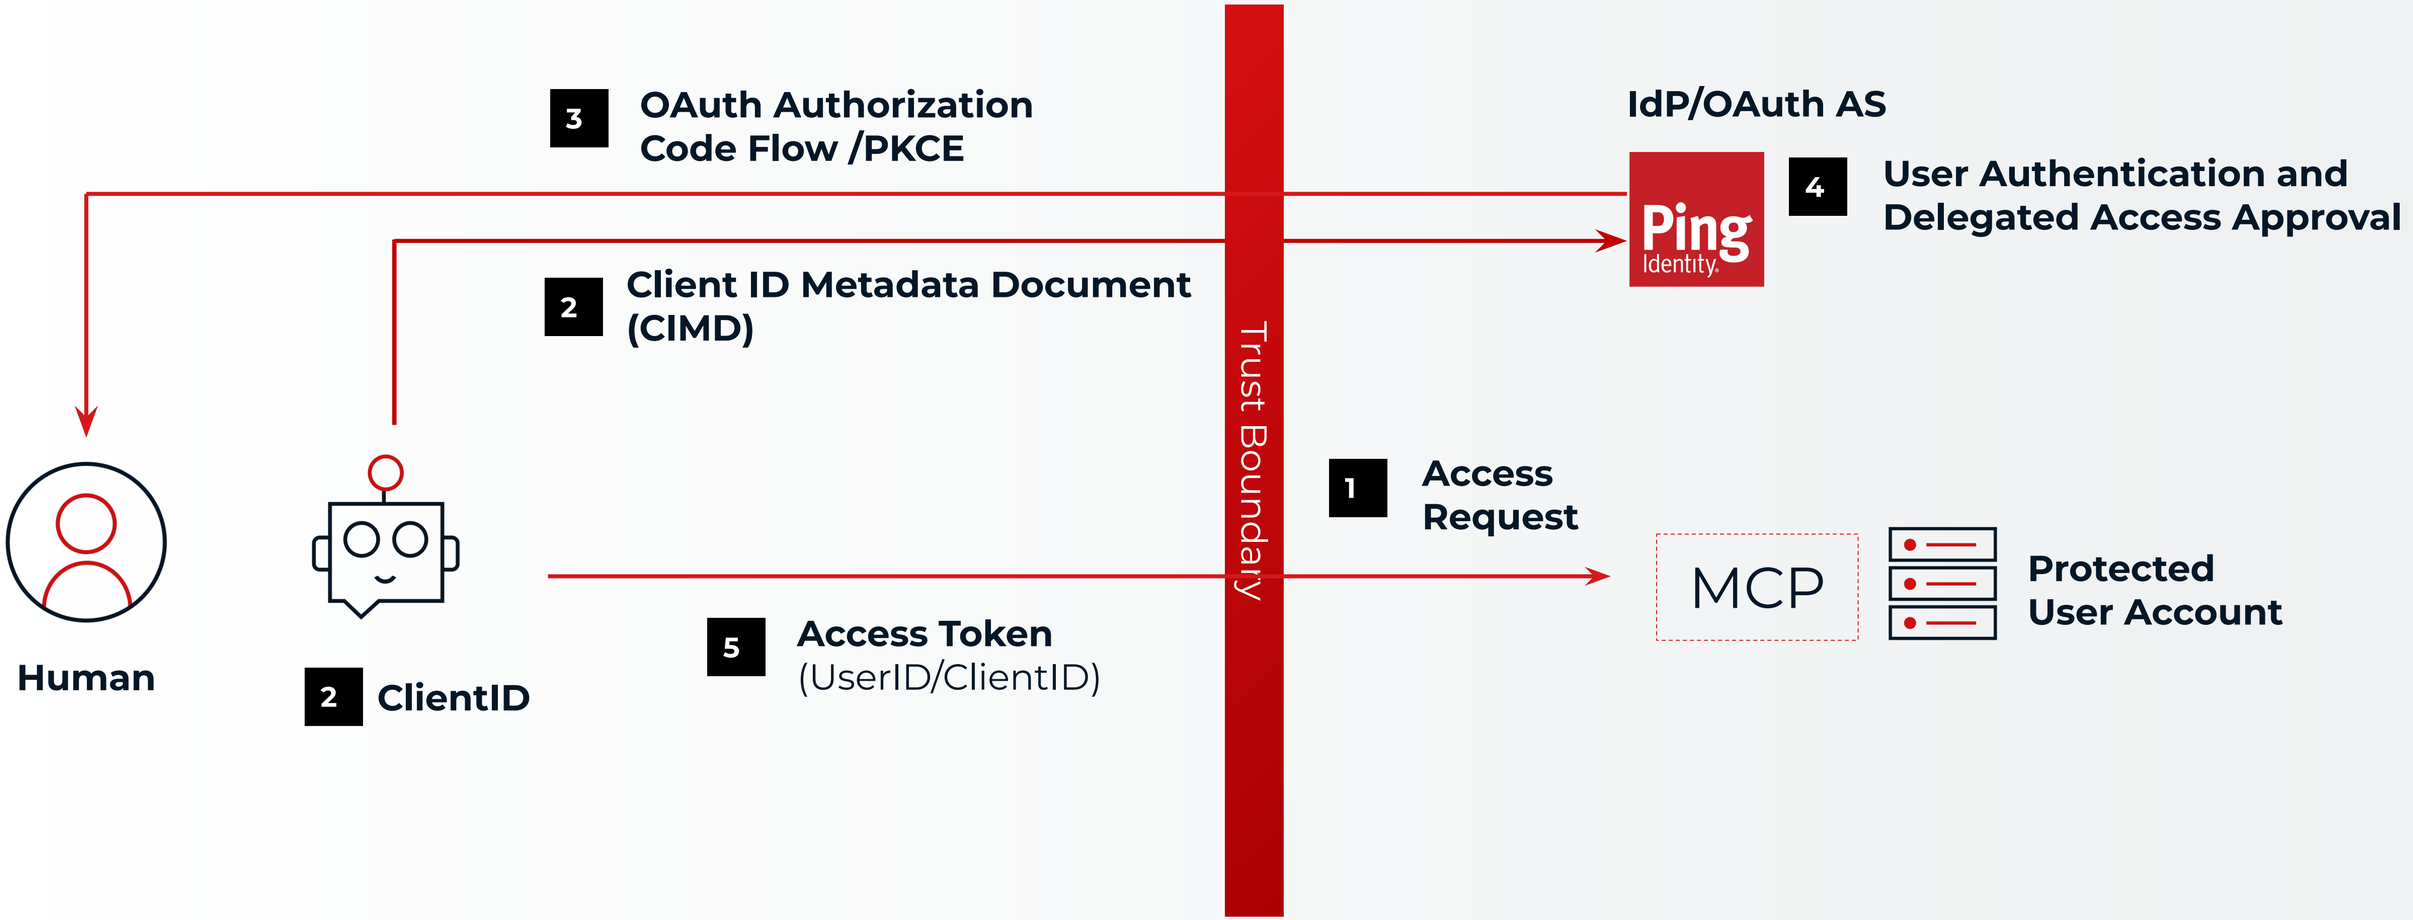


Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Personal Agents: CUA

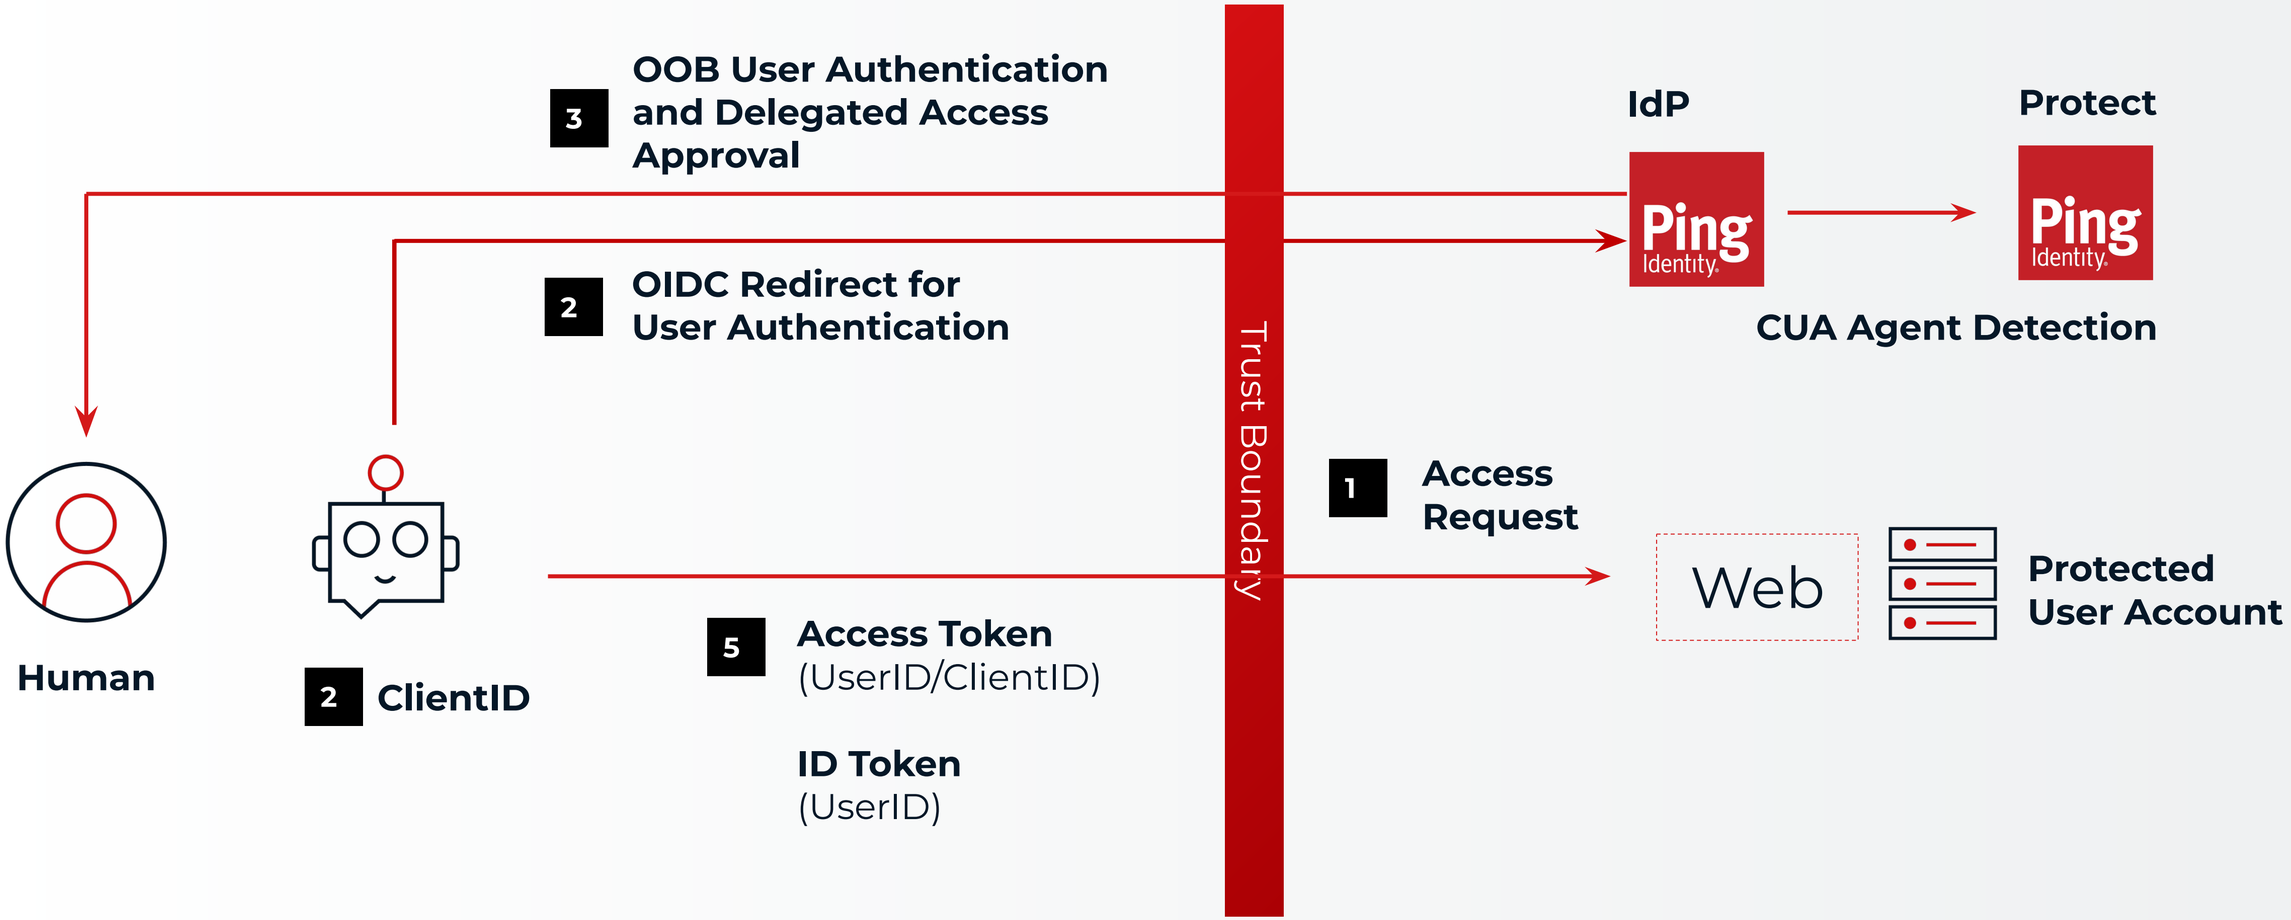

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Four Kinds of Agents: **Same Outcome, Different Paths**



Personal Agents
On the Device at Work or Home

Employee Agents


Personal productivity:
Native, browser, and coding agents running on the user's device.

ChatGPT Claude CLAUDE CODE

Consumer & Partner Agents

The new front door:
Agents acting on behalf of customers and partners in digital channels.

ChatGPT Claude



Enterprise Agents
In the Cloud

Workload Agents

The digital workforce:
Assistants & autonomous agents running on self-hosted or third-party platforms.

Amazon Bedrock Google Vertex.ai LangChain


SaaS-Embedded Agents

Vendor embedded:
Agents running inside SaaS applications.

salesforce glean

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Workload Agent: Digital Assistant (OBO)

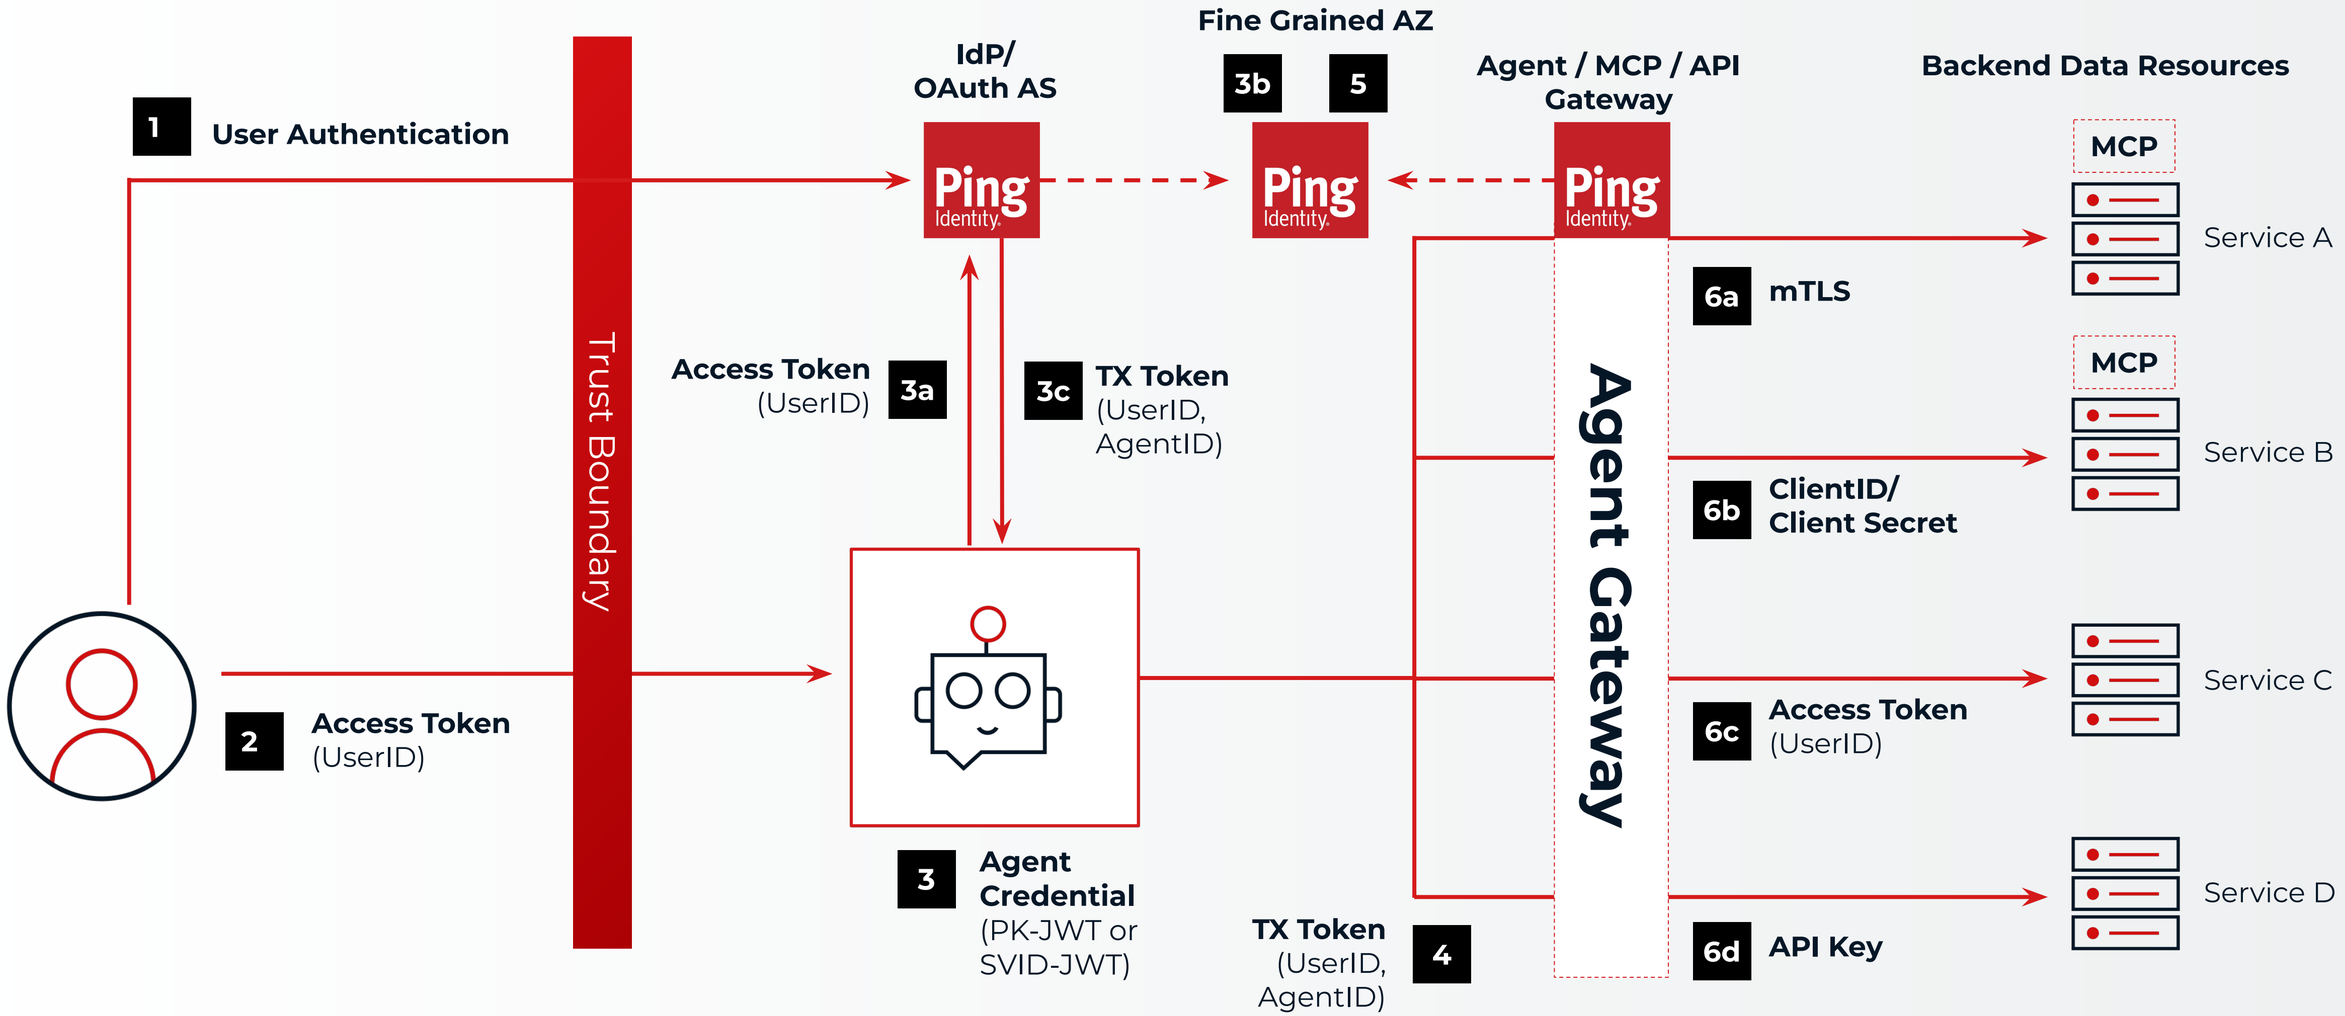

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Delegation: What Does it Mean?

```
{
   "aud":"https://mcp-server.example.com",
   "iss":"https://issuer.example.com",
   "exp":1443904100,
   "nbf":1443904000,
   "sub":"john@example.com",
   "act":
     {
       "sub":"https://digital-assistant.example.com"
     }
 }
```

- ✓ Digital Assistants can access Banking Services
- ✓ John has given the Digital Assistant consent to act on-his-behalf
- ✓ Digital Assistants can be trusted with read-only actions, but we must step-up & verify when performing sensitive actions

Delegation means that we communicate two identities inside the access token

This means we can make decisions about what the Agent can do, and when to re-involve the human

This token structure allows us to make informed authorization decisions

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Transaction Tokens in Workload Agents

```
{
   "aud":"https://mcp-server.example.com",
   "iss":"https://issuer.example.com",
   "exp":1443904100,
   "nbf":1443904000,
   "sub":"john@example.com",
   "txn":"123456",
   "req_wl":"api.example.com",
   "act":
     {
       "sub":"https://digital-assistant.example.com"
     }
     ”rcxt” : requestor context
     “tctx” : immutable txn context details
 }
```

Transaction Token : https://datatracker.ietf.org/doc/draft-ietf-oauth-transaction-tokens/

Short-lived JWT used internally within a system's microservices architecture to securely manage the context and identity of a single, ongoing transaction or API request

Use txn claim as unique transaction id

Use req_wl claim as the identity that requested the Txn-Token

Use tctx claim to convey immutable tx context such as fine grained authorization details


This token structure allows us to make informed authorization decisions

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Enterprise Managed Authorization via ID-JAG

Elimination of Consent Sprawl (No Per-User Consent Screens)

Enterprise managed runtime policy enforcement

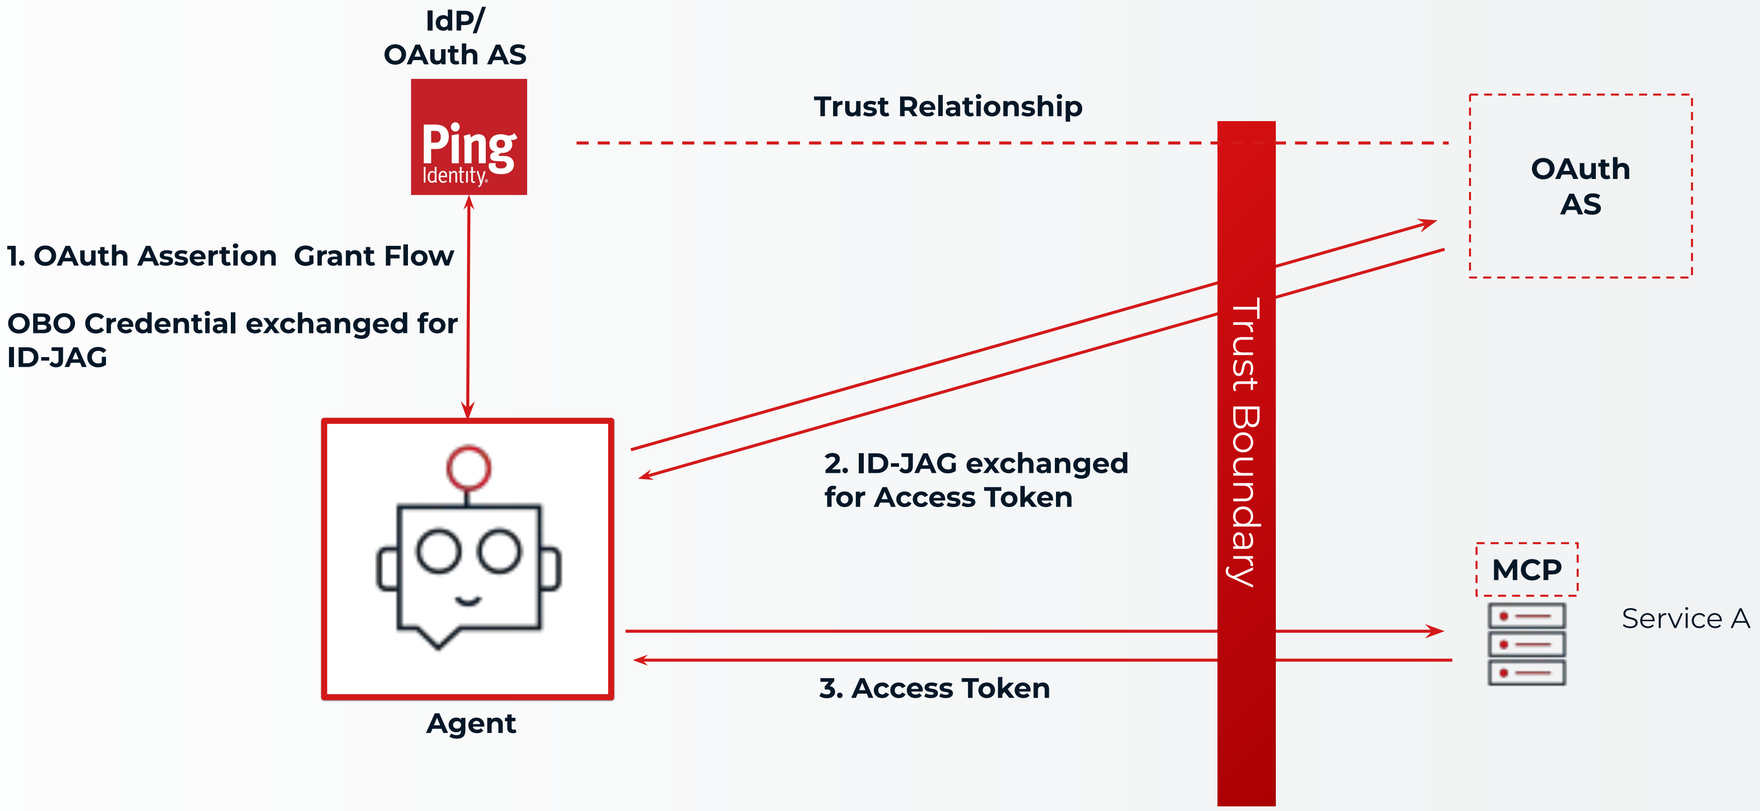

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

INTRODUCING

Identity for AI

Confidential | Do Not Distribute - ©2025, Ping Identity Corp. All Rights Reserved

Identity for AI General Availability

USERS

AGENTS

Protect

Agent Detection
Threat Analysis

AVAILABLE

Authorize

Fine-Grained AuthZ
Business Policies

AVAILABLE

Privilege

JIT Credentials
MCP Developer Gateway

AVAILABLE

Agent IAM Core

Agent & Resource Management
Agent Authentication & Delegation
Human-in-the-Loop

AVAILABLE :: AIC | PINGONE | PINGFEDERATE | AIS

RESOURCES

Agent Gateway

MCP Validation & Auditing
Agent Token Validation
OAuth-based Authorization

AVAILABLE


Agent Governance

Agent & MCP Discovery
Access Insights
Certifications, Requests, Approvals

AVAILABLE

Reference Architecture
Employee Personal Agents

Know what agents are running. Control what they can reach across your managed resources.

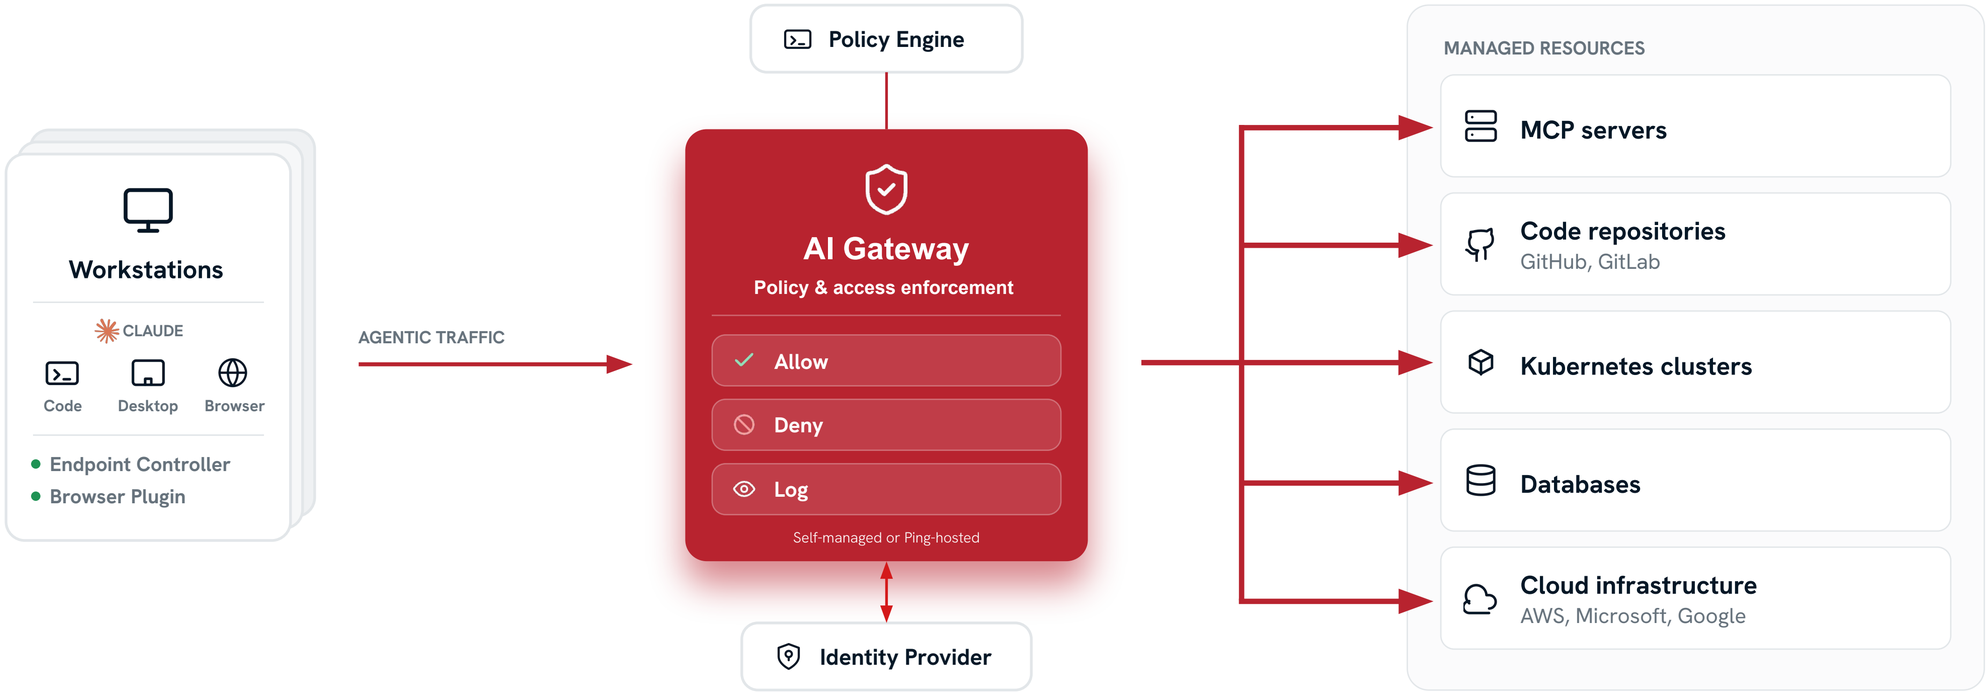


Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Reference Architecture


Workload Agents

Every agent runs on a delegated identity, so its access is scoped, brokered, and accountable end to end.

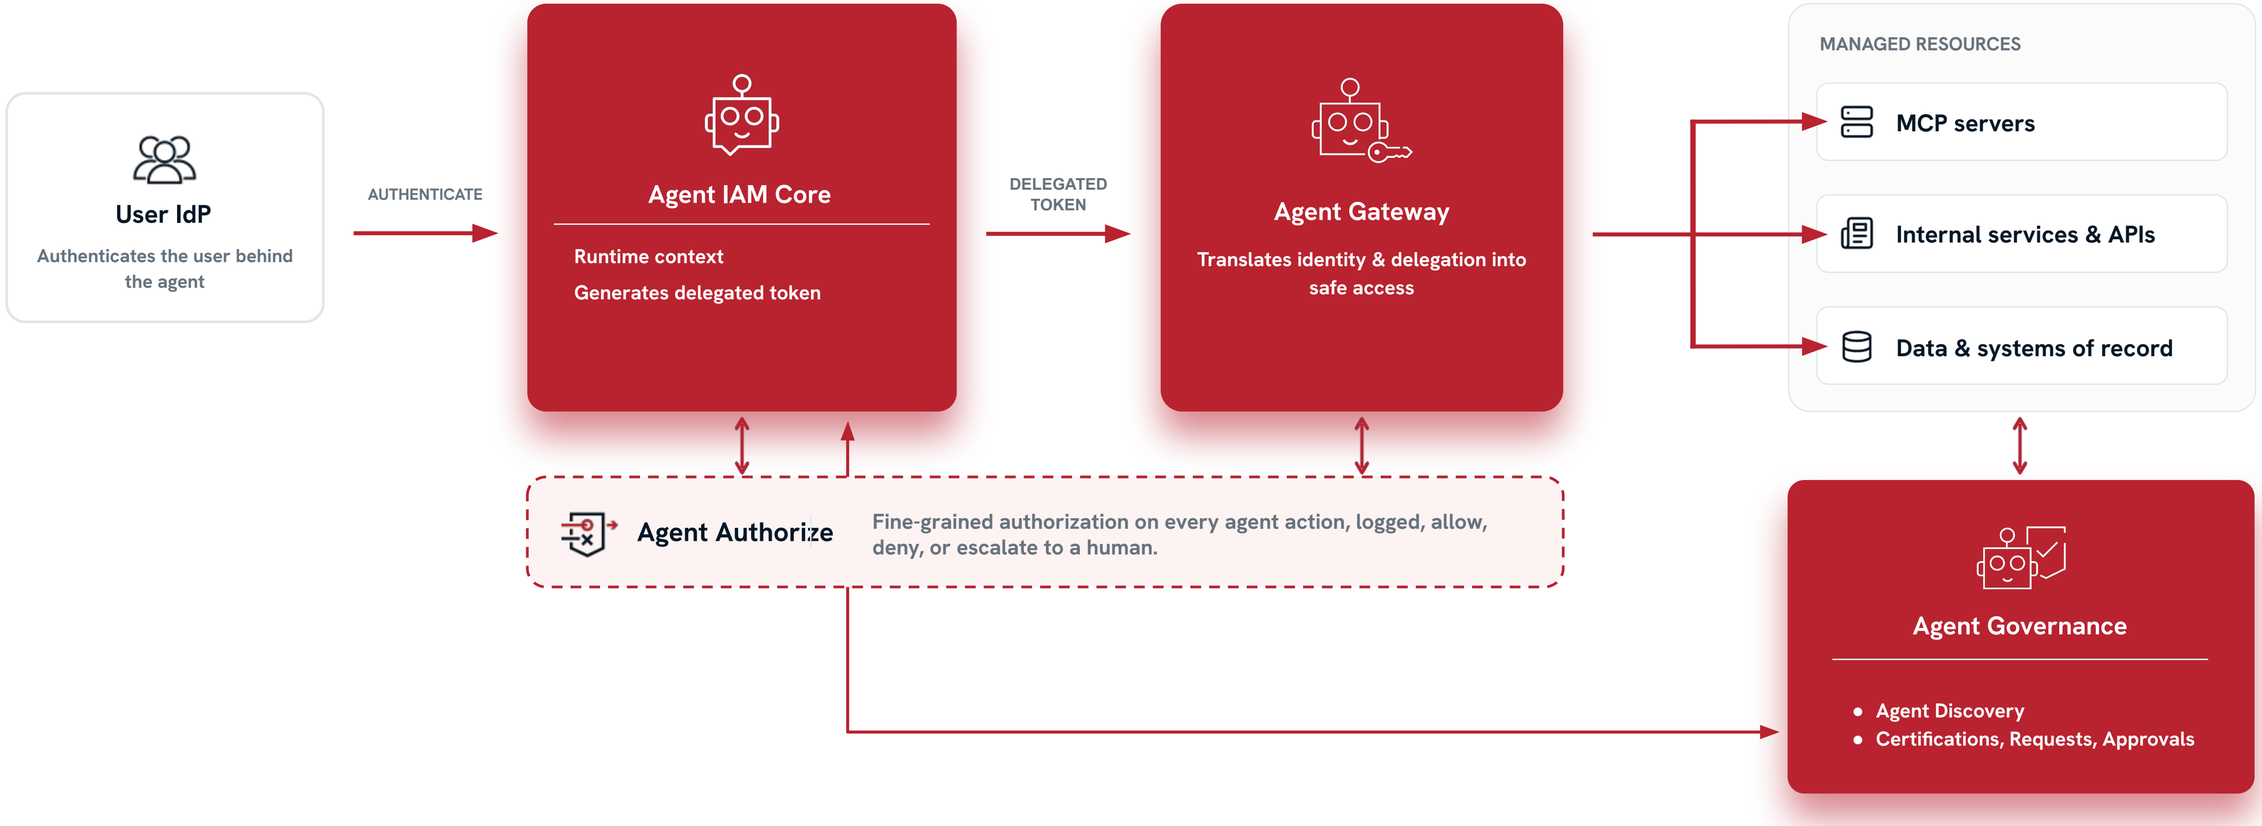

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved

Reference Architecture
Consumer Agents

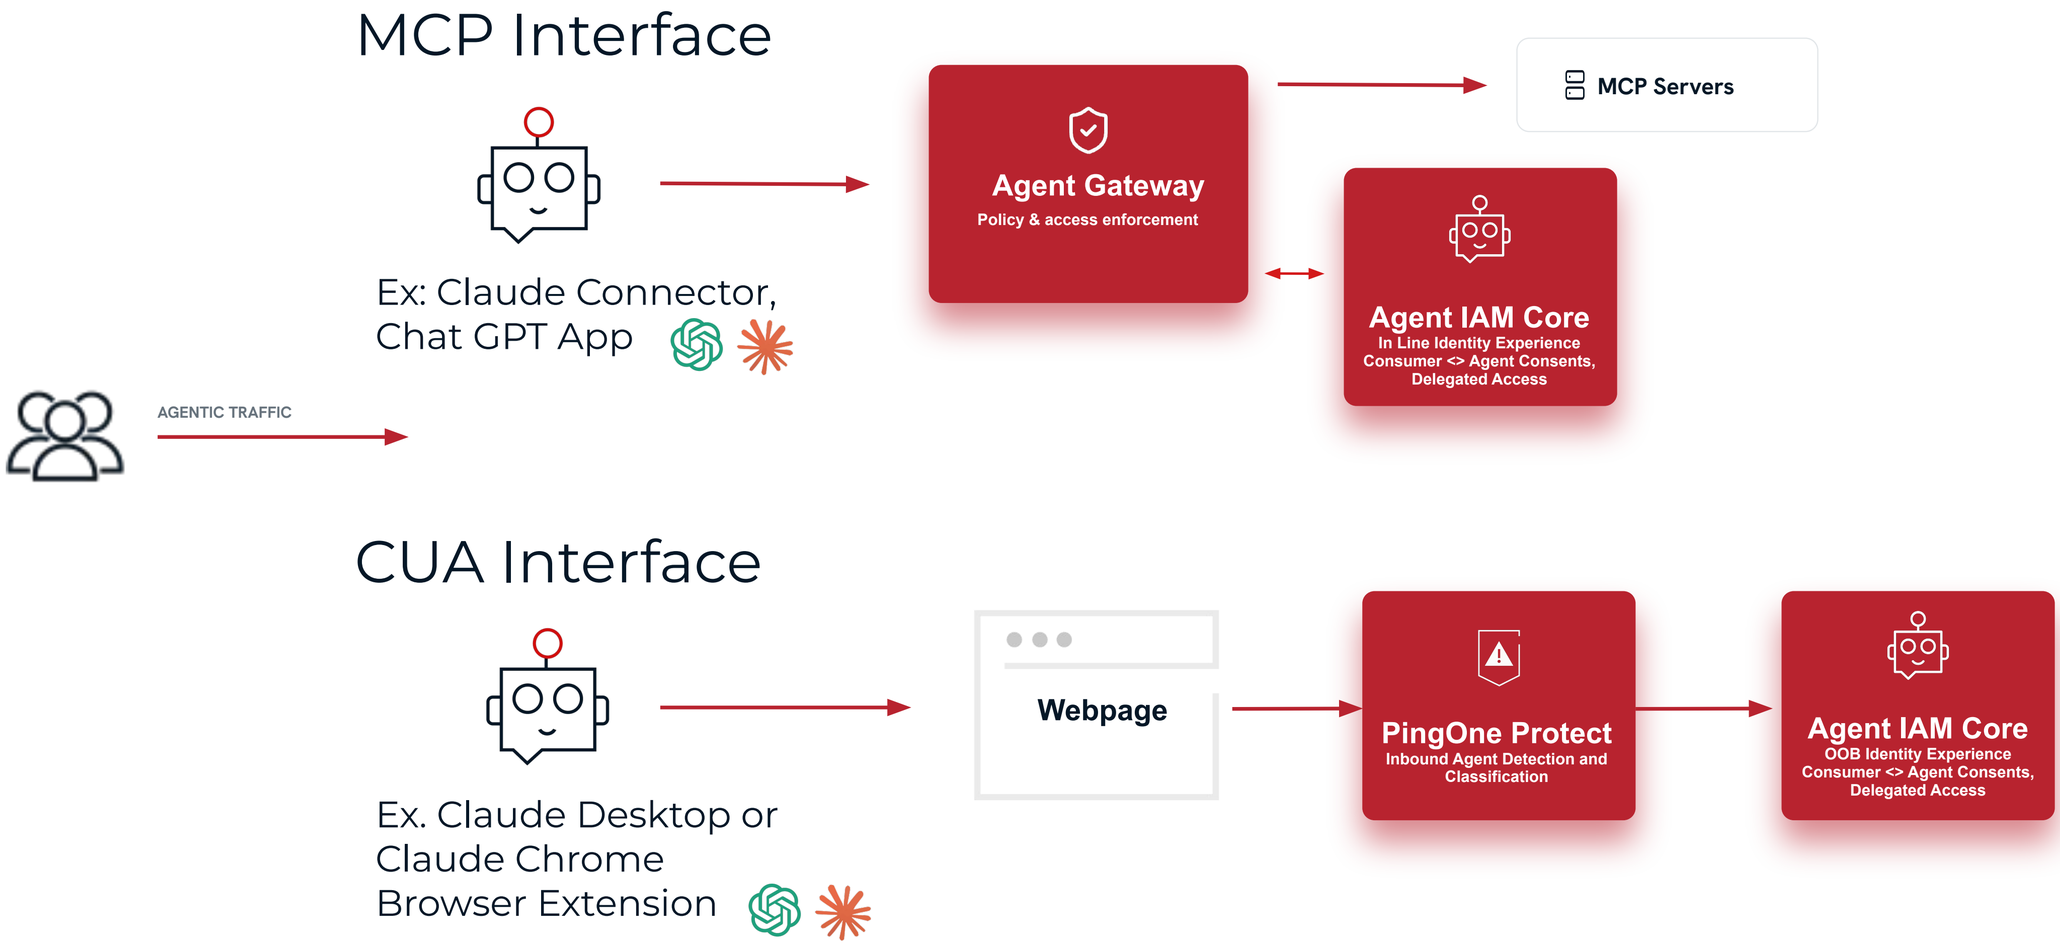

Confidential | Do Not Distribute - ©2025, Ping Identity Corp, All Rights Reserved