

Back to all evaluation sheets

Points earned

O

Minishell

You should evaluate 2 student in this team

Introduction

Please follow the rules below:

- Remain polite, courteous, respectful, and constructive throughout the evaluation process. The well-being of the community depends on it.
- Oldentify with the student or group whose work is being evaluated the possible dysfunctions in their project. Take the time to discuss and debate the problems that may have been identified.
- You must consider that there might be some differences in how your peers might have understood the project's instructions and the scope of its functionalities. Always keep an open mind and grade them as honestly as possible. The pedagogy is useful only if the peer-evaluation is done seriously.

Guidelines

Please follow the guidelines below:

Only grade the work that was turned in to the Git repository of the evaluated student or group.

Ouble-check that the Git repository belongs to the student(s). Ensure that the project is the one expected. Also, check that 'git clone' is used in an empty folder.

Check carefully that no malicious aliases were use evaluating something that is not the content of the of

Points earned O

To avoid any surprises and if applicable, review facilitate the grading (scripts for testing or automation

If you have not completed the assignment you are going to evaluate, you must read the entire subject prior to starting the evaluation process.

Use the available flags to report an empty repository, a non-functioning program, a Norm error, cheating, and so forth. In these cases, the evaluation process ends and the final grade is 0, or -42 in the case of cheating. However, except for cheating, students are strongly encouraged to review together the work that was turned in, in order to identify any mistakes that shouldn't be repeated in the future.

Remember that for the duration of the defense, no segfaults or other unexpected, premature, or uncontrolled terminations of the program will be tolerated, else the final grade is 0. Use the appropriate flag.

You should never have to edit any file except the configuration file if it exists. If you want to edit a file, take the time to explain the reasons with the evaluated student and make sure both of you are okay with this.

You must also verify the absence of memory leaks. Any memory allocated on the heap must be properly freed before the end of execution.

You are allowed to use any of the different tools available on the computer, such as leaks, valgrind, or e_fence. In case of memory leaks, tick the appropriate flag.

Attachments

Please download the attachments below:



Mandatory Part

Points earned O

Compile

Compile

Use "make -n" to see if compilation use "-Wall -Wextra -Werror". If not, select the "invalid compilation" flag.

minishell compiles without any errors. If not, select the flag.

The Makefile must not re-link. If not, select the flag.

Yes No

Simple Command & global variables

Simple Command & global variables

Execute a simple command with an absolute path like /bin/ls, or any other command without any options.

How many global variables are used? Why? Ask the evaluated student to give you a concrete example of why it feels mandatory or logical.

Check the global variable. This global variable cannot provide any other information or data access than the number of a received signal.

Test an empty command.

Test only spaces or tabs.

If something crashes, select the "crash" flag.

If something doesn't work, select the "incomplete work" flag.

Yes No Points earned O

Arguments

Arguments

Execute a simple command with an absolute path like /bin/ls, or any other command with arguments but without any quotes or double quotes.

Repeat multiple times with different commands and arguments.

If something crashes, select the "crash" flag.

If something doesn't work, select the "incomplete work" flag.

Yes No

echo

echo

Execute the echo command with or without arguments, or the -n option.

Repeat multiple times with different arguments.

If something crashes, select the "crash" flag.

If something doesn't work, select the "incomplete work" flag.

exit
exit

Points earned
O

Execute exit command with or without arguments.

Repeat multiple times with different arguments.

Don't forget to relaunch the minishell

If something crashes, select the "crash" flag.

If something doesn't work, select the "incomplete work" flag.

Yes No

Return value of a process

Return value of a process

Execute a simple command with an absolute path like /bin/ls, or any other command with arguments but without any quotes and double quotes. Then execute echo \$?

Check the printed value. You can do the same in bash in order to compare the results.

Repeat multiple times with different commands and arguments. Try some wrong commands like '/bin/ls filethatdoesntexist'

Try anything like expr \$? + \$?

If something crashes, select the "crash" flag.

If something doesn't work, select the "incomplete work" flag.

Yes No
Points earned
O
Signals

Signals

ctrl-C in an empty prompt should display a new line with a new prompt.

ctrl-\ in an empty prompt should not do anything.

ctrl-D in an empty prompt should quit minishell \rightarrow RELAUNCH!

ctrl-C in a prompt after you wrote some stuff should display a new line with a new prompt.

The buffer should be clean too. Press "Enter" to make sure nothing from the previous line is executed.

ctrl-D in a prompt after you wrote some stuff should not do anything.

ctrl-\ in a prompt after you wrote some stuff should not do anything.

Try ctrl-C after running a blocking command like cat without arguments or grep "something".

Try ctrl-\ after running a blocking command like cat without arguments or grep "something".

Try ctrl-D after running a blocking command like cat without arguments or grep "something".

Repeat multiple times using different commands.

If something crashes, select the "crash" flag.

If something doesn't work, select the "incomplete work" flag.

Yes No

Double Quotes

Double Quotes

Points earned O

Execute a simple command with arguments and, this time, use also double quotes (you should try to include whitespaces too).

Try a command like : echo "cat lol.c | cat > lol.c"

Try anything except \$.

If something crashes, select the "crash" flag.

If something doesn't work, select the "incomplete work" flag.

Yes No

Single Quotes

Single Quotes

Execute commands with single quotes as arguments.

Try empty arguments.

Try environment variables, whitespaces, pipes, redirection in the single quotes.

echo '\$USER' must print "\$USER".

Nothing should be interpreted.

| | Yes | No | |
|-------------------|-----|----|-----------------|
| env env | | | Points earned 0 |

Check if env shows you the current environment variables.

Yes No

export

export

Export environment variables, create new ones and replace old ones.

Check the result with env.

Yes No


unset

unset

Export environment variables, create new ones and replace old ones.

Use unset to remove some of them.

Check the result with env.

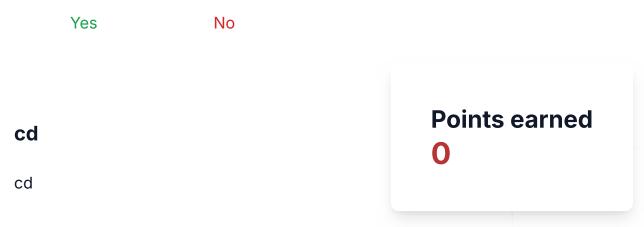

Use the command cd to move the working directory and check if you are in the right directory with /bin/ls

Repeat multiple times with working and not working cd

Also, try '.' and '..' as arguments.

Yes No

pwd

pwd

Use the command pwd.

Repeat multiple times in different directories.

Yes No

Relative Path

Relative Path

Execute commands but this time use a relative path.

Repeat multiple times in different directories with a complex relative path

(lots of ..).

Yes

No

Points earned

Environment path

Environment path

Execute commands but this time without any path (Is, wc, awk and so forth).

Unset the \$PATH and ensure commands are not working anymore.

Set the \$PATH to a multiple directory value (directory1:directory2) and ensure that directories are checked in order from left to right.

Yes No

Redirection

Redirection

Execute commands with redirections < and/or >

Repeat multiple times with different commands and arguments and sometimes change > with >>

Check if multiple tries of the same redirections fail.

Test << redirection (it doesn't have to update the history).

Yes

No

Pipes

Pipes

Execute commands with pipes like 'cat file | grep I

Points earned

O

Repeat multiple times with different commands an

Try some wrong commands like 'ls filethatdoesntexist | grep bla | more'

Try to mix pipes and redirections.

Yes No

Go Crazy and history

Go Crazy and history

Type a command line, then use ctrl-C and press "Enter". The buffer should be clean and there should be nothing left to execute.

Can we navigate through history using Up and Down? Can we retry some command?

Execute commands that should not work like 'dsbksdgbksdghsd'. Ensure minishell doesn't crash and prints an error.

'cat | cat | Is' should behave in a "normal way".

Try to execute a long command with a ton of arguments.

Have fun with that beautiful minishell and enjoy it!

Yes No

Points earned

Environment variables

Environment variables

Execute echo with some environment variables (\$

Check that \$ is interpreted as an environment vari

Check that double quotes interpolate \$.

Check that USER exists. Otherwise, set it.

echo "\$USER" should print the value of the USER variable.

Yes No

Bonus Part

And, Or

Evaluate the bonus part if, and only if, the mandatory part has been entirely and perfectly done, and the error management handles unexpected or bad usage. In case all the mandatory points were not passed during the defense, bonus points must be totally ignored.

Use &&, || and parenthesis with commands and ensure minishell behaves the same way bash does.

Yes No

Wildcard

Wildcard

Use wildcards in arguments in the current working

Points earned

Yes

No

Surprise! (or not...)

Surprise! (or not...)

Set the USER environment variable.

echo "'\$USER'" should print the value of the USER variable.

echo '"\$USER"' should print "\$USER".

Yes No

Ratings



☆ Outstanding

Incomplete Work

Nalid Compilation

Norme



Cheat











© 2024 42evals. All rights reserved.