

Portfolio

Bootstrap

แนะนำตัวก่อนนะ



P' Ter



P' Roy

Facebook:
Panyawut Sriiesaranusorn (P' Ter)
Pawit Aiemvaravutigul (P' Roy)

WELCOME TO

PHOTOGRAPHER'S PORTFOLIO

A separate kind of photo art, that requires incredible skill of the photographer,
it is a portrait photography.



SHORTLY ABOUT ME

My name is Liam Chandler. I am a professional photographer with years of experience. I use state-of-the-art equipment to ensure the highest quality of my works. I want to share them with the audience and show my vision of the whole world. I'm passionate about capturing special moments and emphasizing the beauty of the virgin nature.

[MORE](#)

What is portfolio ?



- Back
- Forward
- Reload
- Save As...
- Print...
- Cast...
- Translate to English
-  AdBlock
-  View Page Source
- Inspect

ค้นหาด้วย Google

ดีใจจัง ค้นแล้วเจอเลย

Google.co.th ที่เป็นภาษา: English

Close



ค้นหาด้วย Google

ดีใจจัง ค้นแล้วเจอเลย

Google.co.th ที่เป็นภาษา: English

เกี่ยวกับ

```
...</div>
<div style="display:none" js1="$t t-o
" r-i38apEGFnkw"></div>
▼<div class="content" data-jiis="cc" i
  ▼<span class="ctr-p" id="body">
    ▼<center>
      ▼<div style="height:233px;margin-
        ▼<div style="padding-top:109px"
          ►<style>...</style>
...
  ►<div style="background-size:
    width:272px" title="Google" al
    onload="window.lol&&lol()">...<
      </div>
    </div>
    <div style="height:118px"></div>
  ►<div data-jibp="h" data-jiis="uc
    "margin-top:12px">...</div>
  </center>
</span>
►<div class="ctr-p" id="footer">...</d
  ►<div data-jibp="h" data-jiis="uc" i
html #gsr #viewport #main #body center div#
```

Styles Event Listeners DOM Breakpoints Properties

Filter :hov .cls +

```
element.style {
  background-size: 272px 92px;
  height: 92px;
  width: 272px;
}
```

```
#hplogo {
  (index):51
  background:▶
    url(/images/branding/googlelog
      no-repeat;
}
```

```
div[Attributes Style] {
  text-align: -webkit-left;
}
```

```
div {
  user agent stylesheet
  display: block;
}
```

Inherited from center

Console

Preser

!DOCTYPE



Authentic eForm

XSLT-HTML ▾

RTI

A scene from Toy Story featuring Woody the牛仔 and Buzz Lightyear the太空骑警。伍迪站在左侧，面露困惑，穿着他的标志性牛仔夹克。巴斯则在右侧，双臂高举，做出胜利的手势，身上穿着绿色的太空服，胸前印有“ASTRONAUT”字样。背景是玩具盒的一部分。

HTML

HTML EVERYWHERE



เกริ่นนำก่อนเข้า HTML

```
<!DOCTYPE html>
<html>
<head>
<title>Page Title</title>
</head>
<body>

<h1>This is a Heading</h1>
<p>This is a paragraph.</p>

</body>
</html>
```

โครงสร้างของ HTML

```
<h1>This is heading 1</h1>
<h2>This is heading 2</h2>
<h3>This is heading 3</h3>
```

Headings(หัวข้อ)

```
<p>This is a paragraph.</p>
<p>This is another paragraph.</p>
```

Paragraphs(เนื้อหา)

```
<!DOCTYPE html>
<html>
<body>

<p>The pre tag preserves both spaces and line breaks:</p>

<pre>
    My Bonnie lies over the ocean.

    My Bonnie lies over the sea.

    My Bonnie lies over the ocean.

    Oh, bring back my Bonnie to me.

</pre>
</body>
</html>
```

การใช้ Pre

ผลลัพธ์ได้ →

The pre tag preserves both spaces and line breaks:

```
My Bonnie lies over the ocean.

My Bonnie lies over the sea.

My Bonnie lies over the ocean.

Oh, bring back my Bonnie to me.
```

ช่วงลองทำดู

โจทย์ : เราสามารถแทรคคำสั่ง p_1, p_2, \dots, p_6 ไว้ใน pre เพื่อให้ตัวหนังสือขนาดต่างกันได้หรือมั้ย ?



```
<!DOCTYPE html>

<html>
<body>



</body>
</html>
```

การ ใส่รูปภาพ

ช่วงลองทำดู

โจทย์ : ลองหาภาพจากเว็บไซต์แล้วลงมาใส่ในเว็บเราดูสิ
อาจจะเป็นภาพตัวน้องก็ได้นะ

โจทย์ : เราสามารถขยายภาพของเราได้มากสุดเท่าไร
และถ้าเราขยายภาพมาก ๆ เกินที่หน้าจอเราจะแสดงผลได้
จะเป็นอย่างไร



```
<!DOCTYPE html>
<html>
<body>

<a href="http://www.sura.ac.th/index.php">
My school</a>
</body>
</html>
```

การเชื่อมไปยังเว็บอื่น


Tag	Description
<u><html></u>	Defines the root of an HTML document
<u><body></u>	Defines the document's body
<u><head></u>	A container for all the head elements (title, scripts, styles, meta information, and more)
<u><h1> to <h6></u>	Defines HTML headings
<u><hr></u>	Defines a thematic change in the content

ແຖ່ນ

ช่วงลองทำดู

โจทย์ : ลองทำให้ภาพได ๆ ภาพนี้ในเว็บของเรา เมื่อ กดแล้ว จะสามารถไปโผล่หน้าเว็บ google ลิ

โจทย์ : ลองเขียนเลข 1 ถึง 10 เว้นบรรทัดกัน โดย ให้แต่ละบรรทัด เว้นกันด้วยเส้นดู

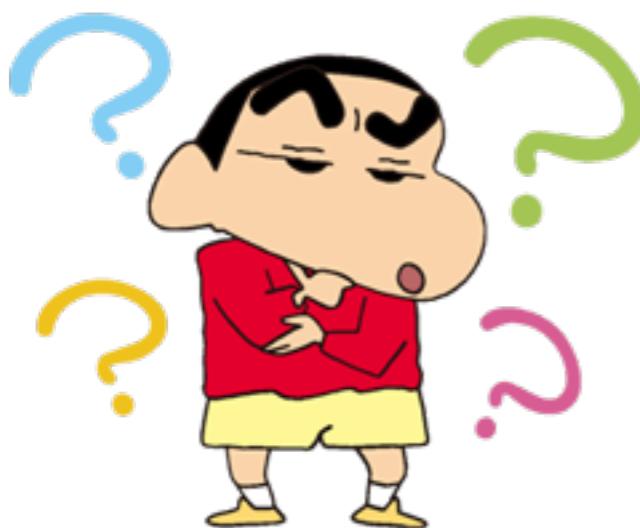

```
<!DOCTYPE html>
<html>
<body>

<p>I am normal</p>
<p style="color:red;">I am red</p>
<p style="color:blue;">I am blue</p>
<p style="font-size:36px">I am big</p>

</body>
</html>
```

การตกแต่งด้วย Style

```
<body style="background-color:powderblue;">
```

Background Color

```
<h1 style="color:blue;">It is blue</h1>
```

```
<p style="color:red;">It is red</p>
```

Text Color

```
<h1 style="font-family:verdana;">I am verdana</h1>
<p style="font-family:courier;">I am courier</p>
```

Fonts

```
<h1 style="font-size:300%;">This is a headings</h1>
<p style="font-size:160%;">This is a paragraph.</p>
```

Text Size

```
<h1 style="text-align:center;">Centered Heading</h1>
<p style="text-align:center;">Centered paragraph.</p>
```

Text Alignment

ช่วงลองทำดู


โจทย์ : ลองเขียนชื่อnamสกุลตัวเอง ให้มีรายละเอียดตามนี้ดูนะ

type : h6

color : pink

font-size : 36px

font-family : courier

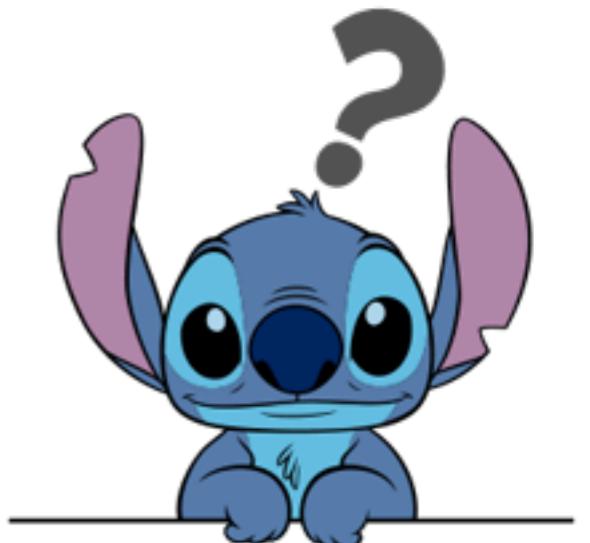

```
<!DOCTYPE html>
<html>
<body>

<h2 style="background-color:rgb(255,0,0)">
Background-color set by using rgb(255,0,0)
</h2>

<h2 style="background-color:rgb(0,255,0)">
Background-color set by using rgb(0,255,0)
</h2>

<h2 style="background-color:rgb(0,0,255)">
Background-color set by using rgb(0,0,255)
</h2>


<h2 style="background-color:rgb(255,255,0)">
Background-color set by using rgb(255,255,0)
</h2>

<h2 style="background-color:rgb(255,0,255)">
Background-color set by using rgb(255,0,255)
</h2>

<h2 style="background-color:rgb(0,255,255)">
Background-color set by using rgb(0,255,255)
</h2>

</body>
</html>
```

ผลลัพธ์



Background-color set by using rgb(255,0,0)

Background-color set by using rgb(0,255,0)

Background-color set by using rgb(0,0,255)


Background-color set by using rgb(255,255,0)

Background-color set by using rgb(255,0,255)

Background-color set by using rgb(0,255,255)

Tag	Description
<u></u>	Defines bold text
<u></u>	Defines emphasized text
<u><i></u>	Defines italic text
<u><small></u>	Defines smaller text
<u></u>	Defines important text
<u><sub></u>	Defines subscripted text
<u><sup></u>	Defines superscripted text
<u><ins></u>	Defines inserted text
<u></u>	Defines deleted text
<u><mark></u>	Defines marked/highlighted text

ตัวอย่าง



```
<h2>HTML <small>Small</small> Formatting</h2>
```

ตาราง

```
<!DOCTYPE html>
<html>
<body>

<table style="width:100%">
  <tr>
    <th>Firstname</th>
    <th>Lastname</th>
    <th>Age</th>
  </tr>
  <tr>
    <td>Jill</td>
    <td>Smith</td>
    <td>50</td>
  </tr>
  <tr>
    <td>Eve</td>
    <td>Jackson</td>
    <td>17</td>
  </tr>
  <tr>
    <td>John</td>
    <td>Doe</td>
    <td>80</td>
  </tr>
</table>

</body>
</html>
```

Firstname	Lastname	Age
Jill	Smith	50
Eve	Jackson	94
John	Doe	80

```
<!DOCTYPE html>
<html>
<body>

<h2> An unordered HTML list</h2>

<ul>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ul>

</body>
</html>
```

ລືສຕໍ່

An unordered HTML list

- Coffee
- Tea
- Milk

Block-level Elements

A block-level element always starts on a new line and takes up the full width available (stretches out to the left and right as far as it can).

The `<div>` element is a block-level element.

Examples of block-level elements:

- `<div>`
- `<h1>` - `<h6>`
- `<p>`
- `<form>`

Inline Elements

An inline element does not start on a new line and only takes up as much width as necessary.

This is `an inline element inside` a paragraph.

Examples of inline elements:

- ``
- `<a>`
- ``

ການໃໝ່ Blocks

```
<!DOCTYPE html>
<html>
<body>

<div style="background-color:black;color:white;padding:20px;">
    <h2>London</h2>
    <p>London is the capital city of England. It is the most populous city in the United Kingdom, with a metropolitan area of over 13 million inhabitants.</p>
    <p>Standing on the River Thames, London has been a major settlement for two millennia, its history going back to its founding by the Romans, who named it Londinium.</p>
</div>

</body>
</html>
```

ผลลัพธ์ ➔

London

London is the capital city of England. It is the most populous city in the United Kingdom, with a metropolitan area of over 13 million inhabitants.


Standing on the River Thames, London has been a major settlement for two millennia, its history going back to its founding by the Romans, who named it Londinium.

```
<!DOCTYPE html>
<html>
<body>

<h1>My<span style="color:red;">Important</span>
Headings</h1>

</body>
</html>
```

My Important Heading

ผลลัพธ์ 

```
#myid{  
    color : #FF0000  
    background-color: red  
}
```


การใช้ ID

CSS

Cascading Style Sheet


```
h1 { color: white;  
    background: orange;  
    border: 1px solid bla  
    padding: 0 0 0 0;  
    font-weight: bold;  
}  
/* begin: seaside-theme */  
  
body {  
    background-color:white;  
    color:black;  
    font-family:Arial,sans-serif;  
    margin: 0 4px 0 0;  
    border: 12px solid;  
}
```

CSS

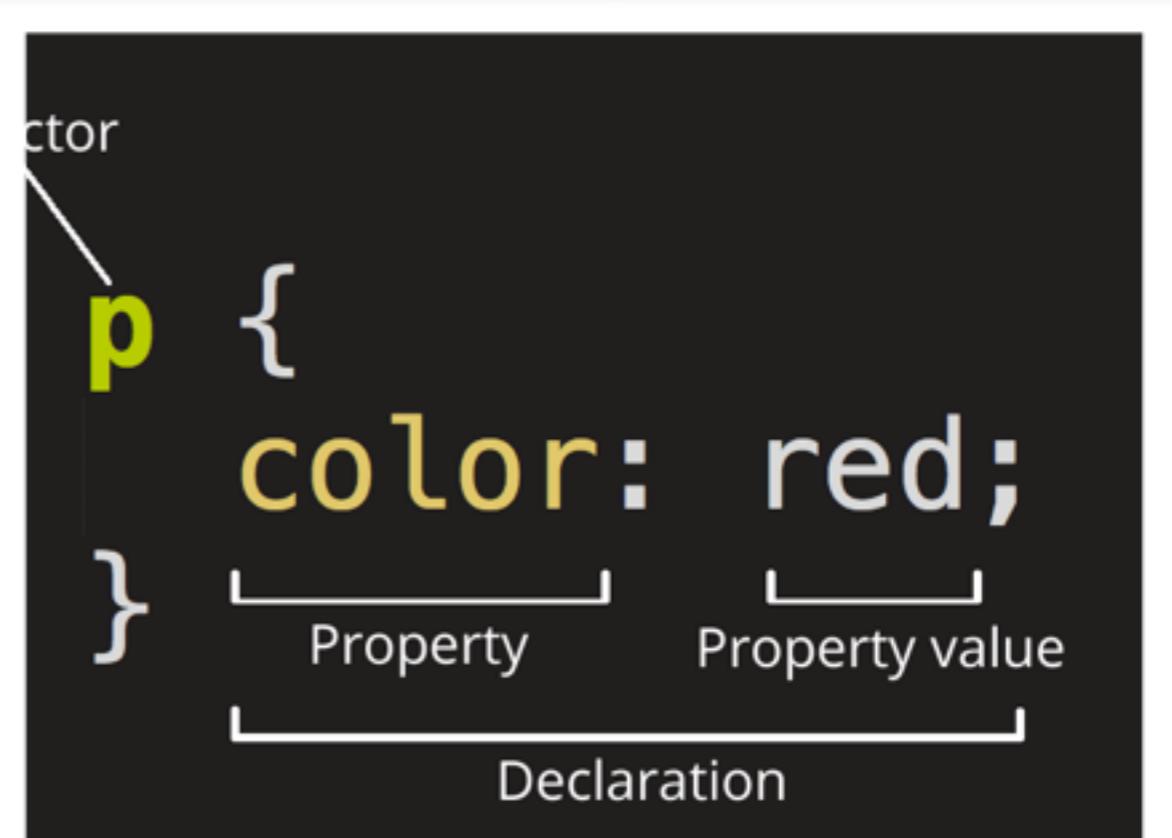

CSS Syntax

A CSS rule-set consists of a selector and a declaration block:

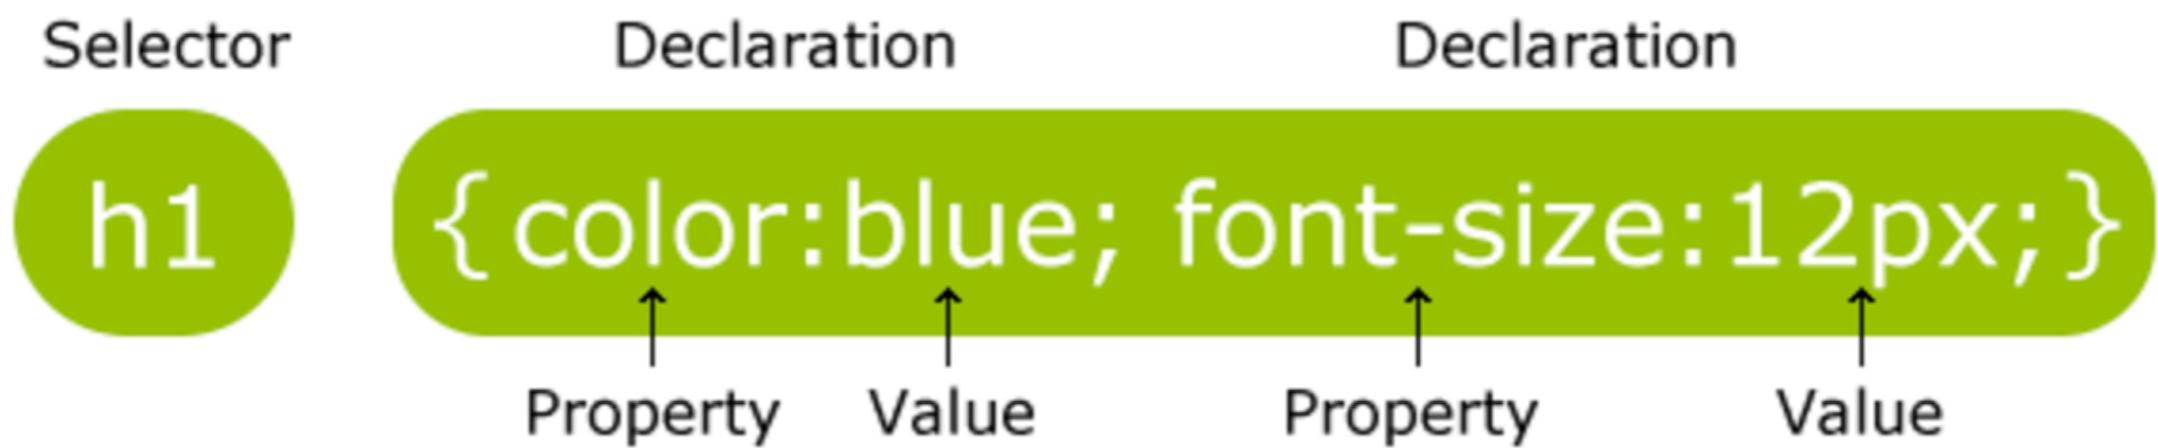

เกริ่นนำ CSS

```
#paral {  
    text-align: center;  
    color: red;  
}
```

```
<p id="paral">Hello World!</p>
```

ການໃຊ້ Id

```
.center{  
    text-align:center;  
    color: red;  
}
```

```
<h1 class="center">Red and centre-aligned heading</h1>
```

การใช้ Class

```
<head>
<link rel="stylesheet" type="text/css"
      href="mystyle.css">
</head>
```

การใช้ Links CSS

```
<style>
div {
    border: 1px solid black;
    background-color: lightblue;
    padding-top: 50px;
    padding-right: 30px;
    padding-bottom: 50px;
    padding-left: 80px;
}
</style>
```

การใช้ Padding

```
<style>
div {
    border: 1px solid black;
    margin-top: 100px;
    margin-bottom: 100px;
    margin-right: 150px;
    margin-left: 80px;
    background-color: lightblue;
}
</style>
```


การใช้ Margin

A large, stylized logo consisting of the letters "JS". The letters are rendered in a dark gray or black color. The "J" is a simple vertical stroke with a small curve at the top. The "S" is a thick, flowing curve that loops back towards the "J". The logo is centered on a solid yellow background.

Javascript

JavaScript คืออะไร

- JavaScript เป็นภาษาที่ทำงานร่วมกับ HTML
- ลูกเล่นต่างๆ ของ HTML5 จะสามารถเรียกใช้ได้อย่างมีประสิทธิภาพด้วย JavaScript
- HTML5 = เนื้อหา (นิ่งๆ) + CSS3 = รูปแบบ (สวยๆ)
JavaScript = สั่งให้ประมวลผล (สร้างความ Dynamic)
- เรียกใช้โดยคำสั่งง่ายๆ คือ`<script language="javascript" type="text/javascript" src="../scripts/exam.js">`
- สามารถเขียนแทรกเข้าไปใน HTML ได้เลย แต่ใน HTML ต้องห้าม

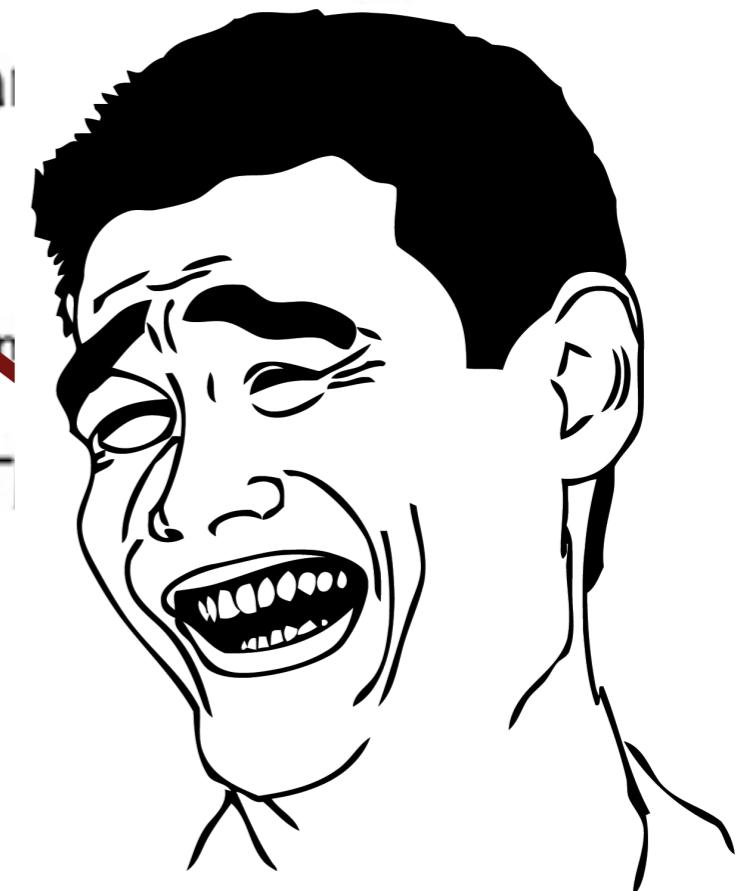



Oh Jesusss !!

<i>JavaScript</i>	<i>jQuery</i>
JavaScript is a language. It is most popular scripting language on internet which works on all major browsers	jQuery is a framework. It is a fast and concise JavaScript library that simplifies HTML document
If I use JavaScript, you need to write own script which may take time	If I use jQuery you need not to write much scripting which already exists in libraries
JavaScript is a combination of ECMA script and DOM	jQuery has DOM (Document object Model)
Example: JavaScript ID Selector: var \$el = document.querySelector('#hello'); JavaScript Class Selector: var \$el = document.querySelector('.bye'); Function changeBackground(color) { Document.body.style.background = color;} Onload="changeBackground ('red');"	Example: jQuery ID Selector: var \$el = \$("#hello"); jQuery Class Selector: var \$el = \$('.bye'); \$('body') .css ('background' , '#ccc');

What's differences ?


```
<script>
$(document).ready(function(){
    $("button").click(function(){
        $("#div1").fadeIn();
        $("#div2").fadeIn("slow");
        $("#div3").fadeIn(3000);
    });
});
</script>
```

ການໃຊ້ Fade In

```
<script>
$(document).ready(function(){
    $("button").click(function(){
        $("div").animate({left: '250px'});
    });
});
</script>
```

การใช้ Animate

Learning by Doing

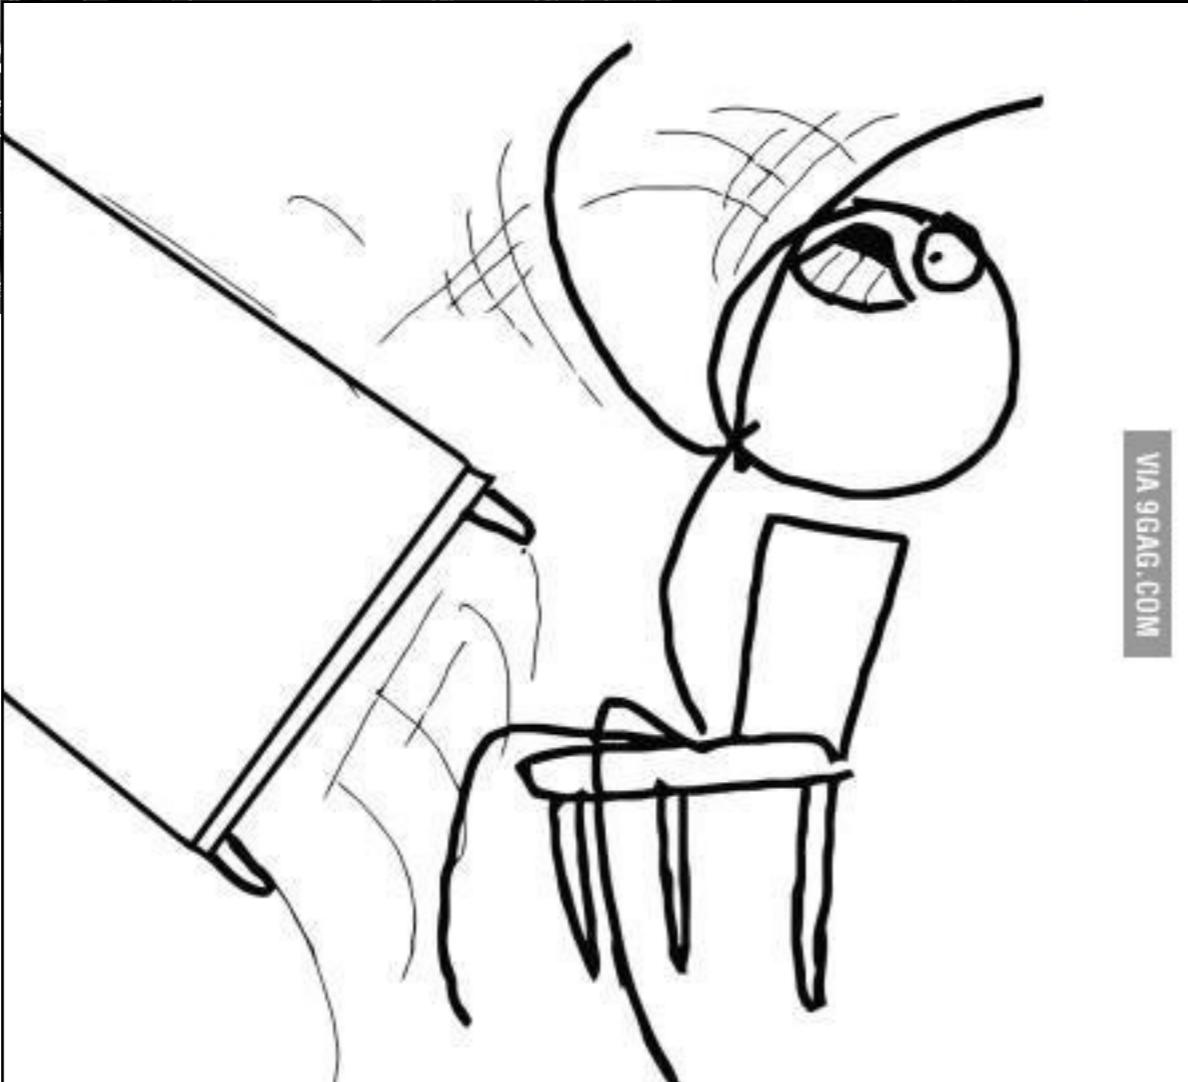

```
<div id="auth" style="display:none;">
</div>
<div id="authdialog" class="dialog" style="position: absolute; left: -1000px;">
<h5>Input</h5>
<form method="post" action="/profile/login/">
<span>Login:</span>
<a href="/profile/register/">No</a>
<input type="text" name="login" class="dialog_form" id="loginfocusneeded" tabindex="1" />
<span>password:</span>
<a href="/profile/password/">No</a>
<input type="password" name="s_password" class="dialog_form" tabindex="1" />
<input type="checkbox" name="b_pem" value="1" checked="checked" />
<input type="hidden" name="s_last_page" value="/" />
<input type="submit" name="submit" value="Entry" tabindex="3" />
```

Bootstrap

startbootstrap.com

[!\[\]\(1ee18ed9aaec3f83a22314fc6c4e909b_img.jpg\) All Templates & Themes](#)[!\[\]\(7981a10373b462de439a67b3b6f14328_img.jpg\) Most Popular](#)[!\[\]\(045cd8d47efe9de8120dbf0d15124123_img.jpg\) Buy Bootstrap Templates](#)**Template & Theme Categories:**[Admin and Dashboard](#)[Full Websites](#)[Landing Pages](#)[One Page Websites](#)[Portfolios](#)[Blogs](#)[Ecommerce](#)[Unstyled Starter Templates](#)[Navigation and Navbars](#)

Bootstrap

strap Themes & Templates


[BROWSE ALL THEMES & TEMPLATES](#)

Portfolios

A collection of Bootstrap portfolio themes and templates perfect for web designers, developers, artists, and more!




[Start Bootstrap](#) / Portfolios

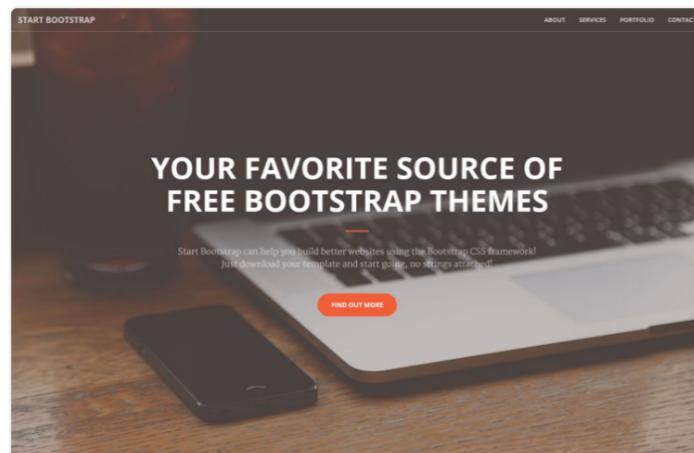

Creative

A one page creative theme.

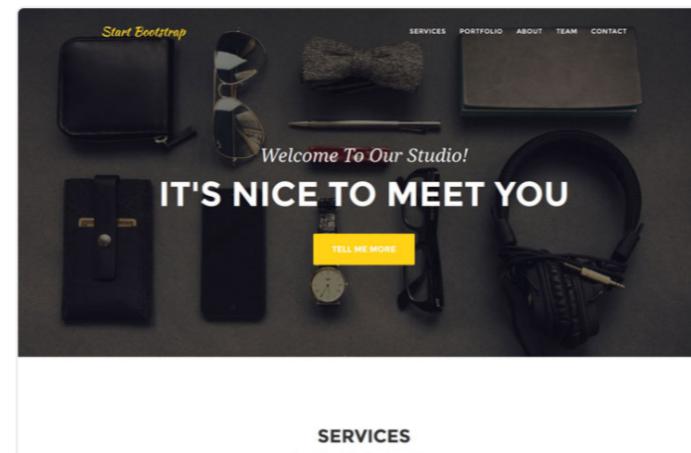


Agency

A one page agency theme.



Freelancer

A one page freelancer theme.

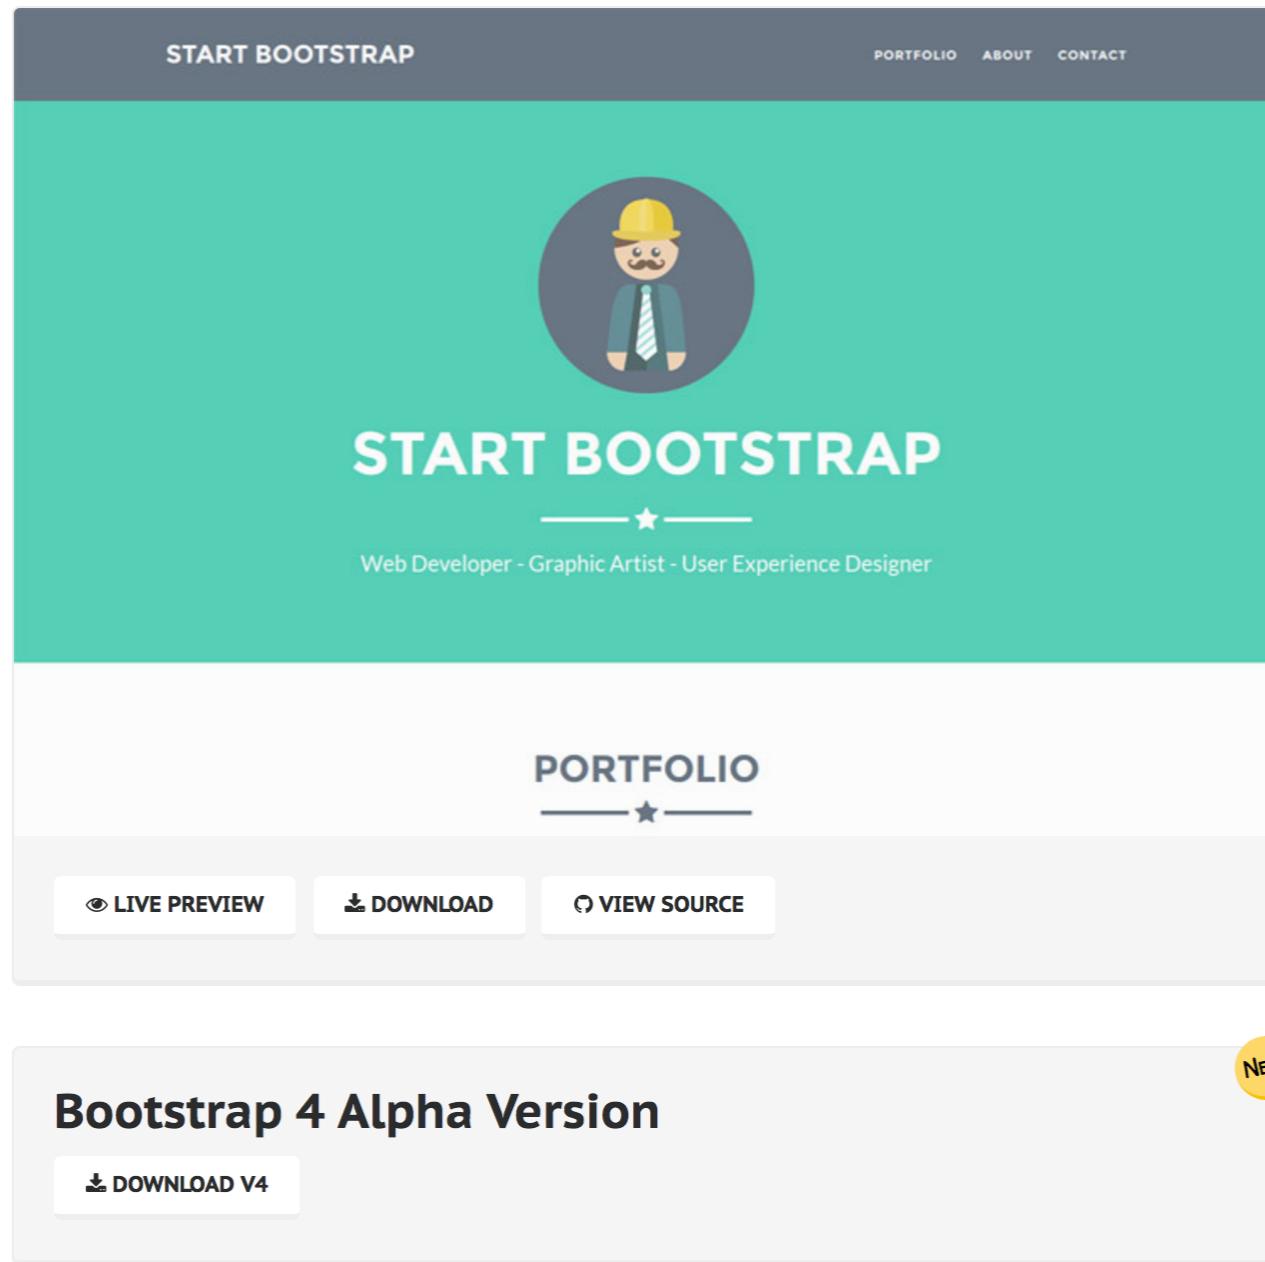

START BOOTSTRAP

PORTFOLIO ABOUT CONTACT

START BOOTSTRAP

Web Developer - Graphic Artist - User Experience Designer

PORTFOLIO

LIVE PREVIEW DOWNLOAD VIEW SOURCE

Bootstrap 4 Alpha Version

DOWNLOAD V4

NEW!

 Fork  Star 1,219  Follow @SBootstrap  Tweet

Need Help?

Feeling stuck? Need something more? You can [hire a designer](#) to help you with your project or to create a custom build of any theme!

Description:

Freelancer is a one page Bootstrap portfolio theme for freelancers.

Features:

- Flat icons by flaticon.com
- LESS files and compiled CSS included
- Fixed top navigation that collapses on scroll
- Scrollspy on navigation items
- Perfectly responsive portfolio grid with hover effects

```
<!DOCTYPE html>
<html lang="en">

<head>

<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta name="description" content="">
<meta name="author" content="">

<title>Freelancer – Start Bootstrap Theme</title>

<!-- Bootstrap Core CSS -->
<link href="vendor/bootstrap/css/bootstrap.min.css" rel="stylesheet">

<!-- Theme CSS -->
<link href="css/freelancer.min.css" rel="stylesheet">

<!-- Custom Fonts -->
<link href="vendor/font-awesome/css/font-awesome.min.css" rel="stylesheet" type="text/css">
<link href="https://fonts.googleapis.com/css?family=Montserrat:400,700" rel="stylesheet" type="text/css">
<link href="https://fonts.googleapis.com/css?family=Lato:400,700,400italic,700italic" rel="stylesheet" type="text/css">

<!-- HTML5 Shim and Respond.js IE8 support of HTML5 elements and media queries -->
<!-- WARNING: Respond.js doesn't work if you view the page via file:// -->
<!--[if lt IE 9]>
    <script src="https://oss.maxcdn.com/libs/html5shiv/3.7.0/html5shiv.js"></script>
    <script src="https://oss.maxcdn.com/libs/respond.js/1.4.2/respond.min.js"></script>
<![endif]-->

</head>

<body id="page-top" class="index">
```

“Practice”

Fin